


Figure 1b — Extended trajectory: early S0 spine + Darwin reboot (train vs deepseek-chat blind; 95% topic-block CI)

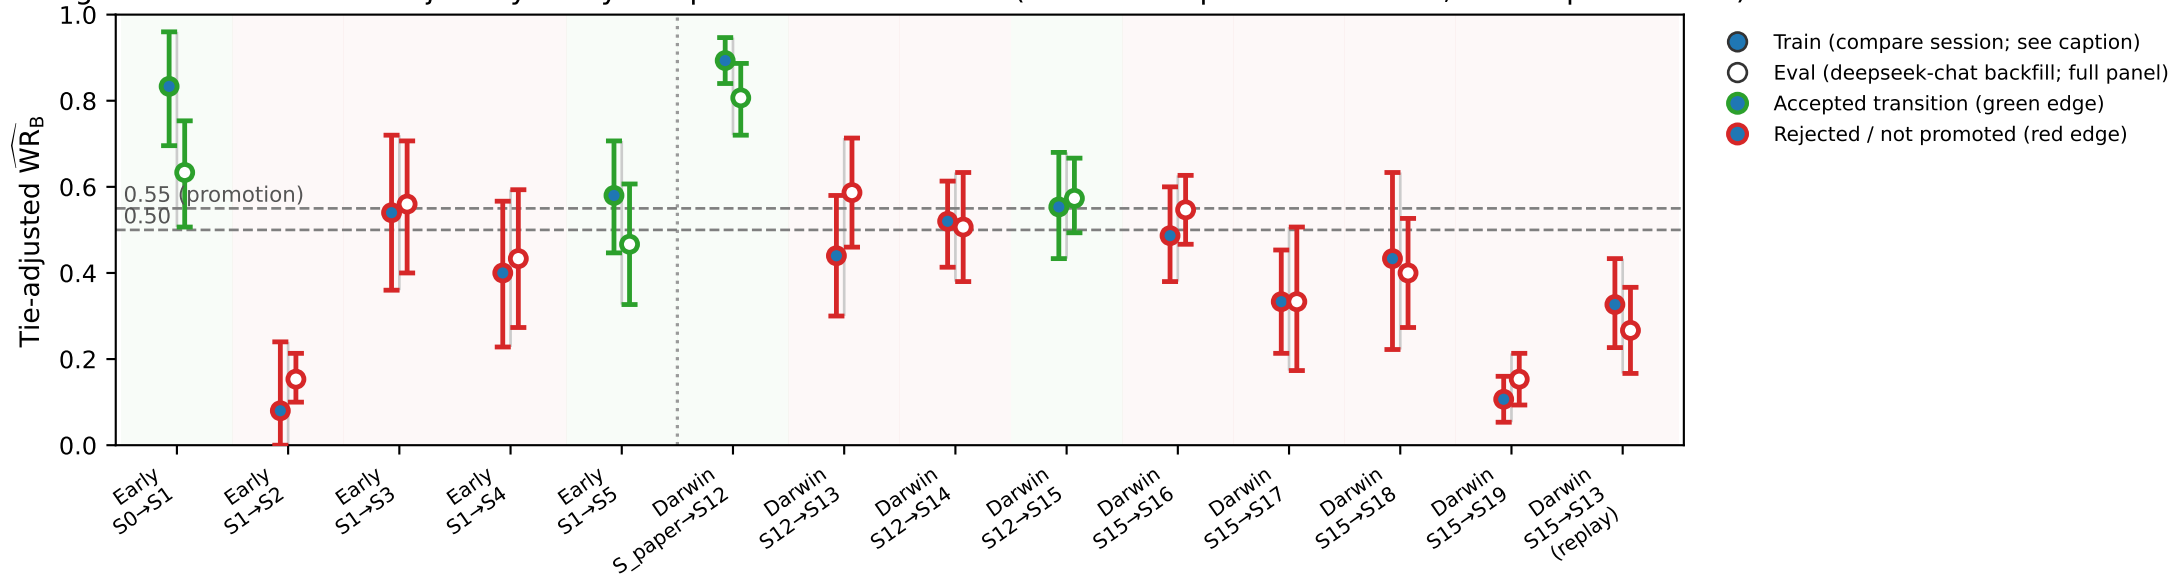

Early (left of dotted line): pre-reboot S0 promotion spine — `compare_*.json` from git before `620151b` (ends at S5; **S6 omitted**). **Darwin (right):** post-reboot head-to-heads; `S_paper`→S12 train is synthesized to match logged promotion mass (no archived compare). Last column is **S15→S13 (replay)**, not chronological successor to S12→S15. **Eval:** `blind__deepseek-chat.json` on every column (`ideas/blind_backfill.py`). **Note:** early vs Darwin idea caches come from different eras; blind re-judges on-disk text. Bands: accept (green) / reject (red).