Learning General Language Processing Agents

Dani Yogatama

DeepMind

Language and Intelligence

A **uniquely human** ability that is a **core component** of our **intelligence**, **independent of** the **surface forms** it manifests in (Hockett, 1960).

Language and Intelligence

A **primary medium** through which we **acquire** new skills and knowledge (+visual perception).

Language and Intelligence

The **most effective** form of communication to **transmit** information and knowledge to others.
(Language for communication; Wittgenstein, 1953; Austin, 1975)

Language and Intelligence

A mechanism with which we **formulate** our **thought process**. (Language for thinking; Spelke, 2003)

Language and Intelligence

Language is key to **human intelligence** and is important for **artificial intelligence**.

General Linguistic Intelligence

The ability to **acquire**, **store**, and **reuse** knowledge (about a language's lexicon, syntax, semantics, and pragmatic conventions) to **adapt** to new tasks **quickly without forgetting** old ones.

General Linguistic Intelligence

The ability to **acquire**, **store**, and **reuse** knowledge (about a language's lexicon, syntax, semantics, and pragmatic conventions) to **adapt** to new tasks **quickly without forgetting** old ones.

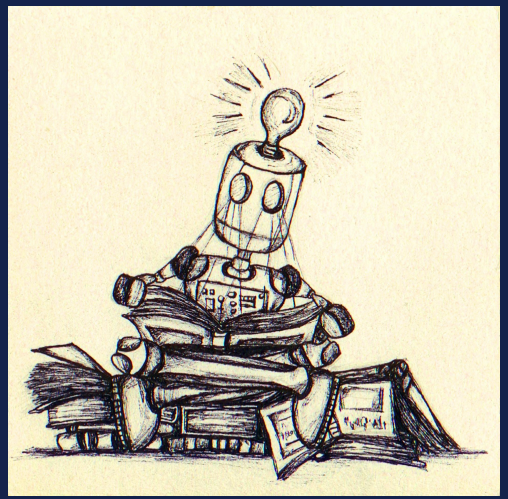

General Linguistic Intelligence

The ability to **acquire**, **store**, and **reuse** knowledge (about a language's lexicon, syntax, semantics, and pragmatic conventions) to **adapt** to new tasks **quickly without forgetting** old ones.

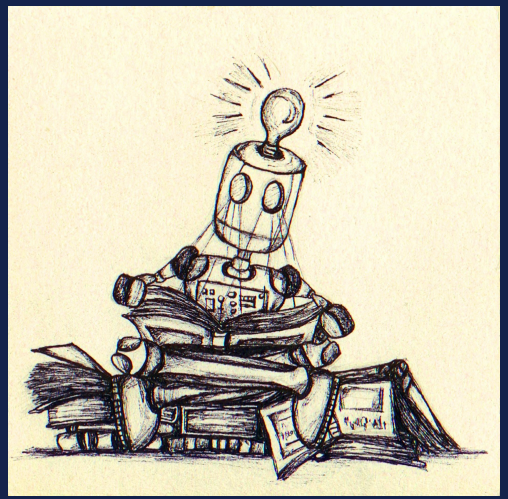

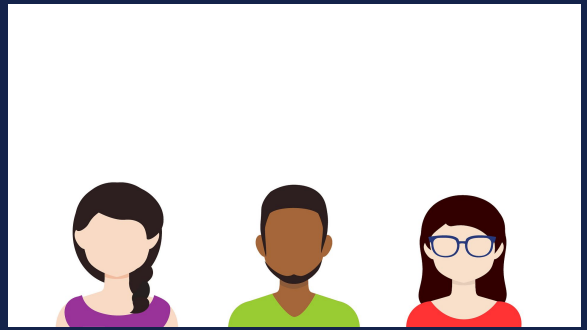

The State of Natural Language Processing

State-of-the-art models are based on increasingly larger transformers.

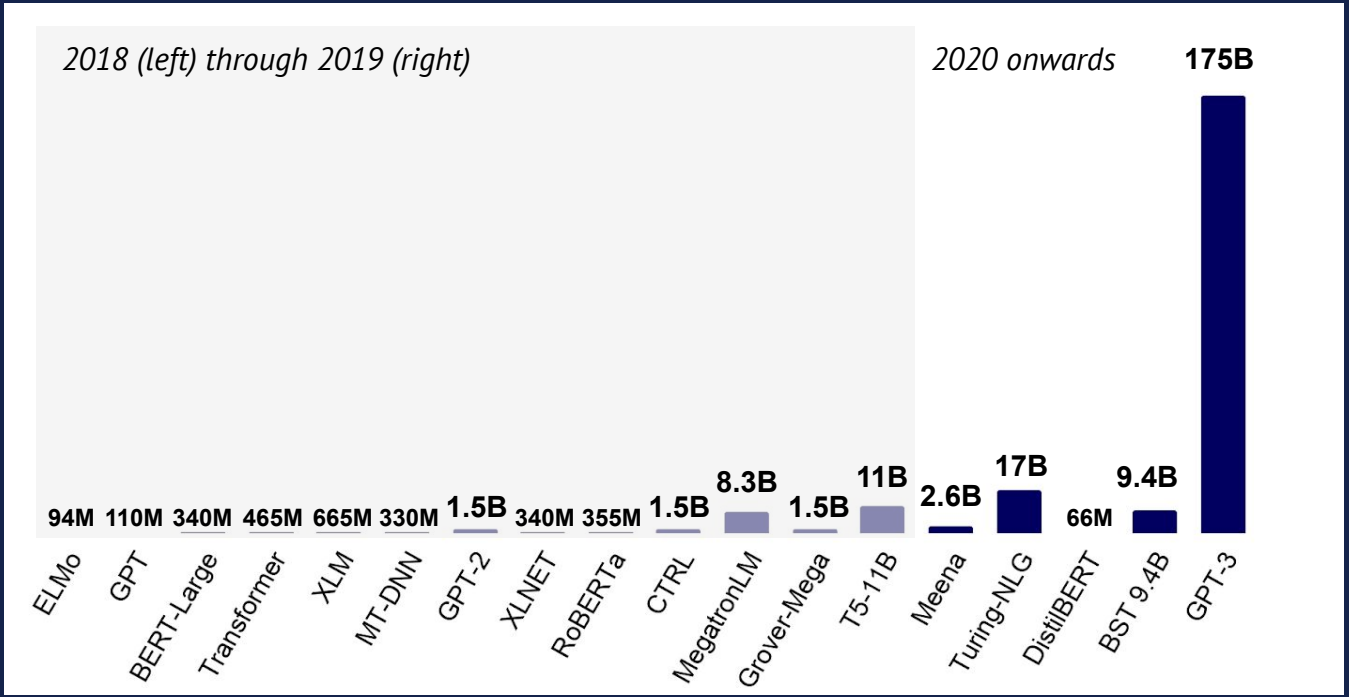

Figure taken from State of AI Report 2020.

Challenges: Human Learning vs. Machine Learning

Human	
``Large'' datasets	**Acquisition**

Challenges: Human Learning vs. Machine Learning

Human	
``Large'' datasets	**Acquisition**
Few examples	**Task Training**

Challenges: Human Learning vs. Machine Learning

Human	
``Large'' datasets	**Acquisition**
Few examples	**Task Training**
Dataset agnostic	**Linguistic knowledge**
Generalizable to new tasks	**Generalization**

Challenges: Human Learning vs. Machine Learning

Human		Machine
``Large'' datasets	**Acquisition**	Large datasets (representation learning)
Few examples	**Task Training**	
Dataset agnostic	**Linguistic knowledge**	
Generalizable to new tasks	**Generalization**	

Challenges: Human Learning vs. Machine Learning

Human		Machine
``Large'' datasets	**Acquisition**	Large datasets (representation learning)
Few examples	**Task Training**	Large datasets (supervised fine tuning)
Dataset agnostic	**Linguistic knowledge**	
Generalizable to new tasks	**Generalization**	

Challenges: Human Learning vs. Machine Learning

Human		Machine
``Large'' datasets	**Acquisition**	Large datasets (representation learning)
Few examples	**Task Training**	Large datasets (supervised fine tuning)
Dataset agnostic	**Linguistic knowledge**	Dataset specific
Generalizable to new tasks	**Generalization**	

Challenges: Human Learning vs. Machine Learning

Human		Machine
``Large'' datasets	**Acquisition**	Large datasets (representation learning)
Few examples	**Task Training**	Large datasets (supervised fine tuning)
Dataset agnostic	**Linguistic knowledge**	Dataset specific
Generalizable to new tasks	**Generalization**	Forget previous tasks given a new task

The State of Natural Language Processing

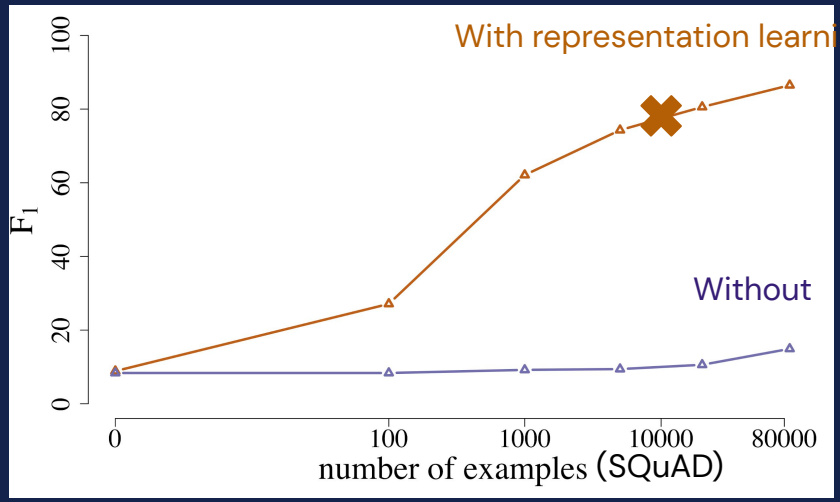

Yogatama et al., arXiv 2019

Model: BERT, Devlin et al. 2019

QA dataset: SQuAD, Rajpurkar et al., 2016

The State of Natural Language Processing

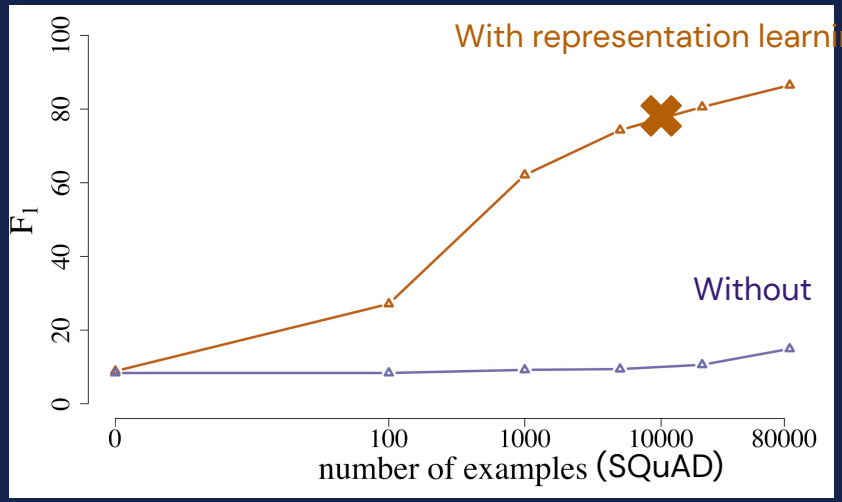

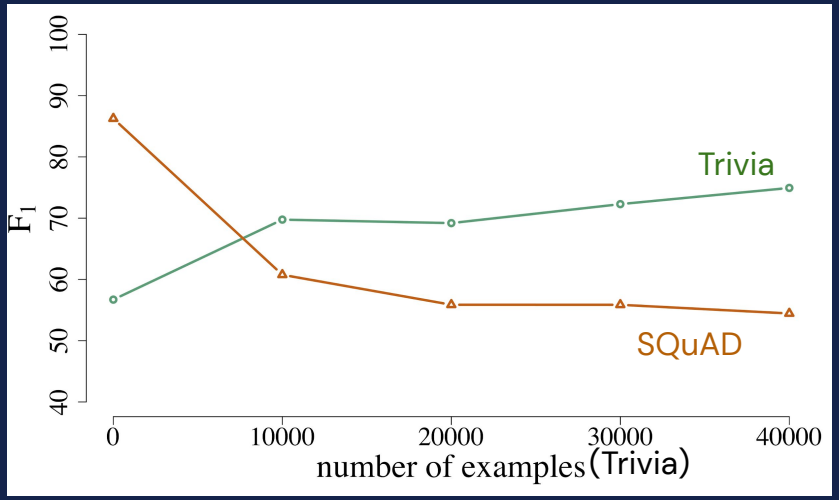

Yogatama et al., arXiv 2019

Model: BERT, Devlin et al. 2019

QA dataset: SQuAD, Rajpurkar et al., 2016

QA dataset 2: Trivia, Joshi et al., 2017

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Model Architectures

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Representation Learning

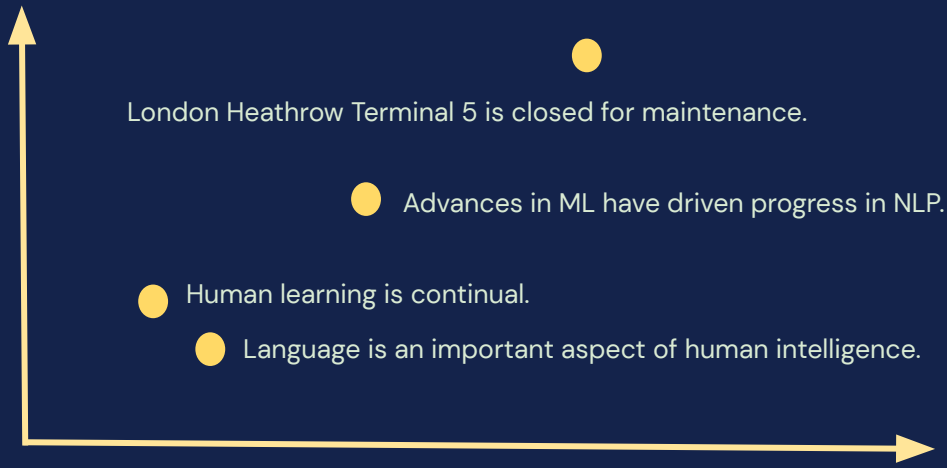

Yogatama and Smith, ACL 2014
Yogatama et al., ACL 2015
Yogatama and Smith; ICML 2015
Kong, de Masson d'Autume, Ling, Yu, Dai, Yogatama; ICLR 2020

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Generative Training

$$\mathcal{L} = \log p(\boldsymbol{x}, y)$$

Yogatama et al., TACL 2014
Yogatama et al., arXiv 2017
Kong, Melis, Ling, Yu, and Yogatama, ICLR 2018
Cao and Yogatama, arXiv 2020

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Few-shot and Transfer Learning

Yogatama and Mann, AISTATS 2014
Yogatama et al., EMNLP 2015
Artetxe, Ruder, Yogatama, ACL 2020

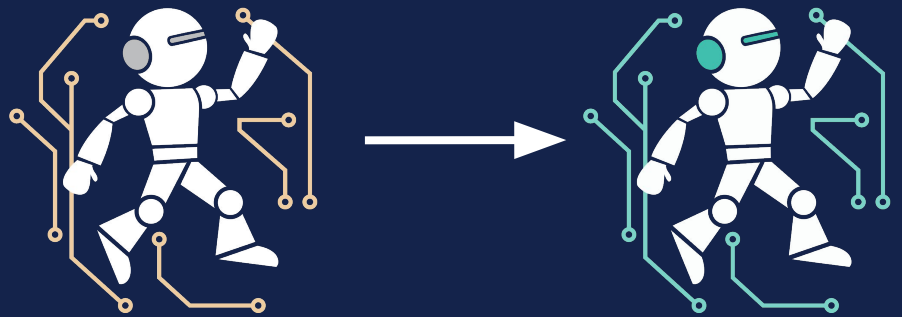

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Model Architectures

Memory Networks

Yogatama et al., ICLR 2017
Yogatama et al., ICLR 2018
de Masson d'Autume, Ruder, Kong, Yogatama, NeurIPS 2019
Yogatama et al., TACL 2021

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

ML is fun

Model Architectures

Memory Networks

Yogatama et al., ICLR 2017
Yogatama et al., ICLR 2018
de Masson d'Autume, Ruder, Kong, Yogatama, NeurIPS 2019
Yogatama et al., TACL 2021

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

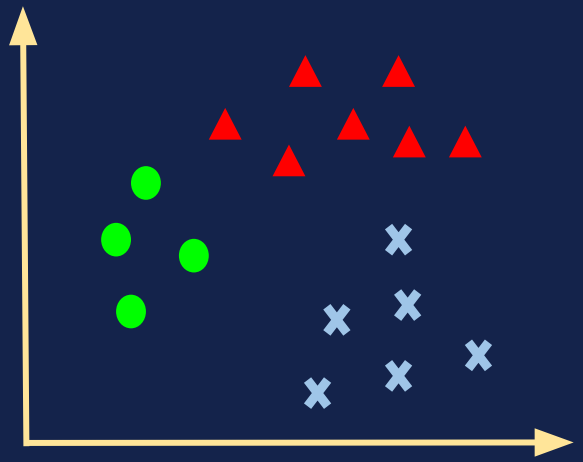

Model Architectures

Memory Networks

Yogatama et al., ICLR 2017
Yogatama et al., ICLR 2018
de Masson d'Autume, Ruder, Kong, Yogatama, NeurIPS 2019
Yogatama et al., TACL 2021

Research Areas

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Model Architectures

This Talk

- A framework for self-supervised language representation learning methods.

  Kong et al., ICLR 2020

- Semiparametric (memory-augmented) language models.

  Yogatama et al., TACL 2021

A Mutual Information Maximization Perspective of Language Representation Learning

Kong et al., ICLR 2020


Lingpeng


Cyprien


Wang


Lei


Zihang

Dani

Text Representations

Good representations facilitate more efficient transfer.

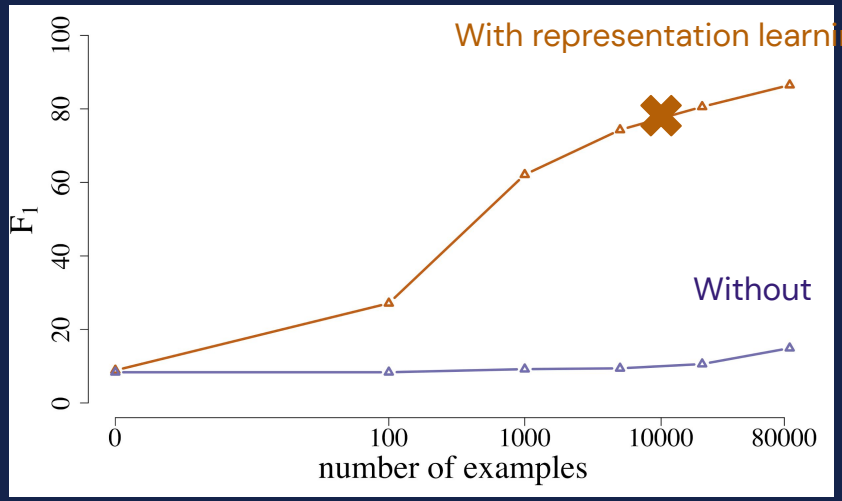

Text Representations

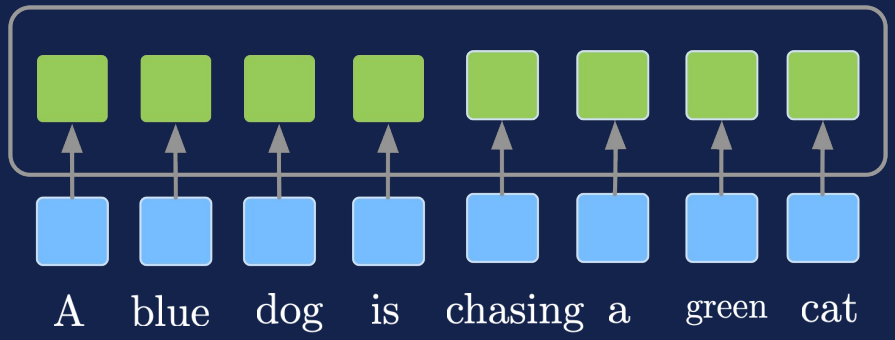

a sequence of vectors

(word representations)

a sequence of words

Text Representations

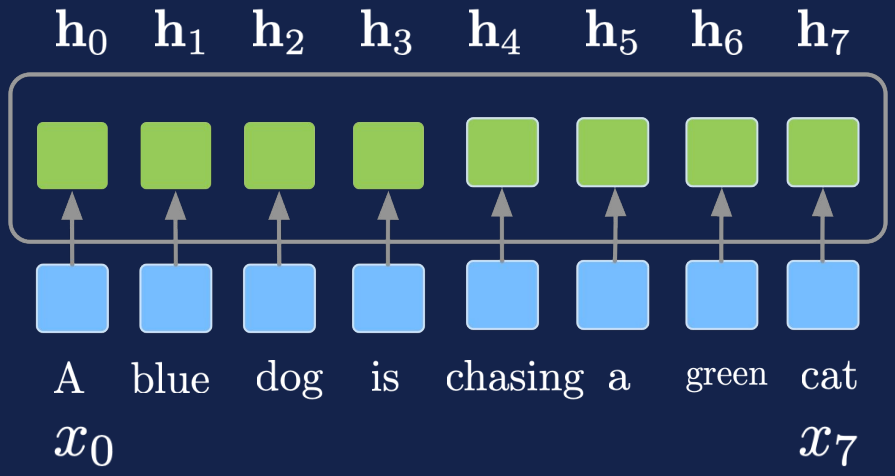

$$g_\omega(x_0, x_1, \ldots, x_7) \rightarrow \mathbf{h}_0, \mathbf{h}_1, \ldots, \mathbf{h}_7$$

Text Representations

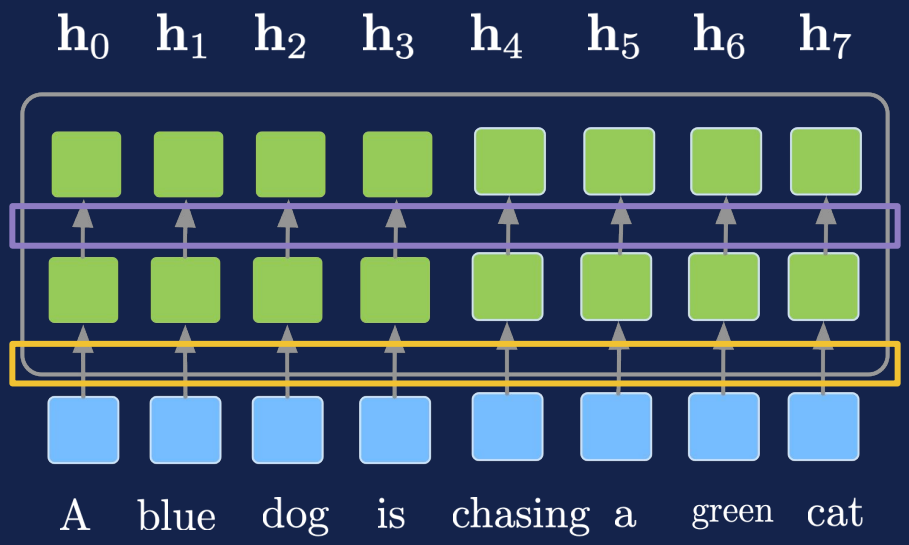

$g_\tau(\mathbf{i}_0, \mathbf{i}_1, \ldots, \mathbf{i}_7) \rightarrow \mathbf{h}_0, \mathbf{h}_1, \ldots, \mathbf{h}_7$

$g_\omega(x_0, x_1, \ldots, x_7) \rightarrow \mathbf{i}_0, \mathbf{i}_1, \ldots, \mathbf{i}_7$

Text Representations

https://twitter.com/SmithaMilli/status/837153616116985856/

Bag of words → **Word embeddings** → **Contextual word embeddings**

Skip gram, Mikolov et al., 2013.

GloVe, Pennington et al., 2014.

ELMo, Peters et al., 2018.

BERT, Devlin et al., 2019.

Text Representations

https://twitter.com/SmithaMilli/status/837153616116985856/

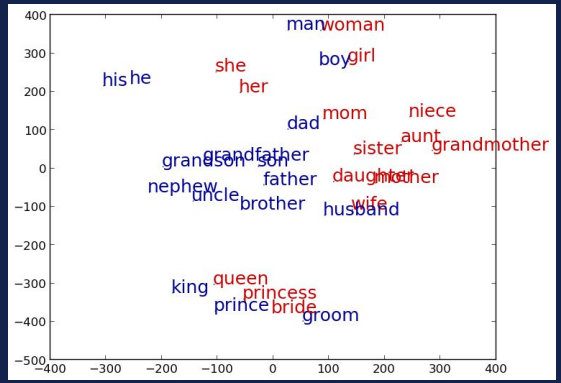

Bag of words

Word embeddings

Skip gram, Mikolov et al., 2013.

GloVe, Pennington et al., 2014.

Contextual word embeddings

ELMo, Peters et al., 2018.

BERT, Devlin et al., 2019.

Text Representations

https://twitter.com/SmithaMilli/status/837153616116985856/

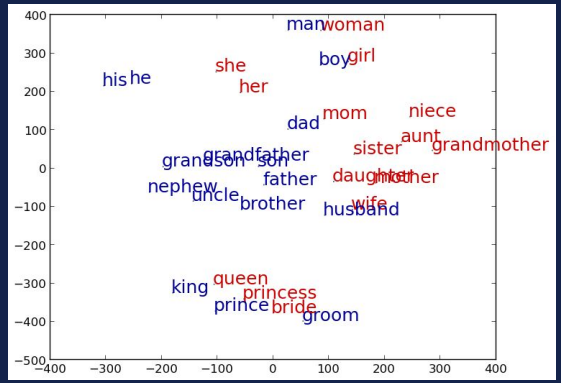

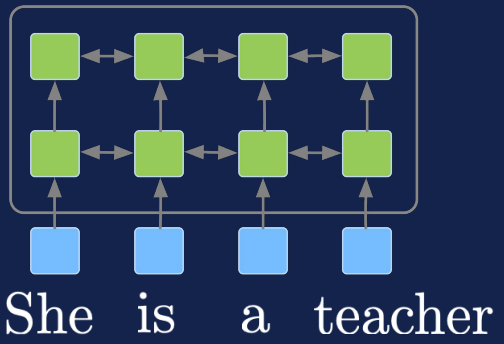

Bag of words

Word embeddings

Skip gram, Mikolov et al., 2013.

GloVe, Pennington et al., 2014.

Contextual word embeddings

ELMo, Peters et al., 2018.

BERT, Devlin et al., 2019.

Text Representations

https://twitter.com/SmithaMilli/status/837153616116985856/

What has been the main driver of progress so far?

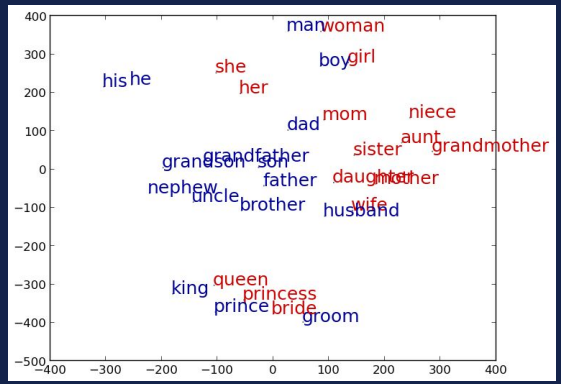

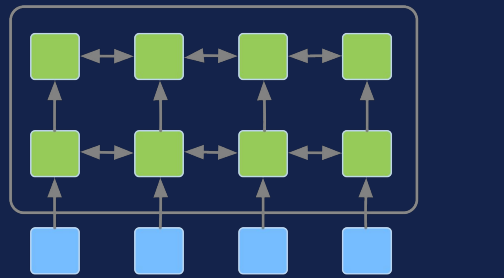

Bag of words

Word embeddings

Skip gram, Mikolov et al., 2013.

GloVe, Pennington et al., 2014.

Contextual word embeddings

ELMo, Peters et al., 2018.

BERT, Devlin et al., 2019.

Contrastive Learning

Main assumption: representations should capture similarity (Arora et al., 2019).

Contrastive Learning

Main assumption: representations should capture similarity (Arora et al., 2019).

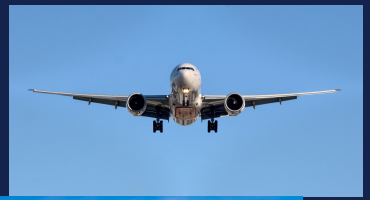







Contrastive Learning

Main assumption: representations should capture similarity (Arora et al., 2019).

Human learning is continual.

Advances in ML have driven progress in NLP.

Logistic regression can be used for classification.

Transformer uses self attention.

There are many direct flights between London and Tokyo.

London Heathrow Terminal 5 is closed for maintenance.

Contrastive Learning with InfoNCE

Main assumption: representations should capture similarity (Arora et al., 2019).

$$I(A, B) \geq \mathbb{E}_{p(A,B)} \left[\mathbb{E}_{p(C)} \left[\log \frac{\exp f_{\boldsymbol{\theta}}(a, b)}{\exp f_{\boldsymbol{\theta}}(a, b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a, c)} \right] \right]$$

InfoNCE objective

Logeswaran and Lee, 2018
van den Oord, et al., 2019

Contrastive Learning with InfoNCE

Main assumption: representations should capture similarity (Arora et al., 2019).

$$I(A,B) \geq \mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

InfoNCE objective

Logeswaran and Lee, 2018

van den Oord, et al., 2019

Contrastive Learning with InfoNCE

Main assumption: representations should capture similarity (Arora et al., 2019).

$$I(A,B) \geq \mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

InfoNCE objective

Logeswaran and Lee, 2018

van den Oord, et al., 2019

High when **a** and **b** go together

Contrastive Learning with InfoNCE

Main assumption: representations should capture similarity (Arora et al., 2019).

$$I(A,B) \geq \mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

InfoNCE objective

Logeswaran and Lee, 2018
van den Oord, et al., 2019

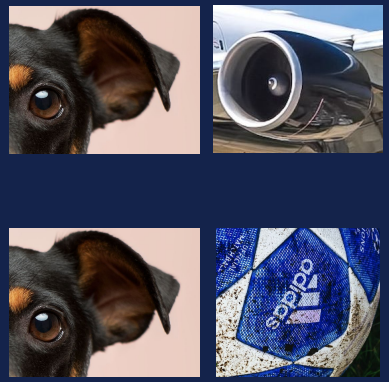

Low when **a** and **c** do not go together

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

The University of Waterloo is located in Canada

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

a b

The University of Waterloo is located in Canada

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

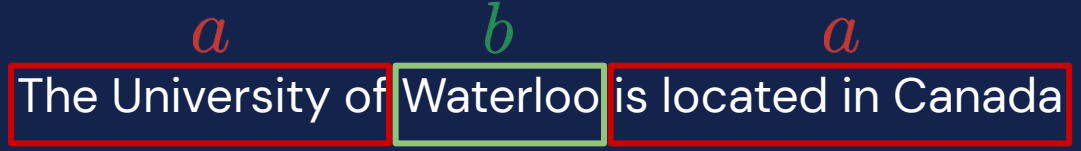

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

a b

The University of Waterloo is located in Canada

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

a b

The University of Waterloo is located in Canada

$$f_{\boldsymbol{\theta}}(a,b) = g_{\boldsymbol{\psi}}(b)^{\top} g_{\boldsymbol{\omega}}(a)$$

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

Tokyo
London
dog
cat

a b

The University of Waterloo is located in Canada

$$f_{\boldsymbol{\theta}}(a,b) = g_{\boldsymbol{\psi}}(b)^{\top} g_{\boldsymbol{\omega}}(a)$$

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

a b

The University of Waterloo is located in Canada

$$f_{\boldsymbol{\theta}}(a,b) = g_{\boldsymbol{\psi}}(b)^{\top} g_{\boldsymbol{\omega}}(a)$$

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

a b

The University of Waterloo is located in Canada

$$f_{\boldsymbol{\theta}}(a,b) = g_{\boldsymbol{\psi}}(b)^{\top} g_{\boldsymbol{\omega}}(a)$$

Contrastive Learning with InfoNCE

$$\mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp f_{\boldsymbol{\theta}}(a,b)}{\exp f_{\boldsymbol{\theta}}(a,b) + \sum_{c \neq b} \exp f_{\boldsymbol{\theta}}(a,c)}\right]\right]$$

a b

The University of Waterloo is located in Canada

$$f_{\boldsymbol{\theta}}(a,b) = g_{\boldsymbol{\psi}}(b)^\top g_{\boldsymbol{\omega}}(a)$$

Skip-gram

Mikolov et al., 2013

The University of Waterloo is located in Canada

Skip-gram

Mikolov et al., 2013

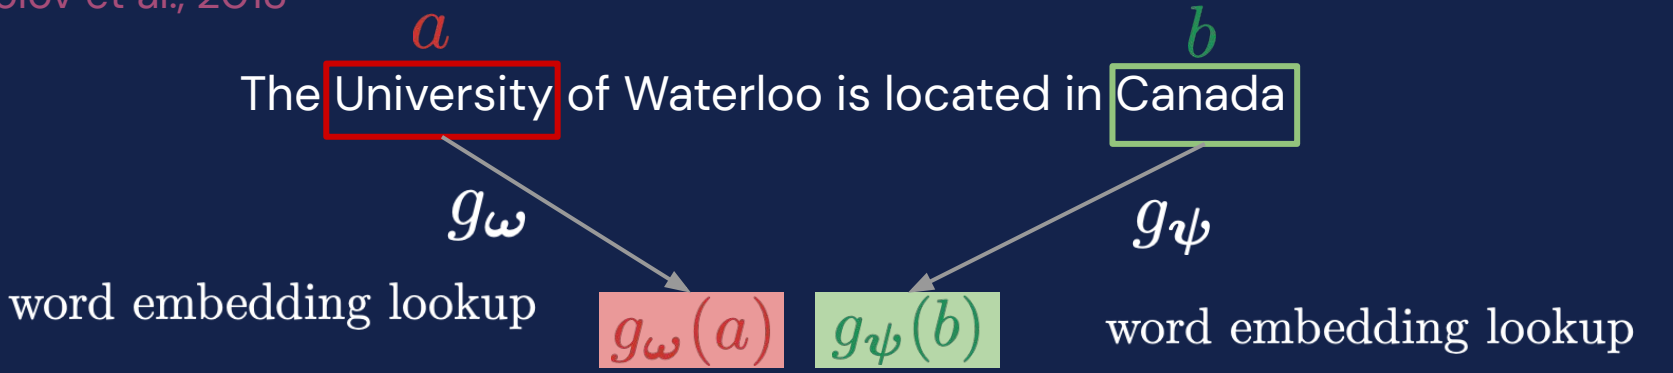

BERT

Devlin et al., 2019

The University of Waterloo is located in Canada

BERT

Devlin et al., 2019

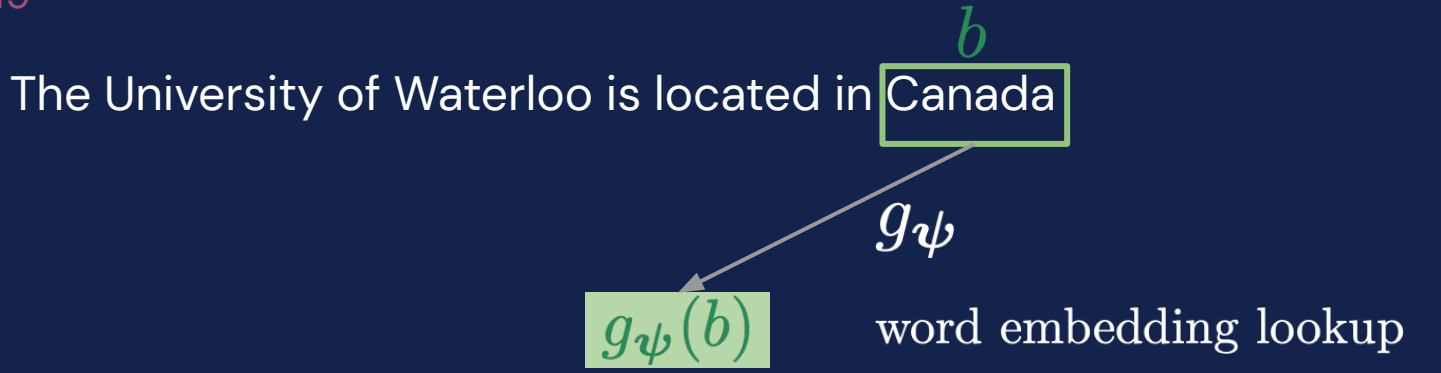

BERT

Devlin et al., 2019

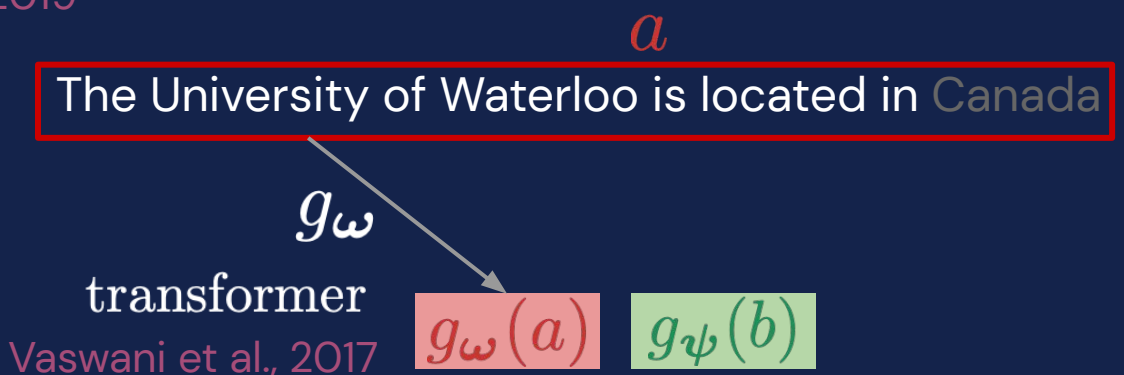

Why is this interesting?

- A framework that unifies classical and modern word embedding methods.

	a	b	g_ω	g_ψ
Mikolov et al., 2013 **Skip-gram**	word	word	lookup	lookup
Devlin et al., 2019 **BERT**	context	word	transformer	lookup
Yang et al., 2019 **XLNet**	context	word	TXL++	lookup

Why is this interesting?

- A framework that unifies classical and modern word embedding methods.

	a	b	g_ω	g_ψ
Mikolov et al., 2013 **Skip-gram**	word	word	lookup	lookup
Devlin et al., 2019 **BERT**	context	word	transformer	lookup
Yang et al., 2019 **XLNet**	context	word	TXL++	lookup

- Provides connections to methods used in other domains (vision, speech).

Why is this interesting?

- A framework that unifies classical and modern word embedding methods.

	a	b	g_ω	g_ψ
Mikolov et al., 2013 **Skip-gram**	word	word	lookup	lookup
Devlin et al., 2019 **BERT**	context	word	transformer	lookup
Yang et al., 2019 **XLNet**	context	word	TXL++	lookup

- Provides connections to methods used in other domains (vision, speech).

- Facilitates exchanges of ideas on how to improve representation learning models.

Model

Deep InfoMax (DIM; Hjelm et al., 2019)

Model

Deep InfoMax (DIM; Hjelm et al., 2019)



g_ω

$g_\omega(a)$

Model

Deep InfoMax (DIM; Hjelm et al., 2019)

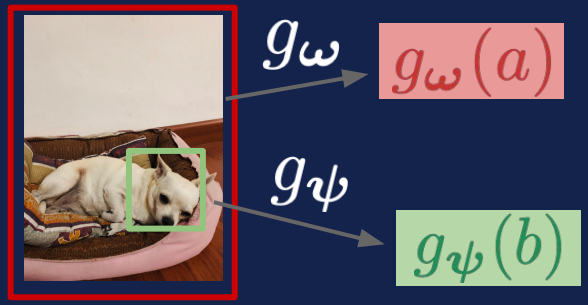

Model

Deep InfoMax (DIM; Hjelm et al., 2019)



g_ω

$g_\omega(a)$

g_ψ

$g_\psi(b)$



g_ψ

$g_\psi(c_1)$

$g_\psi(c_2)$



Model

Deep InfoMax (DIM; Hjelm et al., 2019)



g_ω $g_\omega(a)$

g_ψ $g_\psi(b)$



g_ψ $g_\psi(c_1)$ $g_\psi(c_2)$



$$\mathcal{I}_{\text{DIM}} = \mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp g_\omega(a)^\top g_\psi(b)}{\exp g_\omega(a)^\top g_\psi(b) + \sum_{c \neq b} \exp g_\omega(a)^\top g_\psi(c)}\right]\right]$$

Model

Deep InfoMax (DIM; Hjelm et al., 2019)

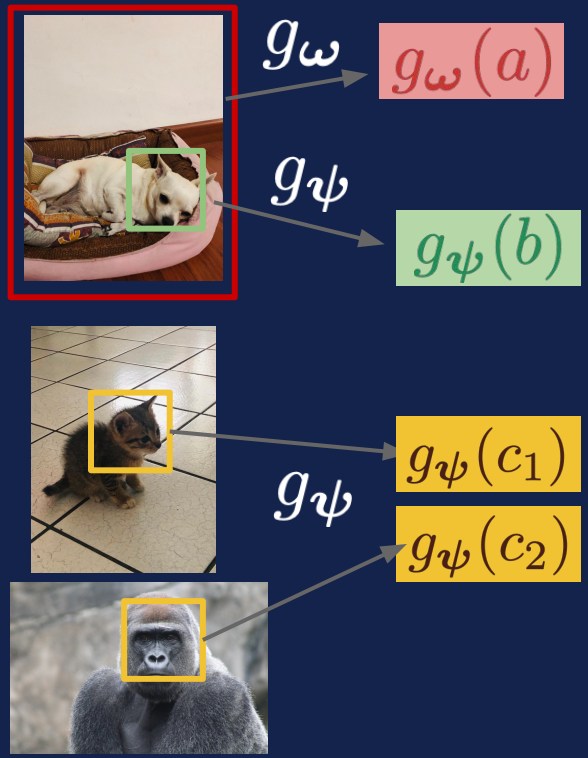

UWaterloo is located in Canada

Model

Deep InfoMax (DIM; Hjelm et al., 2019)

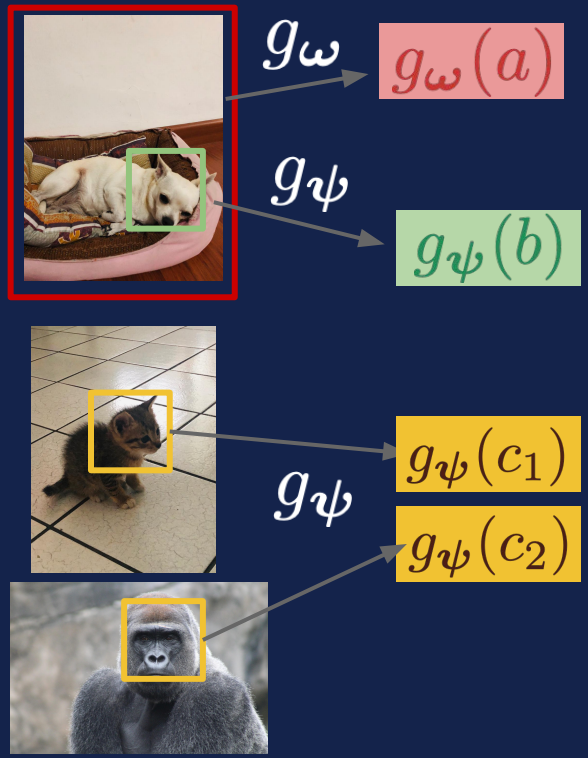

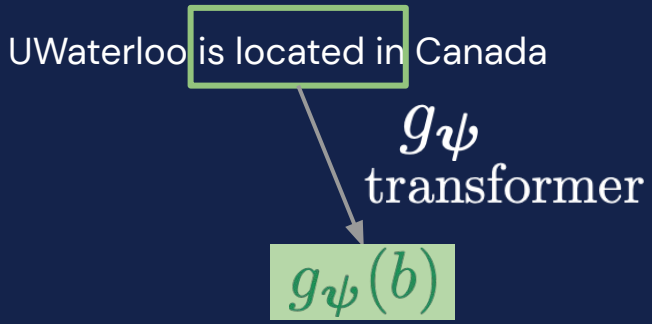

Model

Deep InfoMax (DIM; Hjelm et al., 2019)



g_ω $g_\omega(a)$

g_ψ $g_\psi(b)$



g_ψ $g_\psi(c_1)$ $g_\psi(c_2)$



UWaterloo is located in Canada

g_ω
transformer

$g_\omega(a)$ $g_\psi(b)$

Model

Deep InfoMax (DIM; Hjelm et al., 2019)

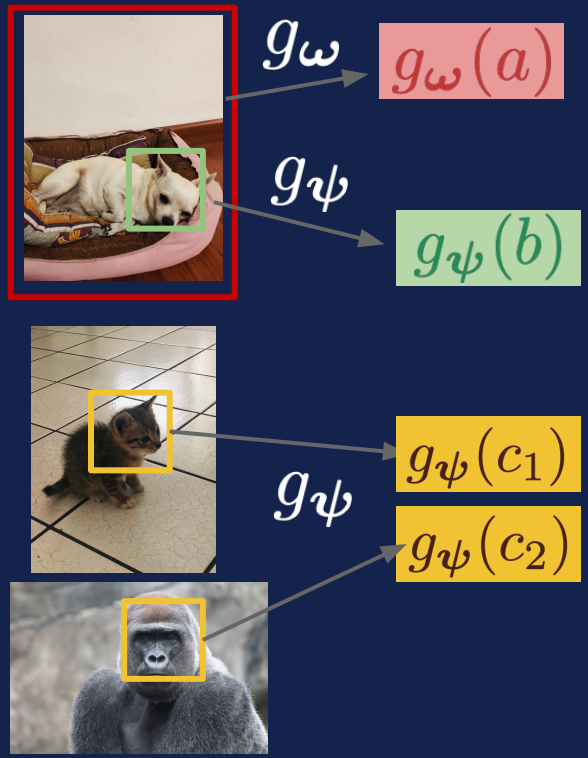

UWaterloo is located in Canada

$g_\omega(a)$ $g_\psi(b)$

Starcraft II is a fun game

Cristiano Ronaldo scores an own goal

Machine learning is transforming drug discovery

Model

Deep InfoMax (DIM; Hjelm et al., 2019)



g_ω

$g_\omega(a)$

g_ψ

$g_\psi(b)$



g_ψ

$g_\psi(c_1)$

$g_\psi(c_2)$



UWaterloo is located in Canada

$g_\omega(a)$ $g_\psi(b)$

$g_\psi(c_1)$

$g_\psi(c_2)$

$g_\psi(c_3)$

Starcraft II is a fun game

Cristiano Ronaldo scores an own goal

Machine learning is transforming drug discovery

g_ψ transformer

Model

Deep InfoMax (DIM; Hjelm et al., 2019)



g_ω $g_\omega(a)$

g_ψ $g_\psi(b)$



g_ψ $g_\psi(c_1)$ $g_\psi(c_2)$



UWaterloo is located in Canada

$g_\omega(a)$ $g_\psi(b)$

$g_\psi(c_1)$ $g_\psi(c_2)$ $g_\psi(c_3)$

Starcraft II is a fun game

Cristiano Ronaldo scores an own goal

Machine learning is transforming drug discovery

$$\mathcal{I}_{\text{DIM}} = \mathbb{E}_{p(A,B)}\left[\mathbb{E}_{p(C)}\left[\log \frac{\exp g_\omega(a)^\top g_\psi(b)}{\exp g_\omega(a)^\top g_\psi(b) + \sum_{c \neq b} \exp g_\omega(a)^\top g_\psi(c)}\right]\right]$$

Experiments

Question answering on SQuAD (Rajpurkar et al., 2016).

		F1
Small Model	BERT	90.9
	Ours	**91.4**
Large Model	BERT	92.7
	Ours	**93.1**

F1 scores (0–100), higher is better.

BERT: Devlin et al., 2019.

Takeaways

- It is possible to transfer ideas across domains when designing self-supervised tasks.

- Progress in language representation learning has largely been driven by advances in model architectures (and training objectives).

Adaptive Semiparametric Language Models

Yogatama et al., TACL 2021

Dani

Cyprien



Lingpeng

Background

What are core limitations of of existing architectures?

Background

State of the art architectures (transformers) are limited by the input sequence length.

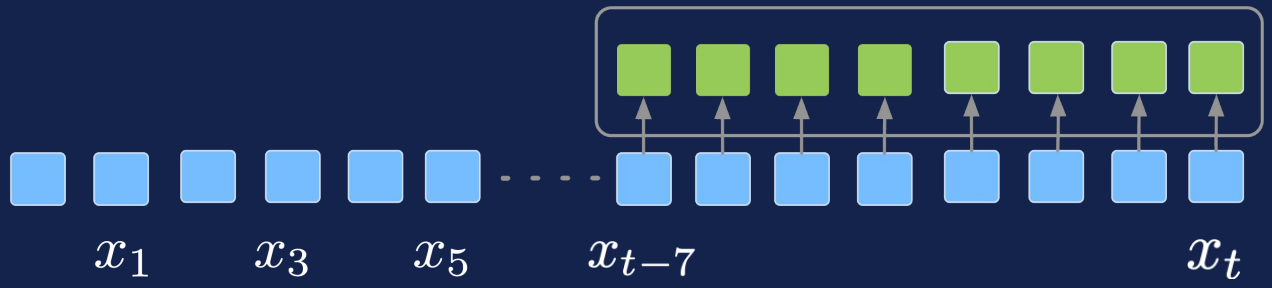

Background

State of the art architectures (transformers) are limited by the input sequence length.

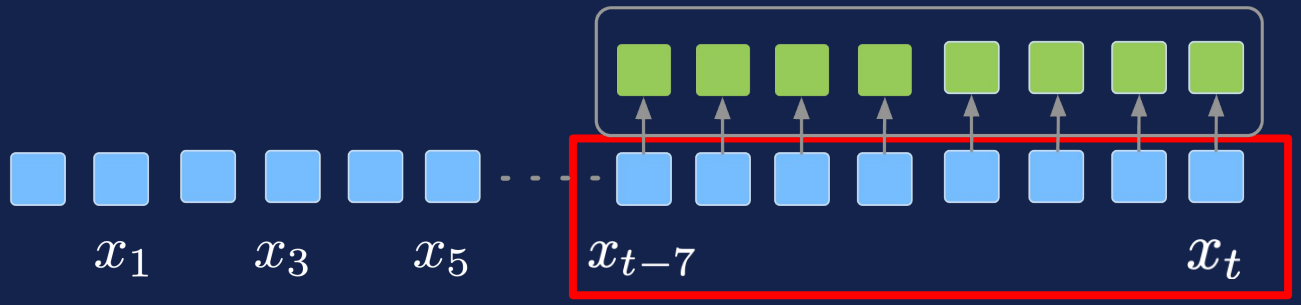

Background

State of the art architectures (transformers) are limited by the input sequence length.

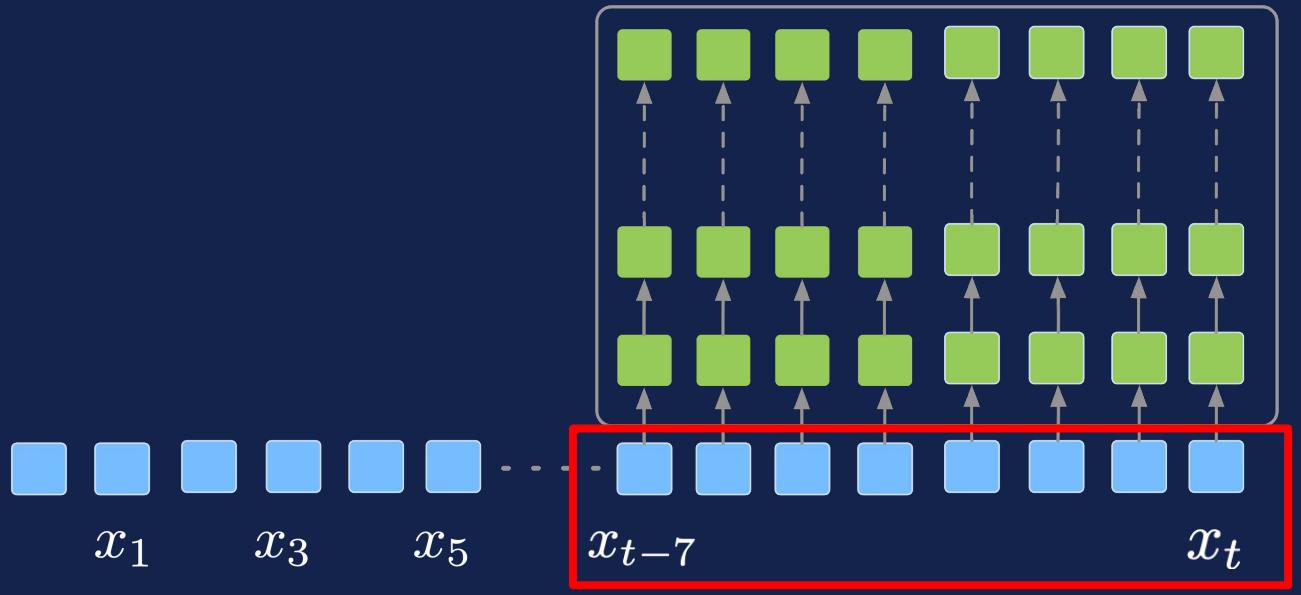

Background

Knowledge is encoded in the weights of a parametric neural network.

Background

Knowledge is encoded in the weights of a parametric neural network.

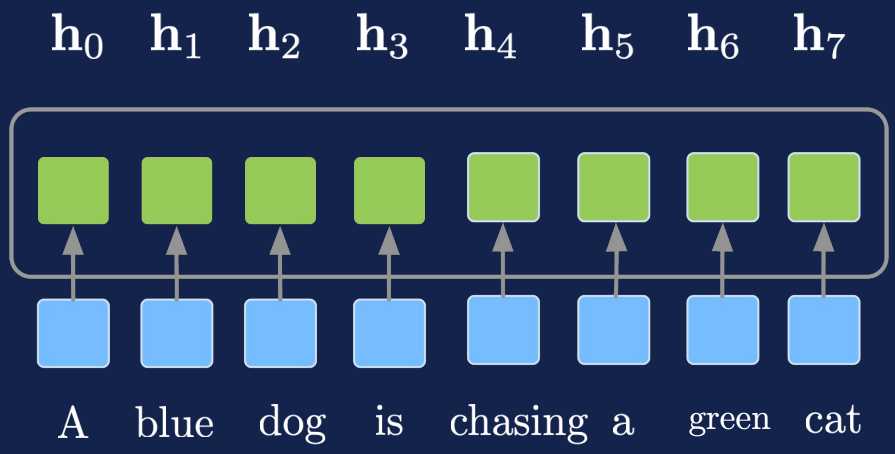

Background

Knowledge is encoded in the weights of a parametric neural network.

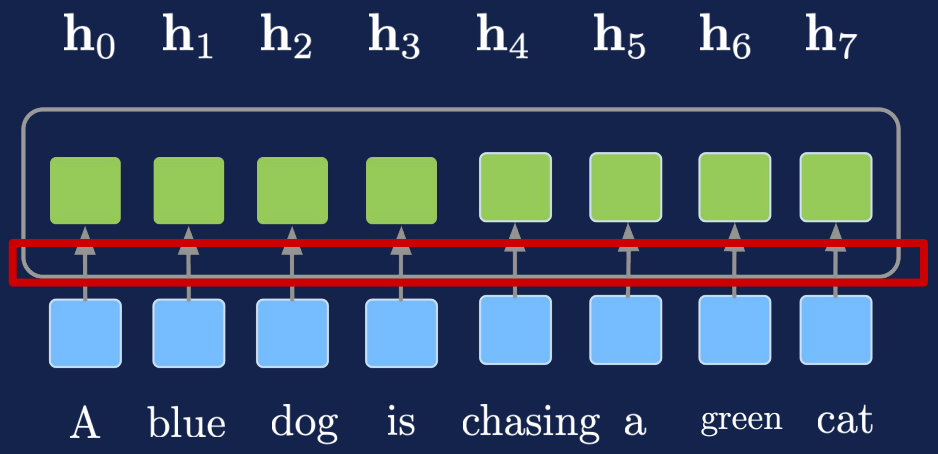

$$g_\omega(x_0, x_1, \ldots, x_7) \rightarrow \mathbf{h}_0, \mathbf{h}_1, \ldots, \mathbf{h}_7$$

Background

Knowledge is encoded in the weights of a parametric neural network.

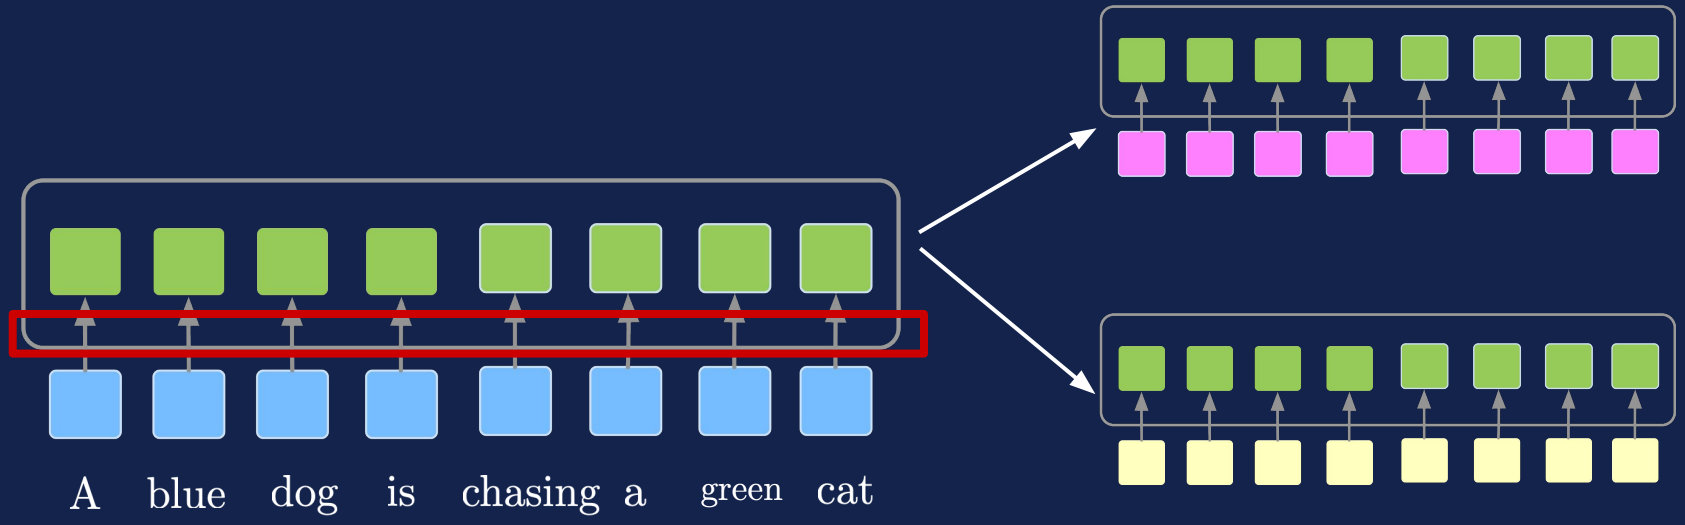

Update weights with new knowledge → changes affect all examples (sequences).

Background

Knowledge is encoded in the weights of a parametric neural network.

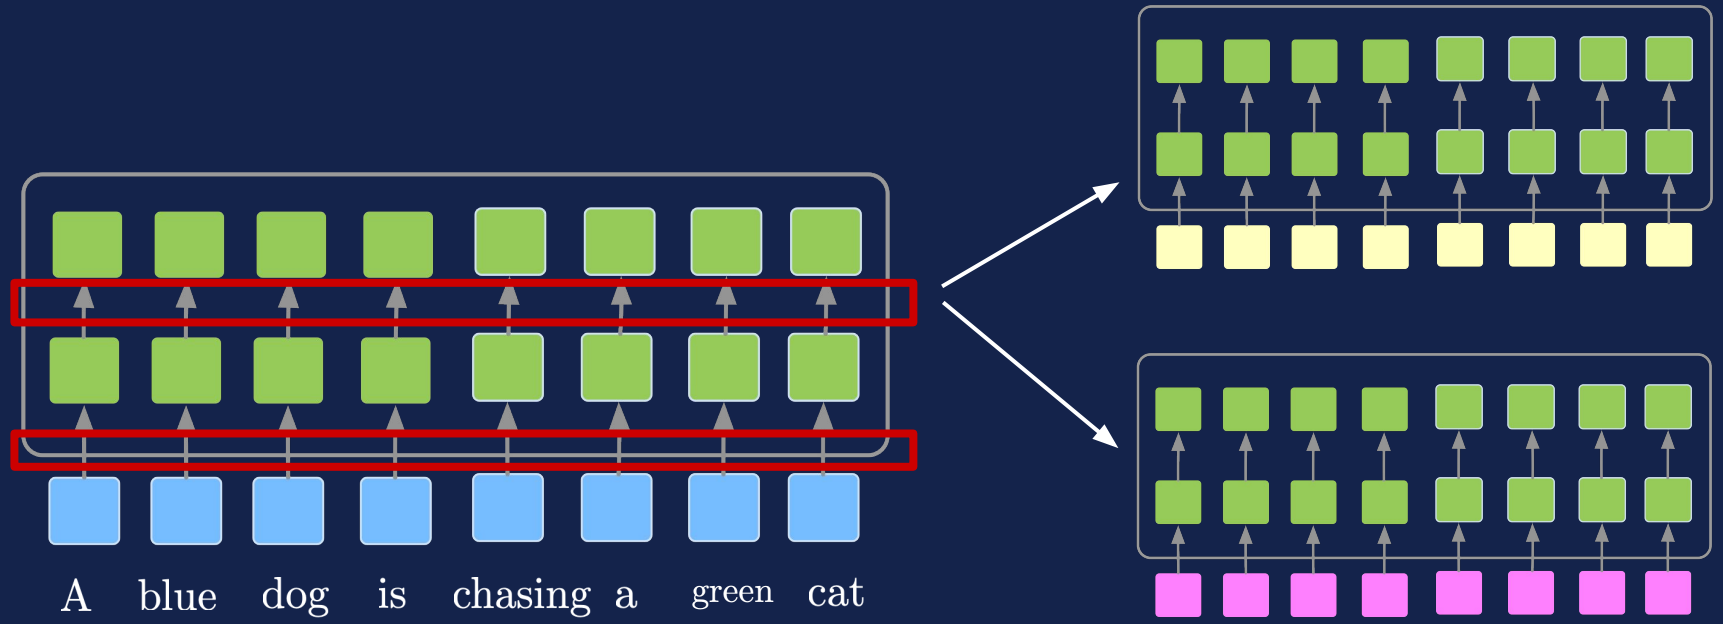

Update weights with new knowledge → changes affect all examples (sequences).

Background

Knowledge is encoded in the weights of a parametric neural network.

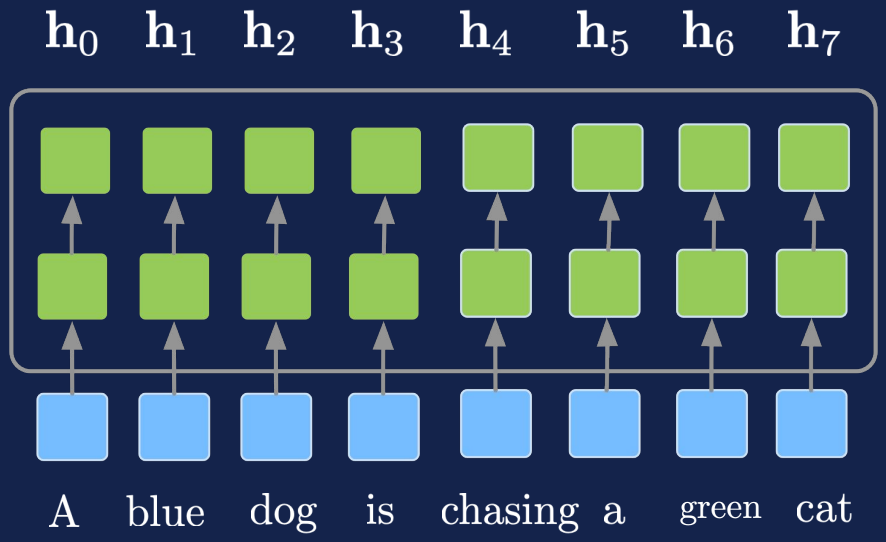

Background

Knowledge is encoded in the weights of a parametric neural network.

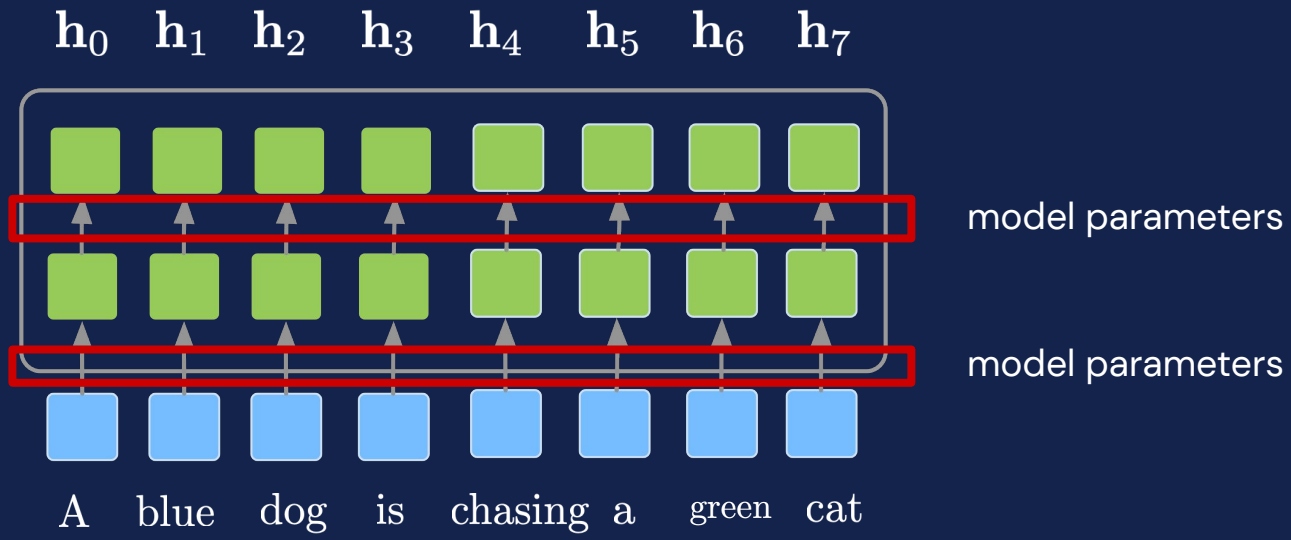

Background

Knowledge is encoded in the weights of a parametric neural network.

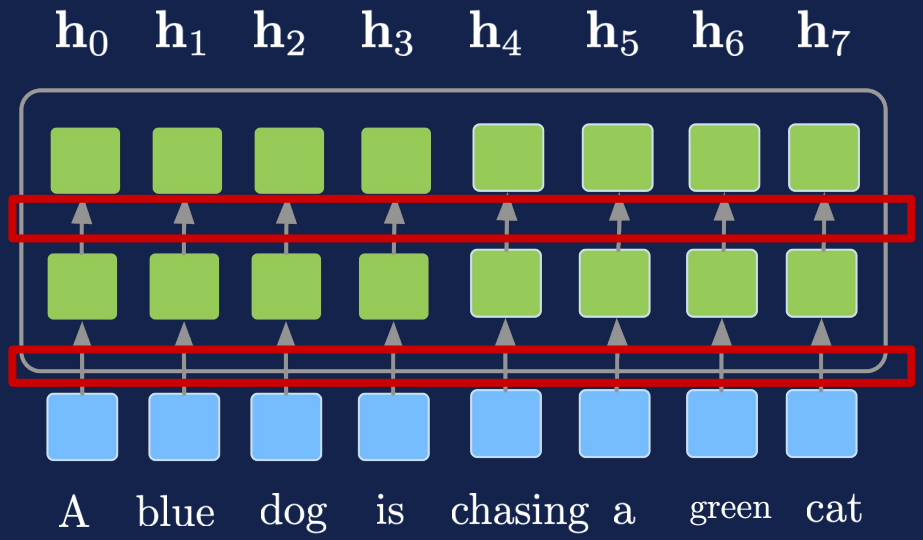

$$f_\alpha(\mathbf{i}_0, \mathbf{i}_1 \ldots, \mathbf{i}_7) \rightarrow \mathbf{h}_0, \mathbf{h}_1, \ldots, \mathbf{h}_7$$

$$f_\beta(x_0, x_1, \ldots, x_7) \rightarrow \mathbf{i}_0, \mathbf{i}_1, \ldots, \mathbf{i}_7$$

Background

Knowledge is encoded in the weights of a parametric neural network.

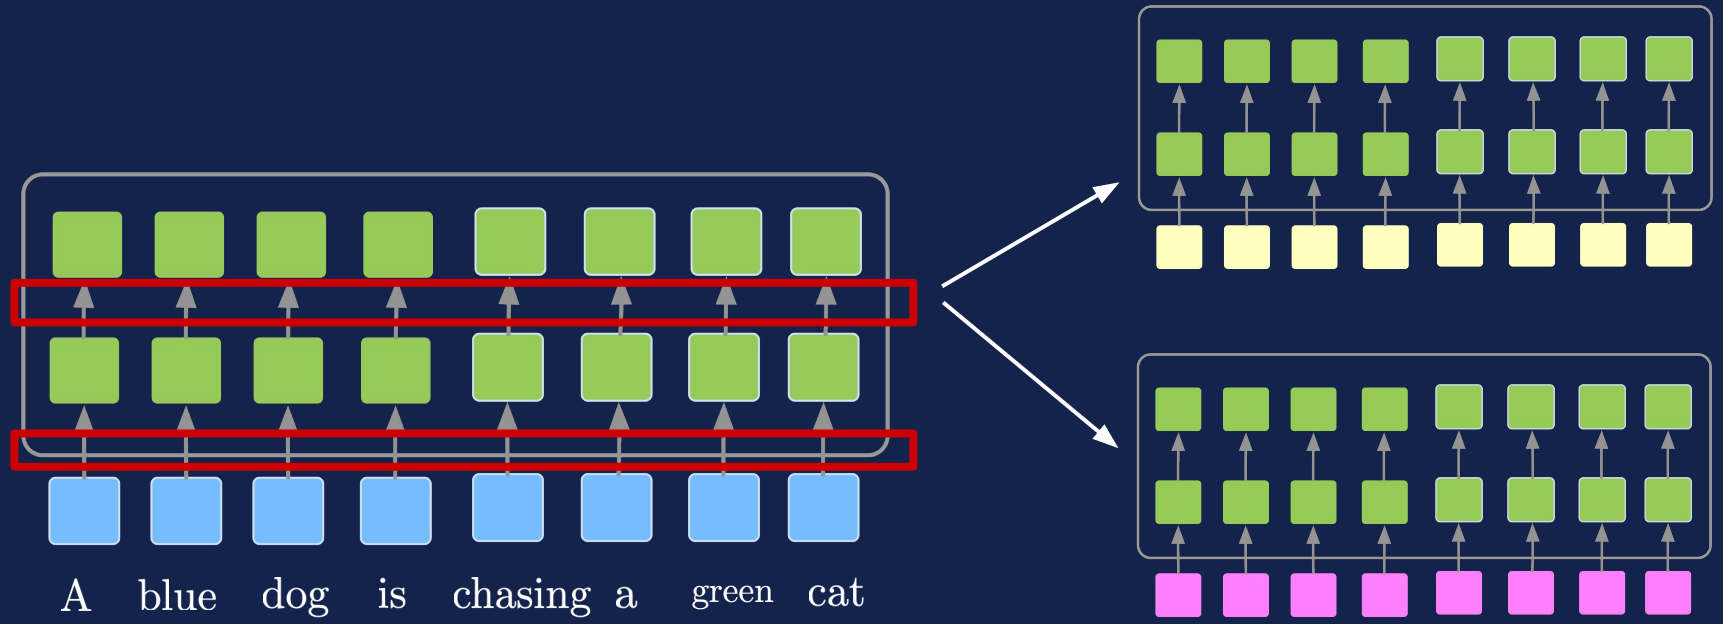

Update weights with new knowledge → changes affect all examples (sequences).

Semiparametric Models

Separation of computation and storage as an architectural bias.

Nematzadeh, Ruder, Yogatama, ICLR Bridging AI and Cognitive Science Workshop 2020

Semiparametric Models

Separation of computation and storage as an architectural bias.

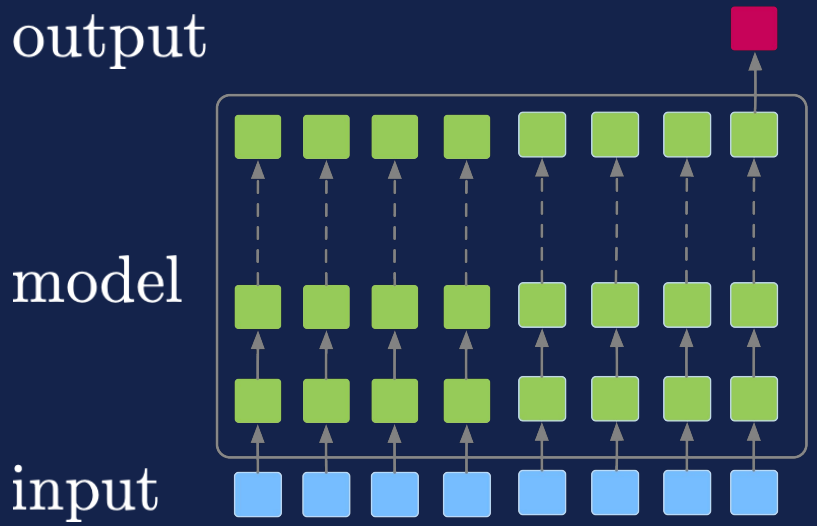

Computation: a neural network

Nematzadeh, Ruder, Yogatama, ICLR Bridging AI and Cognitive Science Workshop 2020

Semiparametric Models

Separation of computation and storage as an architectural bias.

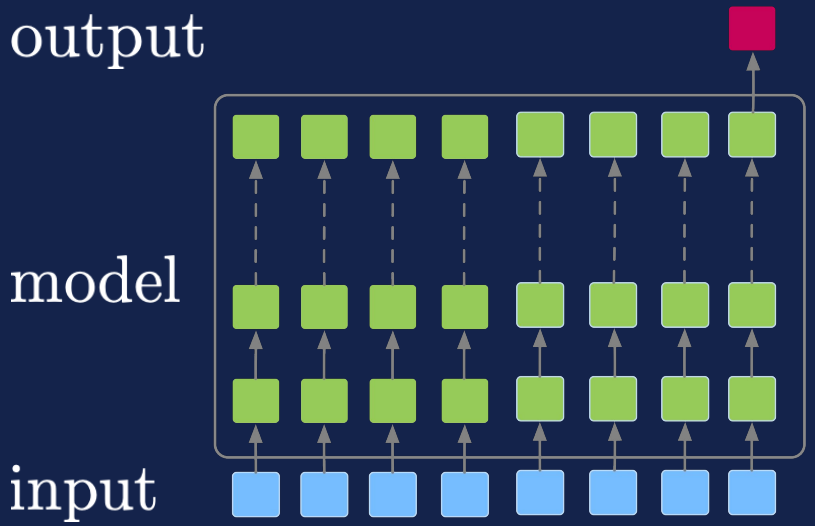

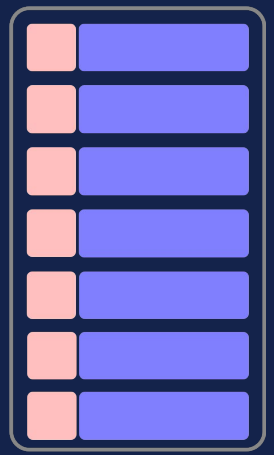

Computation: a neural network

Memory (storage): a key-value database

Nematzadeh, Ruder, Yogatama, ICLR Bridging AI and Cognitive Science Workshop 2020

Semiparametric Language Models

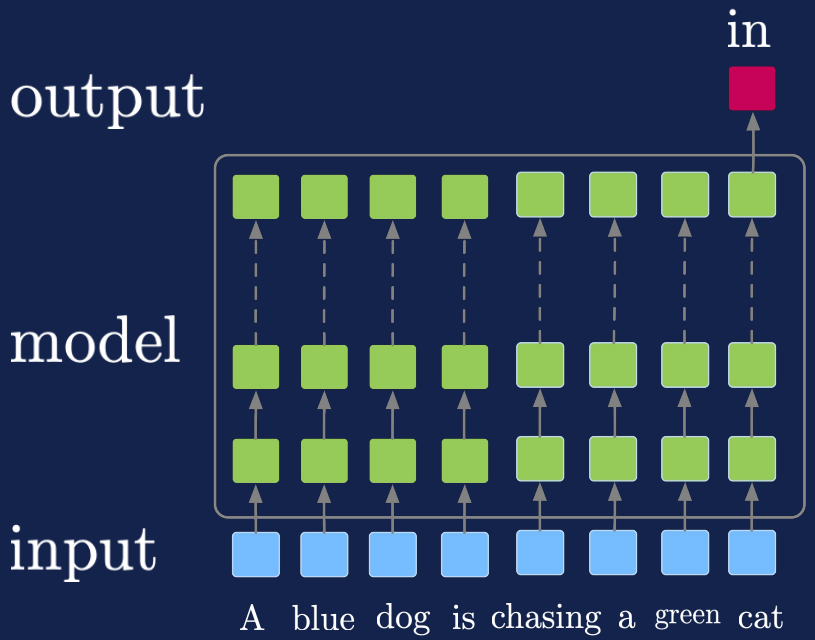

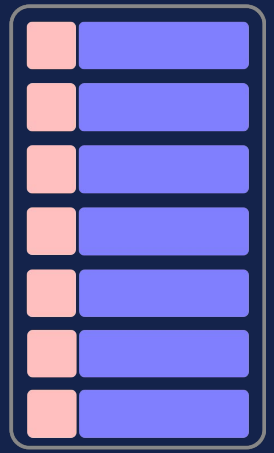

Problem Setup

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to **Uptown**

Problem Setup

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to Uptown **Waterloo**

Problem Setup

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to Uptown Waterloo **and**

Problem Setup

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to Uptown Waterloo and **Waterloo**

Problem Setup

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to Uptown Waterloo and Waterloo **???**

Language Model

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to Uptown Waterloo and Waterloo **???**

Current context

(computation)

Language Model

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to Uptown Waterloo and Waterloo **???**

Current context

(computation)

Extended context

(short-term memory)

Language Model

University of Waterloo Wikipedia

The University of Waterloo (commonly referred to as Waterloo, UW, or UWaterloo) is a public research university with a main campus in Waterloo, Ontario, Canada. The main campus is on 404 hectares of land adjacent to Uptown Waterloo and Waterloo **???**

Current context (computation)

Extended context (short-term memory)

Long-term memory

Waterloo Park Wikipedia

Waterloo Park is an urban park situated in Waterloo, Ontario, Canada.

Language Model



Language Model

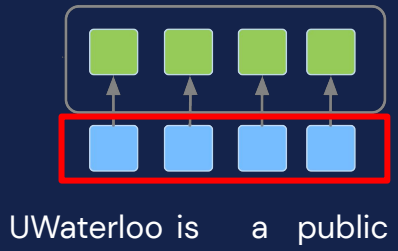

Input: a sequence of tokens.

Language Model

Encoder: transformer

(Vaswani et al., 2017)

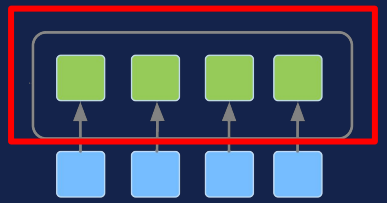

encoder
(computation)

Language Model

Short-term memory:
transformer-XL (Dai et al., 2019)

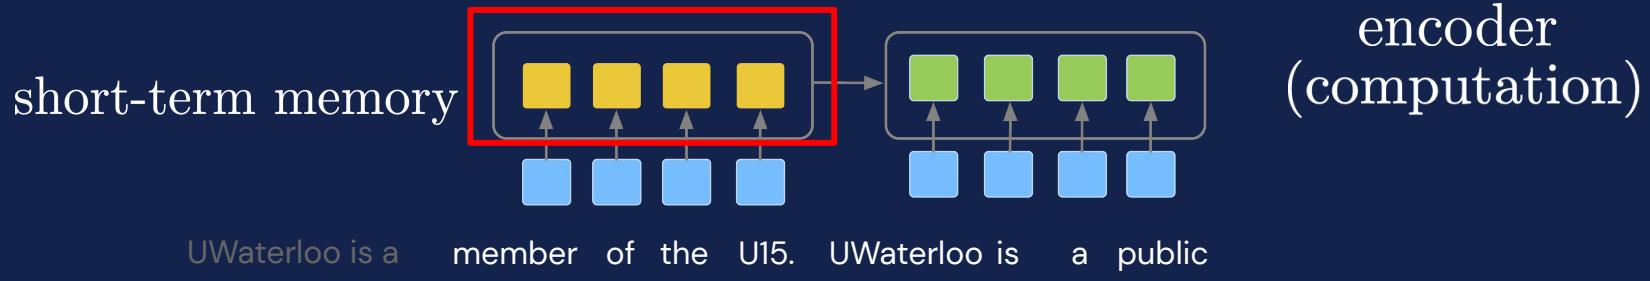

Language Model

Short-term memory:
transformer-XL (Dai et al., 2019)

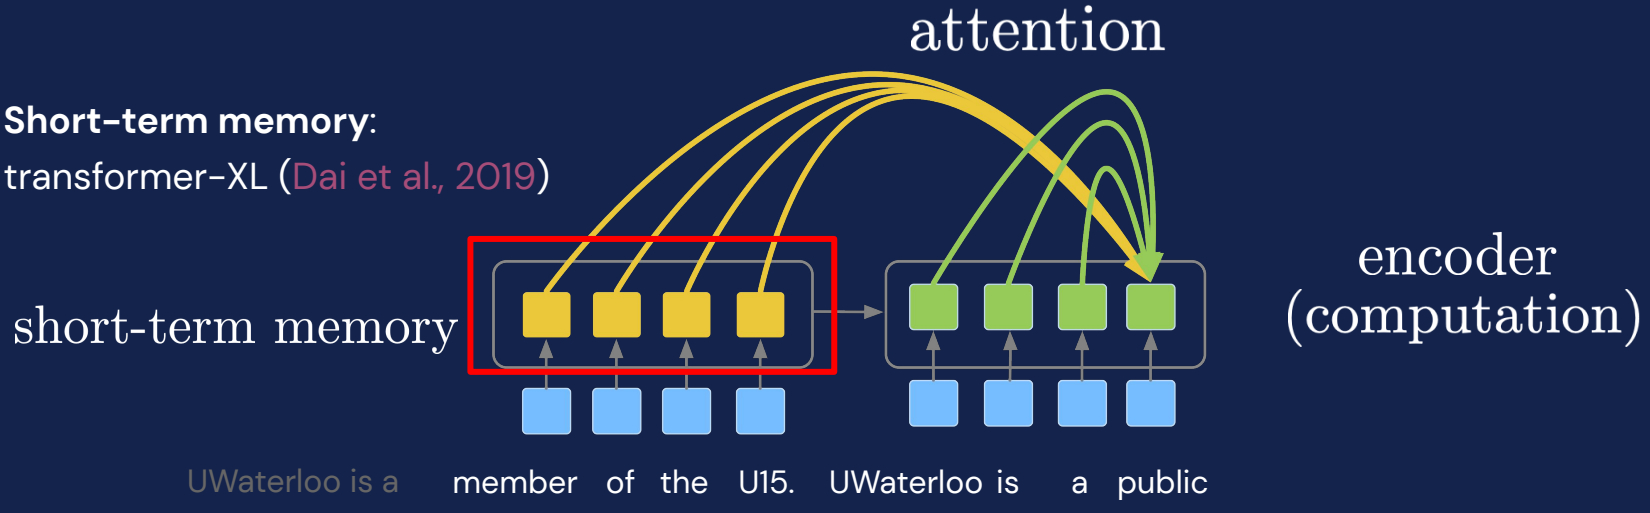

Language Model

Long-term memory:
key-value database

long-term memory

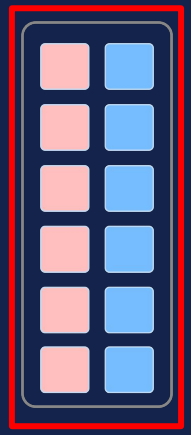

short-term memory

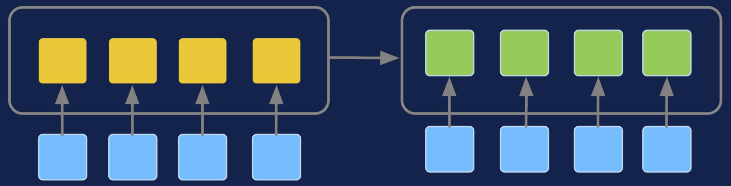

encoder
(computation)

UWaterloo is a member of the U15. UWaterloo is a public

Language Model

long-term memory

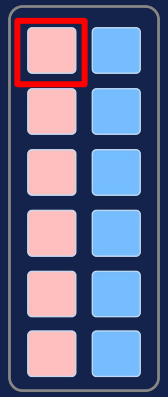

Key: compressed long-term context

Canada is a beautiful

short-term memory

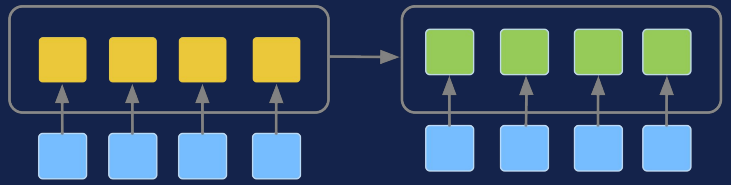

encoder (computation)

UWaterloo is a member of the U15. UWaterloo is a public

Language Model

long-term memory

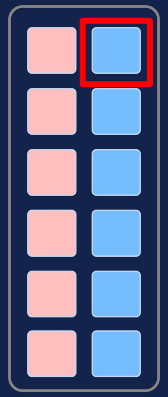

country

Value: output token for the respective context

short-term memory

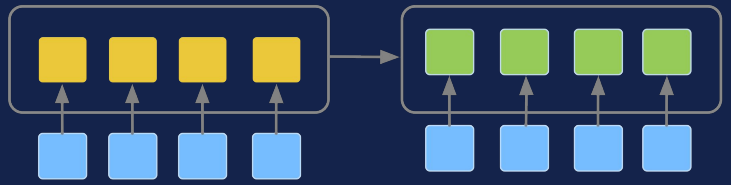

encoder (computation)

UWaterloo is a member of the U15. UWaterloo is a public

Language Model

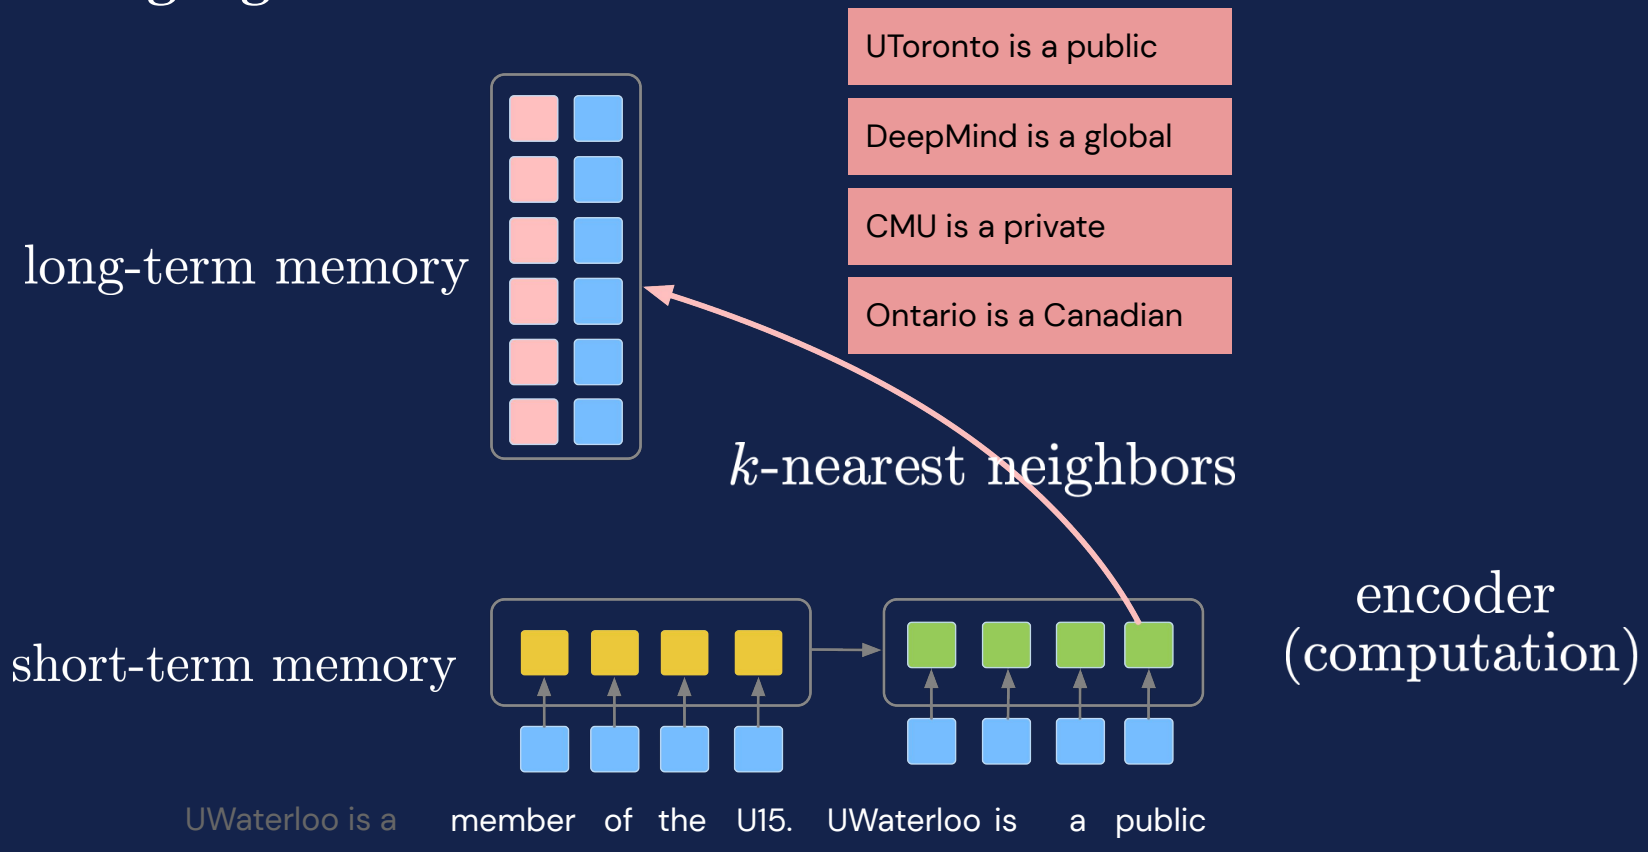

Language Model

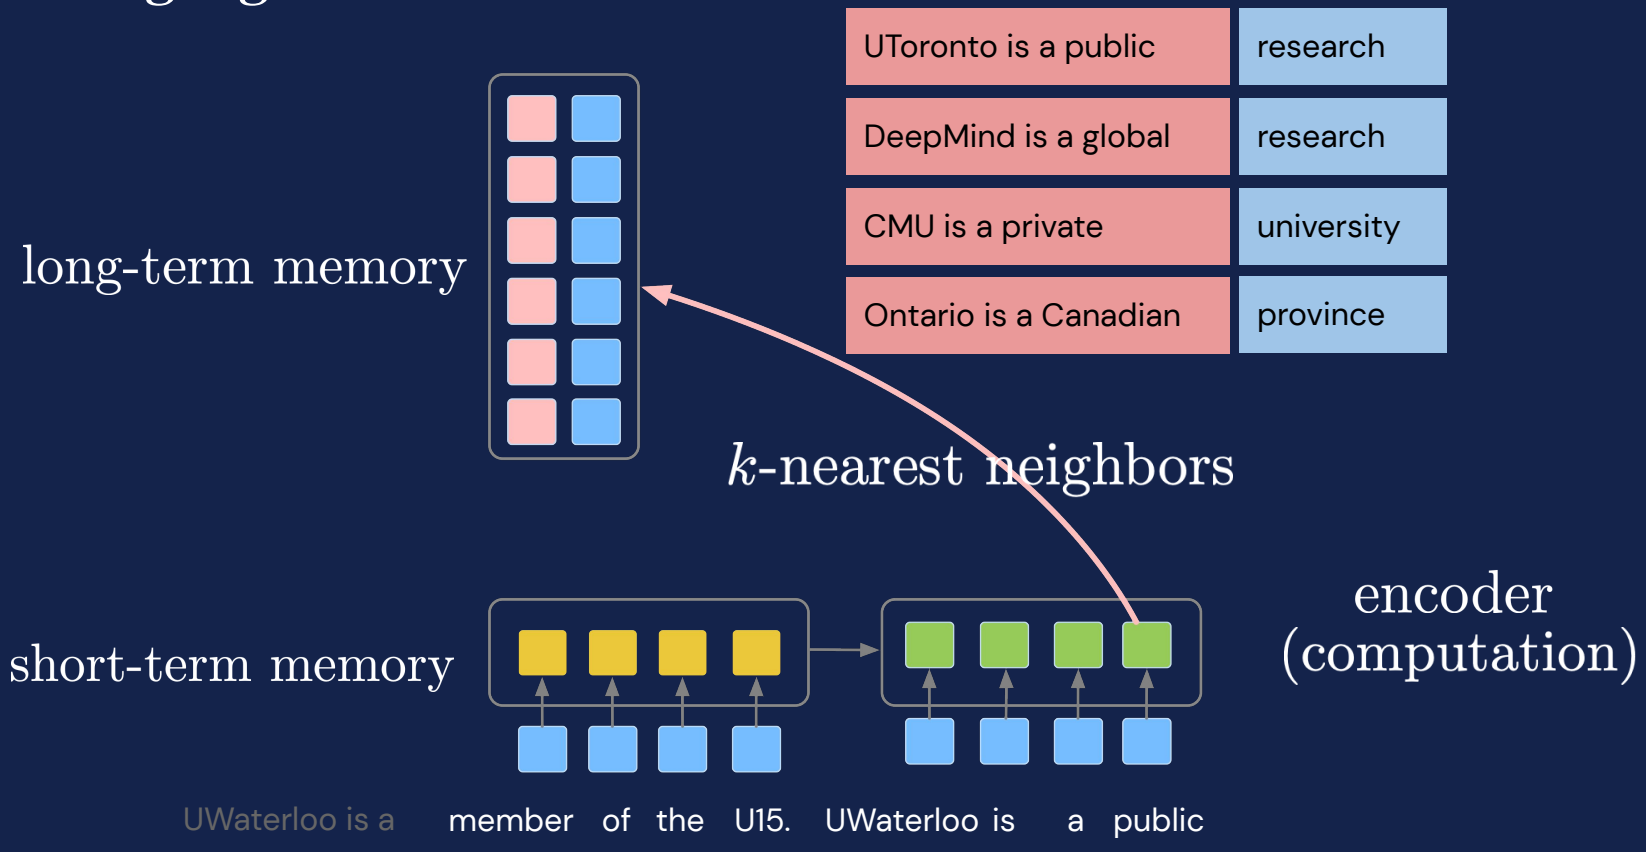

Language Model

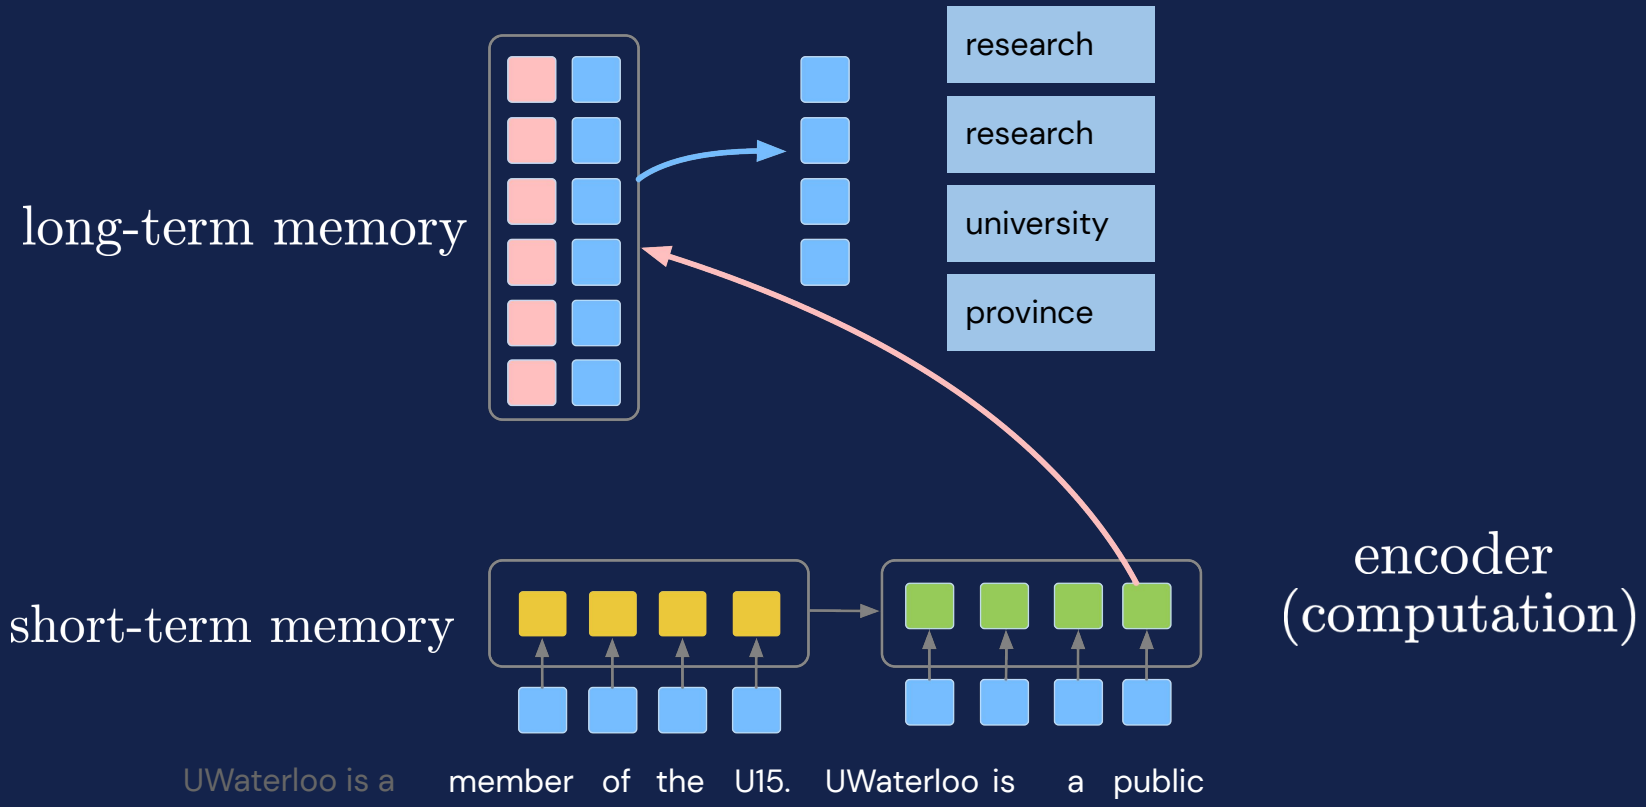

Language Model

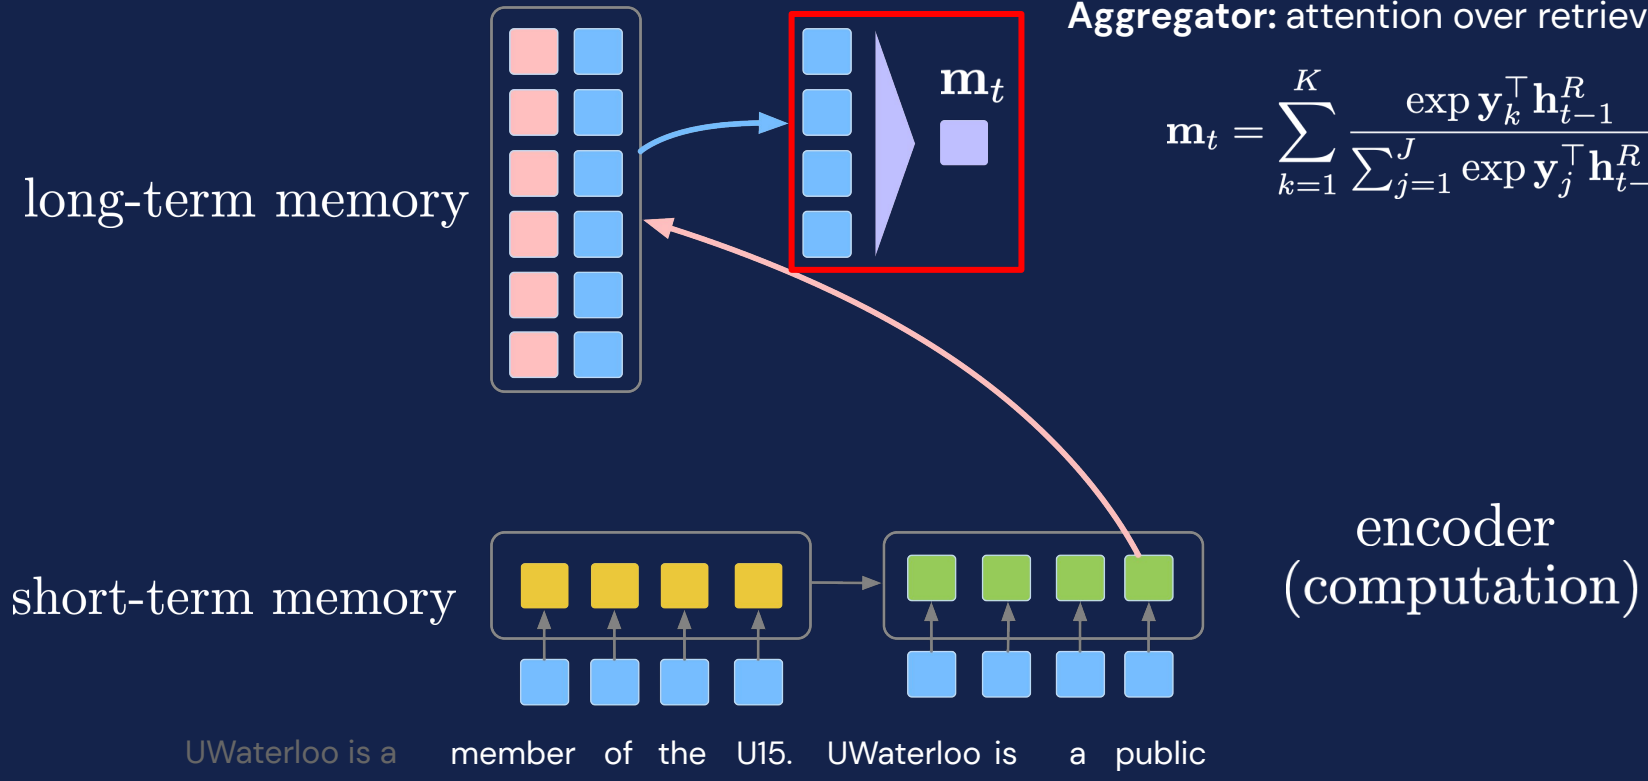

Aggregator: attention over retrieved values

$$\mathbf{m}_t = \sum_{k=1}^{K} \frac{\exp \mathbf{y}_k^\top \mathbf{h}_{t-1}^R}{\sum_{j=1}^{J} \exp \mathbf{y}_j^\top \mathbf{h}_{t-1}^R} \mathbf{y}_k$$

Language Model

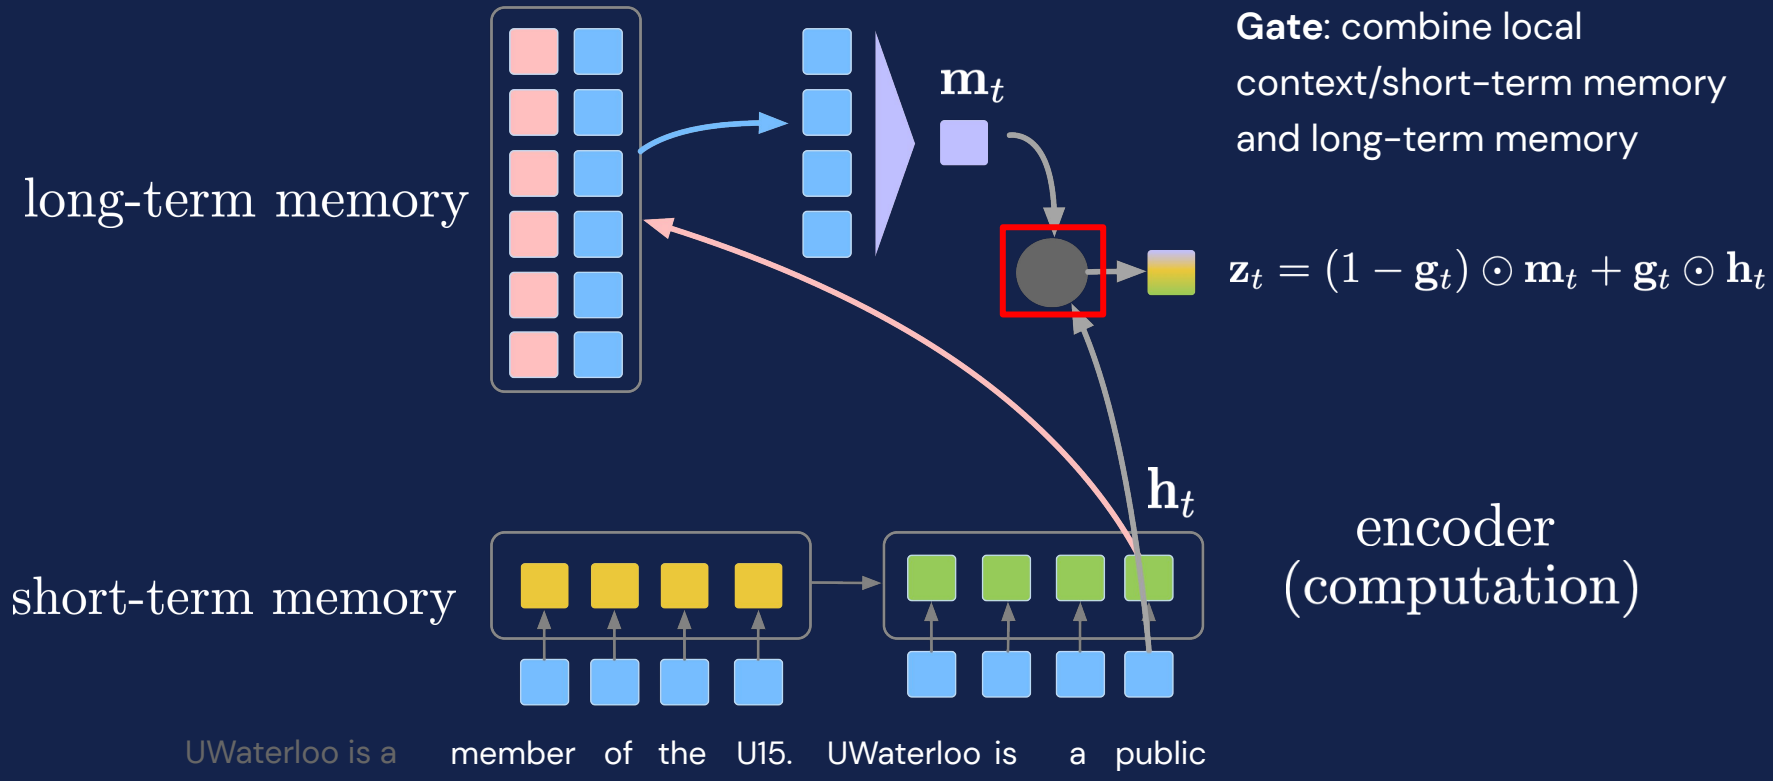

Gate: combine local context/short-term memory and long-term memory

$$\mathbf{z}_t = (1 - \mathbf{g}_t) \odot \mathbf{m}_t + \mathbf{g}_t \odot \mathbf{h}_t$$

Language Model

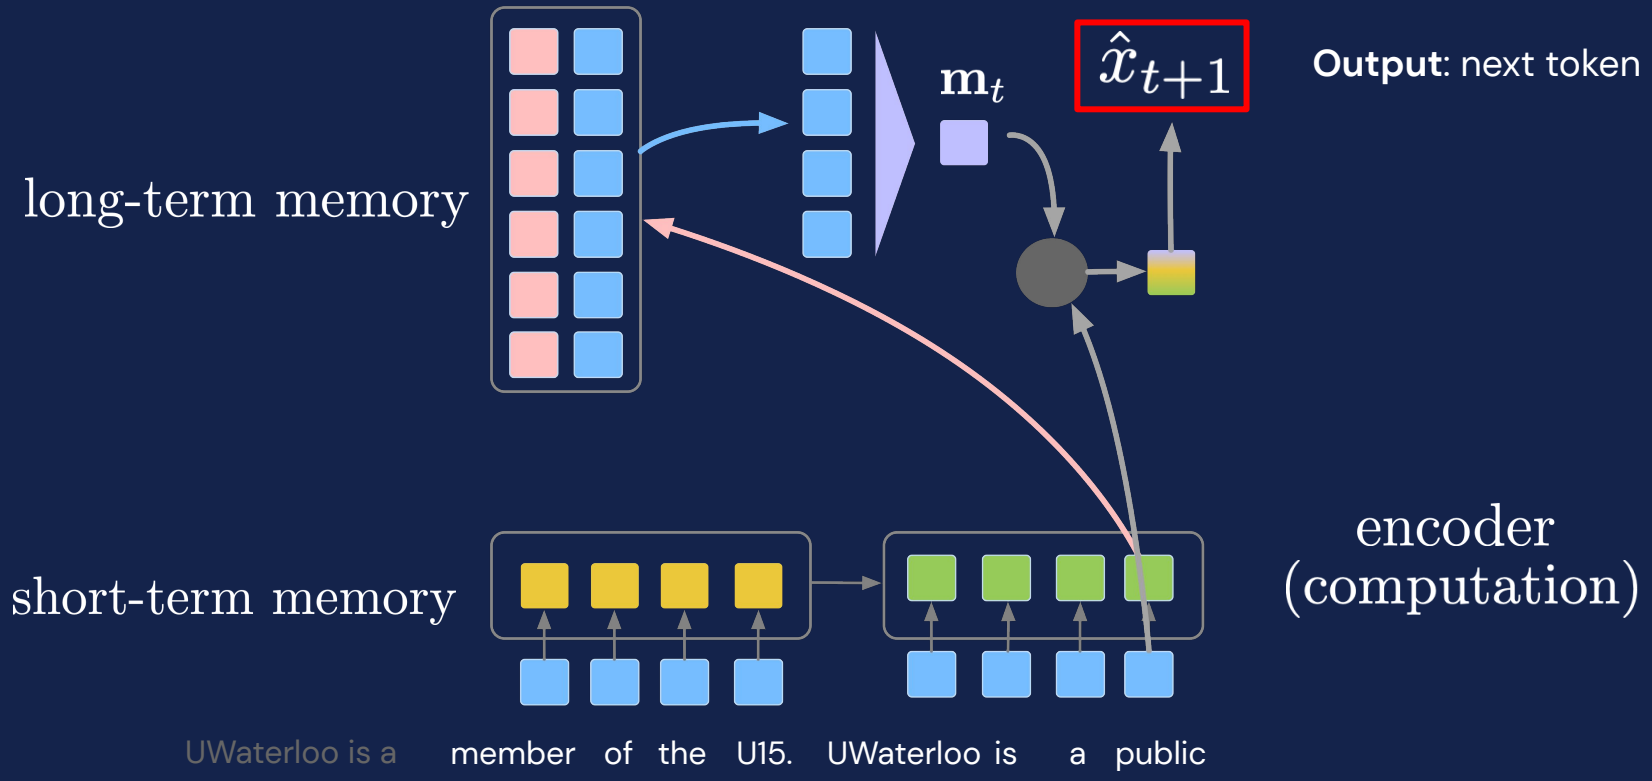

Language Model



UWaterloo is a public

Input: a sequence of tokens.

Language Model

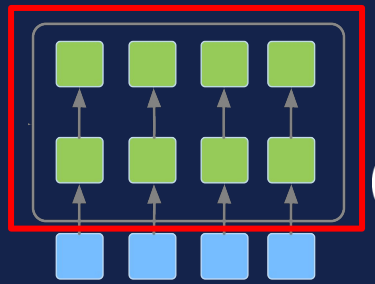

encoder
(computation)

UWaterloo is a public

Encoder: transformer

(Vaswani et al., 2017)

Language Model

Short-term memory:
transformer-XL (Dai et al., 2019)

Encoder: transformer
(Vaswani et al., 2017)



encoder
(computation)

UWaterloo is a | member of the U15. | UWaterloo is a public

Language Model

Short-term memory:
transformer-XL (Dai et al., 2019)

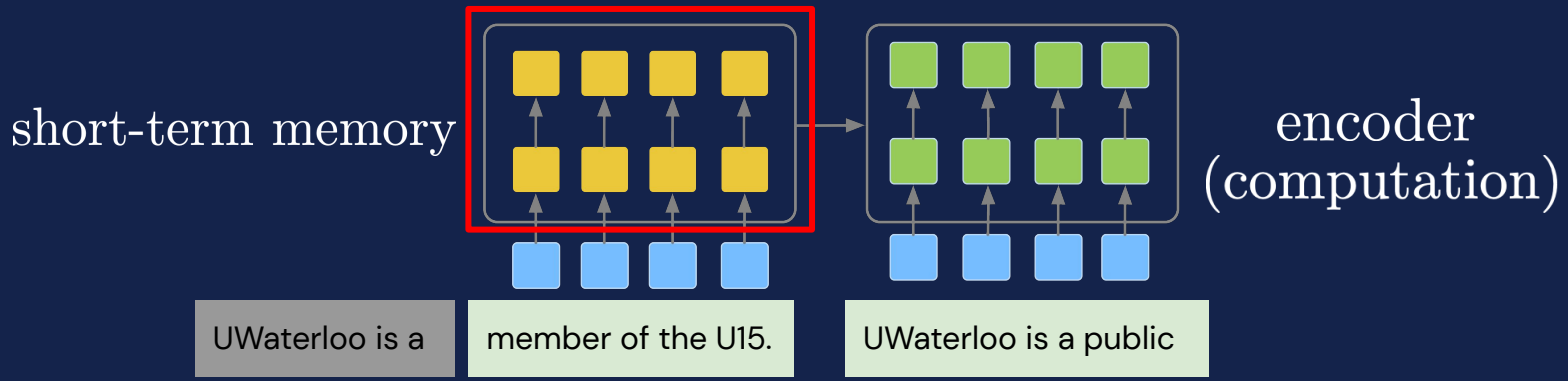

Language Model

Short-term memory:
transformer-XL (Dai et al., 2019)

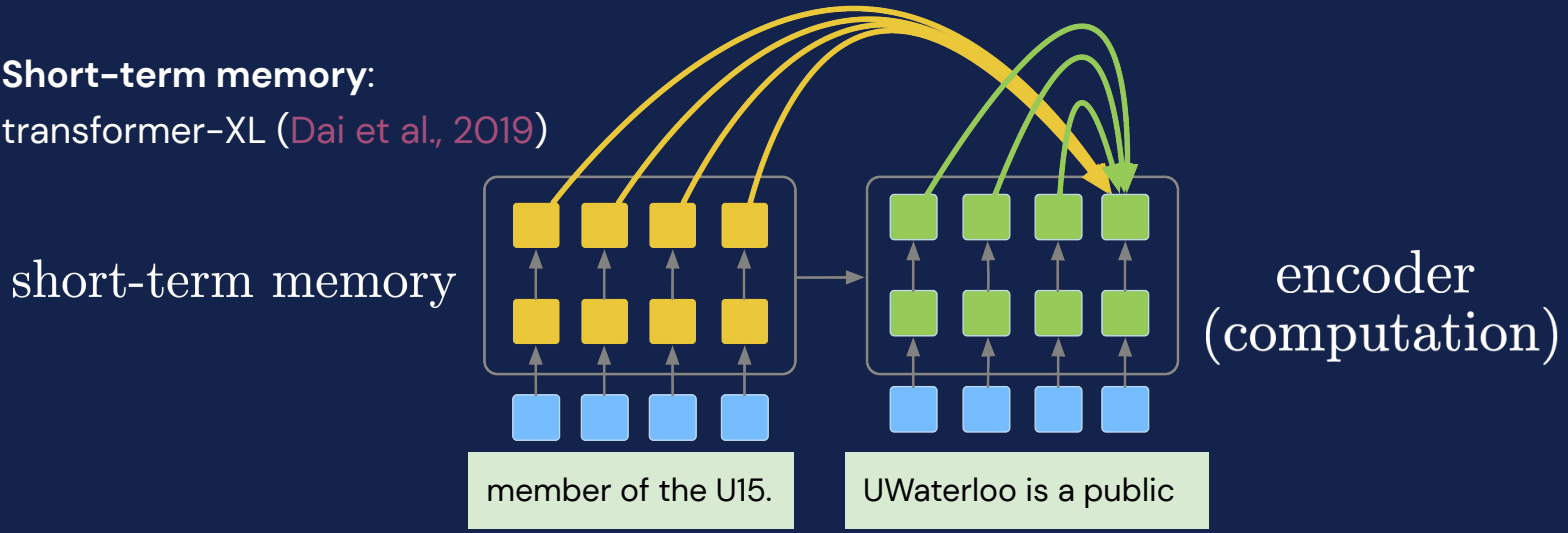

Language Model

Long-term memory:
key-value database

long-term memory

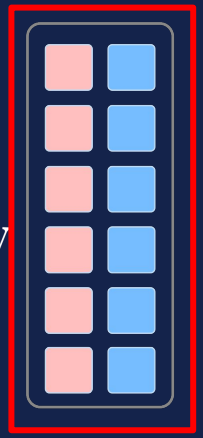

short-term memory

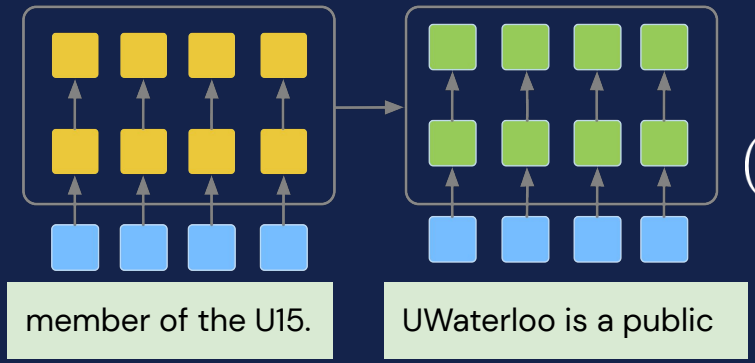

encoder
(computation)

Language Model

long-term memory

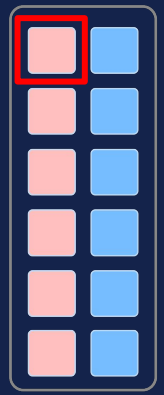

Key: compressed long-term context

Canada is a beautiful

short-term memory

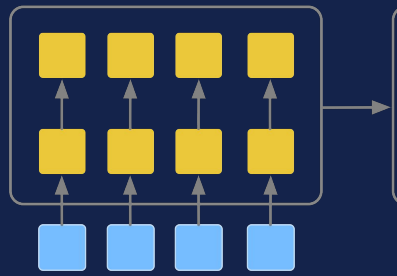

encoder (computation)

member of the U15.

UWaterloo is a public

Language Model

long-term memory

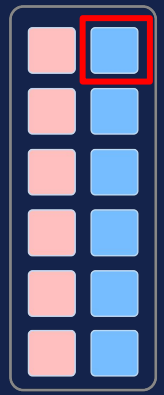

country

Value: output token for the respective context

short-term memory

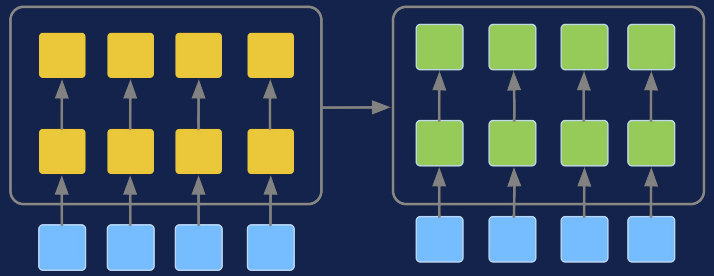

encoder (computation)

member of the U15.

UWaterloo is a public

Language Model

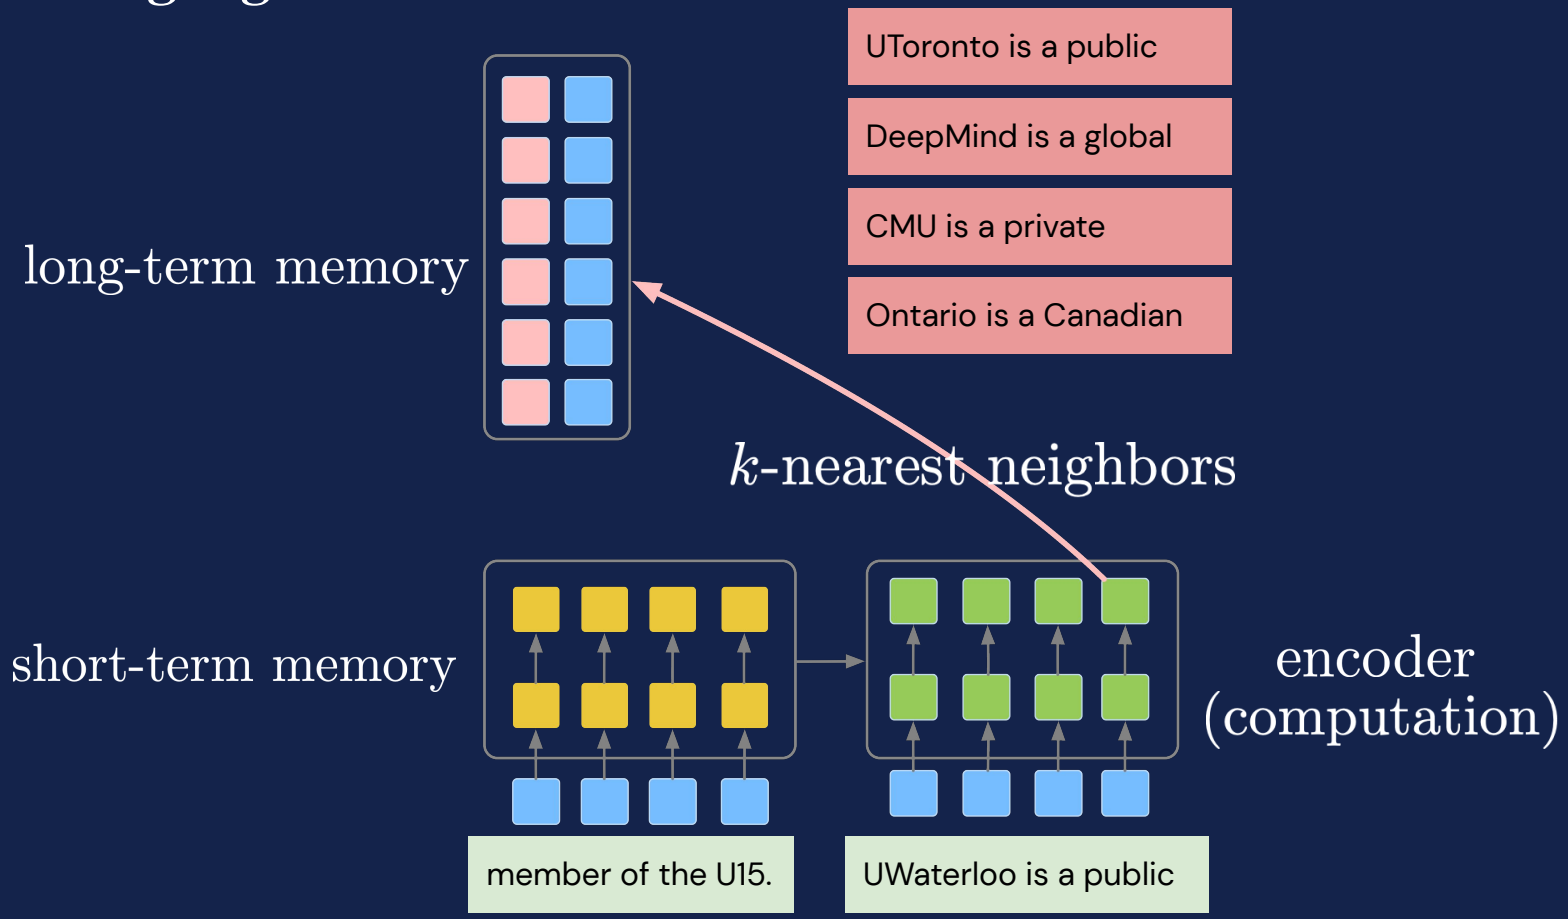

Language Model

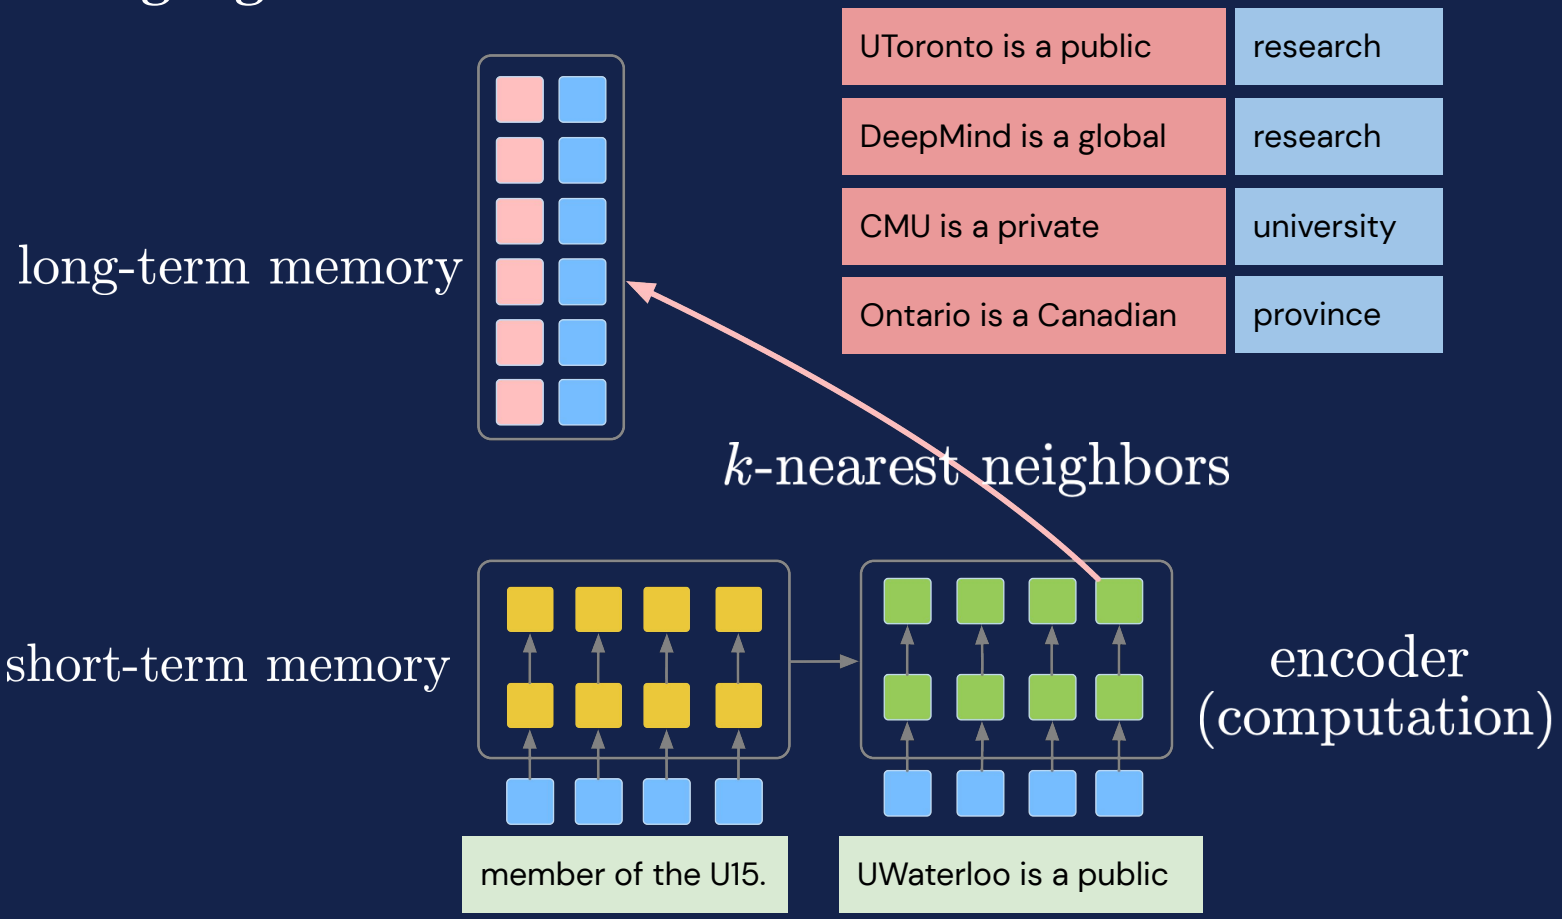

Language Model

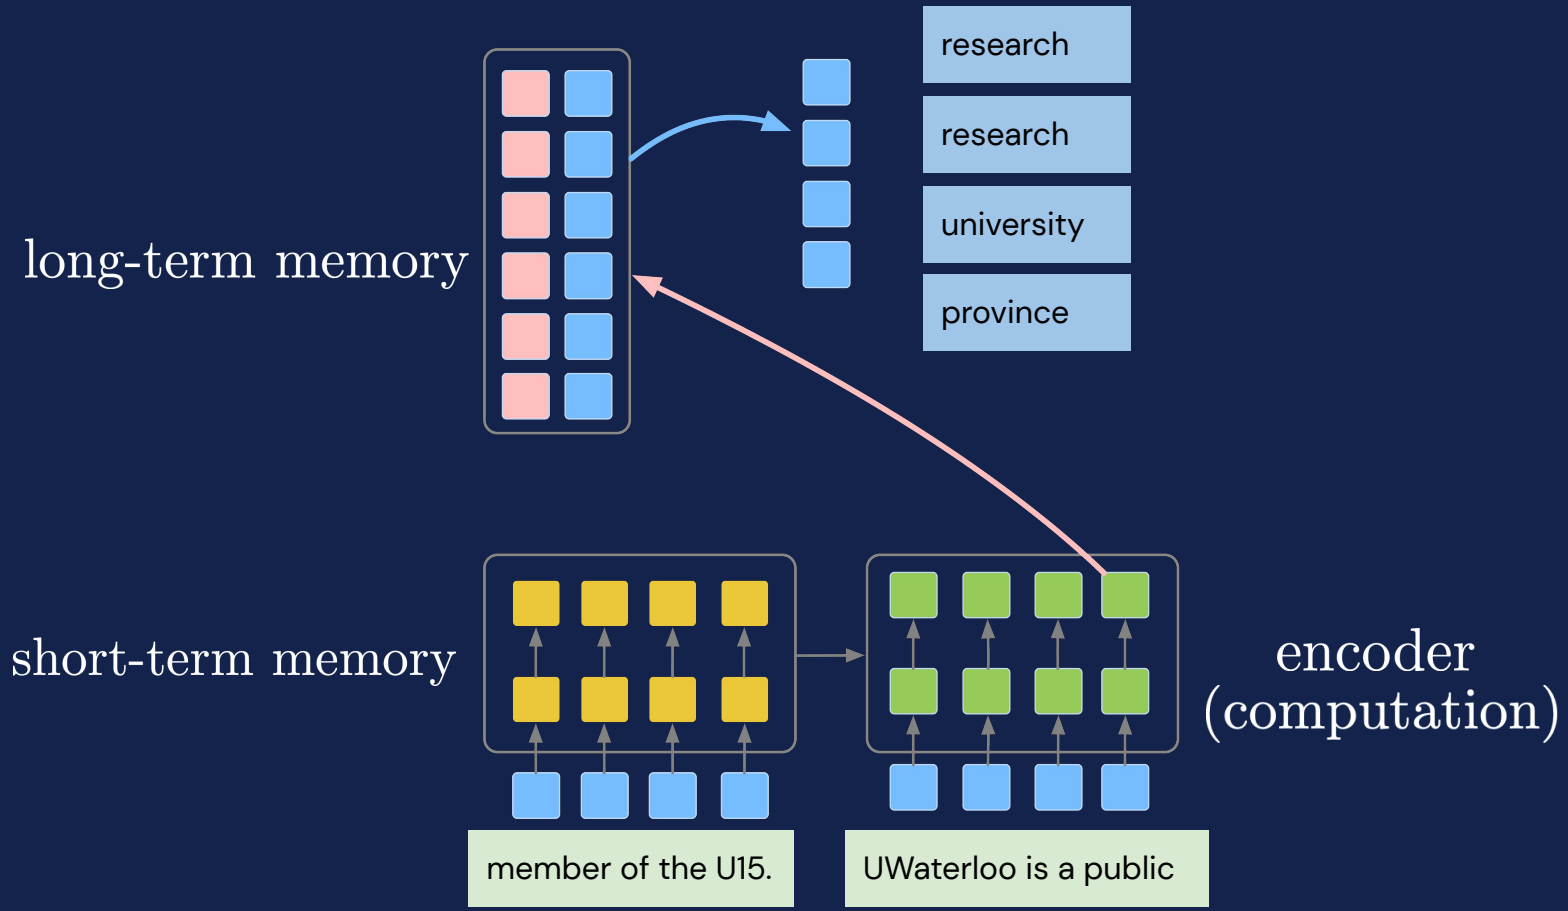

Language Model

Aggregator: attention over retrieved values

$$\mathbf{m}_t = \sum_{k=1}^{K} \frac{\exp \mathbf{y}_k^\top \mathbf{h}_{t-1}^R}{\sum_{j=1}^{J} \exp \mathbf{y}_j^\top \mathbf{h}_{t-1}^R} \mathbf{y}_k$$

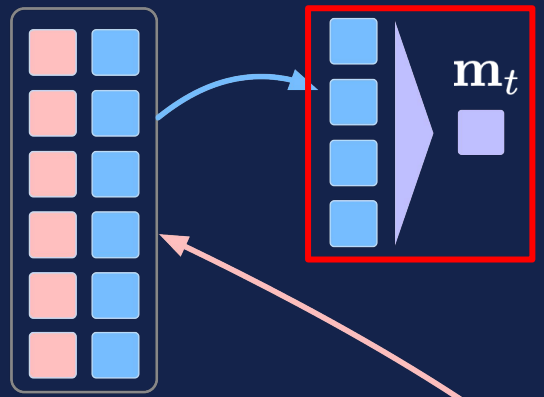

long-term memory

short-term memory

encoder (computation)

member of the U15.

UWaterloo is a public

Language Model

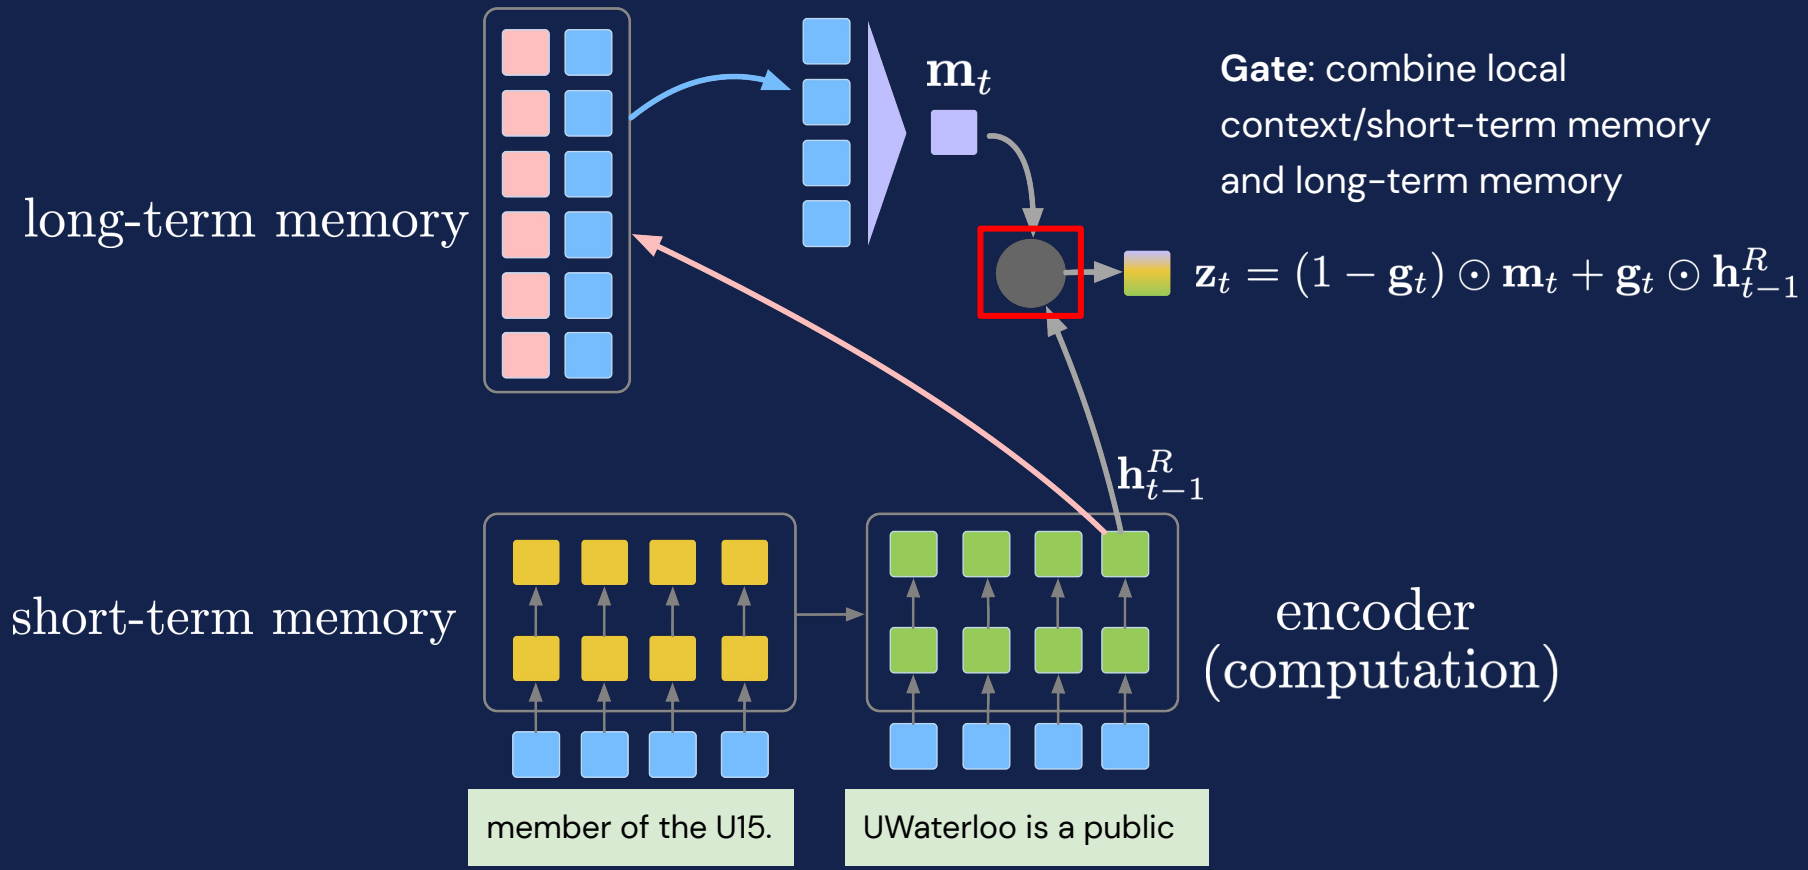

Language Model

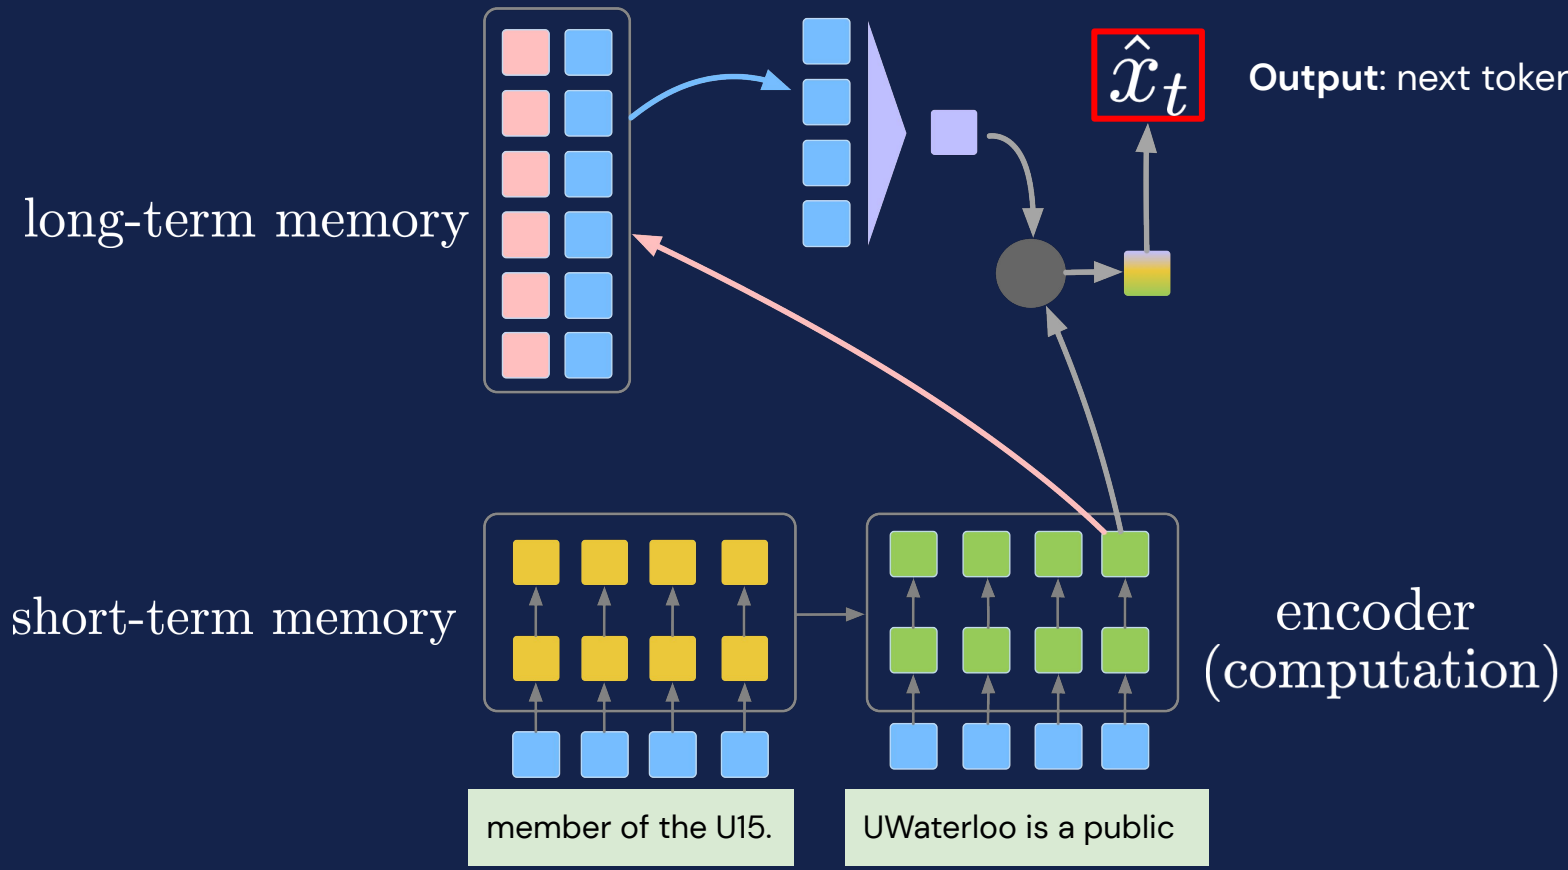

Experiments

- Word-level language modeling.
  - WikiText-103 English (Merity et al., 2016).
  - WMT 2019 English: http://www.statmt.org/wmt19/.

- Character-level language modeling.
  - enwik8: http://prize.hutter1.net.

Experiments

Perplexity (1-inf), lower is better

	Base	TXL	kNN-LM	Ours
WikiText-103	21.8	19.1	18.0	**17.6***
WMT	16.5	15.5	15.2	**14.1**

Transformer: Vaswani et al., 2017

Transformer-XL: Dai et al., 2019

kNN-LM: Khandelwal et al., 2020

Experiments

BPC (0-inf), lower is better

	Base	TXL	kNN-LM	Ours
enwik8	1.05	1.01	1.02	**1.00**

Transformer: Vaswani et al., 2017

Transformer-XL: Dai et al., 2019

kNN-LM: Khandelwal et al., 2020

Analysis

Liberal Democrat leader Jo Swinson has said
she would work with Donald Trump in government as

Analysis

What's in the long-term memory?

Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in
spending	over	the	next	decade	to	provide	health	care
every	American	without	raising	taxes	on	the	middle	class

Analysis

What's in the long-term memory?

For

Perhaps
Like

Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in
spending	over	the	next	decade	to	provide	health	care
every	American	without	raising	taxes	on	the	middle	class

Analysis

What's in the long-term memory?

For	Warren							
	Warren							
Perhaps	Warren							
Like	Warren							
Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in
spending	over	the	next	decade	to	provide	health	care
every	American	without	raising	taxes	on	the	middle	class

Analysis

What's in the long-term memory?

For	Warren	&						
	Warren	may						
Perhaps	Warren	has						
Like	Warren	,						
Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in
spending	over	the	next	decade	to	provide	health	care
every	American	without	raising	taxes	on	the	middle	class

Analysis

What's in the long-term memory?

For	Warren	&	Wednesday					
	Warren	may	Tuesday					
Perhaps	Warren	has	Sunday					
Like	Warren	,	Monday					
Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in
spending	over	the	next	decade	to	provide	health	care
every	American	without	raising	taxes	on	the	middle	class

Analysis

What's in the long-term memory?

For	Warren	&	Wednesday	briefly	a	5	billion	to
	Warren	may	Tuesday	praised	wiping	16	trillion	in
Perhaps	Warren	has	Sunday	stood	breaking	10	billion	for
Like	Warren	,	Monday	defended	using	166	trillion	in
Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in

spending over the next decade to provide health care

every American without raising taxes on the middle class

Analysis

What's in the long-term memory?

For	Warren	&	Wednesday	briefly	a	5	billion	to
	Warren	may	Tuesday	praised	wiping	16	trillion	in
Perhaps	Warren	has	Sunday	stood	breaking	10	billion	for
Like	Warren	,	Monday	defended	using	166	trillion	in
Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in
grants	in	10	course	eight	.	fight	even	care
funding	over	the	next	three	.	upgrade	them	cover
funds	over	10	next	five	in	improve	American	-
,	over	a	next	10	,	invest	a	insur
spending	over	the	next	decade	to	provide	health	care

every American without raising taxes on the middle class

Analysis

What's in the long-term memory?

For	Warren	&	Wednesday	briefly	a	5	billion	to
	Warren	may	Tuesday	praised	wiping	16	trillion	in
Perhaps	Warren	has	Sunday	stood	breaking	10	billion	for
Like	Warren	,	Monday	defended	using	166	trillion	in
Elizabeth	Warren	on	Friday	proposed	$	20	trillion	in
grants	in	10	course	eight	.	fight	even	care
funding	over	the	next	three	.	upgrade	them	cover
funds	over	10	next	five	in	improve	American	-
,	over	a	next	10	,	invest	a	insur
spending	over	the	next	decade	to	provide	health	care
more	community	as	the	rates	.	the	middle	class
everyone	child	,	a	taxes	on	the	wealthy	class
some	baby	,	co	taxes	.	the	middle	class
every	American	by	triggering	taxes	on	all	middle	class
every	American	without	raising	taxes	on	the	middle	class

Takeaways

- A language model that adaptively combines local context, short-term memory, and long-term memory.

Takeaways

- A language model that adaptively combines local context, short-term memory, and long-term memory.

- A variant of the models for question answering (de Masson d'Autume et al., NeurIPS 2019)


Cyprien


Sebastian


Lingpeng

Dani

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Model Architectures

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Model Architectures

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

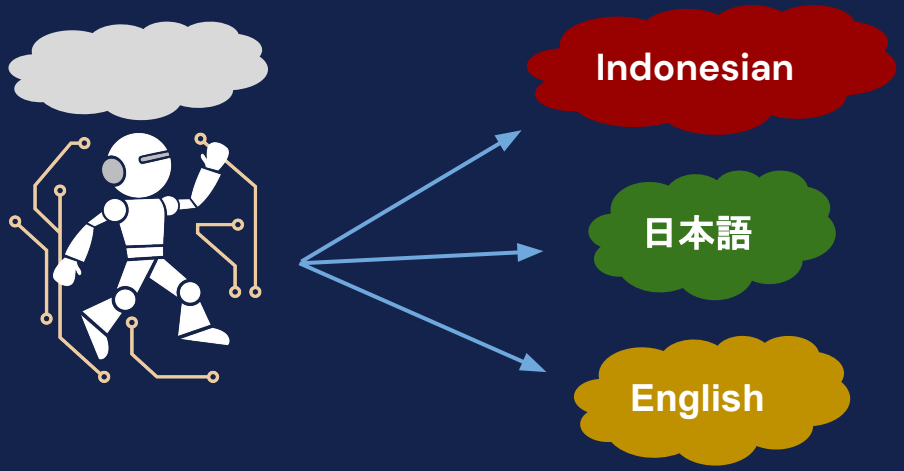

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

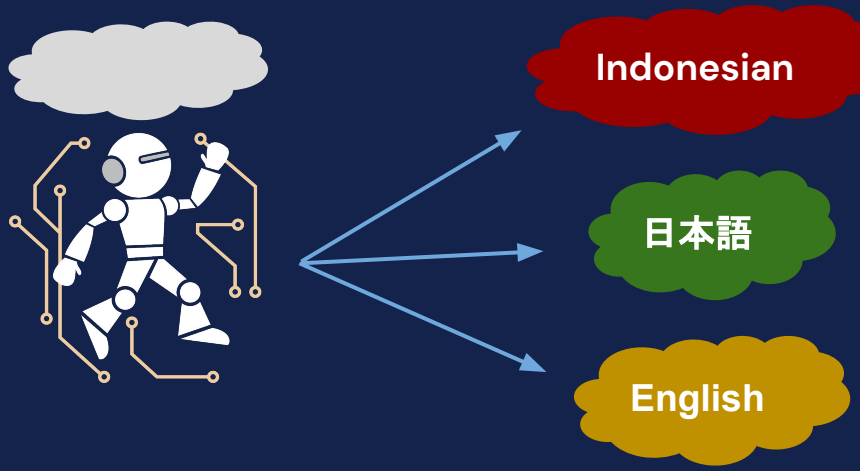

Learning cross-lingual transferable representations

Artetxe et al., ACL 2020

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

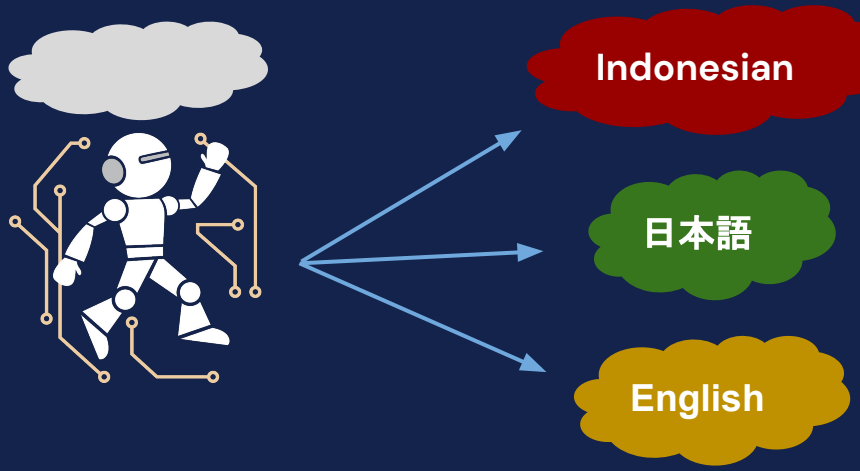

Distributionally Robust Optimization

$$\min_{\theta} \sup_{q} \mathbb{E}_{(x,y)\sim q} \mathcal{L}_{\theta}(x, y)$$

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

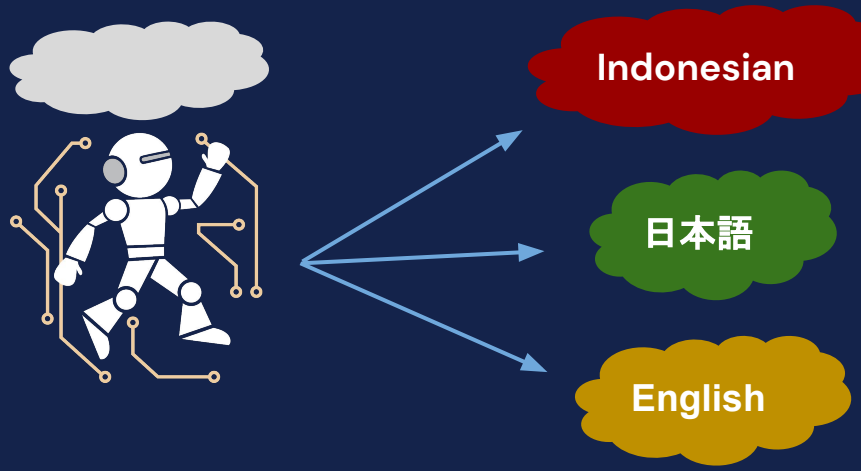

Distributionally Robust Optimization

$$\min_{\theta} \sup_{q} \mathbb{E}_{(x,y)\sim q} \mathcal{L}_{\theta}(x, y)$$

Language

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

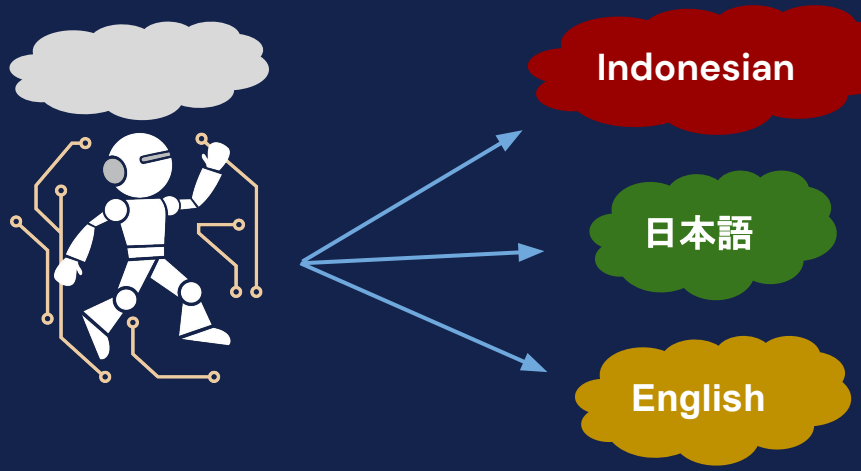

Distributionally Robust Optimization

$$\min_{\theta} \sup_{q} \mathbb{E}_{(x,y)\sim q} \mathcal{L}_{\theta}(x, y)$$

Ensuring that a language model works equally well across languages (important for fairness)

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Model Architectures

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Training Paradigms

Model Architectures

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

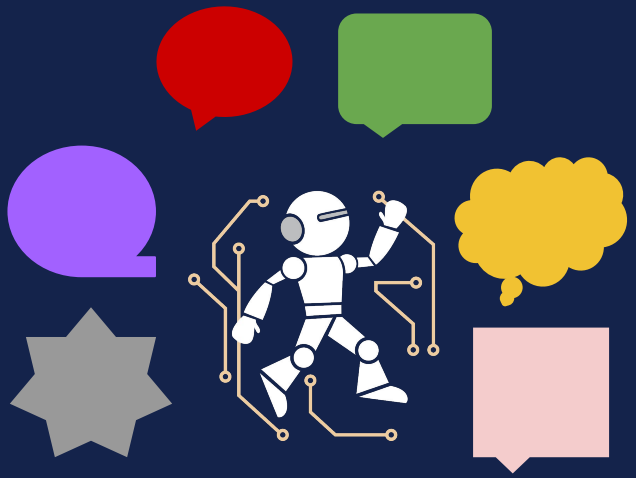

Integration of data from various sources and modalities.

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

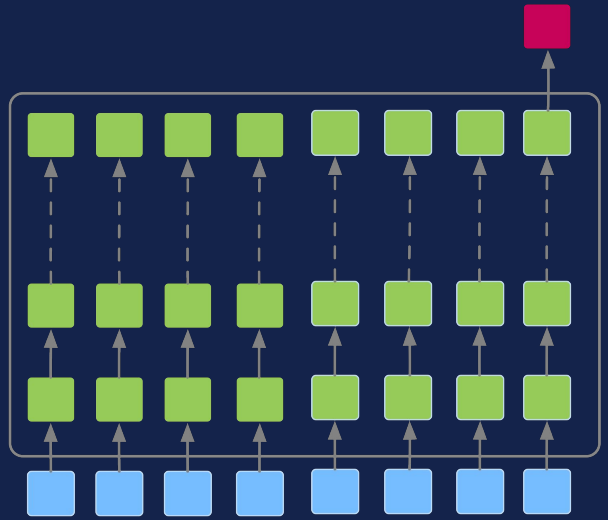

Computation

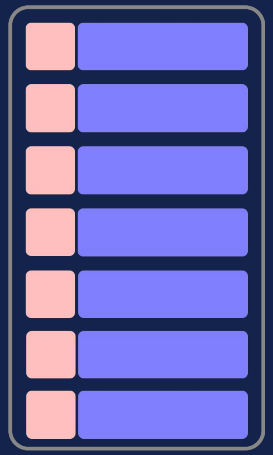

Storage

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

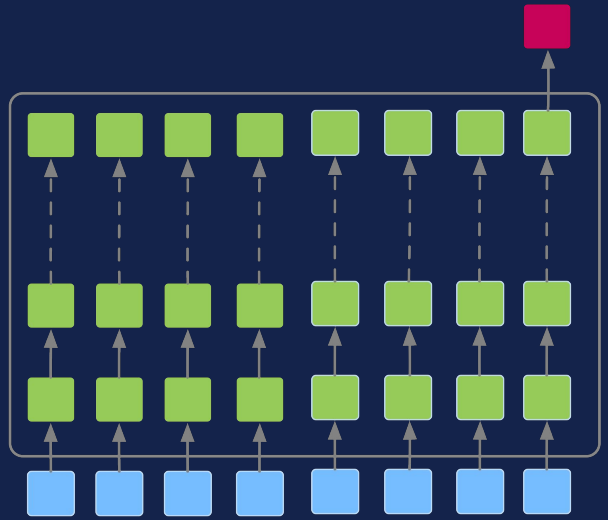

Computation

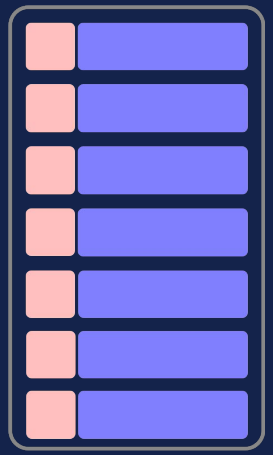

Storage

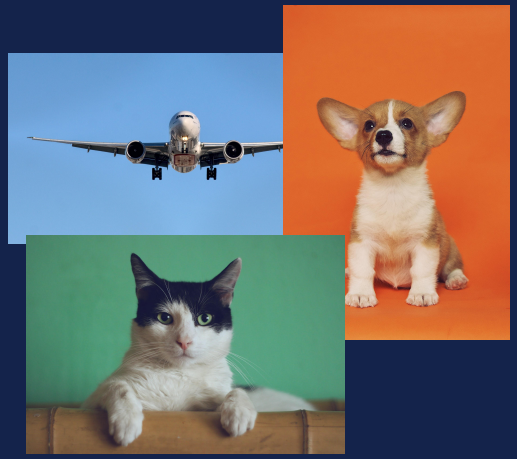

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

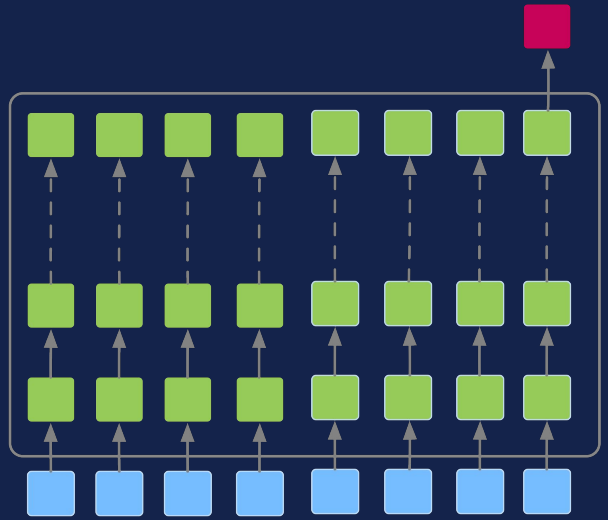

Computation

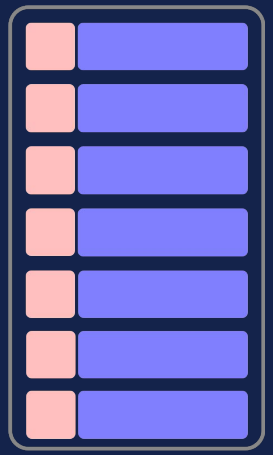

Storage

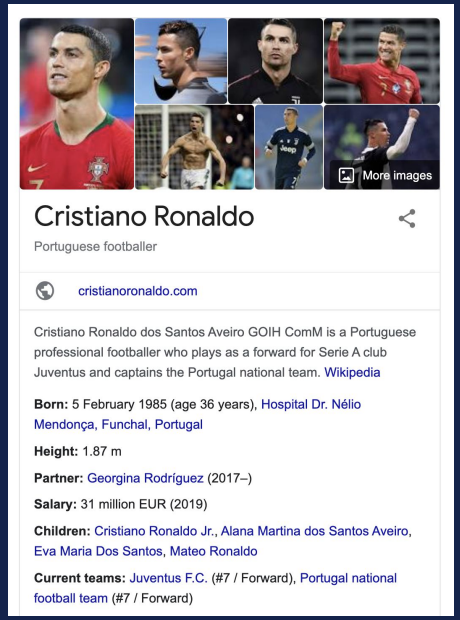

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

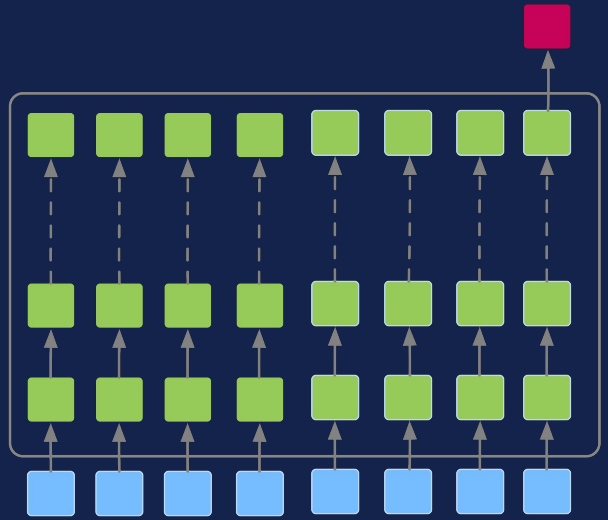

Computation

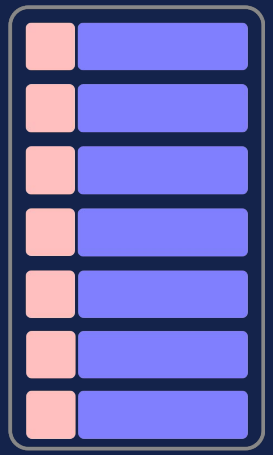

Storage

computational efficiency

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

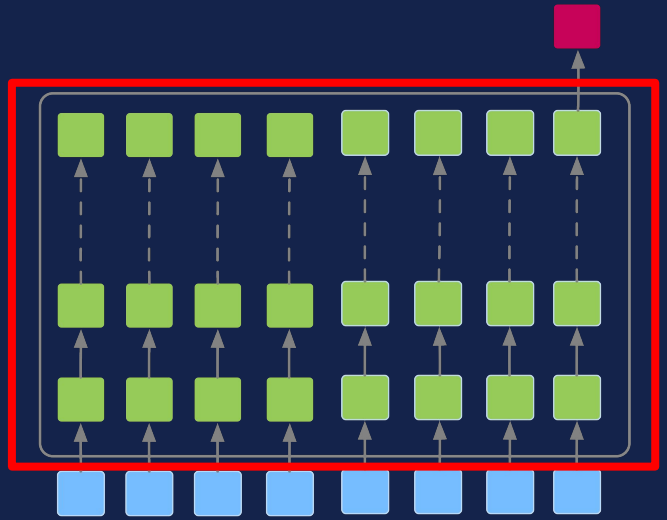

Computation

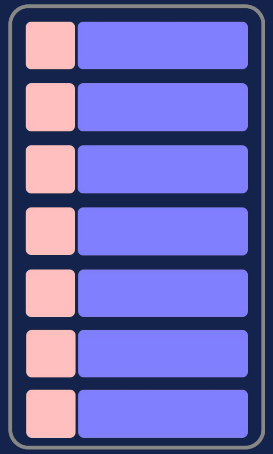

Storage

computational efficiency

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

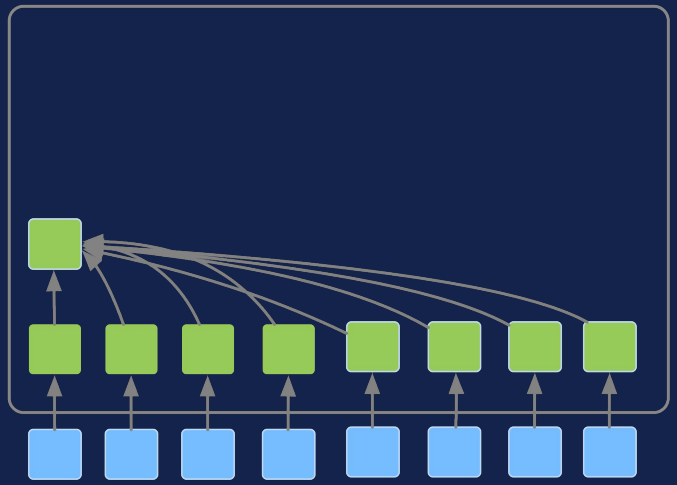

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

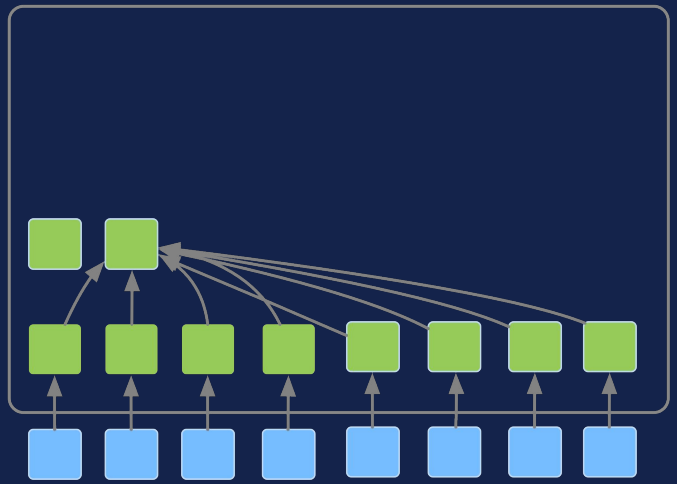

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

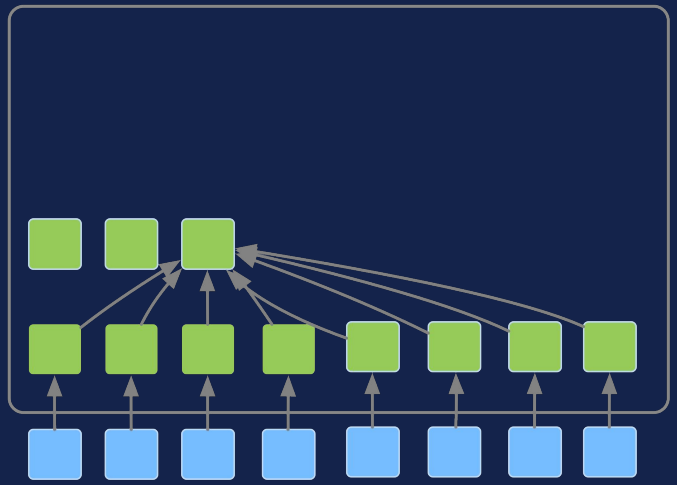

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

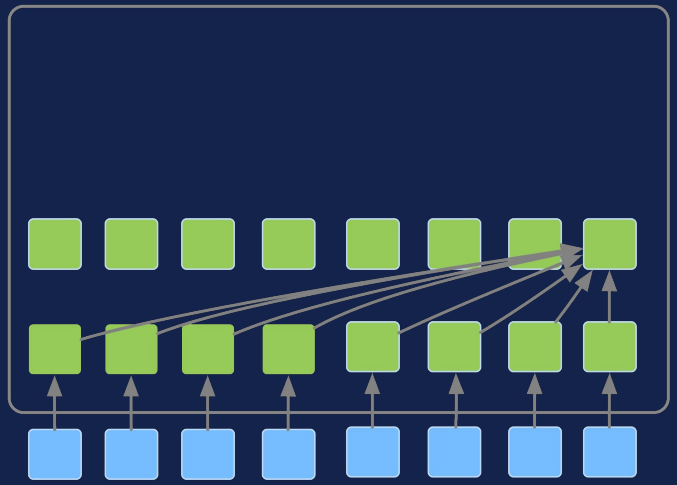

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

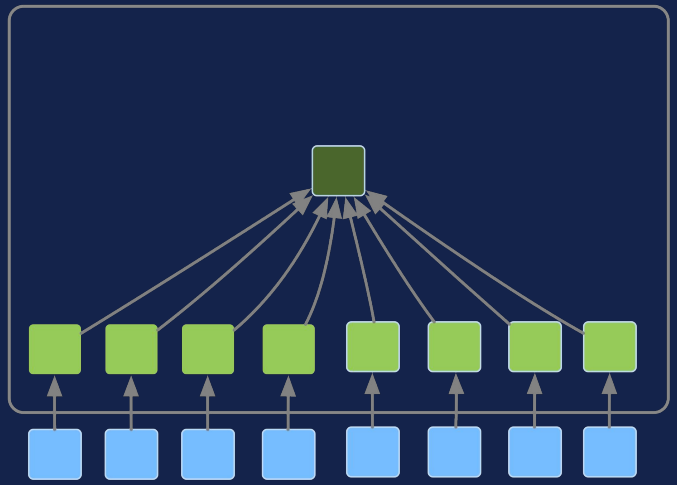

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

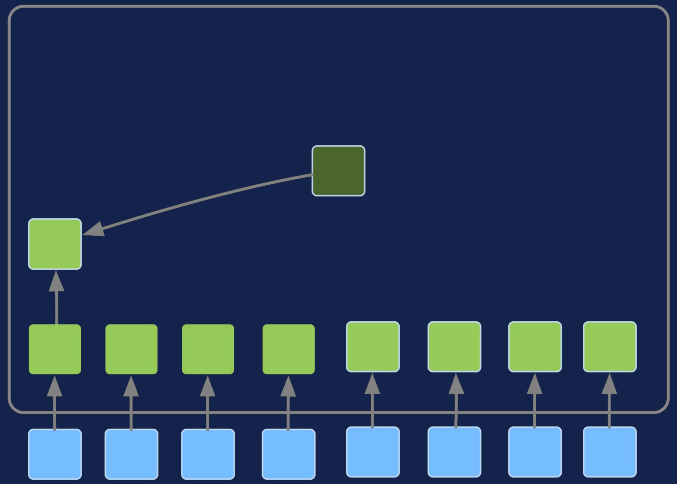

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

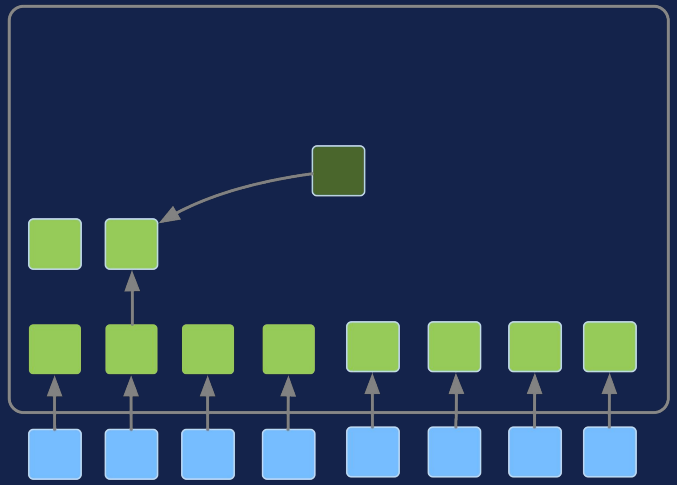

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

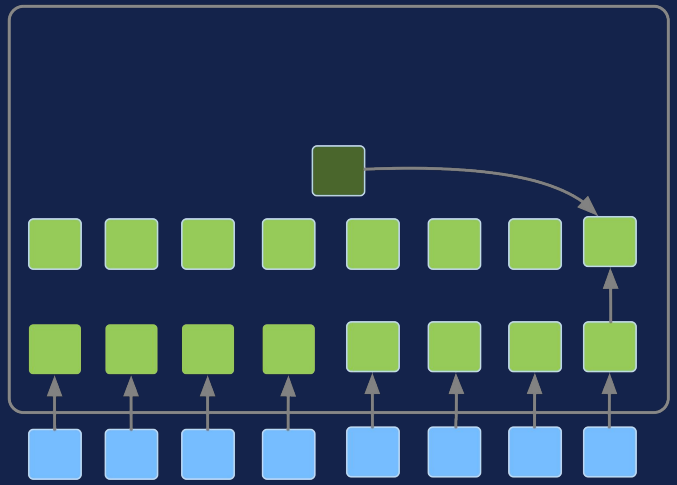

Random Feature Attention

Peng et al., ICLR 2021

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

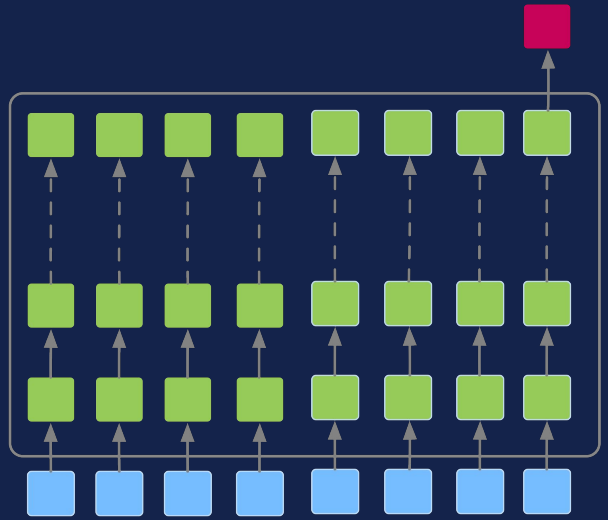

Computation

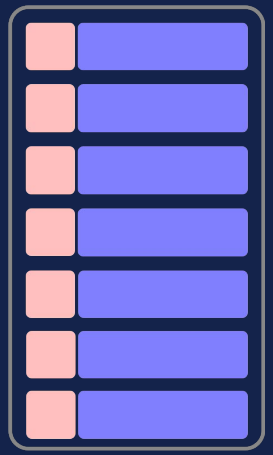

Storage

computational efficiency

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

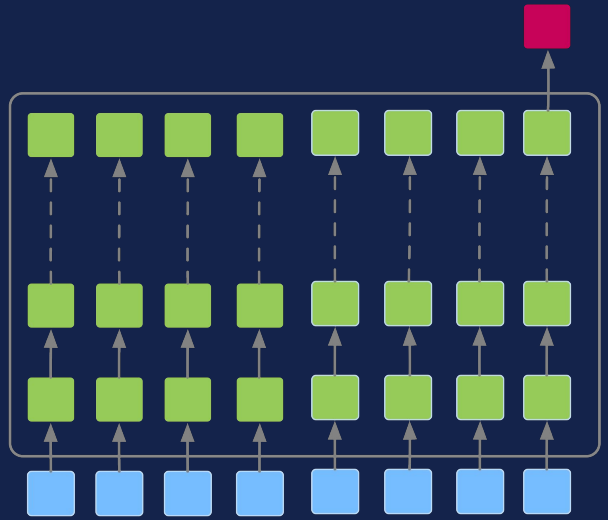

Computation

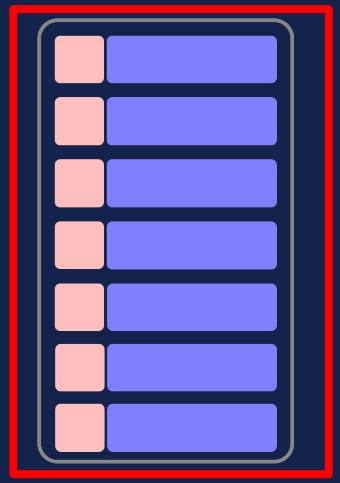

Storage

computational efficiency

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

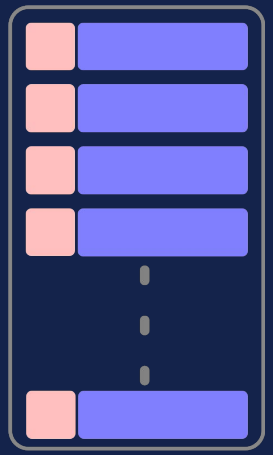

Storage

Learning what to remember and forget

Constant-size memory

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

Future Directions

A language model that continually learns in an efficient way to perform multiple complex tasks in many languages.

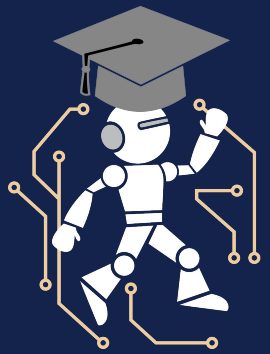

https://dyogatama.github.io
dyogatama@google.com

DeepMind

Memory in Humans

Human language processing is facilitated by specialized memory systems.

(Tulving, 1985; Rolls, 2000; Eichenbaum, 2012)

Memory in Humans

Human language processing is facilitated by specialized memory systems.

(Tulving, 1985; Rolls, 2000; Eichenbaum, 2012)

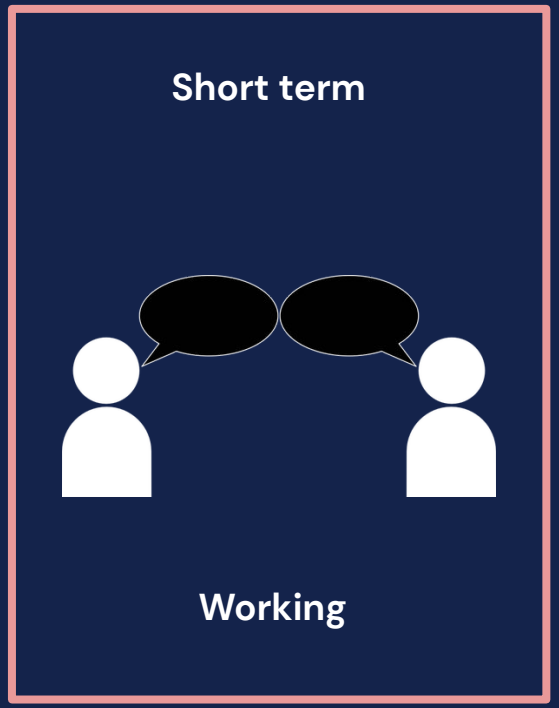

Memory in Humans

Human language processing is facilitated by specialized memory systems.

(Tulving, 1985; Rolls, 2000; Eichenbaum, 2012)

Short term

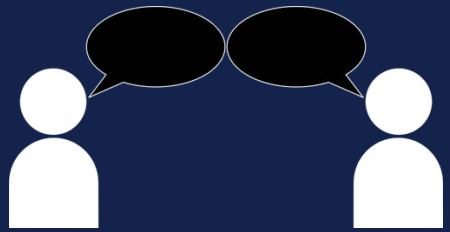

Working

Long term

Implicit

Procedural

Memory in Humans

Human language processing is facilitated by specialized memory systems.

(Tulving, 1985; Rolls, 2000; Eichenbaum, 2012)

Short term

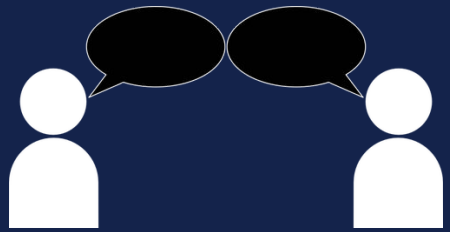

Working

Long term

Implicit

Procedural

Explicit

Semantic

Episodic

Memory in Humans

Human language processing is facilitated by specialized memory systems.

(Tulving, 1985; Rolls, 2000; Eichenbaum, 2012)

Short term

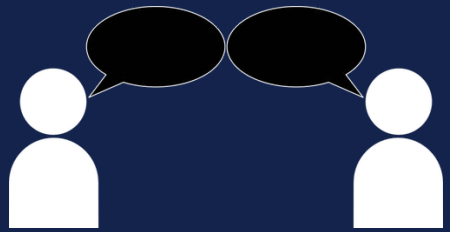

Working

Long term

Explicit

Procedural

Semantic

Episodic

Memory in AI

Short term	Long term
LSTM (Hochreiter and Schmidhuber, 1997)	Memory Networks (Weston et al, 2015)
Differentiable Neural Computers (Graves et al, 2016)	Never-Ending Language Learning (Mitchell et al, 2015)
Reformer (Kitaev et al., 2020)	Matching Networks (Vinyals et al, 2016)
Transformer XL (Dai et al., 2019)	REALM (Guu et al, 2020)

Memory in AI

Short term	Long term
LSTM (Hochreiter and Schmidhuber, 1997)	Memory Networks (Weston et al, 2015)
Differentiable Neural Computers (Graves et al, 2016)	Never-Ending Language Learning (Mitchell et al, 2015)
Reformer (Kitaev et al., 2020)	Matching Networks (Vinyals et al, 2016)
Transformer XL (Dai et al., 2019)	REALM (Guu et al, 2020)

Stack LSTM

Yogatama et al., ICLR 2018

Memory-based Parameter Adaptation ++

de Masson d'Autume, Ruder, Kong, Yogatama, NeurIPS 2019

Memory in AI

Short term	Long term
LSTM (Hochreiter and Schmidhuber, 1997)	Memory Networks (Weston et al, 2015)
Differentiable Neural Computers (Graves et al, 2016)	Never-Ending Language Learning (Mitchell et al, 2015)
Reformer (Kitaev et al., 2020)	Matching Networks (Vinyals et al, 2016)
Transformer XL (Dai et al., 2019)	REALM (Guu et al, 2020)

Stack LSTM

Yogatama et al., ICLR 2018

Memory-based Parameter Adaptation ++

de Masson d'Autume, Ruder, Kong, Yogatama, NeurIPS 2019

A language model with short-term and long-term memory.

Experiments

Perplexity (1-inf), lower is better

	Base	TXL	kNN-LM	Ours
WikiText-103	21.8	19.1	18.0	**17.6***
WMT	16.5	15.5	15.2	**14.1**

$$\lambda p_{k\mathrm{NN}}(x_t \mid \boldsymbol{x}_{<t}) + (1-\lambda) p_{\mathrm{LM}}(x_t \mid \boldsymbol{x}_{<t})$$

kNN-LM: Khandelwal et al., 2020

Background

Knowledge is encoded in the weights of a parametric neural network.

Interpretations via cloze-style questions (Petroni et al., 2020) or prompts (Brown et al., 2020).

Dante was born in [MASK] .

Q: Where was Dante born in?

A:

Analysis

Liberal Democrat leader Jo Swinson has said
she would work with Donald Trump in government as

Experiments

BPC (0-inf), lower is better

	Base	TXL	kNN-LM	Ours
enwik8	1.05	1.01	1.02	**1.00**

Transformer: Vaswani et al., 2017

Transformer-XL: Dai et al., 2019

kNN-LM: Khandelwal et al., 2020

Takeaway and Limitation

- A language model that adaptively combines local context, short-term memory, and long-term memory.

- Retrieving from long-term memory is expensive.

	CPUs	Hours
WikiText-103	1,000	6
WMT	9,000	18
enwik8	1,000	8

Challenges: Human Learning vs. Machine Learning

	Machine
Acquisition	Large datasets (representation learning)
Task Training	Large datasets (supervised fine tuning)
Linguistic knowledge	Dataset specific
Generalization	Forget previous tasks given a new task

Background

Knowledge is encoded in the weights of a parametric neural network.

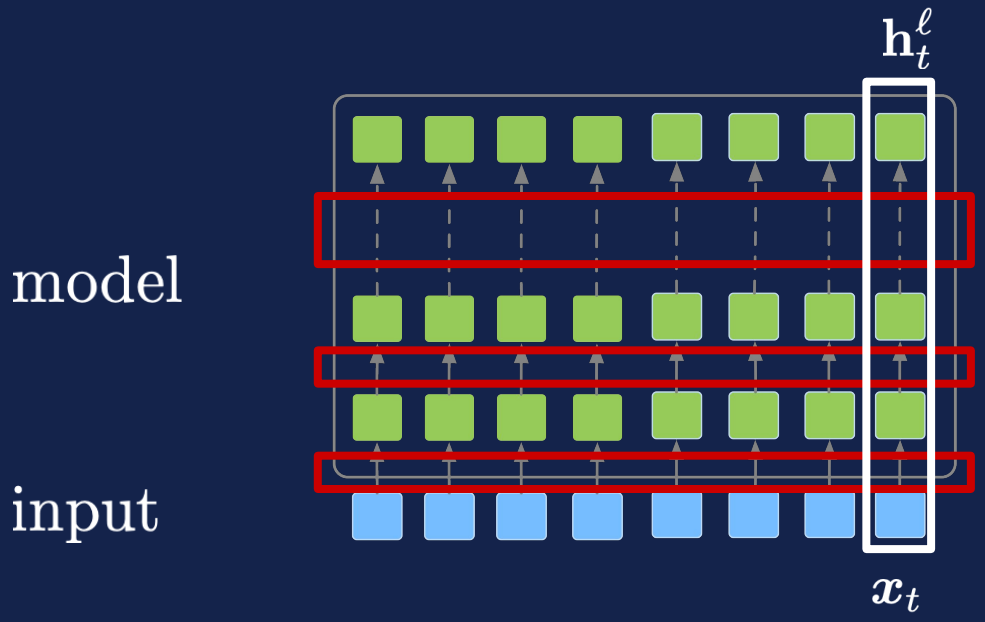

Background

Knowledge is encoded in the weights of a parametric neural network.

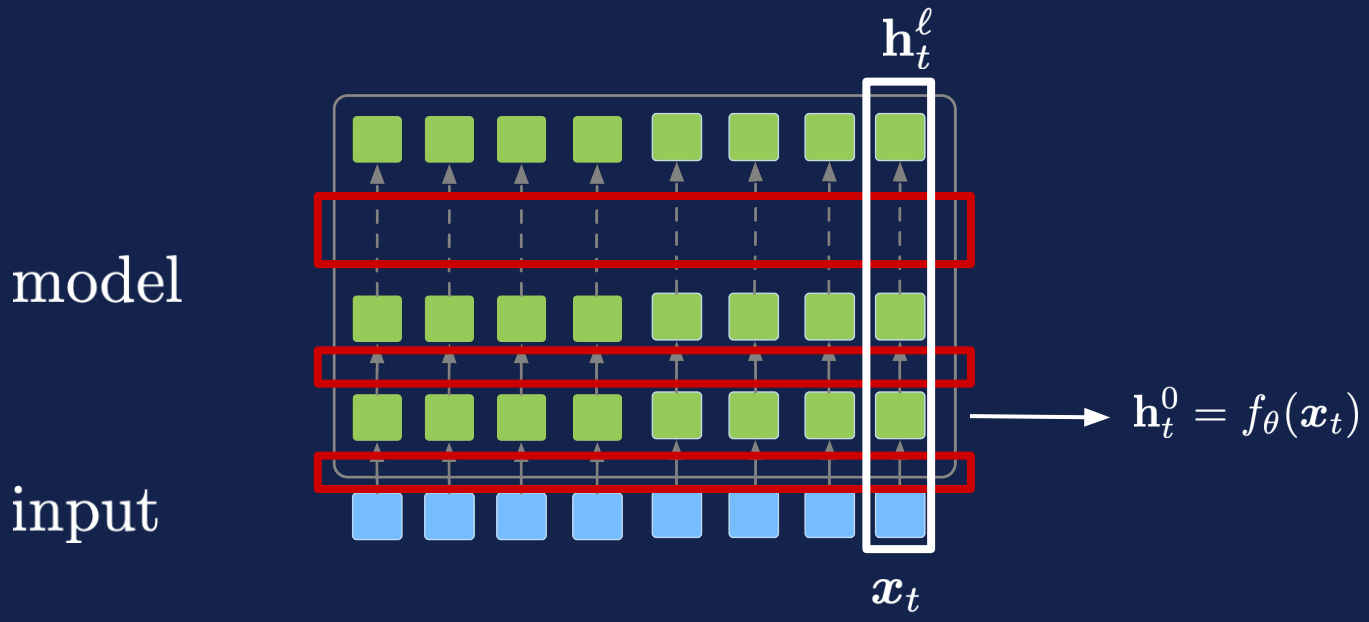

Background

Knowledge is encoded in the weights of a parametric neural network.

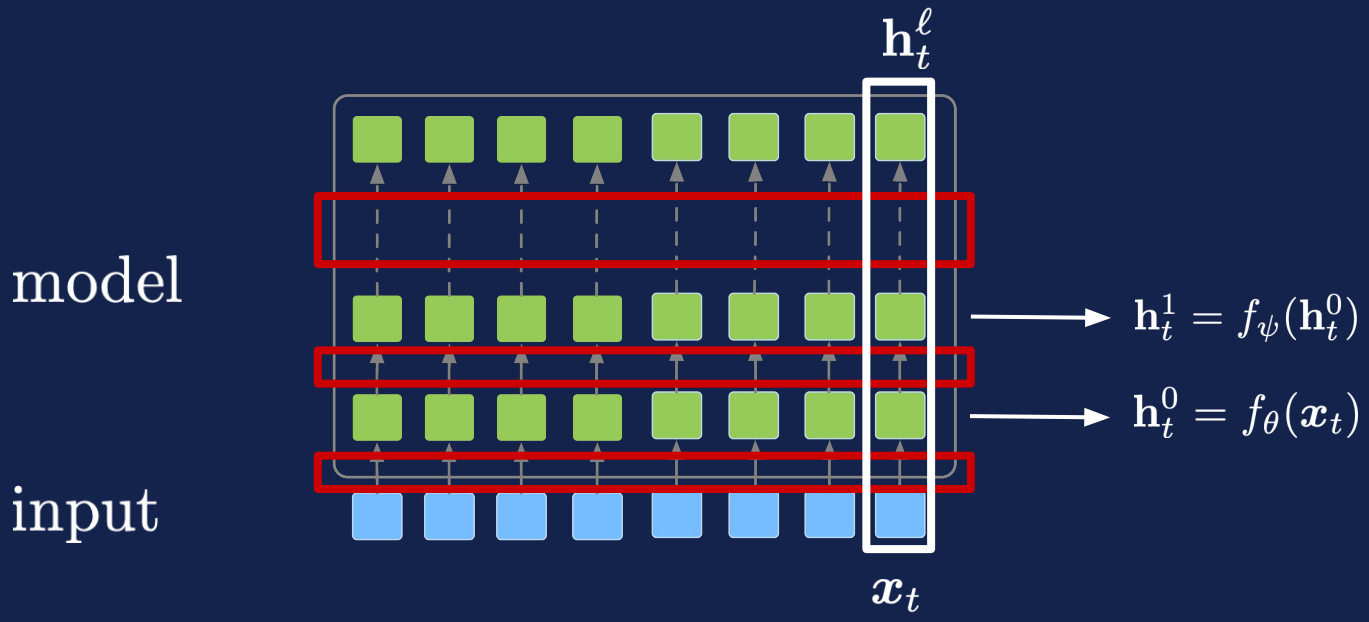

Background

Current models are prone to forgetting

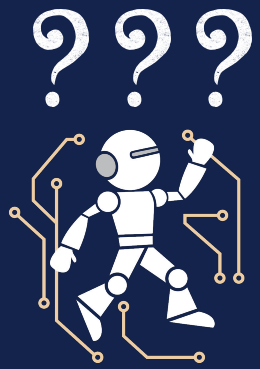

Background

Current models are prone to forgetting

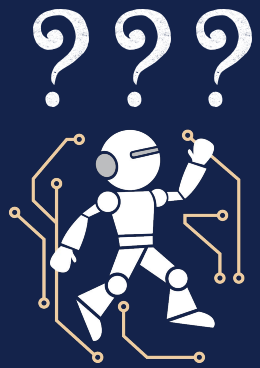

- Incoherent text generations.
- Hallucinating answers in open-domain QA.
- Performance degradation over time.

Background

Our semiparametric language model architecture is designed to mitigate these problems