

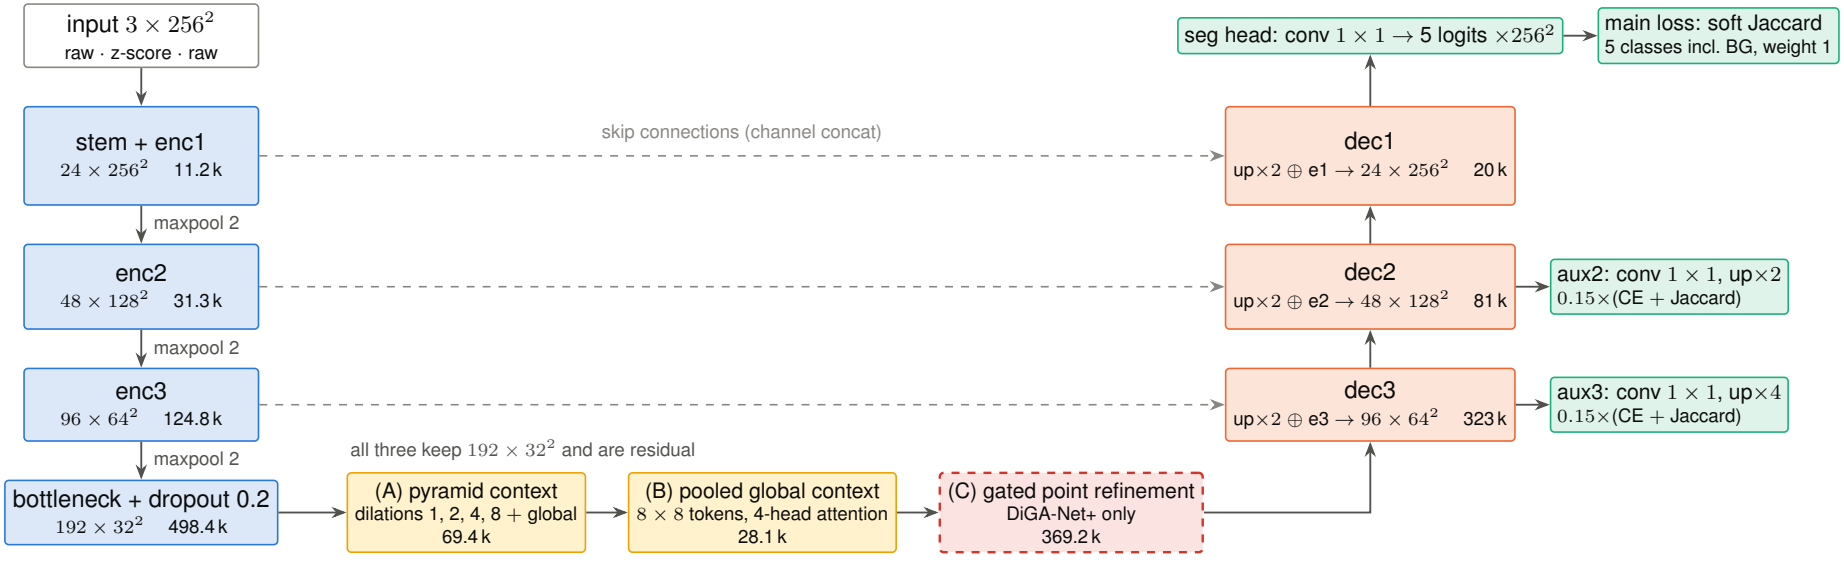


(A) pyramid context

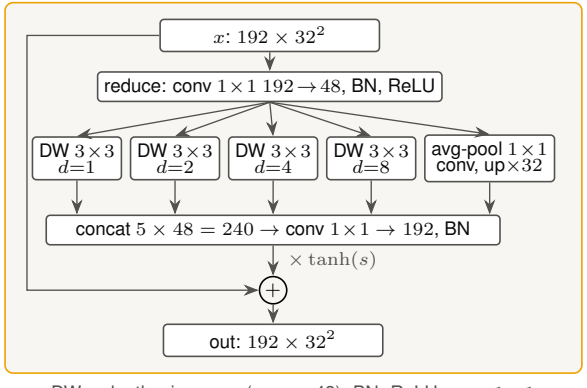


DW = depth-wise conv (groups 48), BN, ReLU, conv 1×1. Receptive field on the 32^2 map: 3 / 5 / 9 / 17 px, plus the whole map.

(B) pooled global context

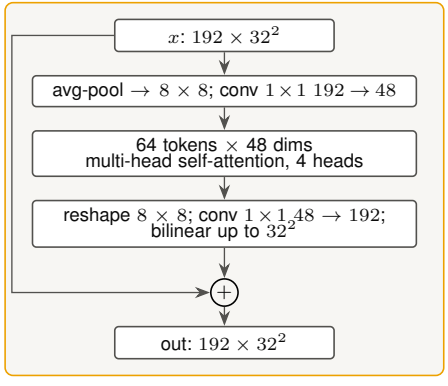

One attention pass over a pooled map, added back densely (plain residual, no scale).

(C) gated point refinement (DiGA-Net+ only)

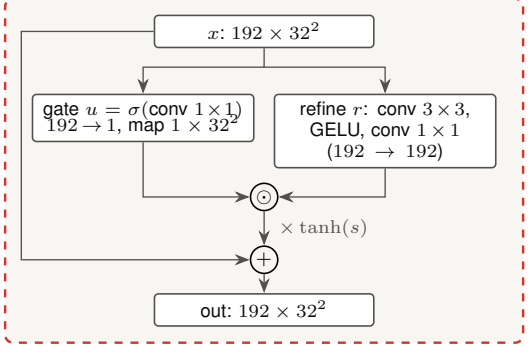

Dense proxy for PointRend: a learned per-pixel gate decides where the refinement residual $u \odot r$ is applied; +369 k parameters.

DiGA-Net = (A)+(B), 1.19 M parameters. **DiGA-Net+** = (A)+(B)+(C), 1.56 M parameters; (C) is the only difference. ConvBlock = 2×(conv 3×3, BatchNorm, ReLU); up×2 = transposed conv 2×2, stride 2; s = learnable scalar initialised at 0.1, so every residual module starts near identity. Numbers under each box are parameter counts. Input: one grey image resized to 256^2, fed as raw intensity, its per-image z-score, and raw again. Inference uses only the seg-head logits (argmax, no TTA).