


Lecture 11: Sequence-to-sequence architectures. Neural attention and memory.


Learning settings

slide credit: A. Karpathy


one to one




one to many




many to one



many to many



many to many



One-to-one: image to class label


One-to-many: text generation/image captioning

Many-to-one: sentiment analysis

Many-to-many 1: machine translation

Many-to-many 2: online classification (e.g. POS tagging)

Bi-directional RNN

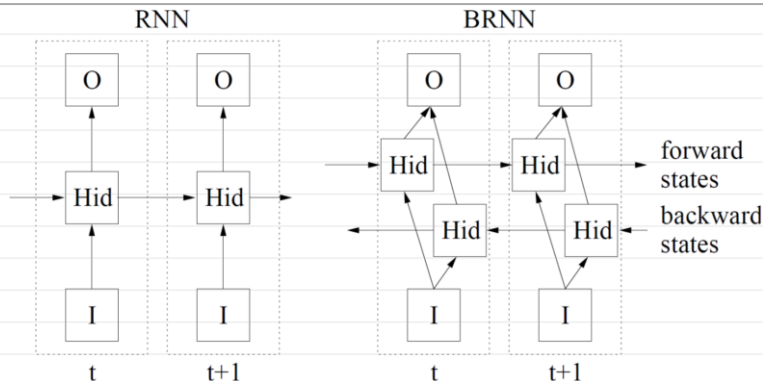

for $t = 1$ to T do

Do forward pass for the forward hidden layer, storing activations at each timestep

for $t = T$ to 1 do


Do forward pass for the backward hidden layer, storing activations at each timestep

for $t = 1$ to T do

Do forward pass for the output layer, using the stored activations from both hidden layers

[A Graves, PhD thesis]

Bi-LSTM POS tagging

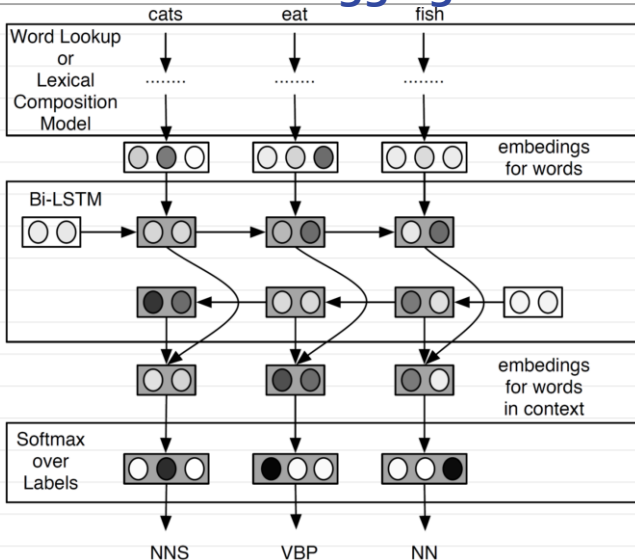

$$\mathbf{l}_i = \tanh(\mathbf{L}^f \mathbf{s}_i^f + \mathbf{L}^b \mathbf{s}_i^b + \mathbf{b}_l)$$

[Ling et al.
EMNLP₁₅]

Bi-LSTM POS tagging

	acc	parameters	words/sec
Word Lookup	96.97	2000k	6K
Convolutional (S&Z)	96.80	42.5k	4K
Forward RNN	95.66	17.5k	4K
Backward RNN	95.52	17.5k	4K
Bi-RNN	95.93	40k	3K
Forward LSTM	97.12	80k	3K
Backward LSTM	97.08	80k	3K
Bi-LSTM $d_{CS} = 50$	97.22	70k	3K
Bi-LSTM	97.36	150k	2K

[Ling et al. EMNLP15]


Uni-directional vs bi-directional

- Bi-directional is not applicable when “future” is unavailable
- When future is available bi-directional is almost always better
- E.g. NLP (batch mode), bioinformatics


Learning settings

slide credit: A. Karpathy


one to one




one to many




many to one



many to many



many to many



One-to-one: image to class label

One-to-many: text generation/image captioning

Many-to-one: sentiment analysis


Many-to-many 1: machine translation

Many-to-many 2: online classification (e.g. POS tagging)

Online seq2seq with monotonic alignment


Many problems are sequence 2 sequence with monotonic alignment:

- Not one-to-one as sequence prediction or POS tagging
- More constrained than general seq2seq

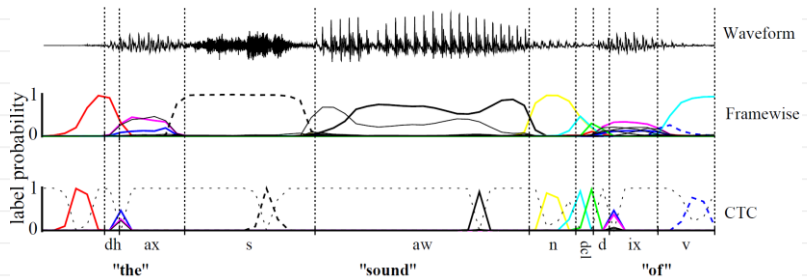

[Graves et al. 2006]

Online seq2seq with monotonic alignment

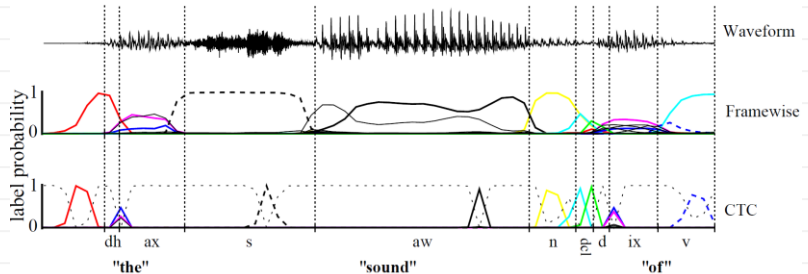


Decoding: 'aaa__bb_c____ddaa' \rightarrow abcda

What should be the loss that encourage correct parsing?

Answer: connectionist temporal classification (CTC) loss

[Graves et al. 2006]

CTC-loss

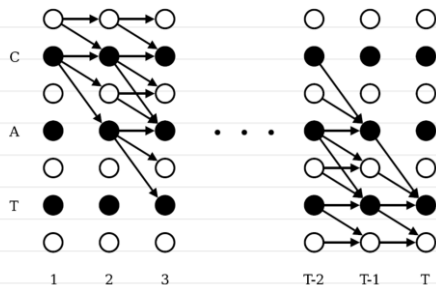


- Augment the output state with *blank*
- Predict probabilities of each symbol (inc. blank) at each time moment
- Compute the probability of each lattice vertex under correct paths using forward-backward
- Push log-probabilities up (*ML training*) proportionally to the current probability

[Graves et al. 2006]

Evolution of the CTC signal

GT sequence: 

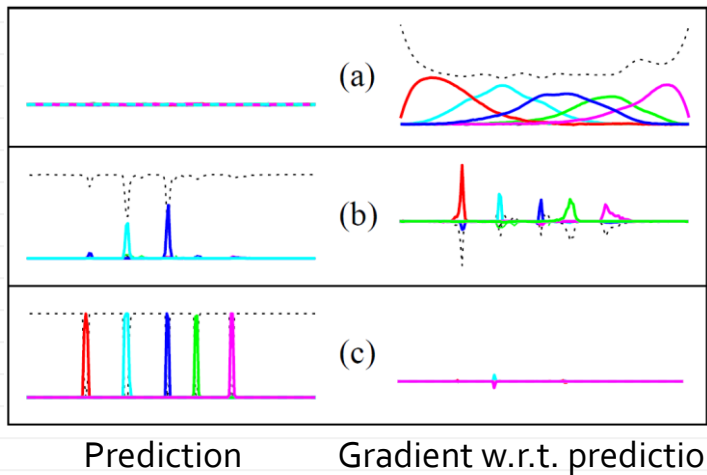

[Graves et al. 2006]


LSTM demo: handwriting recognition

LSTM RNN Demo by Nikhil Buduma:


<https://www.youtube.com/watch?v=mLxsbWAYIpw>

Image/video captioning


one to one




one to many




many to one



many to many




many to many



Activity Recognition

Input:
Sequence
of Frames




Output:
Label



Image Description

Input:
Image




Output:
Sentence

A large building with a
clock on the front of it

Video Description

Input:
Video




Output:
Sentence

A man juiced the orange


[Donahue et al. 2015]

Image/video captioning

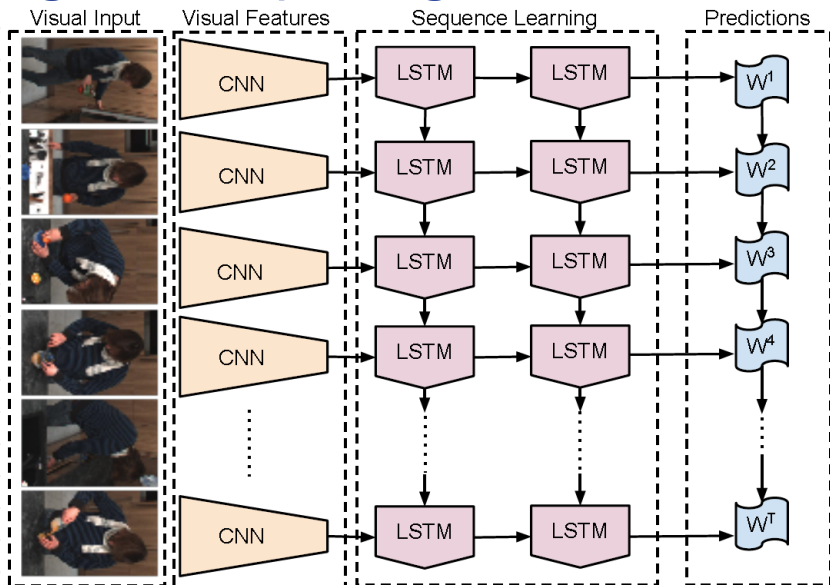

[Donahue et al. 2015]*

Image/video captioning

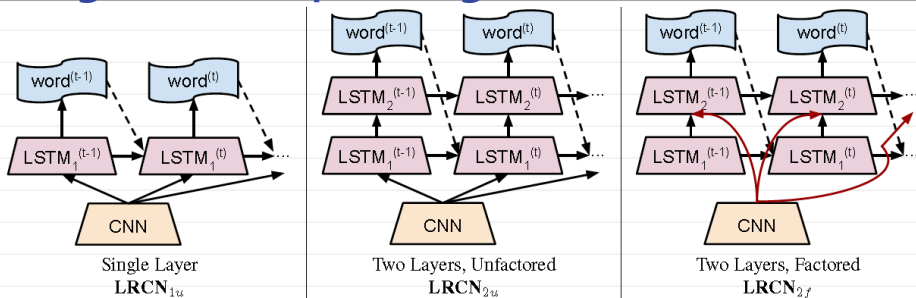

- Train on 108,000 images with descriptions
- Test on 1000 images (5 descr per image)
- For each image score 5000 descriptions
- See if top-k has a correct description:

	R@1	R@5	R@10	Medr
LRCN _{1u}	14.1	31.3	39.7	24
LRCN _{2u}	3.8	12.0	17.9	80
LRCN _{2f}	17.5	40.3	50.8	9
LRCN _{4f}	15.8	37.1	49.5	10

[Donahue et al. 2015]

Image/video captioning

Best results:



A female tennis player in action on the court.



A group of young men playing a game of soccer



A man riding a wave on top of a surfboard.



A baseball game in progress with the batter up to plate.



A brown bear standing on top of a lush green field.




A person holding a cell phone in their hand.

[Donahue et al. 2015]

End-to-end dense image captioning

VGG-16 conv


fully-connected, 2 layers+dropout

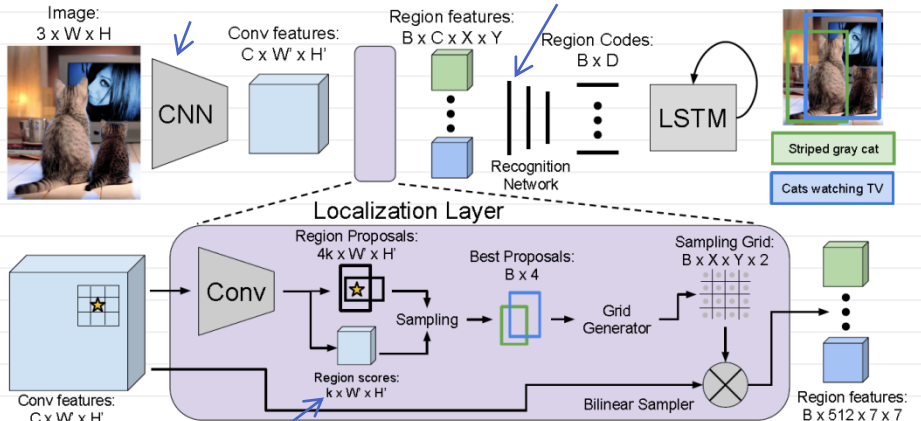

k-anchors at $W' \times H'$ positions


[Johnson et al, CVPR16]

End-to-end dense image captioning

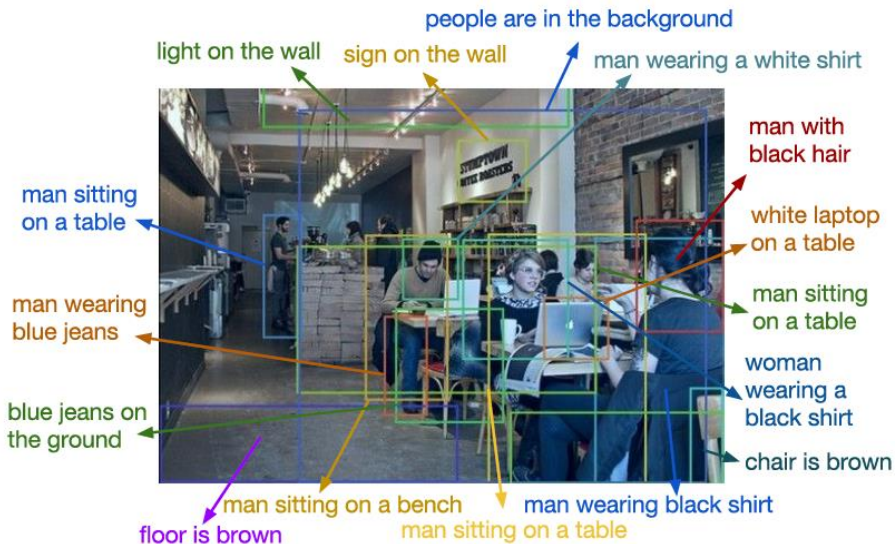

[Johnson et al, CVPR16]

End-to-end dense image captioning

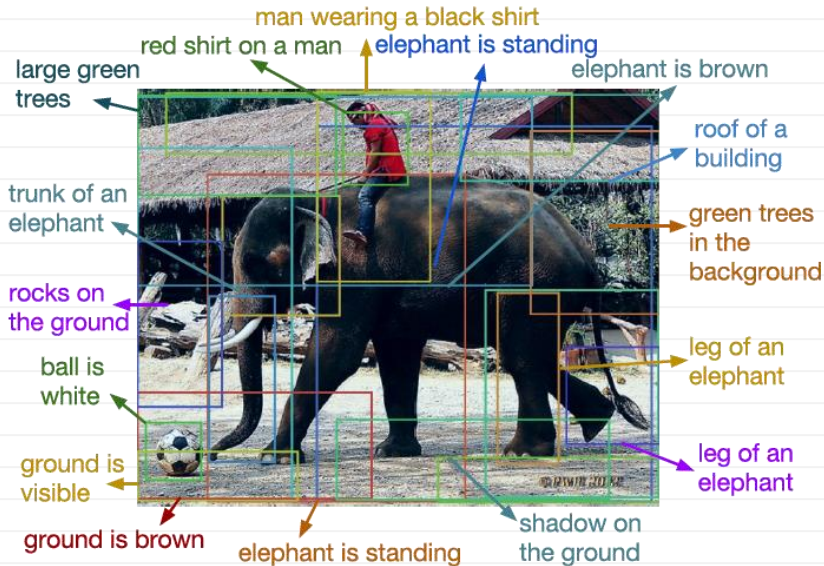

[Johnson et al, CVPR16]

Training set: “visual genome”



Girl feeding elephant

Man taking picture

Huts on a hillside

→ A man taking a picture.

Flip flops on the ground

Hillside with water below

Elephants interacting with people

Young girl in glasses with backpack

Elephant that could carry people

→ An elephant trunk taking two bananas.

→ A bush next to a river.

People watching elephants eating

A woman wearing glasses.

A bag

Glasses on the hair.

→ The elephant with a seat on top

A woman with a purple dress.

A pair of pink flip flops.

A handle of bananas.

→ Tree near the water

A blue shirt.

→ Small houses on the hillside

A woman feeding an elephant

A woman wearing a white shirt and shorts

A man taking a picture

A man wearing an orange shirt

An elephant taking food from a woman

A woman wearing a brown shirt

A woman wearing purple clothes

A man wearing blue flip flops

Man taking a photo of the elephants

Blue flip flop sandals

The girl's white and black handbag

The girl is feeding the elephant

The nearby river

A woman wearing a brown t shirt

Elephant's trunk grabbing the food

The lady wearing a purple outfit

A young Asian woman wearing glasses

Elephants trunk being touched by a hand

A man taking a picture holding a camera

Elephant with carrier on it's back

Woman with sunglasses on her head

A body of water

Small buildings surrounded by trees

Woman wearing a purple dress

Two people near elephants

A man wearing a hat

A woman wearing glasses

Leaves on the ground

- “New Image-net”

108,249 Images

4.2 Million Region

Descriptions

1.7 Million Visual Question

Answers

2.1 Million Object Instances

1.8 Million Attributes

1.8 Million Relationships

Everything Mapped to


Wordnet Synsets

[Krishna et al. 2016]


Learning settings

slide credit: A. Karpathy


one to one




one to many




many to one



many to many




many to many



aka "seq2seq"

Sequence-to-sequence machine translation

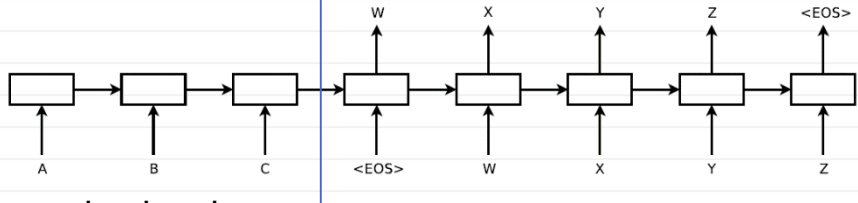


Important notes:

1. Fixed lexicon (160,000 English, 80,000 French) + 'UNK' word
2. Deep (four layers, 1000 cells in each)
3. Reversing input sequence helps a lot
4. Using two different LSTMs
5. Decoding proceeds by *beam search*

[Sutskever et al. NIPS14]

Sequence-to-sequence machine translation

[Sutskever et al.
NIPS14]

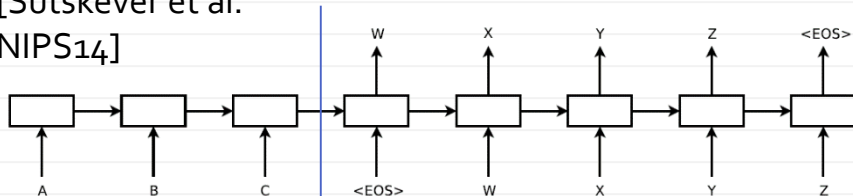



Decoding proceeds by *beam search*:

1. At the first step generate top-K words
2. At each step, expand each of the K in top-L ways (gives KL results)
3. Pick the best K out of KL results

NB: needs some mechanism to compare sequences of different lengths

Sequence-to-sequence machine translation

Learned embeddings:

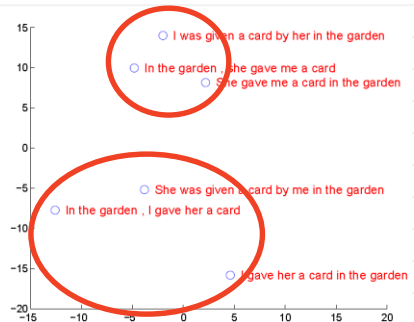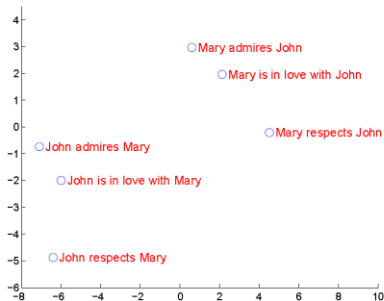

PCA 1000-> 2

[Sutskever et al. NIPS14]


Sequence-to-sequence machine translation

Type	Sentence
Our model	Ulrich UNK , membre du conseil d' administration du constructeur automobile Audi , affirme qu' il s' agit d' une pratique courante depuis des années pour que les téléphones portables puissent être collectés avant les réunions du conseil d' administration afin qu' ils ne soient pas utilisés comme appareils d' écoute à distance .
Truth	Ulrich Hackenberg , membre du conseil d' administration du constructeur automobile Audi , déclare que la collecte des téléphones portables avant les réunions du conseil , afin qu' ils ne puissent pas être utilisés comme appareils d' écoute à distance , est une pratique courante depuis des années .
Our model	“ Les téléphones cellulaires , qui sont vraiment une question , non seulement parce qu' ils pourraient potentiellement causer des interférences avec les appareils de navigation , mais nous savons , selon la FCC , qu' ils pourraient interférer avec les tours de téléphone cellulaire lorsqu' ils sont dans l' air ” , dit UNK .
Truth	“ Les téléphones portables sont véritablement un problème , non seulement parce qu' ils pourraient éventuellement créer des interférences avec les instruments de navigation , mais parce que nous savons , d' après la FCC , qu' ils pourraient perturber les antennes-relais de téléphonie mobile s' ils sont utilisés à bord ” , a déclaré Rosenker .
Our model	Avec la crémation , il y a un “ sentiment de violence contre le corps d' un être cher ” , qui sera “ réduit à une pile de cendres ” en très peu de temps au lieu d' un processus de décomposition “ qui accompagnera les étapes du deuil ” .
Truth	Il y a , avec la crémation , “ une violence faite au corps aimé ” , qui va être “ réduit à un tas de cendres ” en très peu de temps , et non après un processus de décomposition , qui “ accompagnerait les phases du deuil ” .


[Sutskever et al. NIPS14]

Sequence-to-sequence machine translation


one to one




one to many





many to one



many to many




many to many

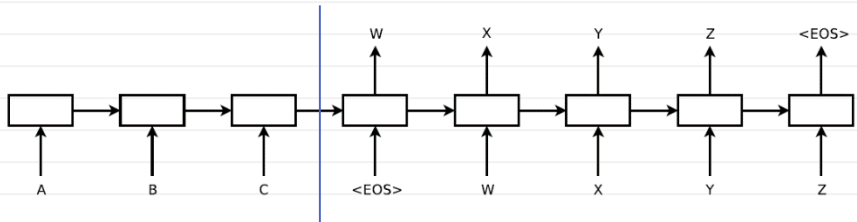

[Sutskever et al. NIPS14]

Sequence-to-sequence machine translation

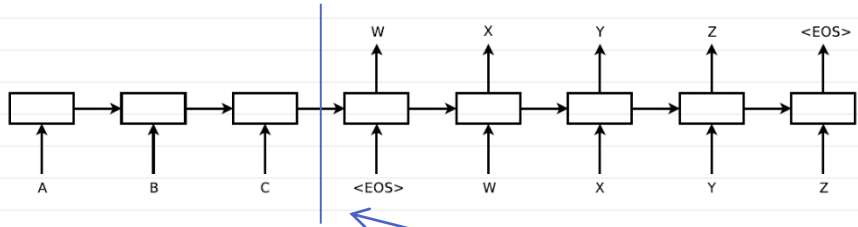

Problem:

all the meaning has to be carried from here


- Large memory needed
- Information has to survive for a very long time



[Sutskever et al. NIPS14]

Translation with attention

decoder RNN

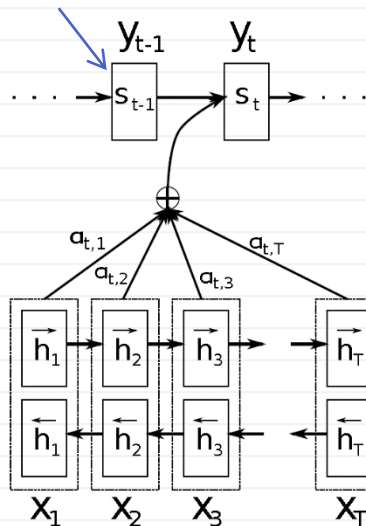

$$s_i = f(s_{i-1}, y_{i-1}, c_i)$$

$$c_i = \sum_{j=1}^{T_x} \alpha_{ij} h_j$$

$$e_{ij} = \boxed{a}(s_{i-1}, h_j)$$

$$\alpha_{ij} = \frac{\exp(e_{ij})}{\sum_{k=1}^{T_x} \exp(e_{ik})}$$


encoder RNN 1

encoder RNN 2

[Bahdanau et al. 2015]

Translation with attention

decoder RNN

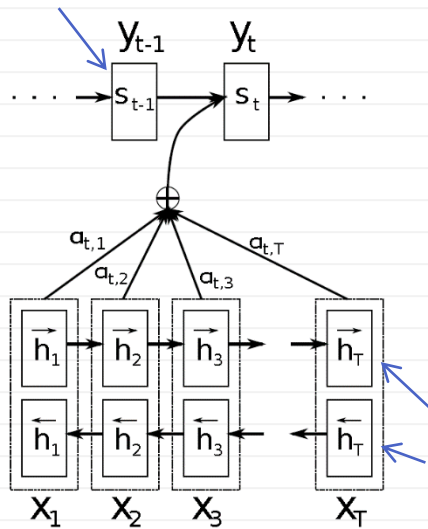



$$e_{ij} = a(s_{i-1}, h_j)$$

- *Attention model:* feed-forward neural network
- All components are trained end-to-end

encoder RNN 1
encoder RNN 2


[Bahdanau et al. 2015]

Translation with attention

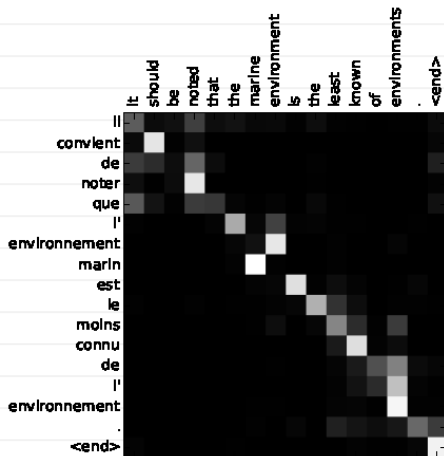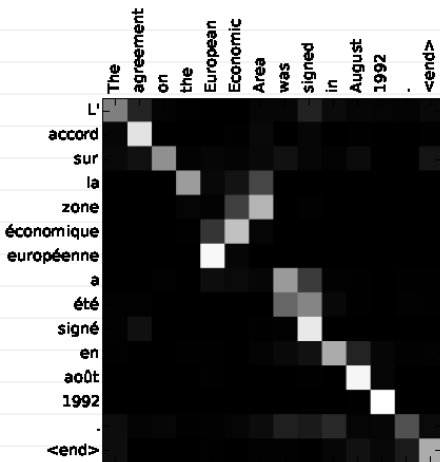

[Bahdanau et al. 2015]

Translation with attention

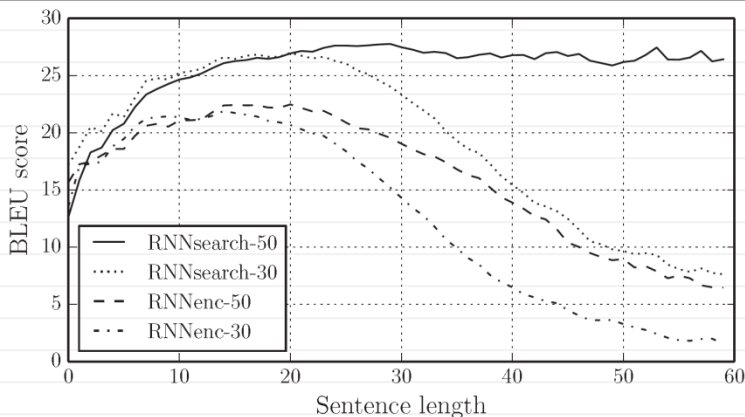

- BLEU-score \approx precision over n-grams
- Trained either with <30 word phrases or with <50 word phrases

[Bahdanau et al. 2015]

Translation with attention

An admitting privilege is the right of a doctor to admit a patient to a hospital or a medical centre to carry out a diagnosis or a procedure, based on his status as a health care worker at a hospital.

LSTM system:


Un privilège d'admission est le droit d'un médecin de reconnaître un patient à l'hôpital ou un centre médical d'un diagnostic ou de prendre un diagnostic en fonction de son état de santé.

Attention-based system:

Un privilège d'admission est le droit d'un médecin d'admettre un patient à un hôpital ou un centre médical pour effectuer un diagnostic ou une procédure, selon son statut de travailleur des soins de santé à l'hôpital.

[Bahdanau et al. 2015]

Simpler translation with attention

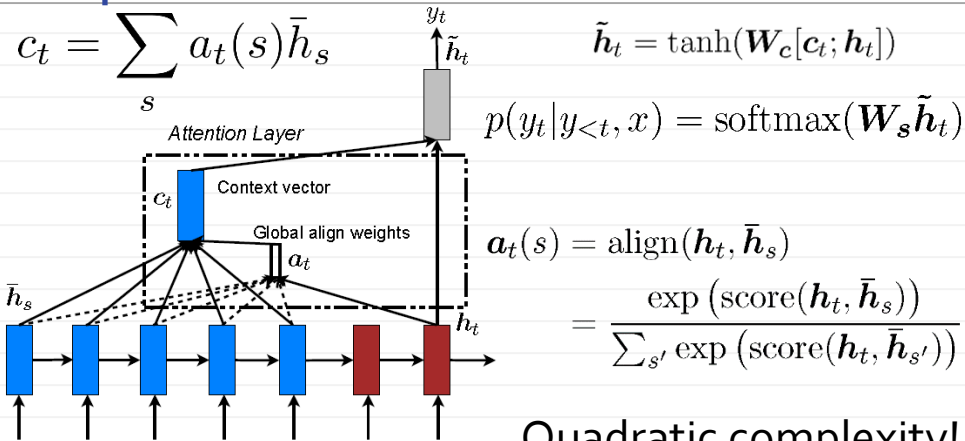

$$a_t(s) = \text{align}(\mathbf{h}_t, \bar{\mathbf{h}}_s)$$

$$= \frac{\exp(\text{score}(\mathbf{h}_t, \bar{\mathbf{h}}_s))}{\sum_{s'} \exp(\text{score}(\mathbf{h}_t, \bar{\mathbf{h}}_{s'}))}$$


Quadratic complexity!

$$\text{score}(\mathbf{h}_t, \bar{\mathbf{h}}_s) = \begin{cases} \mathbf{h}_t^\top \bar{\mathbf{h}}_s & \text{dot} \\ \mathbf{h}_t^\top \mathbf{W}_a \bar{\mathbf{h}}_s & \text{general} \\ \mathbf{v}_a^\top \tanh(\mathbf{W}_a[\mathbf{h}_t; \bar{\mathbf{h}}_s]) & \text{concat} \end{cases}$$

[Luong et al. 2015]

Recap

- Attention solved the limited memory problem
- Complexity is quadratic (in the length of sequence)




“Attention is all you need”: single head

General purpose “single-head” attention:

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{d_k}}\right)V$$


- Recombining previous layer (V) in a long-range way using few parameters

[Vaswani et al. NIPS17]

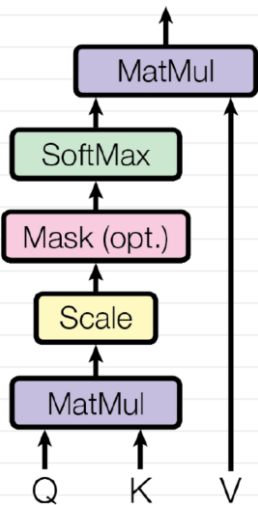

“Attention is all you need”: multiple heads

[Vaswani et al. NIPS17]

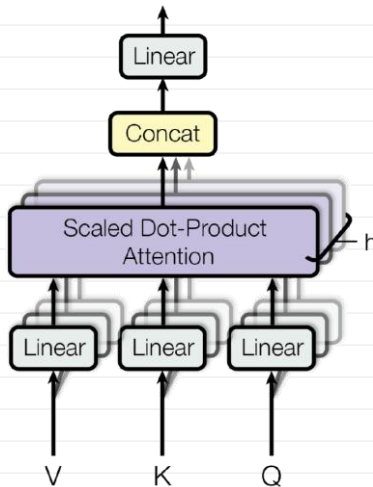


General purpose
“multi-head” attention:

$$\text{MultiHead}(Q, K, V) = \text{Concat}(\text{head}_1, \dots, \text{head}_h) W^O$$

where $\text{head}_i = \text{Attention}(QW_i^Q, KW_i^K, VW_i^V)$


Transformer architecture

- Applying multi-head attention several times first for input, then for output
- Each unit is residual
- Emitting output one word at a time
- Positional encoding adds position-dependent features

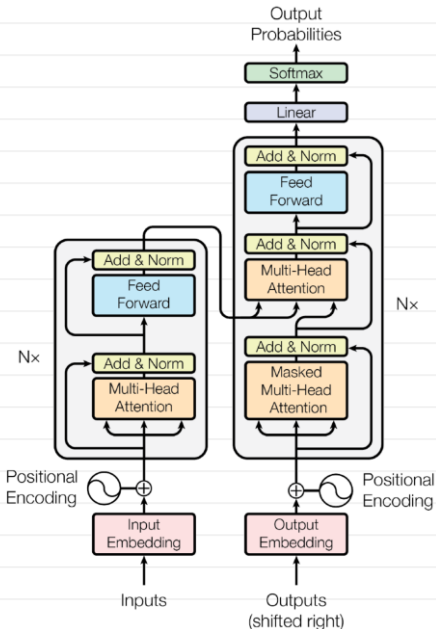


[Vaswani et al. NIPS17]

"Attention is all you need"

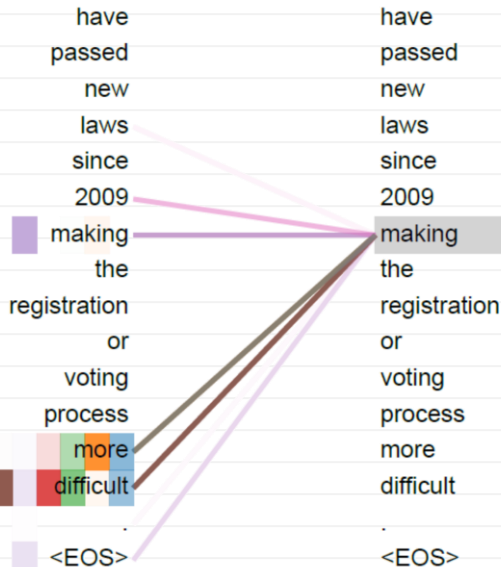


[Vaswani et al. NIPS17]

“Attention is all you need”

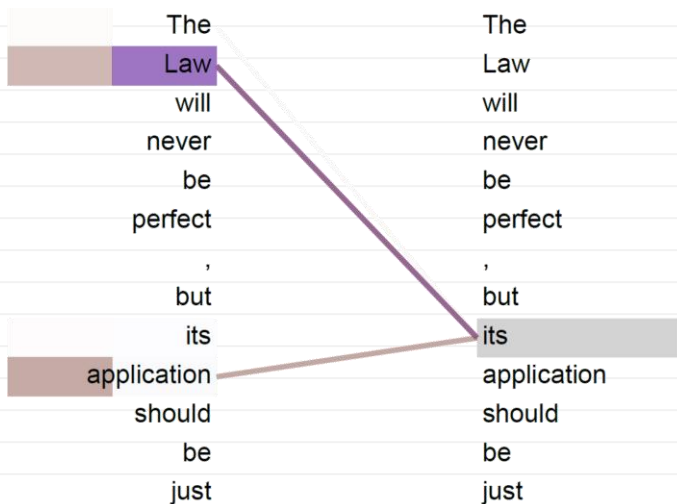


[Vaswani et al. NIPS17]

"Attention is all you need"

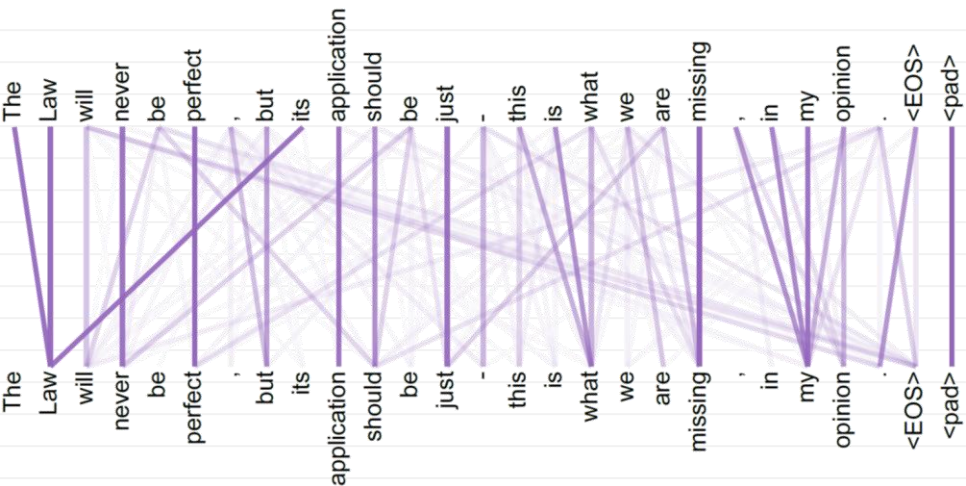


[Vaswani et al. NIPS17]

"Attention is all you need"

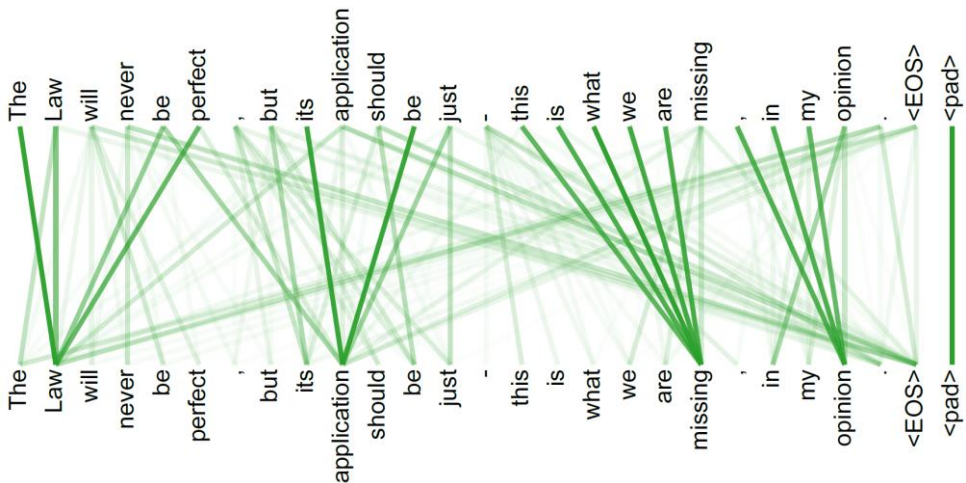

[Vaswani et al. NIPS17]

"Attention is all you need"

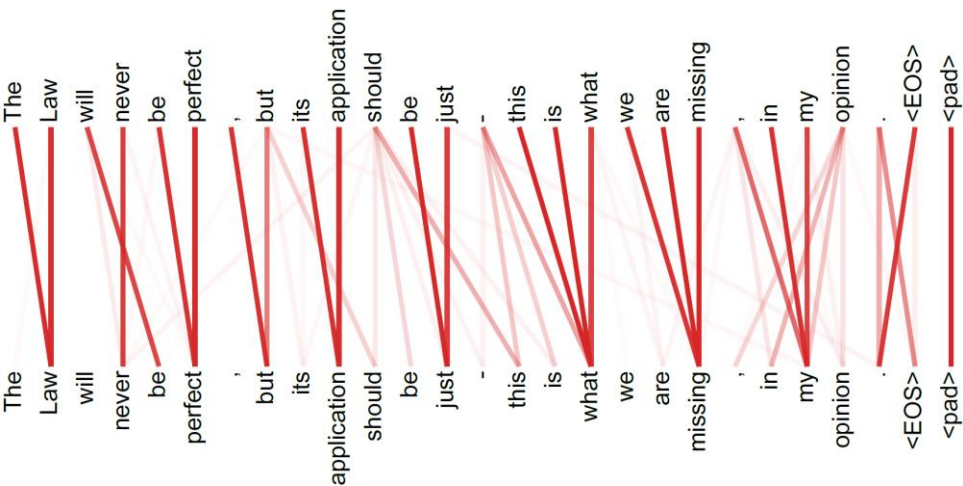

[Vaswani et al. NIPS17]


Stack augmented RNNs

- Inherent limitation of RNNs: memory capacity
- Increasing memory by n gives the increase of parameters by n^2
- **Conclusion:** we need to decouple memory and operations (think RAM and CPU!)

[Joulin and Mikolov NIPS15]

Stack augmented RNNs


Conclusion: we need to decouple memory and operations (think RAM and CPU!)

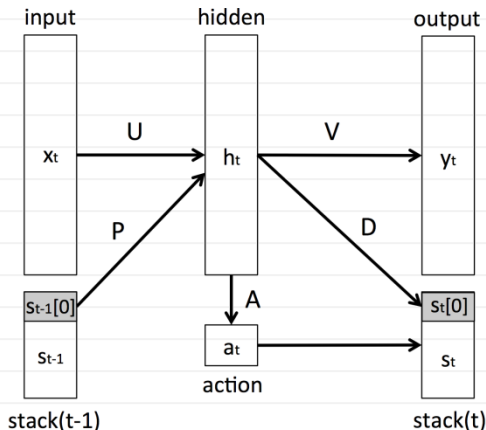

[Joulin and Mikolov NIPS15]

Stack augmented RNNs


$$h_t = \sigma(Ux_t + Wh_{t-1} + Ps_{t-1}^k)$$

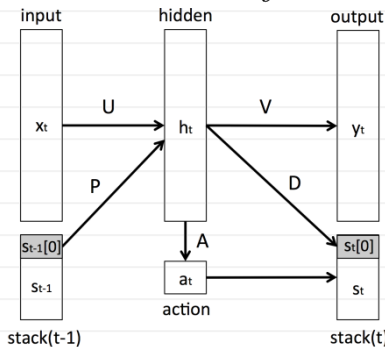

$$y_t = \text{SoftMax}(Vh_t)$$

$$a_t = \text{SoftMax}(Ah_t)$$

$$\sigma(Dh_t)$$

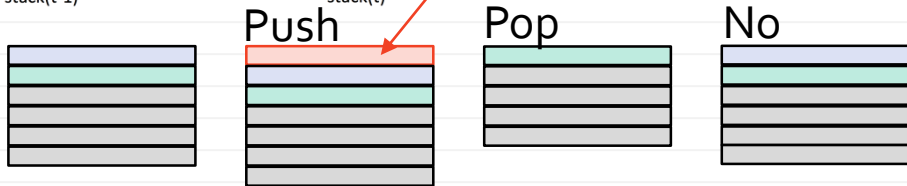

[Joulin and Mikolov NIPS15]


Stack augmented RNNs

$$a_t = \text{SoftMax}(Ah_t)$$

Actions: Push, Pop, No

$$s_t^0 = a_t^{\text{Push}} \sigma(Dh_t) + a_t^{\text{Pop}} s_{t-1}^1 + a_t^{\text{No}} s_{t-1}^0$$


$$s_t^i = a_t^{\text{Push}} s_{t-1}^{i-1} + a_t^{\text{Pop}} s_{t-1}^{i+1} + a_t^{\text{No}} s_{t-1}^i$$

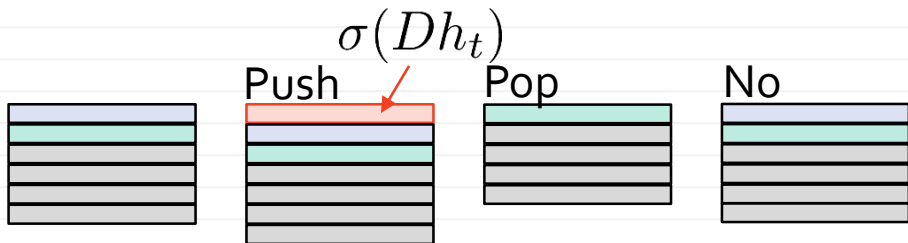

[Joulin and Mikolov NIPS15]

Binary addition with stack-RNN


Goal: train a network that can add binary numbers.

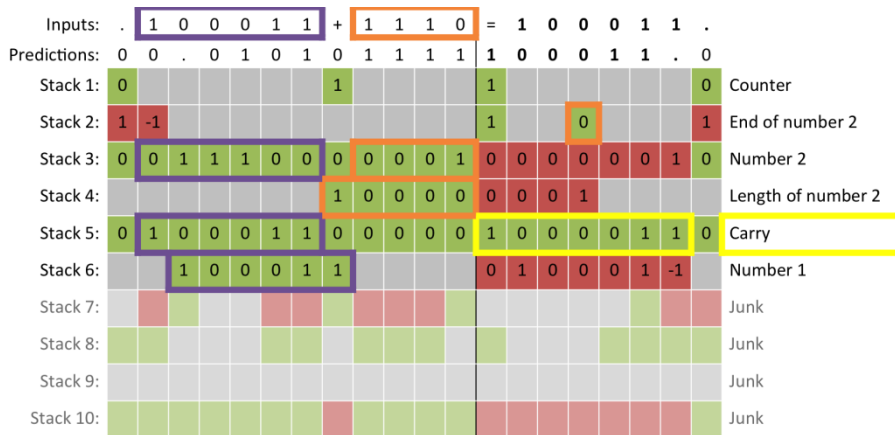

PUSH POP


NB: the answer is reversed, i.e. $101+11 = 0001$

Binary addition with stack-RNN

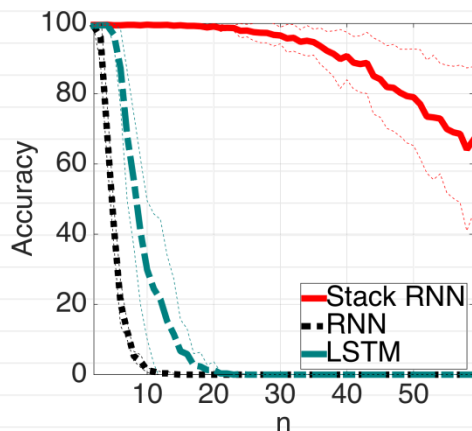

- Training with total lengths upto 20
- 100 hidden units and 10 1-dim stacks

Neural Turing Machine

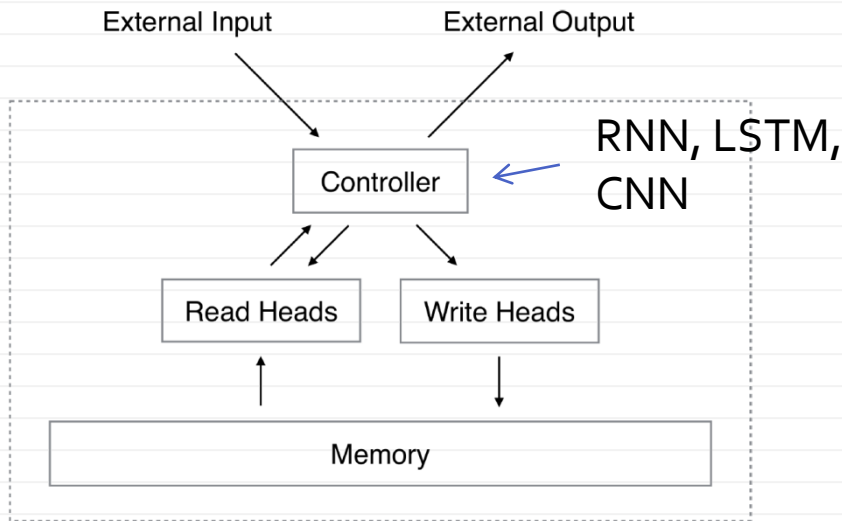

[Graves et al. 2014]

Outlook

- RNNs allow to solve many problems with sequences (as inputs or outputs)
- CTC-loss is useful for monotonically aligned input-output tasks
- The *attention* idea is working and is used across different domains (e.g. computer vision)
- Learning a computer to “program” is ambitious and promising
- Currently works only for simplistic algorithms
- Differentiability requires real-valued (soft) values
- Learning systems that make discrete choices is harder (but possible)

Bibliography

A. Graves. Supervised Sequence Labelling with Recurrent Neural Networks. Textbook, Studies in Computational Intelligence, Springer, 2012

Sepp Hochreiter, Jürgen Schmidhuber: Long Short-Term Memory. Neural Computation 9(8): 1735-1780 (1997)

Ilya Sutskever, Oriol Vinyals, Quoc V. Le:
Sequence to Sequence Learning with Neural Networks. NIPS 2014: 3104-3112

Jeff Donahue, Lisa Anne Hendricks, Sergio Guadarrama, Marcus Rohrbach, Subhashini Venugopalan, Trevor Darrell, Kate Saenko:
Long-term recurrent convolutional networks for visual recognition and description. CVPR 2015: 2625-2634

Justin Johnson, Andrej Karpathy, Li Fei-Fei, DenseCap: Fully Convolutional Localization Networks for Dense Captioning. CVPR 2016

Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie Chen, Yannis Kalantidis, Li-Jia Li, David A. Shamma, Michael S. Bernstein, Fei-Fei Li: Visual Genome: Connecting Language and Vision Using Crowdsourced Dense Image Annotations. CoRR abs/1602.07332 (2016)

D. Bahdanau, K. Cho, and Y. Bengio: Neural machine translation by jointly learning to align and translate. In ICLR 2015.

Bibliography

Wang Ling, Chris Dyer, Alan W. Black, Isabel Trancoso, Ramon Fernandez, Silvio Amir, Luís Marujo, Tiago Luís: Finding Function in Form: Compositional Character Models for Open Vocabulary Word Representation. EMNLP 2015: 1520-1530

Minh-Thang Luong, Hieu Pham, Christopher D. Manning: Effective Approaches to Attention-based Neural Machine Translation. CoRR abs/1508.04025 (2015)

Alex Graves, Santiago Fernández, Faustino J. Gomez, Jürgen Schmidhuber: Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks. ICML 2006: 369-376

Armand Joulin, Tomas Mikolov: Inferring Algorithmic Patterns with Stack-Augmented Recurrent Nets. NIPS 2015: 190-198

Alex Graves, Greg Wayne, Ivo Danihelka: Neural Turing Machines. CoRR abs/1410.5401 (2014)

Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, Illia Polosukhin: Attention is All you Need. NIPS 2017: 6000-6010