



Basic Concept of SVM:

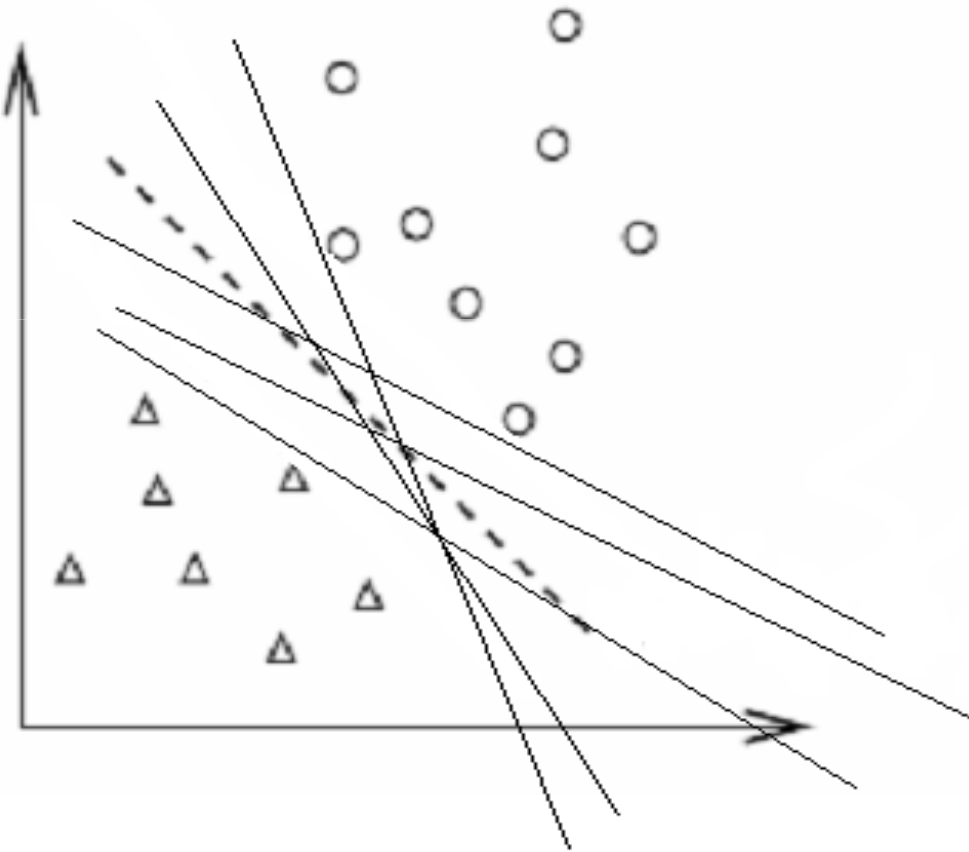

- Which line will classify the unseen data well?
- The dotted line! Its line with Maximum Margin!

Cont...

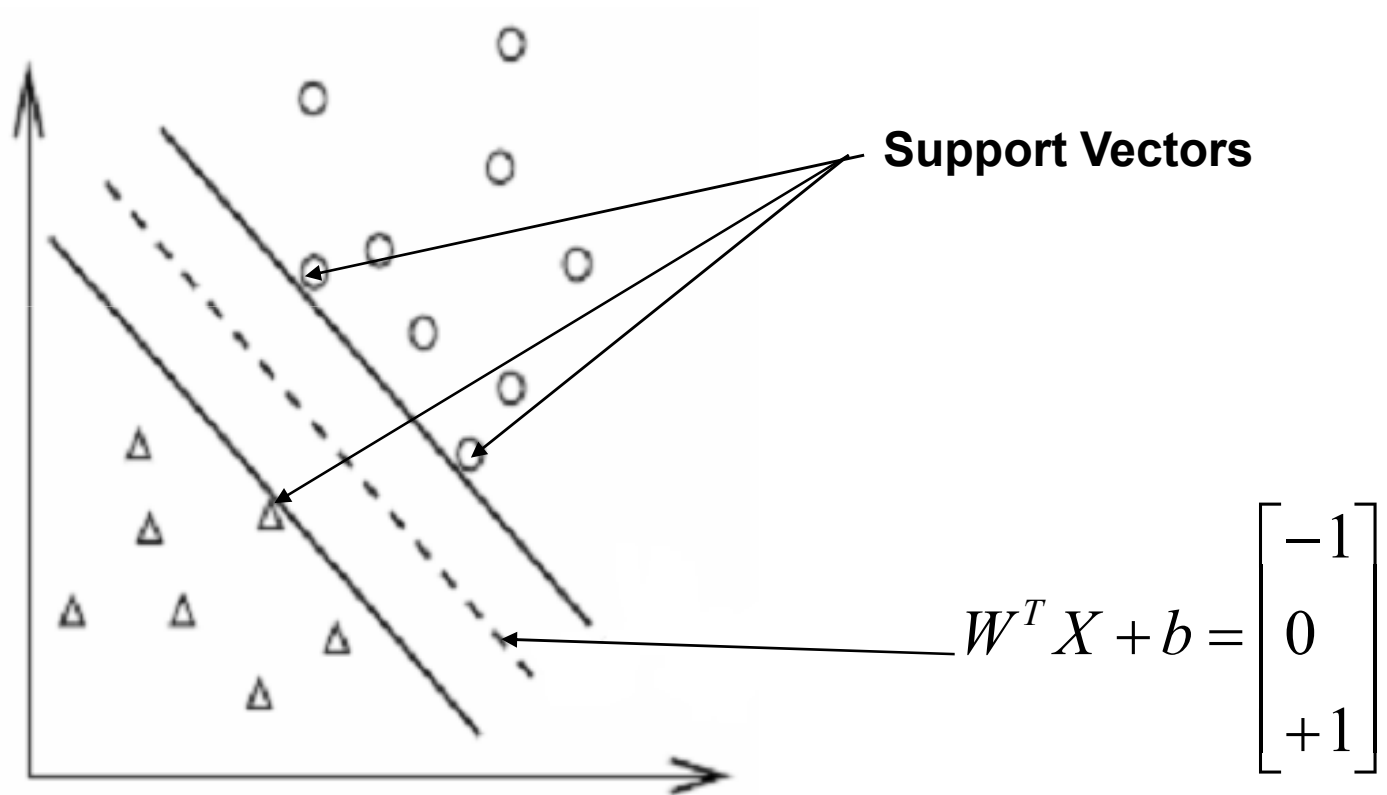

Some definitions:

□ Functional Margin:

w.r.t.

- 1) individual examples : $\hat{\gamma}^{(i)} = y^{(i)} (W^T x^{(i)} + b)$
- 2) example set $S = \{ (x^{(i)}, y^{(i)}) ; i = 1, \dots, m \}$

$$\hat{\gamma} = \min_{i=1, \dots, m} \hat{\gamma}^{(i)}$$


□ Geometric Margin:

w.r.t

- 1) Individual examples: $\gamma^{(i)} = y^{(i)} \left(\left(\frac{W}{\|W\|} \right)^T x^{(i)} + \frac{b}{\|W\|} \right)$
- 2) example set S,

$$\gamma = \min_{i=1, \dots, m} \gamma^{(i)}$$

Problem Formulation:

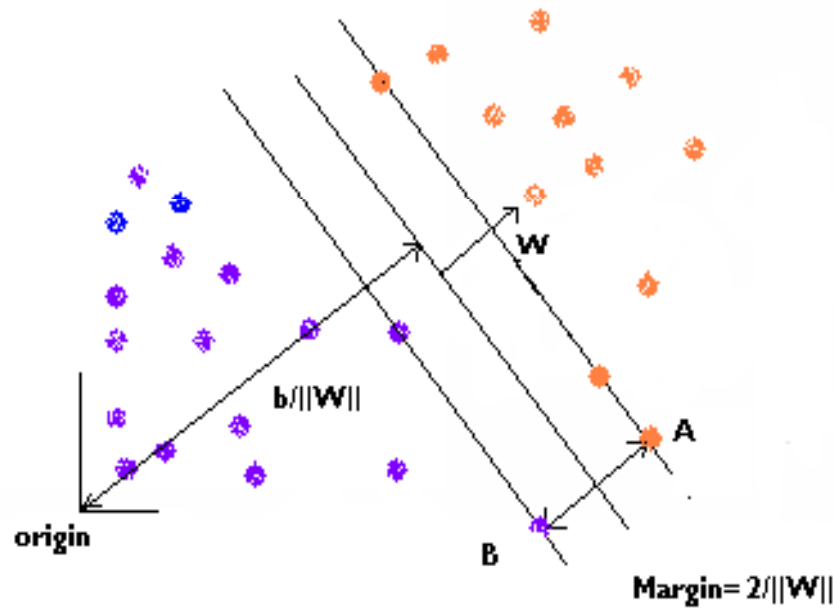

$$W^T X + b = \begin{bmatrix} -1 \\ 0 \\ +1 \end{bmatrix}$$

Cont..

- Distance of a point (u, v) from $Ax+By+C=0$, is given by $|Ax+By+C|/\|n\|$

Where $\|n\|$ is norm of vector $n(A,B)$

- Distance of hyperplane from origin = $\frac{b}{\|W\|}$
- Distance of point A from origin = $\frac{b + 1}{\|W\|}$
- Distance of point B from Origin = $\frac{b - 1}{\|W\|}$
- Distance between points A and B (Margin) = $\frac{2}{\|W\|}$

Cont...

We have data set $\{X^{(i)}, Y^{(i)}\}, i=1, \dots, m$

$$X \in R^d \quad \text{and} \quad Y \in R^1$$

separating hyperplane

$$W^T X + b = 0$$

s.t.

$$W^T X^{(i)} + b > 0 \quad \text{if} \quad Y^{(i)} = +1$$

$$W^T X^{(i)} + b < 0 \quad \text{if} \quad Y^{(i)} = -1$$

Cont...

- Suppose training data satisfy following constraints also,

$$W^T X^{(i)} + b \geq +1 \quad \text{for} \quad Y^{(i)} = +1$$

$$W^T X^{(i)} + b \leq -1 \quad \text{for} \quad Y^{(i)} = -1$$

Combining these to the one,

$$Y^{(i)} (W^T X^{(i)} + b) \geq 1 \quad \text{for} \quad \forall i$$

- Our objective is to find Hyperplane(W,b) with maximal separation between it and closest data points while satisfying the above constraints

THE PROBLEM:

$$\max_{W,b} \frac{2}{\|W\|}$$

such that

$$Y^{(i)}(W^T X^{(i)} + b) \geq 1 \quad \text{for } \forall i$$

Also we know

$$\|W\| = \sqrt{W^T W}$$



Cont..

So the Problem can be written as:

$$\min_{W,b} \frac{1}{2} W^T W$$

Such that

$$Y^{(i)}(W^T X^{(i)} + b) \geq 1 \text{ for } \forall i$$

Notice: $W^T W = \|W\|^2$

It is just a convex quadratic optimization problem !

DUAL

- Solving dual for our problem will lead us to apply SVM for nonlinearly separable data, efficiently
- It can be shown that

$$\min_{W,b} \text{primal} = \max_{\alpha \geq 0} (\min_{W,b} L(W,b,\alpha))$$

- Primal problem:

$$\min_{W,b} \frac{1}{2} W^T W$$

Such that

$$Y^{(i)} (W^T X^{(i)} + b) \geq 1 \quad \text{for } \forall i$$

Constructing Lagrangian

- Lagrangian for our problem:

$$L(W, b, \alpha) = \frac{1}{2} \|W\|^2 - \sum_{i=1}^m \alpha_i [Y^{(i)} (W^T X^{(i)} + b) - 1]$$

Where α a Lagrange multiplier and $\alpha_i \geq 0$

- Now minimizing it w.r.t. W and b :

We set derivatives of Lagrangian w.r.t. W and b to zero

Cont...

- Setting derivative w.r.t. W to zero, it gives:

$$W - \sum_{i=1}^m \alpha_i Y^{(i)} X^{(i)} = 0$$

i.e.

$$W = \sum_{i=1}^m \alpha_i Y^{(i)} X^{(i)}$$

- Setting derivative w.r.t. b to zero, it gives:

$$\sum_{i=1}^m \alpha_i Y^{(i)} = 0$$

Cont...

- Plugging these results into Lagrangian gives

$$L(W, b, \alpha) = \sum_{i=1}^m \alpha_i - \frac{1}{2} \sum_{i,j=1}^m Y^{(i)} Y^{(j)} \alpha_i \alpha_j (X^{(i)})^T (X^{(j)})$$

- Say it

$$D(\alpha) = \sum_{i=1}^m \alpha_i - \frac{1}{2} \sum_{i,j=1}^m Y^{(i)} Y^{(j)} \alpha_i \alpha_j (X^{(i)})^T (X^{(j)})$$

- This is result of our minimization w.r.t W and b,

So The DUAL:

- Now Dual becomes::

$$\max_{\alpha} D(\alpha) = \sum_{i=1}^m \alpha_i - \frac{1}{2} \sum_{i,j=1}^m Y^{(i)} Y^{(j)} \alpha_i \alpha_j \langle X^{(i)}, X^{(j)} \rangle$$

s.t.

$$\alpha_i \geq 0, \quad i = 1, \dots, m$$

$$\sum_{i=1}^m \alpha_i Y^{(i)} = 0$$

- Solving this optimization problem gives us α_i
- Also Karush-Kuhn-Tucker (KKT) condition is satisfied at this solution i.e.

$$\alpha_i [Y^{(i)} (W^T X^{(i)} + b) - 1] = 0, \quad \text{for } i = 1, \dots, m$$

Values of W and b :

- W can be found using


$$W = \sum_{i=1}^m \alpha_i Y^{(i)} X^{(i)}$$

- b can be found using:

$$b^* = - \frac{\max_{i:Y^{(i)}=-1} W^{*T} X^{(i)} + \min_{i:Y^{(i)}=1} W^{*T} X^{(i)}}{2}$$

What if data is nonlinearly separable?

- The maximal margin hyperplane can classify only linearly separable data
- What if the data is linearly non-separable?
- Take your data to linearly separable (higher dimensional space) and use maximal margin hyperplane there!


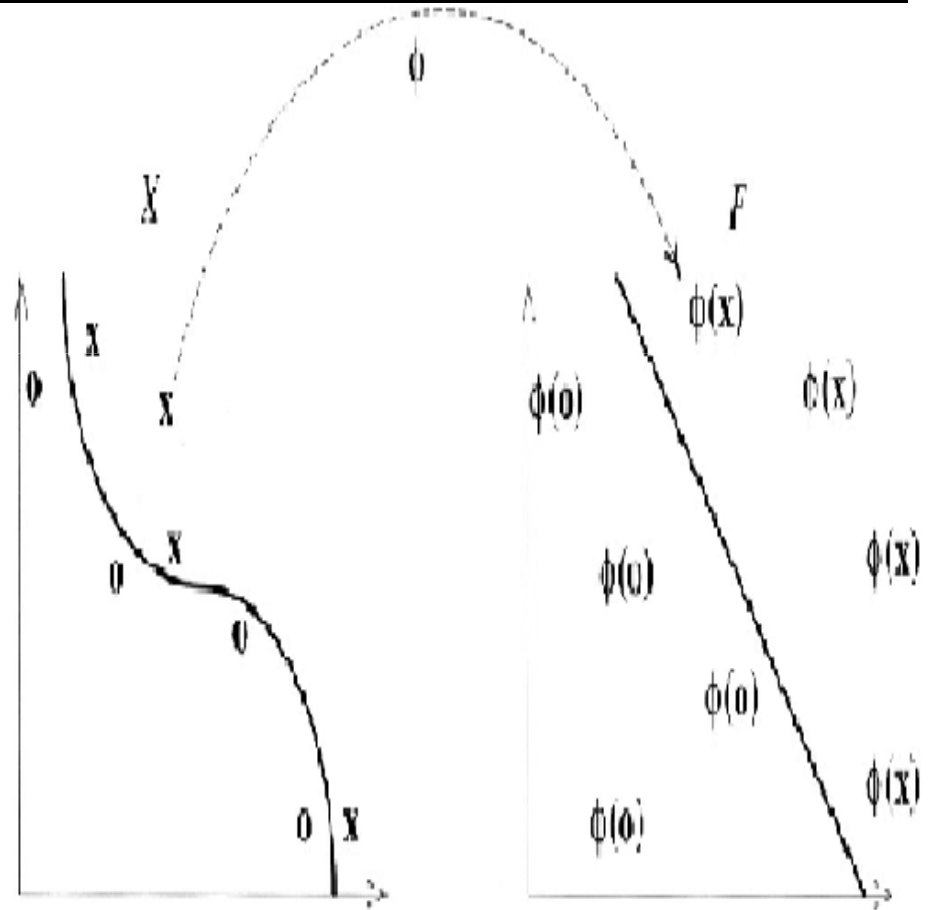


Taking it to higher dimension works!

Ex. XOR

$\mathbf{x}=(x_1,x_2)$	y
(1,1)	-1
(-1,-1)	-1
(1,-1)	1
(-1,1)	1

$\mathbf{x}=(x_1,x_2,x_1.x_2)$	y
(1,1,1)	-1
(-1,-1,1)	-1
(1,-1,-1)	1
(-1,1,-1)	1

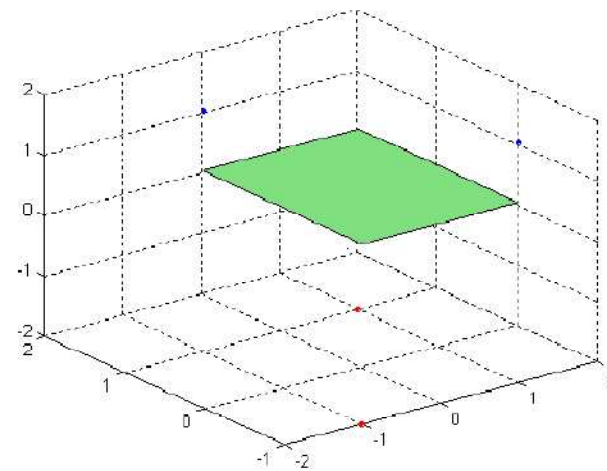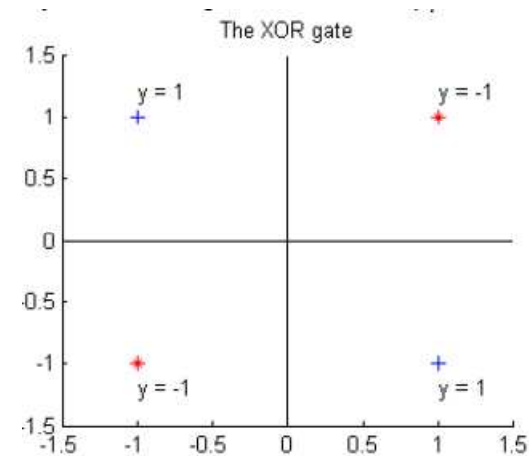

Doing it in higher dimensional space

- Let $\Phi: X \rightarrow F$ be non linear mapping from input space X (original space) to feature space (higher dimensional) F
- Then our inner (dot) product $\langle X^{(i)}, X^{(j)} \rangle$ in higher dimensional space is $\langle \phi(X^{(i)}), \phi(X^{(j)}) \rangle$
- Now, the problem becomes:

$$\max_{\alpha} D(\alpha) = \sum_{i=1}^m \alpha_i - \frac{1}{2} \sum_{i,j=1}^m Y^{(i)} Y^{(j)} \alpha_i \alpha_j \langle \phi(X^{(i)}), \phi(X^{(j)}) \rangle$$

s.t.

$$\alpha_i \geq 0, \quad i = 1, \dots, m$$

$$\sum_{i=1}^m \alpha_i Y^{(i)} = 0$$

Kernel function:

- There exist a way to compute inner product in feature space as function of original input points – Its kernel function!
- Kernel function:

$$K(x, z) = \langle \phi(x), \phi(z) \rangle$$

- We need not know ϕ to compute $K(x, z)$

An example:

let $x, z \in R^n$

$$K(x, z) = (x^T z)^2$$

$$\text{i.e. } K(x, z) = \left(\sum_{i=1}^n x_i z_i \right) \left(\sum_{j=1}^n x_j z_j \right)$$

$$= \sum_{i=1}^n \sum_{j=1}^n x_i x_j z_i z_j$$

$$= \sum_{i,j=1}^n (x_i x_j) (z_i z_j)$$

For $n=3$, feature mapping ϕ
is given as :

$$\phi(x) = \begin{bmatrix} x_1 x_1 \\ x_1 x_2 \\ x_1 x_3 \\ x_2 x_1 \\ x_2 x_2 \\ x_2 x_3 \\ x_3 x_1 \\ x_3 x_2 \\ x_3 x_3 \end{bmatrix}$$

$$K(x, z) = \langle \phi(x), \phi(z) \rangle$$

example cont...

□ Here,

for

$$K(x, z) = (x^T z)^2$$

$$x = \begin{bmatrix} 1 \\ 2 \end{bmatrix} \quad z = \begin{bmatrix} 3 \\ 4 \end{bmatrix}$$

$$x^T z = \begin{bmatrix} 1 & 2 \end{bmatrix} \begin{bmatrix} 3 \\ 4 \end{bmatrix}$$

$$= 11$$

$$K(x, z) = (x^T z)^2 = 121$$

$$\phi(x) = \begin{bmatrix} x_1 x_1 \\ x_1 x_2 \\ x_2 x_1 \\ x_2 x_2 \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 2 \\ 4 \end{bmatrix}$$

$$\phi(z) = \begin{bmatrix} 9 \\ 12 \\ 12 \\ 16 \end{bmatrix}$$

$$\phi(x)^T \phi(z) = \begin{bmatrix} 1 & 2 & 2 & 4 \end{bmatrix} \begin{bmatrix} 9 \\ 12 \\ 12 \\ 16 \end{bmatrix}$$

$$= 121$$

So our SVM for the non-linearly separable data:

□ Optimization problem:

$$\max_{\alpha} D(\alpha) = \sum_{i=1}^m \alpha_i - \frac{1}{2} \sum_{i,j=1}^m Y^{(i)} Y^{(j)} \alpha_i \alpha_j K \langle X^{(i)}, X^{(j)} \rangle$$

s.t.

$$\alpha_i \geq 0, \quad i = 1, \dots, m$$

$$\sum_{i=1}^m \alpha_i Y^{(i)} = 0$$

□ Decision function

$$F(X) = \text{Sign} \left(\sum_{i=1}^m \alpha_i Y^{(i)} K(X^{(i)}, X) + b \right)$$

Some commonly used Kernel functions:

- Linear: $K(X, Y) = X^T Y$
- Polynomial of degree d: $K(X, Y) = (X^T Y + 1)^d$
- Gaussian Radial Basis Function (RBF): $K(X, Y) = e^{-\frac{\|X-Y\|^2}{2\sigma^2}}$
- Tanh kernel: $K(X, Y) = \tanh(\rho(X^T Y) - \delta)$

Implementations:

Some Ready to use available SVM implementations:

1)LIBSVM:A library for SVM by Chih-Chung Chang and
chih-Jen Lin

(at: <http://www.csie.ntu.edu.tw/~cjlin/libsvm/>)

2)SVM light : An implementation in C by Thorsten
Joachims

(at: <http://svmlight.joachims.org/>)

3)Weka: A Data Mining Software in Java by University
of Waikato

(at: <http://www.cs.waikato.ac.nz/ml/weka/>)

Issues:

- ❑ Selecting suitable kernel: Its most of the time trial and error
- ❑ Multiclass classification: One decision function for each class(l_1 vs $l-1$) and then finding one with max value i.e. if X belongs to class 1, then for this and other $(l-1)$ classes vales of decision functions:

$$F_1 (X) \geq + 1$$

$$F_2 (X) \leq - 1$$

.

.

$$F_l (X) \leq - 1$$



Cont....

- ❑ Sensitive to noise: Mislabeled data can badly affect the performance
- ❑ Good performance for the applications like-
 - 1)computational biology and medical applications (protein, cancer classification problems)
 - 2)Image classification
 - 3)hand-written character recognitionAnd many others.....
- ❑ Use SVM :High dimensional, linearly separable data (strength), for nonlinearly depends on choice of kernel