

Branch & Bound and Knapsack Lab

Objectives

- Perform the branch and bound algorithm
- Apply branch and bound to the knapsack problem
- Understand the geometry of the branch and bound algorithm

Brief description: In this lab, we will try solving an example of a knapsack problem with the branch-and-bound algorithm. We will also see how adding a cutting plane helps in reducing the computation time and effort of the algorithm. Lastly, we will explore the geometry of the branch and bound algorithm.

```
In [1]: # imports -- don't forget to run this cell
import pandas as pd
import gilp
from gilp.visualize import feasible_integer_pts
from ortools.linear_solver import pywraplp as OR
```

Part 1: Branch and Bound Algorithm

Recall that the branch and bound algorithm (in addition to the simplex method) allows us to solve integer programs. Before applying the branch and bound algorithm to the knapsack problem, we will begin by reviewing some core ideas. Furthermore, we will identify a helpful property that will make branch and bound terminate quicker later in the lab!

Q1: What are the different ways a node can be fathomed during the branch and bound algorithm? Describe each.

A: you can go from the root node and based on the objective values you branch off into new nodes within certain constraints

Q2: Suppose you have a maximization integer program and you solve its linear program relaxation. What does the LP-relaxation optimal value tell you about the IP optimal value? What if it is a minimization problem?

A: its optimal value tells you the top bound of the IP optimal value. If it was a minimization problem it would tell us the bottom bound of the IP optimal value.

Q3: Assume you have a maximization integer program with all integral coefficients in the objective function. Now, suppose you are running the branch and bound algorithm and come across a node with an optimal value of 44.5. The current incumbent is 44. Can you fathom this node? Why or why not?

A: yes you can fathom this node with value 44 because we have a new upper bound of 44.5 that we can possibly further explore.

Q4: If the optimal solution to the LP relaxation of the original program is integer, then you have found an optimal solution to your integer program. Explain why this is true.

A: this is true because if LP is either the lowerbound for minimizing or the upper bound for maximizing IP formulations.

Q5: If the LP is infeasible, then the IP is infeasible. Explain why this is true.

A: this is true because the LP again is the lower or upper bound and it will include all values, even the decimals/fractional values. that means that if the LP cannot be found then there's no way the IP can be found.

The next questions ask about the following branch and bound tree. If the solution was not integral, the fractional x_i that was used to branch is given. If the solution was integral, it is denoted *INT*. In the current iteration of branch and bound, you are looking at the node with the *.



Q6: Can you determine if the integer program this branch and bound tree is for is a minimization or maximization problem? If so, which is it?

A: this is a maximization problem because the value of z continues to increase as the nodes are explored.

Hint: For **Q7-8**, you can assume integral coefficients in the objective function.

Q7: Is the current node (marked z^*) fathomed? Why or why not? If not, what additional constraints should be imposed for each of the next two nodes?

A: node z^* is fathomed because it is lower than the next highest bound being 17 at that time.

Q8: Consider the nodes under the current node (where $z = 16.3$). What do you know about the optimal value of these nodes? Why?

A: for nodes that would be under $z=16.3$ they would all have optimal value less than 20.

Part 2: The Knapsack Problem

In this lab, you will solve an integer program by branch and bound. The integer program to be solved will be a knapsack problem.

Knapsack Problem: We are given a collection of n items, where each item $i = 1, \dots, n$ has a weight w_i and a value v_i . In addition, there is a given capacity W , and the aim is to select a maximum value subset of items that has a total weight at most W . Note that each item can be brought at most once.

$$\begin{aligned} \max \quad & \sum_{i=1}^n v_i x_i \\ \text{s.t.} \quad & \sum_{i=1}^n w_i x_i \leq W \\ & 0 \leq x_i \leq 1, \text{ integer}, i = 1, \dots, n \end{aligned}$$

Consider the following data which we import from a CSV file:

```
In [2]: data = pd.read_csv('knapsack_data_1.csv', index_col=0)
data
```

Out[2]:

	value	weight
item		
1	50	10
2	30	12
3	24	10
4	14	7
5	12	6
6	10	7
7	40	30

and $W = 18$.

Q9: Are there any items we can remove from our input to simplify this problem? Why? If so, replace `index` with the item number that can be removed in the code below. Hint: how many of each item could we possibly take?

A: we can remove numebr 7 because item's 7 weigth is 30>18.

```
In [3]: # TODO: replace index
data = data.drop(7)
```

Q10: If we remove item 7 from the knapsack, it does not change the optimal solution to the integer program. Explain why.

A: no it doesn't because it's not feasible so it wouldn't have any input on the optimal solution in the first place

Q11: Consider removing items i such that $w_i > W$ from a knapsack input. How does the LP relaxation's optimal value change?

A: if i removed one of the duplicated with weights 7 or 10 the optimal value probably wouldn't change much.

In **Q10-11**, you should have found that removing these items removes feasible solutions from the linear program but does not change the integer program. This is desirable as the gap between the optimal IP and LP values can become smaller. By adding this step, branch and bound may terminate sooner.

Recall that a branch and bound node can be fathomed if its bound is no better than the value of the best feasible integer solution found thus far. Hence, it helps to have a good feasible integer solution as quickly as possible (so that we stop needless work). To do this, we can first try to construct a good feasible integer solution by a reasonable heuristic algorithm before starting to run the branch and bound procedure.

In designing a heuristic for the knapsack problem, it is helpful to think about the value per unit weight for each item. We compute this value in the table below.

```
In [4]: data['value per unit weight'] = (data['value'] / data['weight']).round(2)
data
```

Out[4]:

	value	weight	value per unit weight
item			
1	50	10	5.00
2	30	12	2.50
3	24	10	2.40
4	14	7	2.00
5	12	6	2.00
6	10	7	1.43

Q12: Design a reasonable heuristic for the knapsack problem. Note a heuristic aims to find a decent solution to the problem (but is not necessarily optimal).

A: my heuristic would be to take the items with the highest value per unit weight first

Q13: Run your heuristic on the data above to compute a good feasible integer solution. Your heuristic should generate a feasible solution with a value of 64 or better. If it does not, try a different heuristic (or talk to your TA!)

A: items 1, 4 will give me $50+14=64$

We will now use the branch and bound algorithm to solve this knapsack problem! First, let us define a mathematical model for the linear relaxation of the knapsack problem.

Q14: Complete the model below.

```
In [5]: def Knapsack(table, capacity, integer = False):
        """Model for solving the Knapsack problem.

        Args:
            table (pd.DataFrame): A table indexed by items with a column for value
            and weight
            capacity (int): An integer-capacity for the knapsack
            integer (bool): True if the variables should be integer. False otherwise.
        """
        ITEMS = list(table.index)          # set of items
        v = table.to_dict()['value']        # value for each item
        w = table.to_dict()['weight']       # weight for each item
        W = capacity                       # capacity of the knapsack

        # define model
        m = OR.Solver('knapsack', OR.Solver.CBC_MIXED_INTEGER_PROGRAMMING)

        # decision variables
        x = {}
        for i in ITEMS:
            if integer:
                x[i] = m.IntVar(0, 1, 'x_%d' % (i))
            else:
                x[i] = m.NumVar(0, 1, 'x_%d' % (i))

        # define objective function here
        m.Maximize(sum(v[i]*x[i] for i in ITEMS))

        # TODO: Add a constraint that enforces that weight must not exceed capacity
        # recall that we add constraints to the model using m.Add()
        m.Add( sum(w[i]*x[i] for i in ITEMS) <= W )

        return (m, x) # return the model and the decision variables
```

```
In [6]: # You do not need to do anything with this cell but make sure you run it!
def solve(m):
    """Used to solve a model m."""
    m.Solve()

    print('Objective =', m.Objective().Value())
    print('iterations :', m.iterations())
    print('branch-and-bound nodes :', m.nodes())

    return ({var.name() : var.solution_value() for var in m.variables()})
```

We can now create a linear relaxation of our knapsack problem. Now, `m` represents our model and `x` represents our decision variables.

```
In [7]: m, x = Knapsack(data, 18)
```

We can use the next line to solve the model and output the solution

```
In [8]: solve(m)

Objective = 70.0
iterations : 0
branch-and-bound nodes : 0

Out[8]: {'x_1': 1.0,
         'x_2': 0.6666666666666667,
         'x_3': 0.0,
         'x_4': 0.0,
         'x_5': 0.0,
         'x_6': 0.0}
```

Q15: How does this optimal value compare to the value you found using the heuristic integer solution?

A: it is less than what i found 70,92

Q16: Should this node be fathomed? If not, what variable should be branched on and what additional constraints should be imposed for each of the next two nodes?

A: no it shouldn't be fathomed since it's our first value. we should go to x_2 next using constraints of $x_2 \geq 0$ and $x_2 \leq 0$

After constructing the linear relaxation model using `Knapsack(data1, 18)` we can add additional constraints. For example, we can add the constraint $x_2 \leq 0$ and solve it as follows:

```
In [9]: m, x = Knapsack(data, 18)
m.Add(x[2] <= 0)
solve(m)
```

```
Objective = 69.2
iterations : 0
branch-and-bound nodes : 0
```

```
Out[9]: {'x_1': 1.0, 'x_2': 0.0, 'x_3': 0.8, 'x_4': 0.0, 'x_5': 0.0, 'x_6': 0.0}
```

NOTE: The line `m, x = Knapsack(data1, 18)` resets the model `m` to the LP relaxation. All constraints from branching have to be added each time.

Q17: Use the following cell to compute the optimal value for the other node you found in **Q16**.

```
In [10]: m, x = Knapsack(data, 18)
m.Add(x[2] >= 1)
solve(m)
```

```
Objective = 60.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[10]: {'x_1': 0.6000000000000001,
          'x_2': 1.0,
          'x_3': 0.0,
          'x_4': 0.0,
          'x_5': 0.0,
          'x_6': 0.0}
```

Q18: What was the optimal value? Can this node be fathomed? Why? (Hint: In **Q13**, you found a feasible integer solution with value 64.)

A: the optimal value was 60 and yes this node can be fathomed because we found a feasible solution of 64

If we continue running the branch and bound algorithm, we will eventually reach the branch and bound tree below where the z^* indicates the current node we are looking at.



Q19: The node with $z = 64.857$ was fathomed. Why are we allowed to fathom this node? (Hint: think back to **Q3**)

A: we can fathom this node because we have a solution of 64 already and each time we add a node the optimal value decreases and since it's 64.857 the max integer value we can get is 64 so we fathom it and move on to the next one

Q20: Finish running branch and bound to find the optimal integer solution. Use a separate cell for each node you solve and indicate if the node was fathomed with a comment. (Hint: Don't forget to include the constraints further up in the branch and bound tree.)

```
In [11]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[2] <= 0)
m.Add(x[3] <= 0)
m.Add(x[4] >= 1)
m.Add(x[5] <= 0)
m.Add(x[6] <= 0)

solve(m)
# fathomed?
```

```
Objective = 64.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[11]: {'x_1': 1.0, 'x_2': 0.0, 'x_3': 0.0, 'x_4': 1.0, 'x_5': 0.0, 'x_6': 0.0}
```

```
In [12]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[2] <= 0)
m.Add(x[3] <= 0)
m.Add(x[4] >= 1)
m.Add(x[5] <= 0)
m.Add(x[6] >= 1)

solve(m)
# NODE IS FATHOMED
```

```
Objective = 44.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[12]: {'x_1': 0.4, 'x_2': 0.0, 'x_3': 0.0, 'x_4': 1.0, 'x_5': 0.0, 'x_6': 1.0}
```

```
In [ ]:
```

A:

Q21: How many nodes did you have to explore while running the branch and bound algorithm?

A: 2 nodes

In the next section, we will think about additional constraints we can add to make running branch and bound quicker.

Part 3: Cutting Planes

In general, a cutting plane is an additional constraint we can add to an integer program's linear relaxation that removes feasible linear solutions but does not remove any integer feasible solutions. This is very useful when solving integer programs! Recall many of the problems we have learned in class have something we call the "integrality property". This is useful because it allows us to ignore the integrality constraint since we are guaranteed to reach an integral solution. By cleverly adding cutting planes, we strive to remove feasible linear solutions (without removing any integer feasible solutions) such that the optimal solution to the linear relaxation is integral!


Consider an integer program whose linear program relaxation is

$$\begin{array}{ll}\max & 2x_1 + x_2 \\ \text{s.t.} & x_1 + x_2 \leq 3 \\ & 2x_1 \leq 5 \\ & -x_1 + 2x_2 \leq 2 \\ & x_1, x_2 \geq 0\end{array}$$

We can define this linear program and then visualize its feasible region. The integer points have been highlighted.

```
In [13]: lp = gilp.LP([[1,1],[2,0],[-1,2]],
                    [3,5,2],
                    [2,1])
fig = gilp.lp_visual(lp)
fig.set_axis_limits([3.5,2])
fig.add_trace(feasible_integer_pts(lp, fig))
fig
```

Geometric Interpretation of LPs

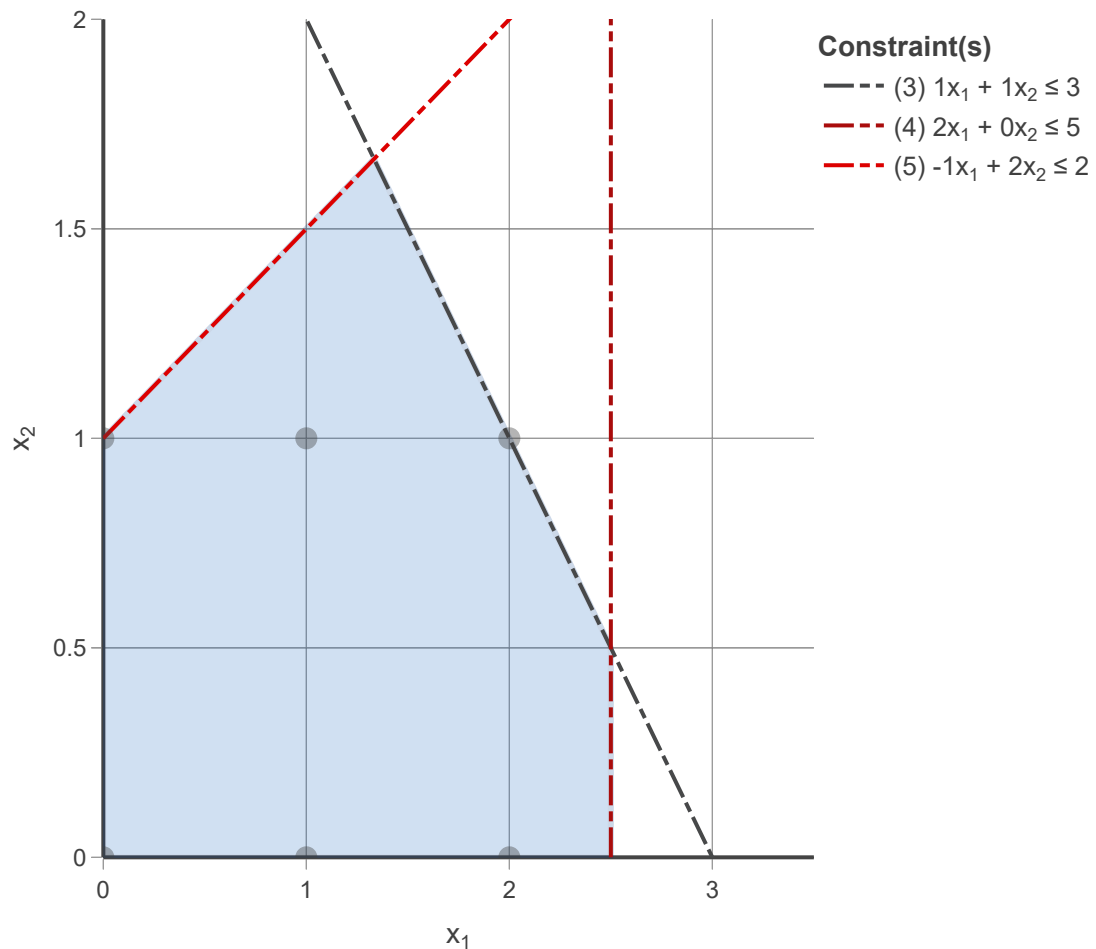

Q22: List every feasible solution to the integer program.

A: (0,0), (0,1), (1,1), (1,0), (2,0), (2,2)


Q23: Is the constraint $x_2 \leq 1$ a cutting plane? Why? (Hint: Would any feasible integer points become infeasible? What about feasible linear points?)

A: yes because no feasible integer points will become infeasible from the constraint

Let's add this cutting plane to the LP relaxation!

```
In [14]: lp = gilp.LP([[1,1],[2,0],[-1,2],[0,1]],
                    [3,5,2,1],
                    [2,1])
fig = gilp.lp_visual(lp)
fig.set_axis_limits([3.5,2])
fig.add_trace(feasible_integer_pts(lp, fig))
fig
```

Geometric Interpretation of LPs

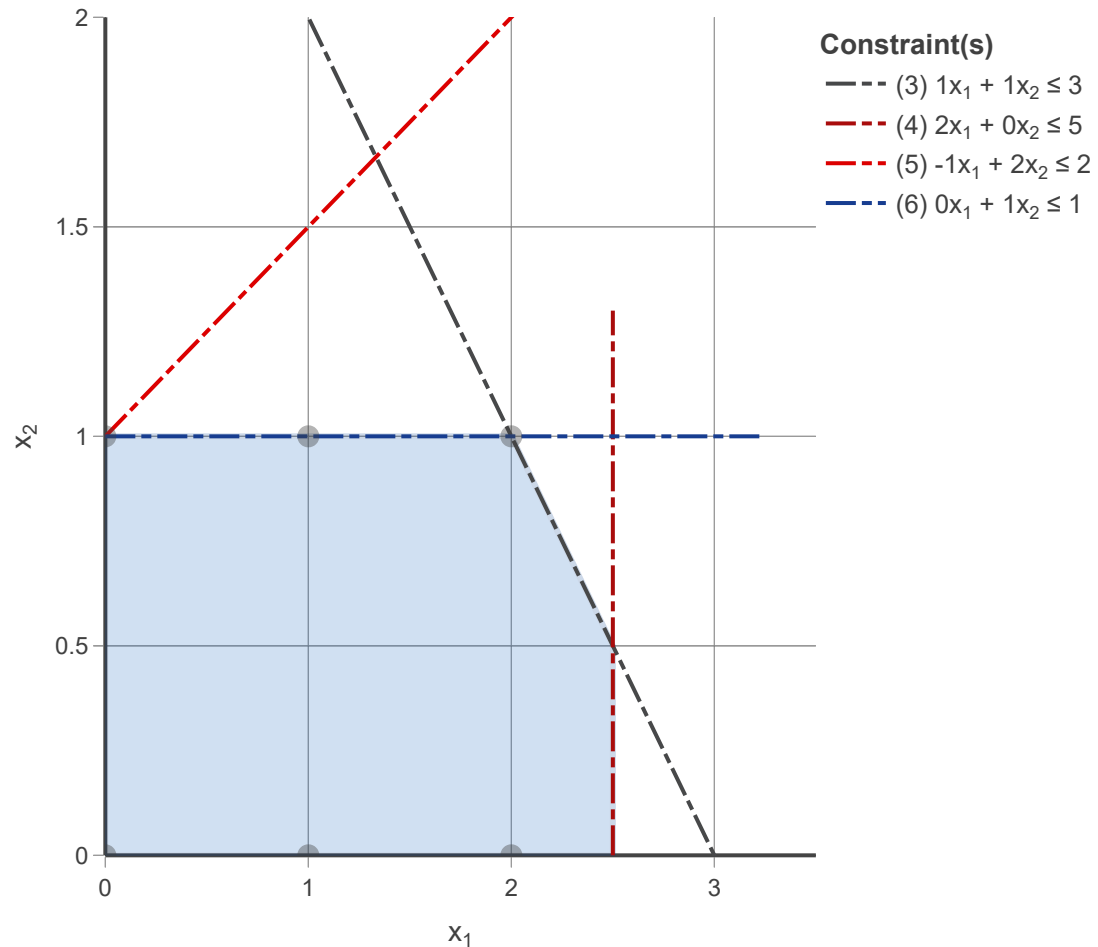

Q24: Is the constraint $x_1 \leq 3$ a cutting plane? Why?

A: no because $x=3$ is not a value in the feasible region to begin with


Q25: Can you provide another cutting plane? If so, what is it?

A: $x_1 \leq 2$

Let's look at the feasible region after adding the cutting plane from **Q23** and one of the possible answers from **Q25**. Notice the optimal solution to the LP relaxation is now integral!

```
In [15]: lp = gilp.LP([[1,1],[2,0],[-1,2],[0,1],[1,0]],
                      [3,5,2,1,2],
                      [2,1])
fig = gilp.lp_visual(lp)
fig.set_axis_limits([3.5,2])
fig.add_trace(feasible_integer_pts(lp, fig))
fig
```

Geometric Interpretation of LPs

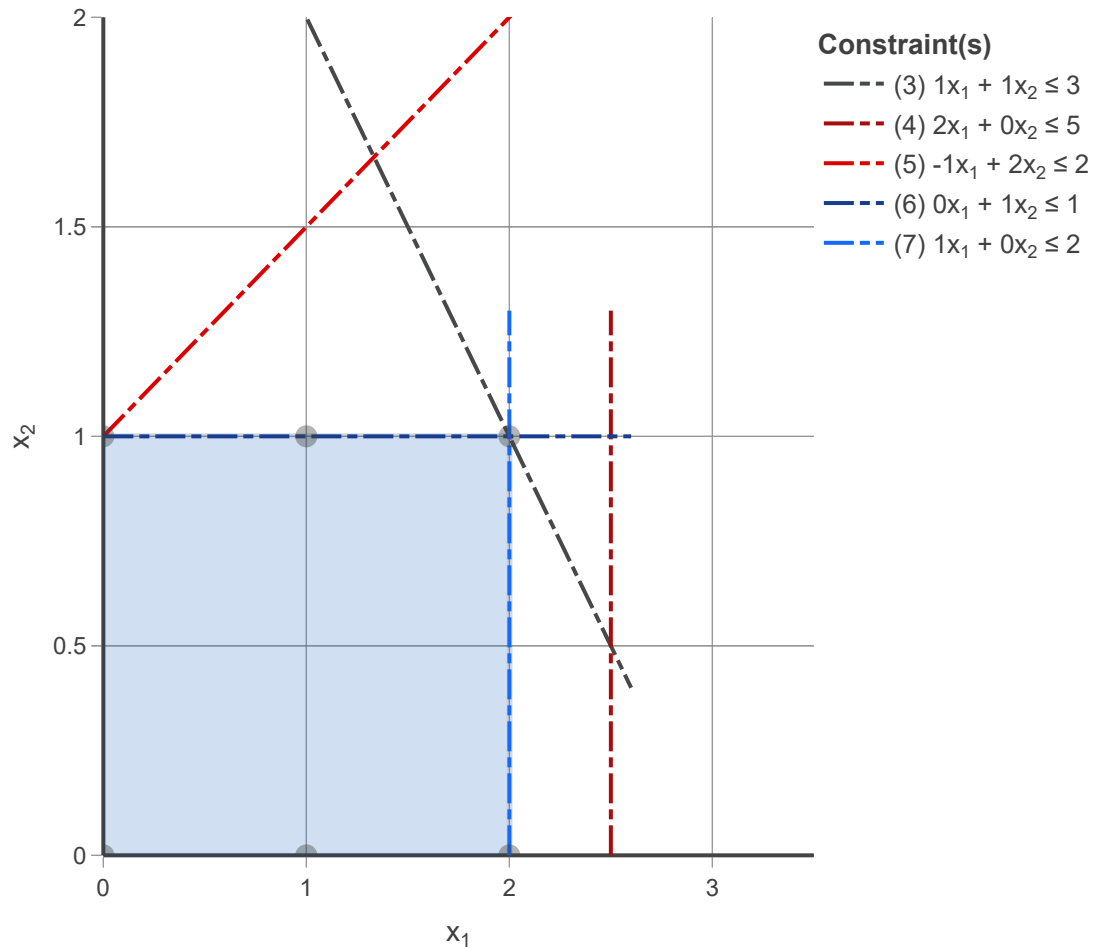

Let's try applying what we know about cutting planes to the knapsack problem! Again, recall our input was $W = 18$ and:

In [16]: data

Out[16]:

	value	weight	value per unit weight
item			
1	50	10	5.00
2	30	12	2.50
3	24	10	2.40
4	14	7	2.00
5	12	6	2.00
6	10	7	1.43

Q26: Look at items 1, 2, and 3. How many of these items can we take simultaneously? Can you write a new constraint to capture this? If so, please provide it.

A: $x_1 + x_2 + x_3 \leq 1$ because we can only take at most 1 of the three 1, 2, or 3, items.

Q27: Is the constraint you found in **Q26** a cutting plane? If so, provide a feasible solution to the linear program relaxation that is no longer feasible (i.e. a point the constraint *cuts off*).

A:

Q28: Provide another cutting plane involving items 4, 5 and 6 for this integer program. Explain how you derived it.

A: $x_4 + x_5 + x_6 \leq 2$ I said it can be less than 2 because a feasible solution would be item 5 and 6 which has weight $14 < 18$ and value 24

Q29: Add the cutting planes from **Q26** and **Q28** to the model and solve it. You should get a solution in which we take items 1 and 4 and $\frac{1}{6}$ of item 5 with an objective value of 66.

```
In [17]: m, x = Knapsack(data, 18)
# TODO: Add cutting planes here
m.Add(x[1] + x[2] + x[3] <= 1)
m.Add(x[4] + x[5] + x[6] <= 2)
solve(m)
```

```
Objective = 66.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[17]: {'x_1': 1.0,
          'x_2': 0.0,
          'x_3': 0.0,
          'x_4': 1.0,
          'x_5': 0.166666666666666696,
          'x_6': 0.0}
```

Let's take a moment to pause and reflect on what we are doing. Recall from **Q9-11** that we dropped item 7 because its weight was greater than the capacity of the knapsack. Essentially we added the constraint $x_7 \leq 0$. This constraint was a cutting plane! It eliminated some linear feasible solutions but no integer ones. By adding these two new cutting planes, we can get branch and bound to terminate earlier yet again! So far, we have generated cutting planes by inspection. However, there are more algorithmic ways to identify them (which we will ignore for now).

If we continue running the branch and bound algorithm, we will eventually reach the branch and bound tree below where the z^* indicates the current node we are looking at.



NOTE: Do not forget about the feasible integer solution our heuristic gave us with value 64.

Q30 Finish running branch and bound to find the optimal integer solution. Use a separate cell for each node you solve and indicate if the node was fathomed with a comment. Hint: Don't forget the cutting plane constraints should be included in every node of the branch and bound tree.

```
In [18]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] <= 0)
solve(m)
# fathomed?
```

```
Objective = 67.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[18]: {'x_1': 1.0,
          'x_2': 0.166666666666666674,
          'x_3': 0.0,
          'x_4': 0.0,
          'x_5': 1.0,
          'x_6': 0.0}
```

```
In [19]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] >= 1)
solve(m)
# THIS NODE IS FATHOMED
```

```
Objective = 51.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[19]: {'x_1': 0.5, 'x_2': 0.0, 'x_3': 0.0, 'x_4': 1.0, 'x_5': 1.0, 'x_6': 0.0}
```

```
In [20]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] <= 0)
m.Add(x[2] <= 0)
solve(m)
# fathomed?
```

```
Objective = 66.800000000000001
iterations : 0
branch-and-bound nodes : 0
```

```
Out[20]: {'x_1': 1.0,
          'x_2': 0.0,
          'x_3': 0.200000000000000018,
          'x_4': 0.0,
          'x_5': 1.0,
          'x_6': 0.0}
```

```
In [21]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] <= 0)
m.Add(x[2] >= 1)
solve(m)
# NODE IS FATHOMED
```

Objective = 42.0
 iterations : 0
 branch-and-bound nodes : 0

```
Out[21]: {'x_1': 0.0, 'x_2': 1.0, 'x_3': 0.0, 'x_4': 0.0, 'x_5': 1.0, 'x_6': 0.0}
```

```
In [22]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] <= 0)
m.Add(x[2] <= 0)
m.Add(x[3] <= 0)
solve(m)
# fathomed?
```

Objective = 64.85714285714286
 iterations : 0
 branch-and-bound nodes : 0

```
Out[22]: {'x_1': 1.0,
          'x_2': 0.0,
          'x_3': 0.0,
          'x_4': 0.0,
          'x_5': 1.0,
          'x_6': 0.28571428571428603}
```

```
In [23]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] <= 0)
m.Add(x[2] <= 0)
m.Add(x[3] >= 1)
solve(m)
# NODE IS FATHOMED
```

Objective = 46.0
 iterations : 0
 branch-and-bound nodes : 0

```
Out[23]: {'x_1': 0.2, 'x_2': 0.0, 'x_3': 1.0, 'x_4': 0.0, 'x_5': 1.0, 'x_6': 0.0}
```



```
In [24]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] <= 0)
m.Add(x[2] <= 0)
m.Add(x[3] <= 0)
m.Add(x[6] <= 0)
solve(m)
# NODE IS FATHOMED
```

```
Objective = 62.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[24]: {'x_1': 1.0, 'x_2': 0.0, 'x_3': 0.0, 'x_4': 0.0, 'x_5': 1.0, 'x_6': 0.0}
```

```
In [25]: # Template
m, x = Knapsack(data, 18)
# Add constraints here
m.Add(x[5] >= 1)
m.Add(x[4] <= 0)
m.Add(x[2] <= 0)
m.Add(x[3] <= 0)
m.Add(x[6] >= 1)
solve(m)
# NODE IS FATHOMED
```

```
Objective = 47.0
iterations : 0
branch-and-bound nodes : 0
```

```
Out[25]: {'x_1': 0.5, 'x_2': 0.0, 'x_3': 0.0, 'x_4': 0.0, 'x_5': 1.0, 'x_6': 1.0}
```

Q31: Did you find the same optimal solution? How many nodes did you explore? How did this compare to the number you explored previously?

A: yes i did find the same optimal solution. I went through 8 nodes which probably would have been more if we didn't add in the cut planes

Part 4: Geometry of Branch and Bound


Previously, we used the `gilp` package to visualize the simplex algorithm but it also has the functionality to visualize branch and bound. We will give a quick overview of the tool. Similar to `lp_visual` and `simplex_visual`, the function `bnb_visual` takes an LP and returns a visualization. It is assumed that every decision variable is constrained to be integer. Unlike previous visualizations, `bnb_visual` returns a series of figures for each node of the branch and bound tree. Let's look at a small 2D example:

$$\begin{aligned} \max \quad & 5x_1 + 8x_2 \\ \text{s.t.} \quad & x_1 + x_2 \leq 6 \\ & 5x_1 + 9x_2 \leq 45 \\ & x_1, x_2 \geq 0, \quad \text{integral} \end{aligned}$$

```
In [26]: nodes = gilp.bnb_visual(gilp.examples.STANDARD_2D_IP)
```

```
In [27]: nodes[0].show()
```

Geometric Interpretation of LPs

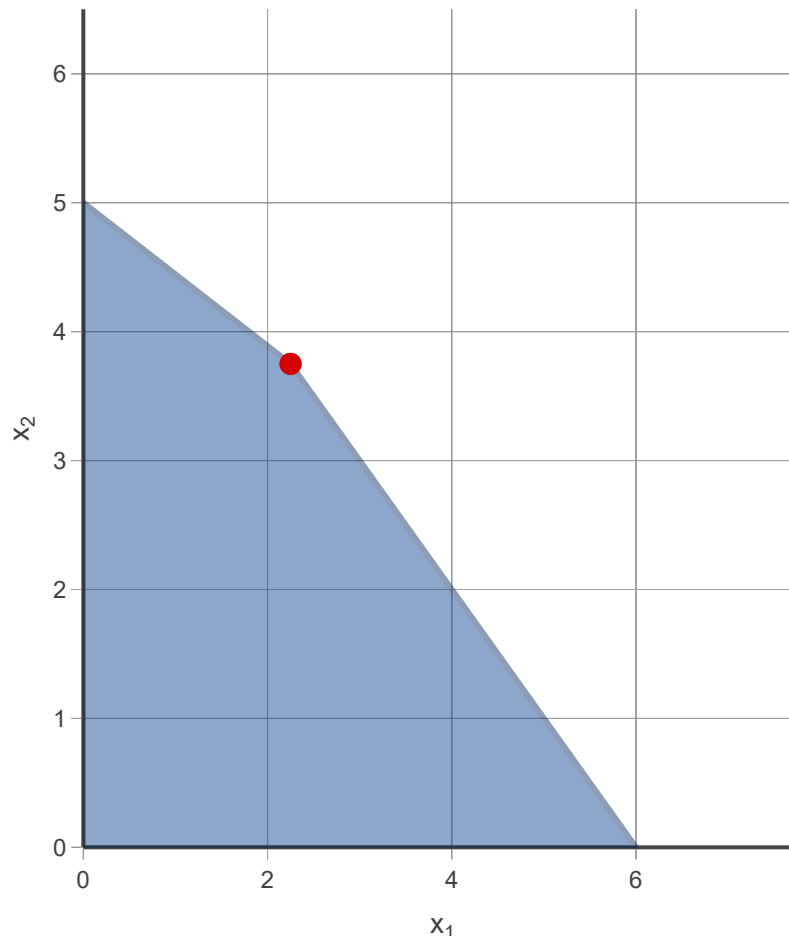

Of
0.1

Run the cells above to generate a figure for each node and view the first node. At first, you will see the LP relaxation on the left and the root of the branch and bound tree on the right. The simplex path and isoprofit slider are also present.

Q32: Recall the root of a branch and bound tree is the unaltered LP relaxation. What is the optimal solution? (Hint: Use the objective slider and hover over extreme points).


A: $x_1=2.25$ $x_2=3.75$ optimal value 41.25

Q33: Assume that we always choose the variable with the minimum index to branch on if there are multiple options. Write down (in full) each of the LPs we get after branching off the root node.

A: $x_1 \geq 3$ $x_1 \leq 2$ $x_2 \leq 3$ $x_2 \geq 4$

Q34: Draw the feasible region to each of the LPs from **Q33** on the same picture.


A:

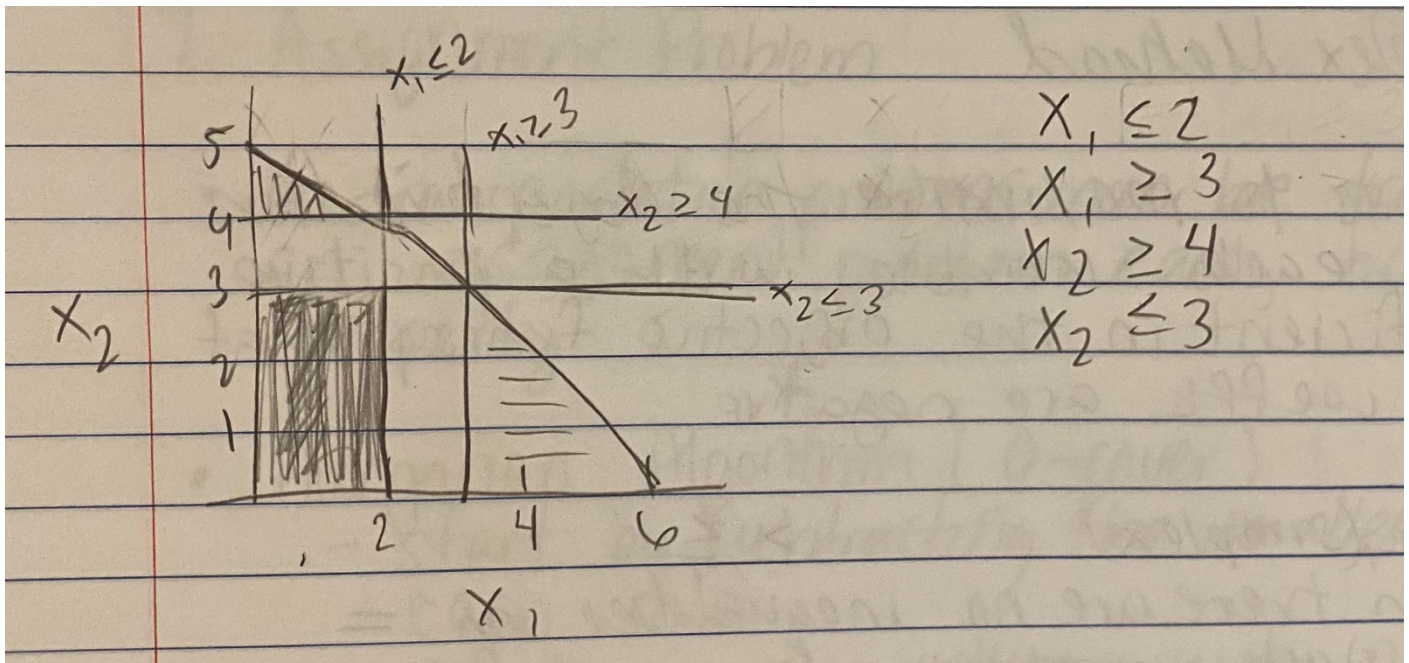

Run the following cell to see if the picture you drew in **Q34** was correct.

```
In [57]: nodes[1].show()
```

Geometric Interpretation of LPs

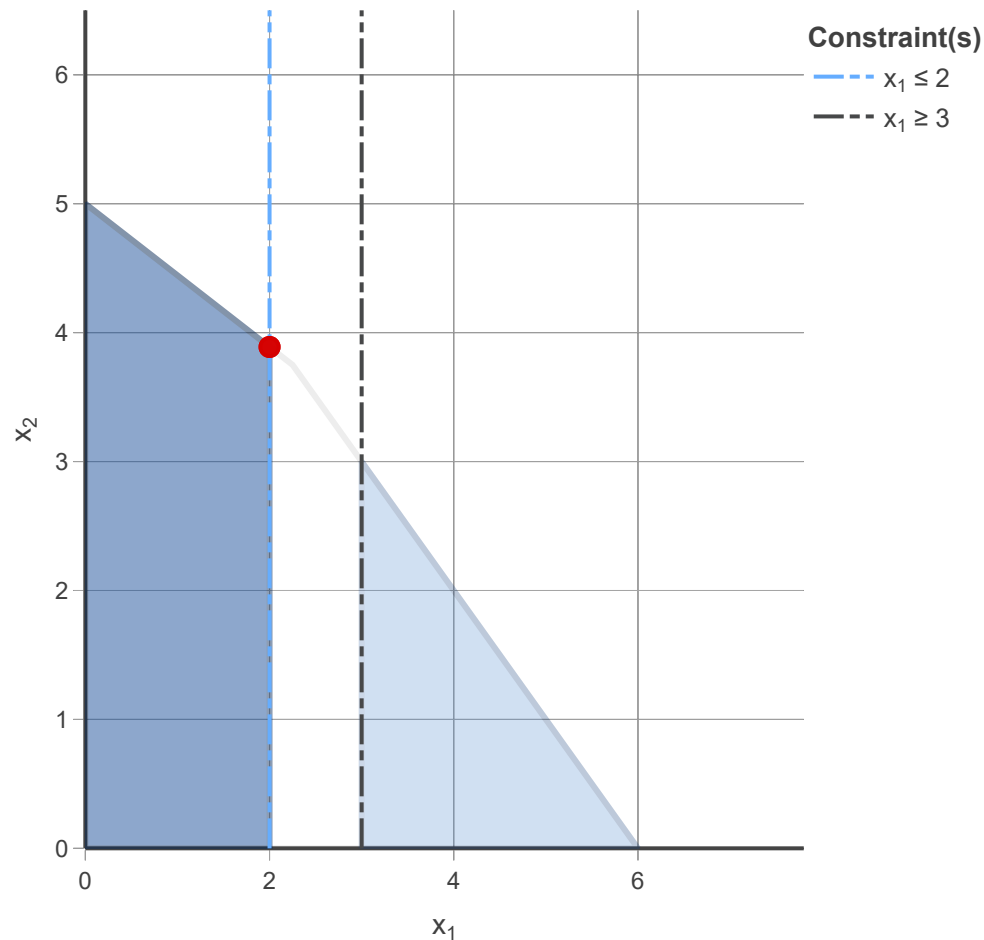

x_1
4.1
 $x^* = (2, 4)$

0.1

The outline of the original LP relaxation is still shown on the left. Now that we have eliminated some of the fractional feasible solutions, we now have 2 feasible regions to consider. The darker one is the feasible region associated with the current node which is also shaded darker in the branch and bound tree. The unexplored nodes in the branch and bound tree are not shaded in.

Q35: Which feasible solutions to the LP relaxation are removed by this branch?


A: (3,1), (3,2), (3,3), (3,0)

Q36: At the current (dark) node, what constraints will we add? How many feasible regions will the original LP relaxation be broken into?

A: 2 constraints making the feasible region split into 2 parts

```
In [55]: nodes[2].show()
```

Geometric Interpretation of LPs

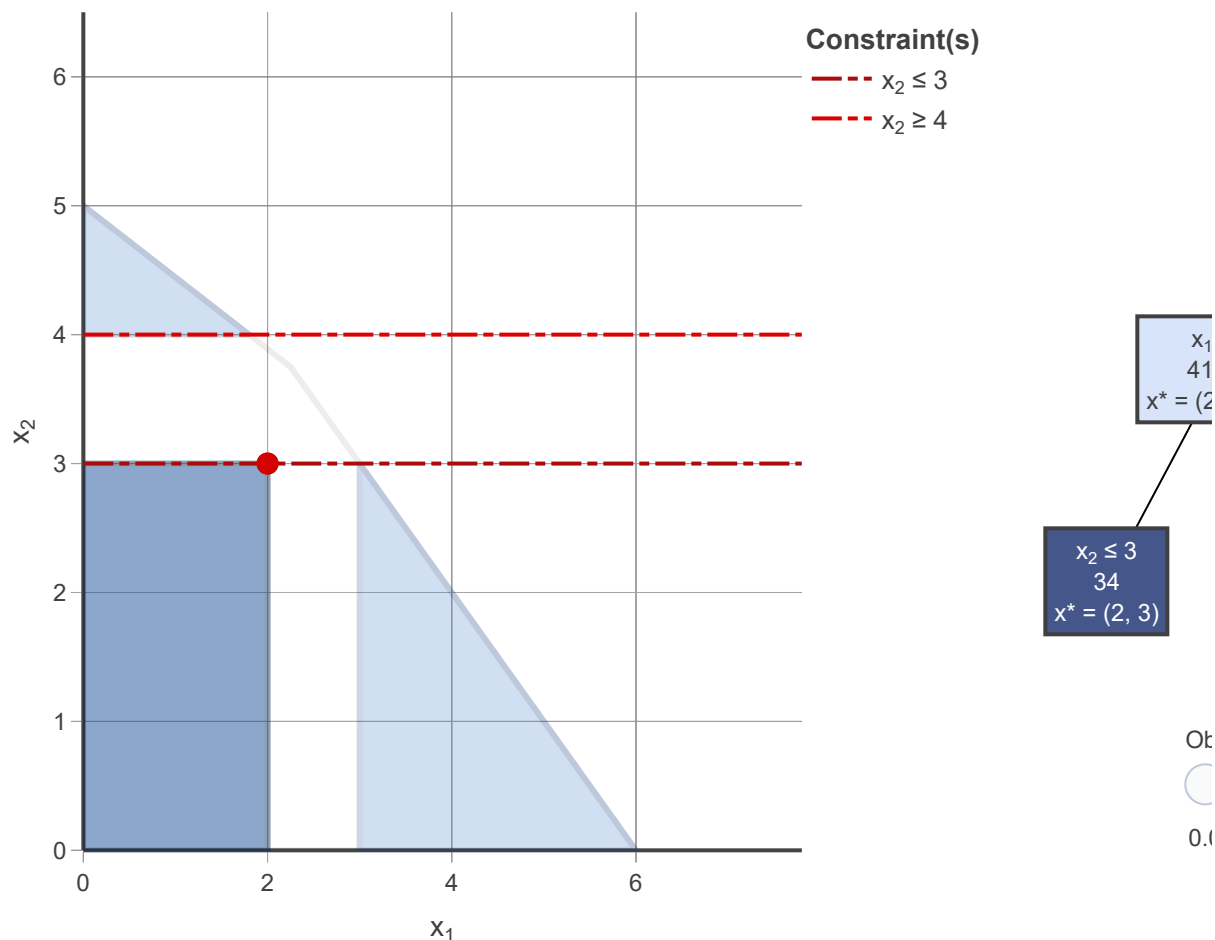

Q37: What is the optimal solution at the current (dark) node? Do we have to further explore this branch? Explain.

A: $x_1=2$, $x_2=3$ no because both variables are integers

Q38: Recall shaded nodes have been explored and the node shaded darker (and feasible region shaded darker) correspond to the current node and its feasible region. Nodes not shaded have not been explored. How many nodes have not yet been explored?


A: 2 nodes have not been explored

Q39: How many nodes have a degree of one in the branch and bound tree? (That is, they are only connected to one edge). These nodes are called leaf nodes. What is the relationship between the leaf nodes and the remaining feasible region?


A: 1 so far. it can mean two things 1 that the node hasn't been explored yet or two that the node has become fathomed

```
In [28]: # Show the next two iterations of the branch and bound algorithm  
nodes[3].show()  
nodes[4].show()
```

Geometric Interpretation of LPs

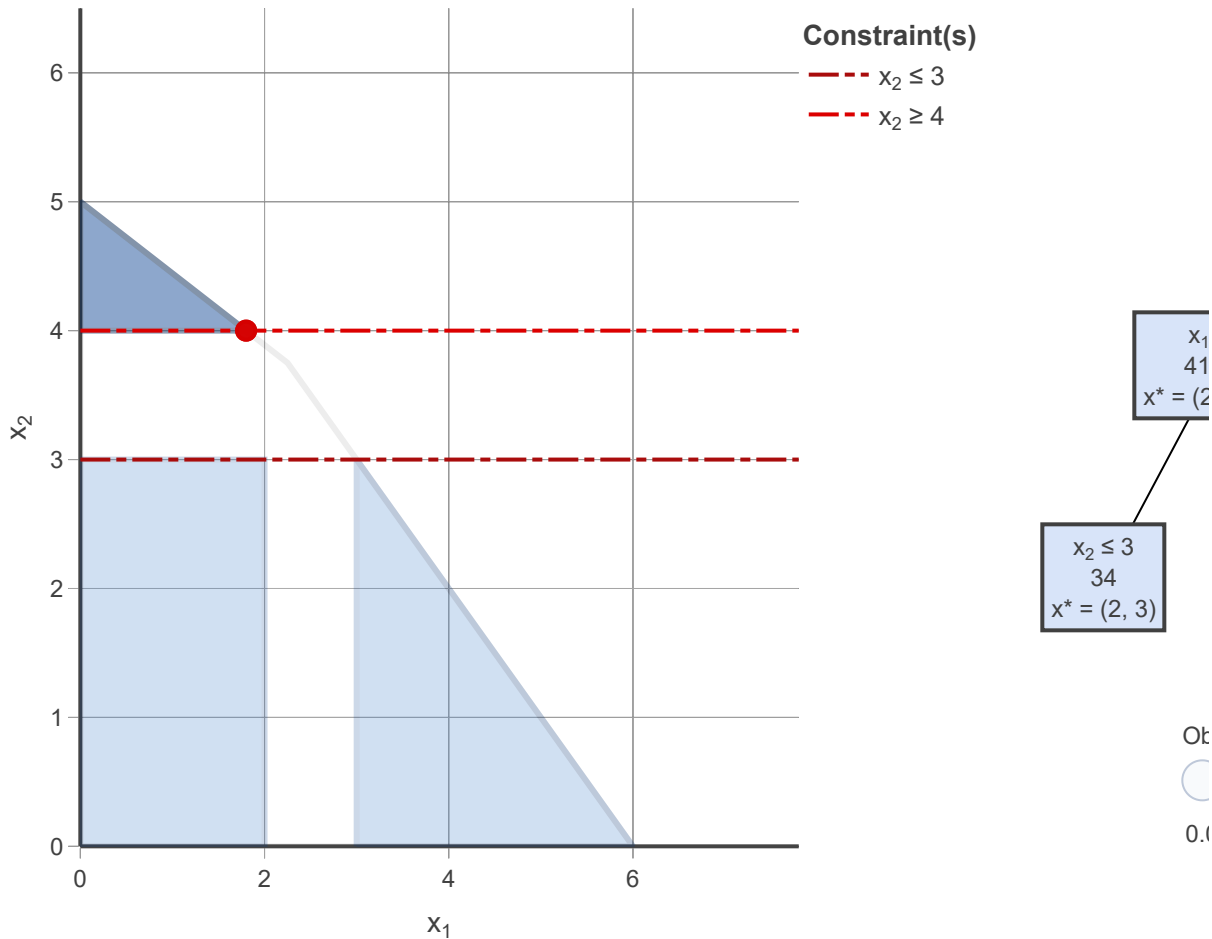

Geometric Interpretation of LPs

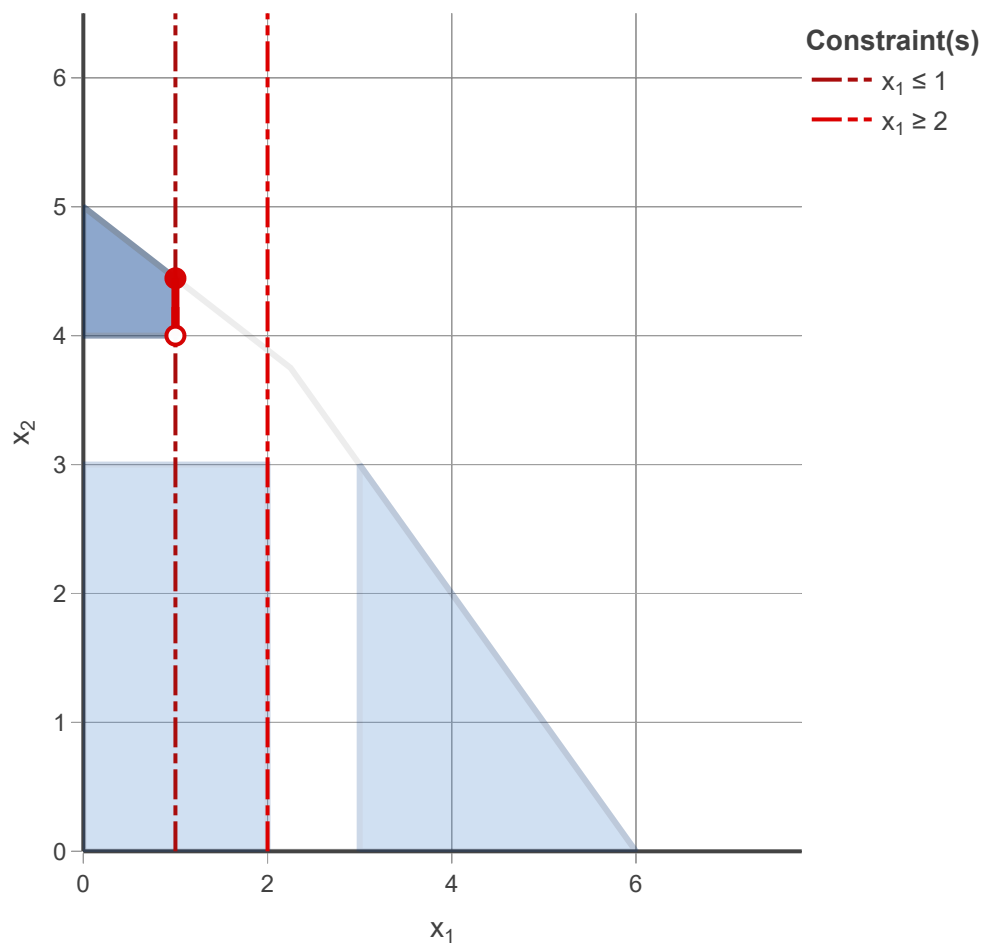

x_1
41
 $x^* = (2, 3)$

$x_2 \leq 3$
34
 $x^* = (2, 3)$

$x^* =$


Obj
0.1

Q40: At the current (dark) node, we added the constraint $x_1 \leq 1$. Why were the fractional solutions $1 < x_1 < 2$ not eliminated for $x_2 \leq 3$?


A: because it returned positive values for x_1 and x_2


```
In [29]: # Show the next three iterations of the branch and bound algorithm  
nodes[5].show()  
nodes[6].show()  
nodes[7].show()
```


Geometric Interpretation of LPs

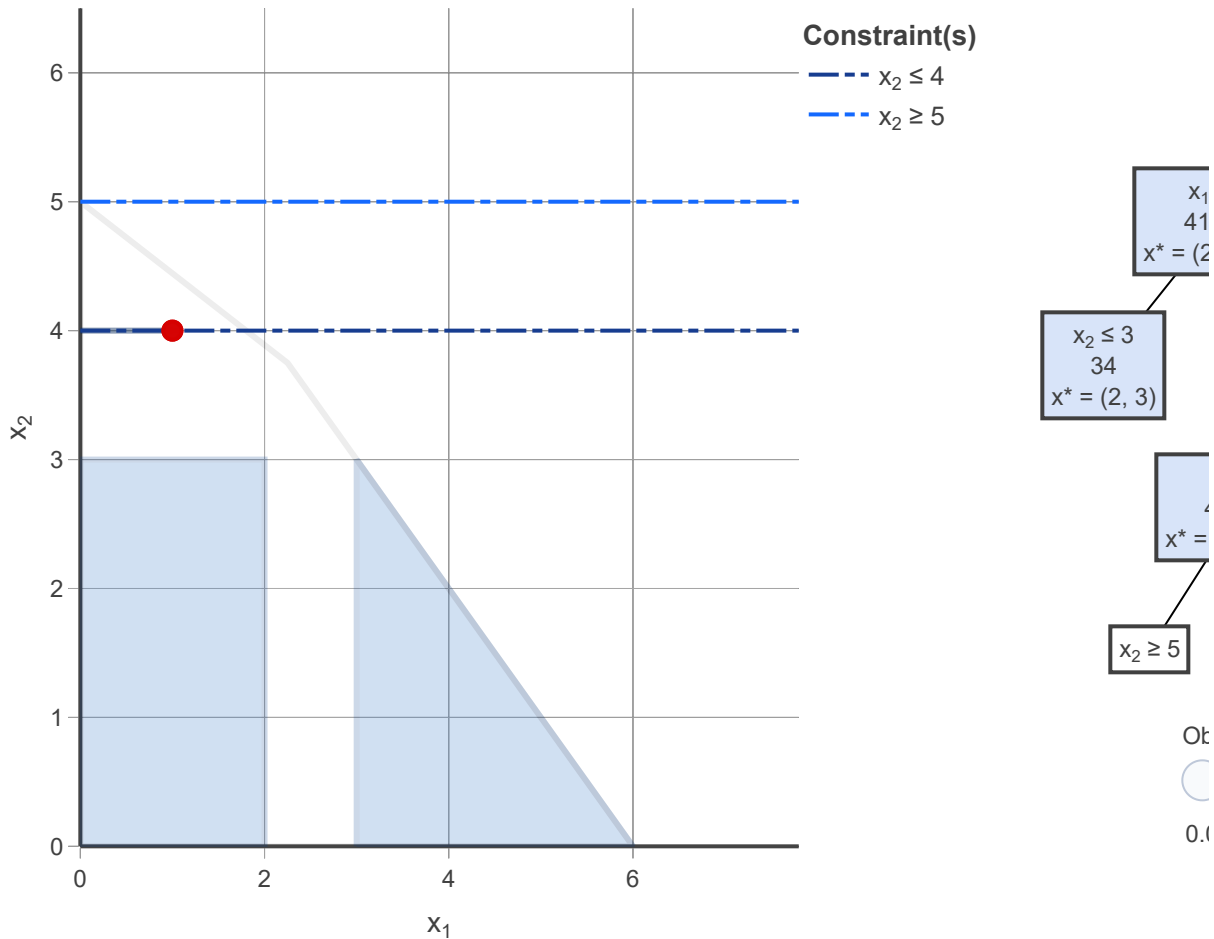

Geometric Interpretation of LPs

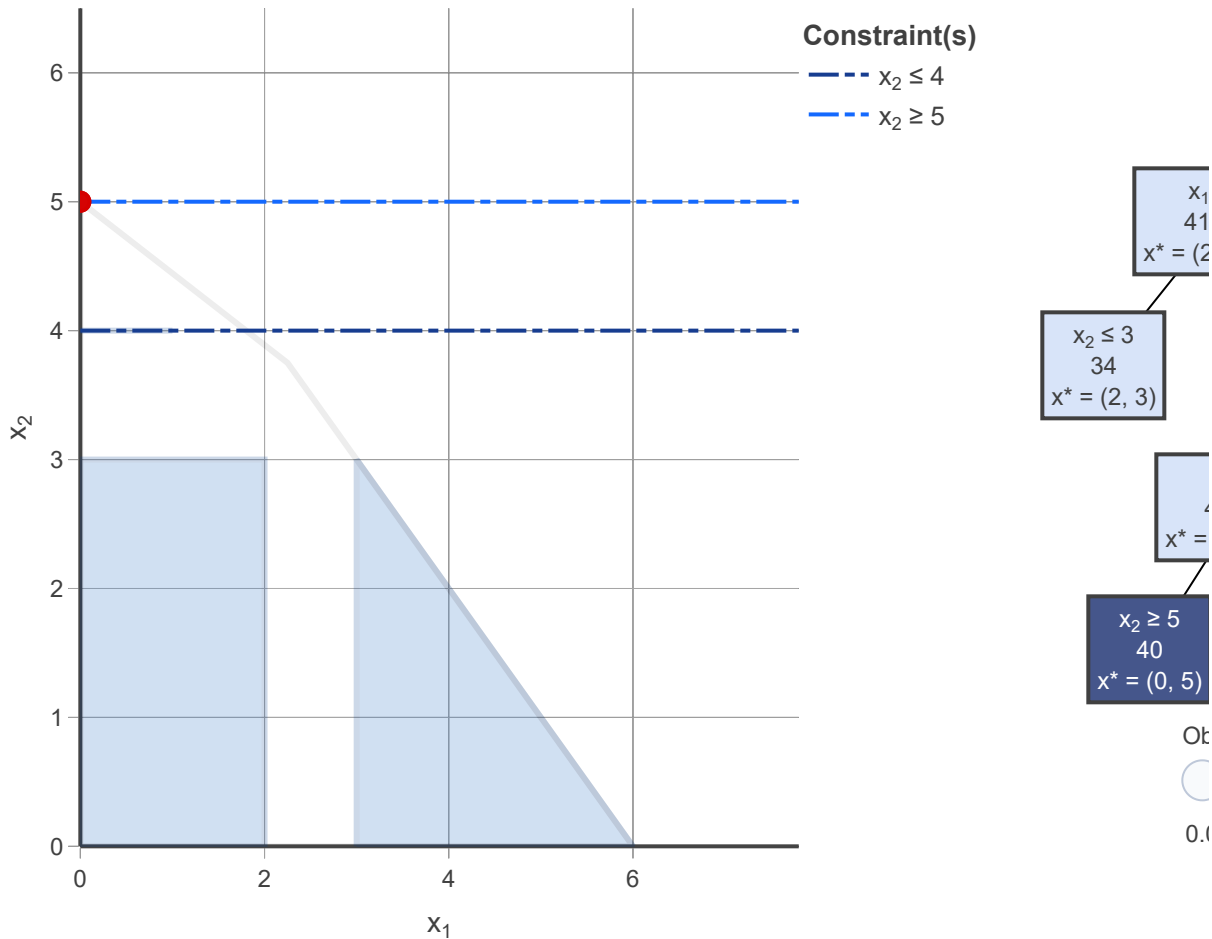

Geometric Interpretation of LPs


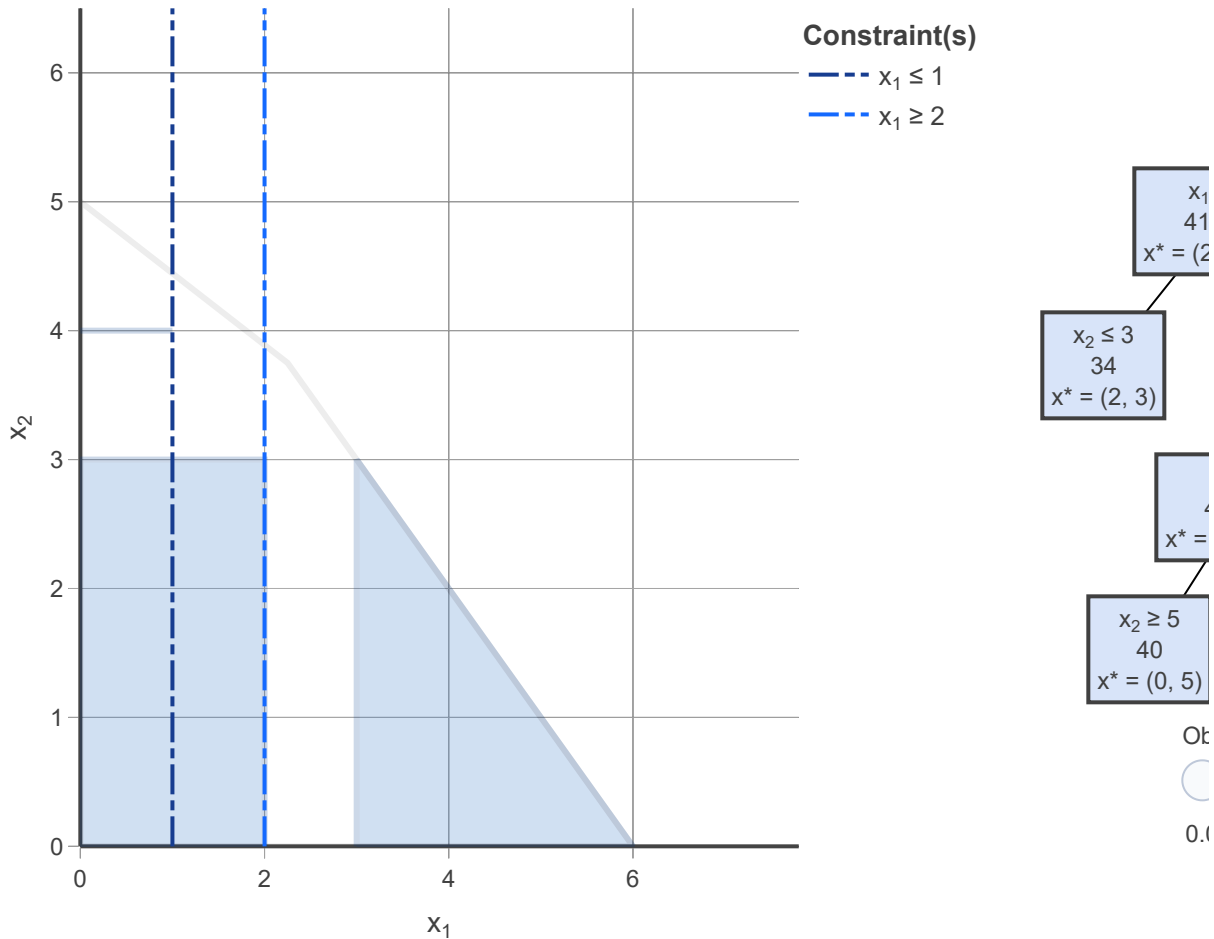


Q41: What constraints are enforced at the current (dark) node? Why are there no feasible solutions at this node?

A: none because it's not feasible. the rane (2,3) is no tin the feasible solution so x2>2 cannot be true

```
In [30]: nodes[8].show()
```

Geometric Interpretation of LPs

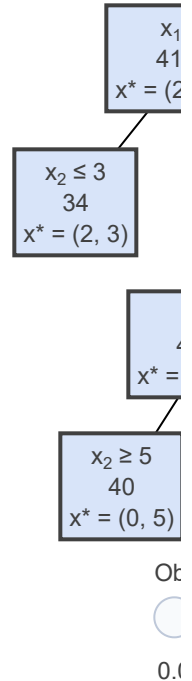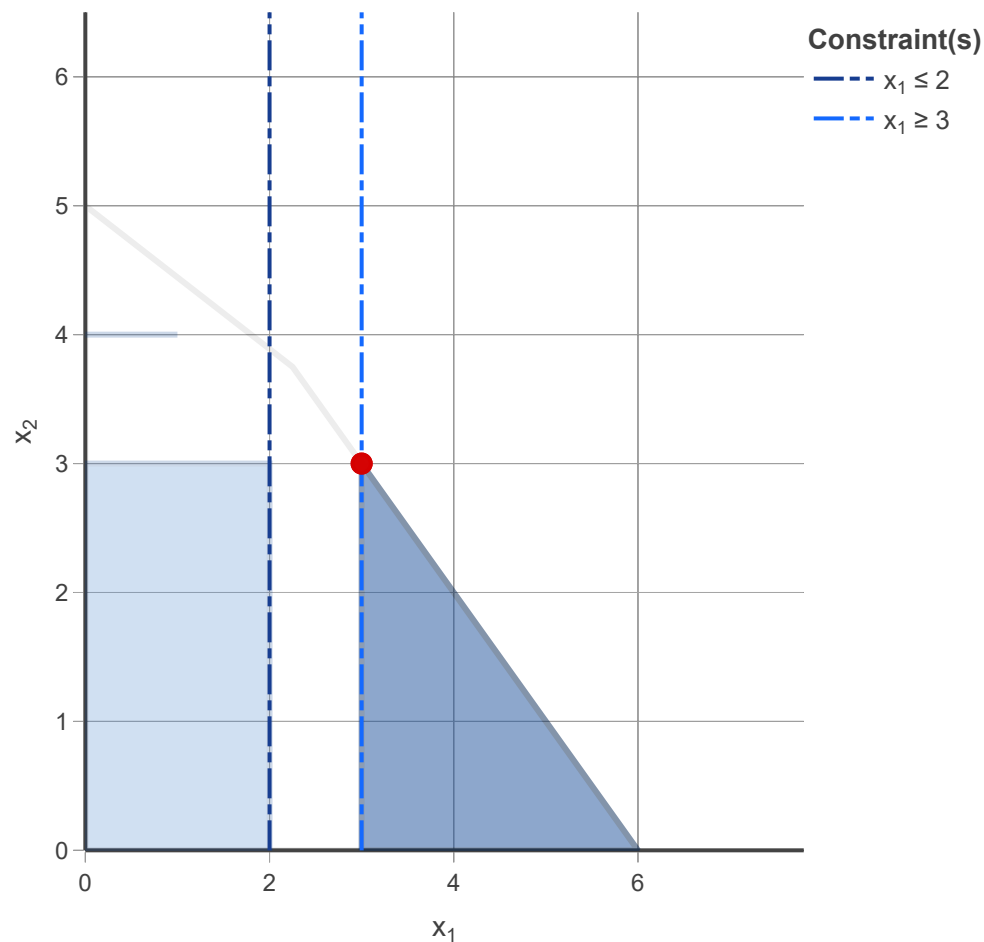

Q42: Are we done? If so, what nodes are fathomed and what is the optimal solution? Explain.

A: yes we are done. the optimal solution is 39 x_1 and $x_2 = 3$

Let's look at branch and bound visualization for an integer program with 3 decision variables!

```
In [31]: nodes = gilp.bnb_visual(gilp.examples.VARIED_BRANCHING_3D_IP)
```

```
In [32]: # Look at the first 3 iterations  
nodes[0].show()  
nodes[1].show()  
nodes[2].show()
```

Geometric Interpretation of LPs

Objec




0.0

Geometric Interpretation of LPs

Constraint(s)

$x_2 \leq 2$

$x_2 \geq 3$

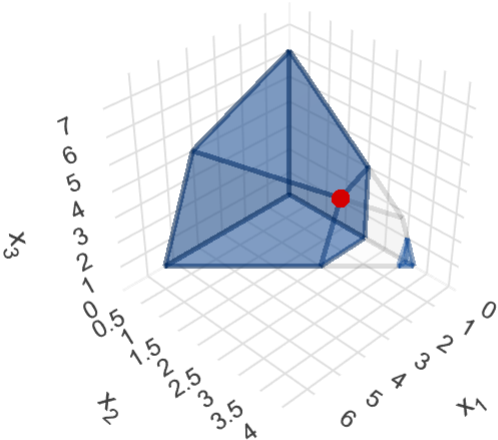

$x_2 \leq 1$
12.8
 $x^* = (1.2, 1.2, 12.8)$

Objec




0.0

Geometric Interpretation of LPs

Constraint(s)

$x_1 \leq 1$
 $x_1 \geq 2$

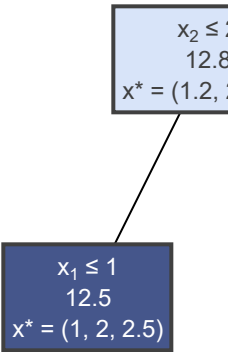

Objec



0.0

Let's fast-forward to the final iteration of the branch and bound algorithm.


In [33]: `nodes[-1].show()`

Geometric Interpretation of LPs

Constraint(s)

$$x_2 \leq 2$$

$$x_2 \geq 3$$

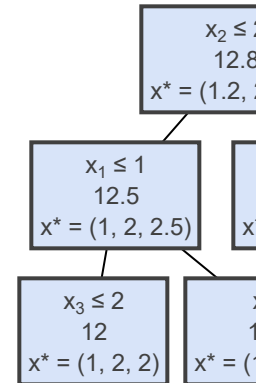

Objec



0.0

Q43: Consider the feasible region that looks like a rectangular box with one corner point at the origin. What node does it correspond to in the tree? What is the optimal solution at that node?

A: it corresponds to the node $x_3 \leq 2$ with optimal value 12 and optimal solution $x_1=1, x_2=2, x_3=2$

Q44: How many branch and bound nodes did we explore? What was the optimal solution? How many branch and bound nodes would we have explored if we knew the value of the optimal solution before starting branch and bound?

A: 12 nodes we explored. optimal solution $x_1=0, x_2=3, x_3=1$ with value 13. if we already knew the solution we could have explored only 2 nodes

Bonus: Branch and Bound for Knapsack

Consider the following example:

item	value	weight
1	2	1
2	9	3
3	6	2

The linear program formulation will be:

$$\begin{array}{ll}\max & 2x_1 + 9x_2 + 6x_3 \\ \text{s.t.} & 1x_1 + 3x_2 + 2x_3 \leq 10 \\ & x_1, x_2, x_3 \geq 0, \quad \text{integer}\end{array}$$

In gilp, we can define this lp as follows:

```
In [ ]: lp = gilp.LP([[1,3,2]],  
                    [10],  
                    [2,9,6])  
  
for fig in gilp.bnb_visual(lp):  
    fig.show()
```