

- [Version](#)
 - [History](#)
- [Introduction](#)
- [Authentication](#)
- [URLs](#)
 - [Server API](#)
 - [WPF](#)
 - [Consumer API](#)
 - [Tokenization API](#)
 - [Genesis KYC Services JSON API](#)
- [Transactions](#)
 - [Invoking a Transaction](#)
 - [Card](#)
 - [Authorize](#)
 - [Capture](#)
 - [Sale](#)
 - [Argencard](#)
 - [Aura](#)
 - [Bancontact](#)
 - [Cabal](#)
 - [Cencosud](#)
 - [Credit \(CFT\)](#)
 - [Elo](#)
 - [Hipercard](#)
 - [Naranja](#)
 - [Nativa](#)
 - [Tarjeta Shopping](#)
 - [Non-financial Transactions](#)
 - [Account Verification](#)
 - [3DS Card](#)
 - [Authorize 3D](#)
 - [Sale 3D](#)
 - [Init Recurring Sale 3D](#)
 - [Notification for Asynchronous Payments](#)
 - [Recurring Transactions](#)
 - [Init Recurring Sale](#)
 - [Recurring Sale](#)
 - [Wallets](#)
 - [Neteller](#)
 - [PayPal Express Checkout](#)
 - [QIWI](#)
 - [WebMoney](#)
 - [Wechat](#)
 - [Zimpler](#)
 - [Vouchers](#)
 - [Astropay Card](#)
 - [CashU](#)
 - [Neosurf](#)
 - [Paysafecard](#)
 - [Online Banking ePayments \(oBeP\)](#)
 - [Astropay Direct](#)
 - [Banco do Brasil](#)
 - [Bancomer](#)
 - [Bradesco](#)
 - [Entercash](#)
 - [EPS](#)
 - [GiroPay](#)
 - [iDebit](#)
 - [Payin](#)
 - [Payout](#)
 - [iDeal](#)
 - [InstaDebit](#)
 - [Payin](#)
 - [Payout](#)
 - [InstantTransfer](#)
 - [Itau](#)
 - [Multibanco](#)
 - [My Bank](#)
 - [Online Banking](#)
 - [Bank Codes](#)
 - [P24](#)
 - [PayU](#)
 - [POLi](#)
 - [PSE \(Pagos Seguros en Linea\)](#)
 - [QQPay](#)
 - [Rapipago](#)

- [SafetyPay](#)
- [Santander](#)
- [SDD Init Recurring Sale](#)
- [SDD Recurring Sale](#)
- [SDD Refund](#)
- [SDD Sale](#)
- [Sofort](#)
- [Trustly Sale](#)
- [TrustPay](#)
- [Webpay](#)
- [Cash Payments](#)
 - [Baloto](#)
 - [Banamex](#)
 - [Banco de Occidente](#)
 - [Boleto](#)
 - [Carulla](#)
 - [Efecty](#)
 - [Emprese De Energia](#)
 - [OXXO](#)
 - [Pago Facil](#)
 - [Redpagos](#)
 - [Santander Cash](#)
 - [Surtimax](#)
- [Gift Cards](#)
 - [Intersolve](#)
 - [Fashioncheque](#)
 - [TCS](#)
 - [Split Payments](#)
- [Invoice Payment Methods](#)
 - [Klarna Authorize](#)
 - [Klarna Capture](#)
- [Crypto](#)
 - [BitPay Sale](#)
- [Payouts](#)
 - [Bank Pay-out](#)
 - [Bank Names](#)
 - [BitPay Payout](#)
 - [eZeeCard Payout](#)
 - [Payout](#)
 - [SCT Payout](#)
 - [Trustly Withdrawal](#)
 - [Tola Payout](#)
- [Mobile Payments](#)
 - [Tola Sale](#)
- [Reversals](#)
 - [Refund](#)
 - [Void](#)
 - [Klarna Refund](#)
 - [BitPay Refund](#)
- [Alternative Payment Method External Events](#)
 - [Introduction](#)
 - [List of external events per alternative payment method](#)
 - [Email Notification](#)
 - [API Notification](#)
- [Advanced risk management with RiskParams](#)
- [Credential On File \(COF\)](#)
- [Currency and Amount Handling](#)
- [Dynamic Descriptor](#)
- [Electronic Commerce Indicator](#)
- [Issuer Response Codes](#)
- [Manually Reviewed Transactions](#)
- [Partial Approvals](#)
- [Required vs Optional API params](#)
- [Transaction States](#)
- [Supported Card Brands](#)
- [Document ID Parameter](#)
- [Reconcile](#)
 - [Single Transaction](#)
 - [By date range](#)
- [Chargebacks](#)
 - [Chargeback notifications](#)
 - [Chargeback API](#)
 - [Single Chargeback](#)
 - [By date range](#)
 - [Chargeback types](#)
- [Retrieval Requests](#)
 - [Retrieval Request notifications](#)

- [Retrieval Request API](#)
- [Single Retrieval Request](#)
- [By date range](#)

- [Fraud reports](#)

- [SAFE/TC40 API](#)
- [Single SAFE/TC40 report](#)
- [By date range](#)

- [Blacklists](#)

- [Invoking a Request](#)
- [Response](#)

- [Asynchronous Transactions and Notifications](#)

- [Asynchronous Transactions](#)
- [Notifications](#)

- [WPF](#)

- [Workflow](#)
- [WPF API](#)
 - [URLs](#)
 - [Create](#)
 - [Notification](#)
 - [Reconcile](#)
 - [Errors](#)
- [WPF transaction types](#)
- [WPF Internationalization \(i18n\)](#)

- [Authentication Services](#)

- [Introduction](#)
 - [SCA with 3DSecure](#)
 - [Alternative services](#)

- [Genesis KYC Services](#)

- [General Info](#)
- [Create Consumer Registration](#)
- [Update Consumer Registration](#)
- [Create Transaction](#)
- [Update Transaction](#)
- [Identity Document Upload](#)
- [Identity Document Download](#)
- [Consumer Phone verifications](#)
- [Consumer Identity verifications](#)
- [Consumer Bank Account verifications](#)
- [Make call](#)
- [Update call](#)
- [Error Response](#)
- [Kyc Service Notification](#)

- [Consumers](#)

- [Introduction](#)
- [Consumer API](#)
 - [Create consumer](#)
 - [Update consumer](#)
 - [Disable consumer](#)
 - [Enable consumer](#)
 - [Get consumer cards](#)

- [Tokenization](#)

- [Introduction](#)
- [Tokenization API](#)
 - [Accepted cardholder parameters](#)
 - [Consumer required](#)
 - [Tokenize](#)
 - [Detokenize](#)
 - [Update token](#)
 - [Validate Token](#)
 - [Delete Token](#)
- [How to tokenize card holder data in Processing API](#)
 - [Create a Consumer](#)
 - [Use existing consumer](#)
- [How to use tokens in Processing API](#)
 - [Requests](#)
- [How to tokenize card holder data in WPF API](#)
 - [Create a Consumer](#)
 - [Use existing consumer](#)
- [How to use tokens in WPF API](#)

- [Supported transaction types](#)

- [Klarna Services](#)

- [Introduction](#)
- [Release Remaining Authorization API](#)
- [Resend Invoice API](#)
- [Update Order Items API](#)
- [Update Order Address API](#)

- [Errors](#)

- [Error groups table](#)
- [Error codes tables](#)

- [Client Integrations](#)

- [Shopping Carts](#)
- [Testing](#)
- [Status Page](#)
- [Infrastructure and Uptime](#)
- [Penetration Testing Warning](#)
- [AVS Status Codes](#)
- [Level 3 Travel Data](#)

- [Travel Types](#)

- [Airline Itinerary Data \(AID\)](#)
- [Car Rental](#)
- [Hotel Rental](#)
- [Ancillary Charges](#)
- [Miscellaneous Charges](#)

- [Special Cases](#)

- [Travel Authorize \(3D\) and Capture](#)
- [Visa Refund](#)

- [Allowed Values](#)

- [Car Rental Classes](#)
- [Charge Types](#)
- [Car Rental Extra Charges](#)
- [Hotel Rental Extra Charges](#)
- [Ticket Change Indicators](#)
- [Credit Reason Indicators](#)

Version

API version 12.3

Documentation version 12.3

History

Version	Date	Name	Description
1.0	2011/06/10	Emil Petkov	Initial version
1.1	2011/11/11	Emil Petkov	Added optional shipping params section for the shipping address
1.2	2012/04/18	Emil Petkov	Added dynamic descriptor functionality
1.3	2012/08/03	Emil Petkov	Added new transaction type AVS and Account Verification
2.0	2013/03/29	Emil Petkov	Added gaming and MOTO flags and support
2.1	2013/04/11	Emil Petkov	Split Credits with an initial ref transaction and Payouts without a reference transaction
2.2	2013/05/26	Emil Petkov	Added new transaction type InitRecurringSale3D - recurring payments with initial 3D
2.3	2014/01/15	Emil Petkov	Removed the transaction types DebitSale and IdealSale
2.4	2014/01/22	Emil Petkov	Added authorization code and issuer response code to API, section for issuer response codes
2.5	2014/01/29	Emil Petkov	Moto and gaming flags are now returned in the transaction response if present/marketed in the request
2.6	2014/02/05	Emil Petkov	Dynamic descriptor params are now returned in the transaction response if present in the request
2.7	2014/02/15	Emil Petkov	Recurring advices are now returned in the transaction response if received from the issuer
2.8	2014/05/01	Emil Petkov	Added required vs. optional API params
2.9	2014/06/16	Emil Petkov	Currency handling rework and API description (different currency exponents, etc)

Version	Date	Name	Description
3.0	2014/08/28	Emil Petkov	Added risk related APIs - chargebacks, retrieval requests, blacklists
3.1	2014/11/25	Emil Petkov	Added API support for partial approvals
3.2	2014/12/03	Emil Petkov	Added WPF I18N specifics
3.3	2014/12/08	Emil Petkov	Added shopping carts and client integrations list
3.4	2014/12/16	Hristo Tanchev	Now the remote ip can be either a required or optional API param
3.5	2015/02/22	Dimitar Kostov	Added API for eZeeWallet and PayByVoucher via Yeepay
3.6	2015/02/23	Hristo Tanchev	Added API for CashU and Paysafecard
3.7	2015/03/13	Dimitar Kostov	Added API for Sofort
3.8	2015/03/18	Hristo Tanchev	Added API for PPRO
3.9	2015/04/15	Emil Petkov	New WPF API and WPF payment methods
4.0	2015/05/14	Hristo Tanchev	Added API for Neteller and ABN iDEAL
4.1	2015/06/15	Dimitar Kostov	Added WPF custom attributes - bin, tail
4.2	2015/08/10	Tsvetelina Borisova	Added WPF custom attributes - default, expiration date
4.3	2015/08/12	Vladimir Korichkov	Added API for WebMoney and POLi
4.4	2015/08/19	Tsvetelina Borisova	Added fraud related API for TC40/SAFE (fraud reports)
4.5	2015/08/27	Emil Petkov	3D attributes xid and cavv are now not required in the MPI sync attempted only workflow, only eci is
4.6	2015/09/02	Emil Petkov	New transaction type PayByVoucher Sale for purchasing vouchers via credit cards. Reworked the PayByVouchers section
4.7	2015/09/04	Emil Petkov	Added penetration testing warning for merchants
4.8	2015/09/06	Emil Petkov	Reconcile API now works with ARN and transaction ID in addition to unique ID
4.9	2015/09/11	Hristo Tanchev	Added Electronic Commerce Indicator to notifications
5.0	2015/09/30	Vladimir Korichkov	Added API for INPay
5.1	2015/12/09	Pepa Simeonova	Added event parameter to notifications for fraud transactions.
5.2	2016/02/02	Hristo Tanchev	Added API for P24
5.3	2016/02/16	Tsvetelina Borisova	Added ARN in reconcile response if available.
5.4	2016/03/18	Tsvetelina Borisova	Added page for Manually Reviewed Transactions
5.5	2016/03/17	Tsvetelina Borisova	Added API for SDD.
5.6	2016/03/28	Emil Petkov	Extended PayByVouchers processing and WPF APIs with redeem type and card type
5.7	2016/04/08	Emil Petkov	Added info for statuspage.io, uptime and infrastructure, and new shopping carts
5.8	2016/05/11	Tsvetelina Borisova	Change the example for chargeback API - amount is returned in minor currency unit
5.9	2016/05/22	Emil Petkov	Now birth date API param is required only for Visa initial transactions with Financial Service MCCs (e.g. 6012)
6.0	2016/06/30	Pepa Simeonova	Added dynamic descriptor params to WPF payments.
6.1	2016/07/20	Stefan Slaveykov	Now usage can be either a required or optional API param
6.2	2016/07/21	Tsvetelina Borisova	Update documentation for chargebacks API
6.3	2016/12/08	George Naydenov	Added API for Trustly
6.4	2017/01/20	Plamen Terziev	Added AVS Codes
6.5	2017/02/16	Nikolay Petrov	Added API for PayPal Express Checkout
6.6	2017/03/20	Iskar Enev	Added API for Citadel
6.7	2017/03/30	Stanislav Mihailov	Added API for Instadebit/iDebit
6.8	2017/03/31	Tsvetelina Borisova	Added API for SCT Payout

Version	Date	Name	Description
6.9	2017/05/12	Nikolay Petrov	Added reference transaction unique id to the Reconcile API response
7.0	2017/05/13	Nikolay Petrov	Added API for Earthport
7.1	2017/05/15	Stanislav Mihailov	Added API for Wechat
7.2	2017/05/30	George Naydenov	Added API for Alipay
7.3	2017/06/05	Hristo Tanchev	Added API for PaySec
7.4	2017/06/06	Hristo Tenev	Added card brand and card number tags in reconcile response.
7.5	2017/06/27	Lukasz Wojcik	Added lifetime for WPF Payments.
7.6	2017/07/06	Nikolay Petrov	Removed AVS transaction type. AVS response code and text are returned in the transactions responses when present and supported or in the notifications for payments with asynchronous workflow.
7.7	2017/07/06	Iskar Enev	Added APM External Events.
7.8	2017/08/11	Samuil Goranov	Added support for optional shipping address params in Processing and WPF APIs.
7.9	2017/08/17	Lukasz Wojcik	Remove remote ip parameter for transactions with reference. It will be copied from reference transaction
8.0	2017/08/18	Lukasz Wojcik	Added invalid transaction types for amount parameter to WPF response.
8.1	2017/08/18	Emil Kirilov	Added search option by import date in Chargeback, Retrieval request and Fraud APIs.
8.2	2017/09/05	George Naydenov	Added API for RPN Payment
8.3	2017/10/13	Ventsislav Dimitrov	Added API for FashionCheque gift card and split payments.
8.4	2017/10/13	Pepa Simeonova	Added API for Intersolve gift card and split payments.
8.5	2017/10/13	Stanislav Mihailov	Added API for TCS gift card and split payments.
8.6	2017/10/23	Iskar Enev	Added Authentication Services and iSignThis.
8.7	2017/11/02	George Naydenov	Added API for RPN Payout
8.8	2017/11/24	Hristo Tenev	Added API for Paycommerce
8.9	2017/11/25	George Naydenov	API update with new sections Card, 3DS Card, Common. Removing older payment methods.
9.0	2017/12/18	George Naydenov	Added API for Neosurf.
9.1	2018/01/02	George Naydenov	Removed API for Inpay, ABN iDeal, Teleingreso and PayByVoucher.
9.2	2018/01/03	Iskar Enev & Nikolay Petrov	Added Tokenization service.
9.3	2018/01/12	Hristo Tanchev	Added API for Klarna.
9.4	2018/01/18	Stefan Petrov	Added ARN in WPF reconcile response if available.
9.5	2018/01/26	George Naydenov	Added API for Astropay Direct, Pago Facil, Link, Carulla, Davivienda.
9.6	2018/02/22	George Kostov & Hristo Tenev	Added API for Genesis KYC Services.
9.7	2018/02/22	Emil Kirilov	Added API for PSE.
9.8	2018/02/26	Stefan Petrov	Added API for Rapipago, Webpay, Banco de Chile.
9.9	2018/03/01	Stefan Petrov	Added API for Surtimax, Efecty, Cabal, Cencosud, Hipercard, Elo, Aura, Itau, Bradesco, Tarjeta Shopping, BBVA Bancomer, Boleto, Redpagos, Emprese De Energia, GiroPay, InstantTransfer, Multibanco.
10.0	2018/03/02	George Naydenov	Added API for OXXO, Argencard, Naranja, Nativa, Cartao Mercado Livre, Astropay Card, Banamex, Santander, Santander Cash, Zimpler PayU.
10.1	2018/03/02	Emil Kirilov	Added API for Baloto, Banco de Occidente, Banco do Brasil.
10.2	2018/04/10	Stefan Petrov	Added API for Entercash.
10.3	2018/05/08	Hristo Tenev	Added API for eZeeWallet Payout.
10.4	2018/05/31	Maya Nedyalkova	Added 3D MasterCard test cards.
10.5	2018/05/31	George Naydenov	Added API for QQPay.
10.6	2018/06/22	Hristo Tanchev	Added API for Credential on File (COF).
10.7	2018/07/05	George Naydenov	Removed Paysec and added Online Banking OBeP.
10.8	2018/07/18	Stanislav Mihailov	Added the API param issuer_oct_enabled to Visa-based Account Verification transactions, to allow merchant to verify if issuer supports OCTs for the given PAN

Version	Date	Name	Description
10.9	2018/07/27	Yordan Pulov	Added Money Transfer support to Payouts.
11.0	2018/08/01	George Naydenov	Removed Paysec Payout and added Bank Payout.
11.1	2018/08/02	Stanislav Mihailov	Remove API for Citadel
11.2	2018/08/31	Hristo Tenev	Added API for BitPay.
11.3	2018/08/31	Maya Nedyalkova	Add rc_code and rc_description in notification parameters.
11.4	2018/10/10	Ralitsa Borisova	Remove Paycommerce, RPN Payment, Link, Davivienda, Banco de Chile, Cartao Mercado Livre documentation.
11.5	2018/10/11	Emil Petkov	Introduced debt repayments - now birth date API param is required also for Mastercard/- Maestro initial transactions with Financial Service MCCs (e.g. 6012), where merchant is UK-based, transaction is domestic (with UK-based bin), and card type is DEBIT.
11.6	2018/11/02	Yordan Pulov and Stanislav Mihailov	Introduced Travel layer and Added Level 3 Travel API.
11.7	2018/11/21	Hristo Tenev	Added Payout support for BitPay
11.8	2018/12/05	Stefan Petrov	Added API for eZeeCard Payout
11.9	2018/12/05	Nikolay Petrov	Added Pay Later support to the WPF. Introduced Reminders module.
12.0	2019/01/07	Yordan Pulov	Changed Contract Merchant Category Codes for Level 3 Visa Car and Hotel Rental Transactions.
12.1	2019/01/31	Aleksandar Krastev	Introduced Consumer API. Extended Tokenization API to require a consumer. Extended WPF and Processing APIs to create consumers and tokenize card details in one step. WPF API can use saved cards to make payments.
12.2	2019/02/18	Yordan Pulov	Extend the Online Banking bank codes and add payment type.
12.3	2019/02/26	Stefan Petrov	Added API for Tola payments.

Introduction

You can get PHP SDK from https://github.com/GenesisGateway/genesis_php

Installation:

Get the SDK from GitHub and load it with Composer autoloader or include it in your own autoloader (The SDK uses PSR-4 spec).

```
git clone http://github.com/GenesisGateway/genesis_php genesis_php
cd genesis_php
composer install
```

You can get Node.js SDK from <https://github.com/GenesisGateway/genesis.js>

Installation:

Get the SDK from GitHub

```
git clone http://github.com/GenesisGateway/genesis.js genesis.js
cd genesis.js
npm install
```

Or install it using npm

```
npm install genesis.js
```

You can get Java SDK from http://github.com/GenesisGateway/genesis_java

Installation:

Get the SDK from GitHub and install Maven plugin

```
git clone http://github.com/GenesisGateway/genesis_java genesis_java
cd genesis_java
mvn clean install
```

Finally add this to your pom.xml file:

```
<dependency>
<groupId>com.emerchantpay.gateway</groupId>
<artifactId>genesis-java</artifactId>
<version>1.3.1</version>
</dependency>
```

You can get cURL from <https://curl.haxx.se>

This document describes the usage of the payment gateway XML API.

The API allows you to trigger all supported transactions of the gateway and to retrieve information about transactions existing in the gateway. You can also retrieve chargeback information.

The payment API is synchronous (except for 3-D secure payments), it accepts HTTP POST or XML data and returns XML data. Connections are always secured via SSL both in test and live mode. Be sure to set Content-type: text/xml in your headers.

! The API cannot be accessed via HTTP GET.

! Current Java SDKs do not have the necessary root certificate installed. You need to download the CA with your browser and import it into cacerts manually.

Authentication

```
<?php

use \Genesis\Config as GenesisConfig;

// Load the pre-configured ini file...
GenesisConfig::loadSettings('/path/to/config.ini');

// ...OR, optionally, you can set the credentials manually
GenesisConfig::setEndpoint('<set_your_endpoint>');
GenesisConfig::setEnvironment('<set_your_environment>');
GenesisConfig::setUsername('<enter_your_username>');
GenesisConfig::setPassword('<enter_your_password>');
GenesisConfig::setToken('<enter_your_token>');

// You can find example configuration file in root directory of the module
```

```
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;;
import com.emerchantpay.gateway.util.Configuration;

// Create configuration
Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

configuration.setUsername("SET_YOUR_USERNAME");
configuration.setPassword("SET_YOUR_PASSWORD");
configuration.setToken("SET_YOUR_TOKEN");
```

You can override the path to the directory holding your configuration files (by default its config in the root directory of the module) via environmental variable NODE_CONFIG_DIR.

The first file to parse configuration from, is <your-config-dir>/default.json and based on the environment variable (NODE_ENV), you can specify your custom file; for example <your-config-dir>/<NODE_ENV_NAME>.json.

Its good practice to prevent web/direct access to your config directory and protect the files inside

Send username and password directly in url

```
curl https://username:password@gate.emerchantpay.net:443/process/TERMINAL-TOKEN
```

Or use -u flag

```
curl -u username:password https://gate.emerchantpay.net:443/process/TERMINAL-TOKEN
```

To interact with the payment API, you need to provide login credentials using standard HTTP Basic Authentication. (credentials can be found in your Admin interface.)

To decrease network traffic and response times, we recommend that you enforce sending authentication credentials directly in the first request.

Some implementations like e.g. the Java HttpClient automatically try to guess the best authentication scheme. This can be overridden by setting the authorization to preemptive:

! HttpClient.getParams.setAuthenticationPreemptive(true);

URLs

Server API

API methods are called with the following structure:

```
https://gate.emerchantpay.net/process/TERMINAL-TOKEN/
```

Single transaction reconciles can be done via this URL:

```
https://gate.emerchantpay.net/reconcile/TERMINAL-TOKEN/
```

Date range reconciles can be done via this URL:

```
https://gate.emerchantpay.net/reconcile/by_date/TERMINAL-TOKEN/
```

This URL allows retrieval of a list of supported banks based on the customers country and/or currency:

https://gate.emerchantpay.net/retrieve_inpay_banks/TERMINAL_TOKEN/

WPF

The URL for the WPF API create method is:

<https://wpf.emerchantpay.net/wpf>

For the test system the URL is:

<https://staging.wpf.emerchantpay.net/wpf>

The URL for the WPF API reconcile method is:

<https://wpf.emerchantpay.net/wpf/reconcile>

For the test system the URL is:

<https://staging.wpf.emerchantpay.net/wpf/reconcile>

 Terminal token and login credentials can be found in your admin panel. To use our testing environment, refer to chapter Testing

Your admin panel can be found here:

<https://merchant.emerchantpay.net/>

Consumer API

Create consumer:

https://gate.emerchantpay.net/v1/create_consumer/

Update consumer:

https://gate.emerchantpay.net/v1/update_consumer/

Disable consumer:

https://gate.emerchantpay.net/v1/disable_consumer/

Enable consumer:

https://gate.emerchantpay.net/v1/enable_consumer/

Get consumer cards:

https://gate.emerchantpay.net/v1/get_consumer_cards/

For the test system use the following URLs:

https://staging.gate.emerchantpay.net/v1/create_consumer/

https://staging.gate.emerchantpay.net/v1/update_consumer/

https://staging.gate.emerchantpay.net/v1/disable_consumer/

https://staging.gate.emerchantpay.net/v1/enable_consumer/

https://staging.gate.emerchantpay.net/v1/get_consumer_cards/

Tokenization API

Tokenize cardholder data:

<https://gate.emerchantpay.net/v1/tokenize/>

Detokenize cardholder data:

<https://gate.emerchantpay.net/v1/detokenize/>

Update the cardholder data (PAN cannot be updated):

https://gate.emerchantpay.net/v1/update_token/

Validate if given token is valid for the merchant:

https://gate.emerchantpay.net/v1/validate_token/

Delete a token:

```
https://gate.emerchantpay.net/v1/delete\_token/
```

For the test system use the following URLs:

```
https://staging.gate.emerchantpay.net/v1/tokenize/
```

```
https://staging.gate.emerchantpay.net/v1/detokenize/
```

```
https://staging.gate.emerchantpay.net/v1/update\_token/
```

```
https://staging.gate.emerchantpay.net/v1/validate\_token/
```

```
https://staging.gate.emerchantpay.net/v1/delete\_token/
```

 Terminal token and login credentials can be found in your admin panel. To use our testing environment, refer to chapter Testing

Genesis KYC Services JSON API

Testing environment

Create Consumer:

```
POST https://staging.gate.emerchantpay.net/kyc_service/create_consumer
```

Update Consumer:

```
POST https://staging.gate.emerchantpay.net/kyc_service/update_consumer
```

Create Transaction:

```
POST https://staging.gate.emerchantpay.net/kyc_service/create_transaction
```

Update Transaction:

```
POST https://staging.gate.emerchantpay.net/kyc_service/update_transaction
```

Upload Document:

```
POST https://staging.gate.emerchantpay.net/kyc_service/upload_document
```

Download Document:

```
POST https://staging.gate.emerchantpay.net/kyc_service/download_document
```

Verify Phone:

```
POST https://staging.gate.emerchantpay.net/kyc_service/verify_phone
```

Verify Identity:

```
POST https://staging.gate.emerchantpay.net/kyc_service/verify_identity
```

Verify Bank Account:

```
POST https://staging.gate.emerchantpay.net/kyc_service/verify_bank_account
```

Create Authentication:

```
POST https://staging.gate.emerchantpay.net/kyc_service/create_authentication
```

Update Authentication:

```
POST https://staging.gate.emerchantpay.net/kyc_service/update_authentication
```

Production environment

Genesis KYC Services JSON API URLs for production environment:

Create Consumer:

```
POST https://gate.emerchantpay.net/kyc_service/create_consumer
```

Update Consumer:

```
POST https://gate.emerchantpay.net/kyc_service/update_consumer
```

Create Transaction:

```
POST https://gate.emerchantpay.net/kyc_service/create_transaction
```

Update Transaction:

```
POST https://gate.emerchantpay.net/kyc_service/update_transaction
```

Upload Document:

```
POST https://gate.emerchantpay.net/kyc_service/upload_document
```

Download Document:

```
POST https://gate.emerchantpay.net/kyc_service/download_document
```

Verify Phone:

```
POST https://gate.emerchantpay.net/kyc_service/verify_phone
```

Verify Identity:

```
POST https://gate.emerchantpay.net/kyc_service/verify_identity
```

Verify Bank Account:

```
POST https://gate.emerchantpay.net/kyc_service/verify_bank_account
```

Create Authentication:

```
POST https://gate.emerchantpay.net/kyc_service/create_authentication
```

Update Authentication:

```
POST https://gate.emerchantpay.net/kyc_service/update_authentication
```

Transactions

Invoking a Transaction

A transaction is invoked via HTTPS POST, parameters are passed as XML with UTF-8 encoding.

Card

AUTHORIZE

With authorize transactions, you can confirm that a credit card is valid and reserve the desired amount on the card.

After settling the transaction (e.g. shipping the goods), you can then capture the amount. The customer will not be billed until the capture has taken place, but the amount is reserved and the customer's credit card limit is reduced. Authorizes will automatically be cancelled after a certain timeframe, most likely one week.

For a typical e-commerce application it is recommended to authorize the amount on incoming orders and capture it when shipping the goods. If you are selling services or non-tangible goods, you can use the sale transaction, which combines authorize and capture.

If you chose not to serve the customer, consider to void the authorize to unfreeze the amount on the client's credit card.

 Authorize transactions are also available as 3dsecure transactions

 This transaction type supports Tokenization.

 This transaction type supports Level 3 travel data.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Authorize');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.AuthorizeRequest;
import com.emerchantpay.gateway.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        AuthorizeRequest request = new AuthorizeRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.authorize(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TOKEN \ 
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>authorize</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: authorize
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)

Parameter	Required	Format	Description
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required*	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with <code>remember_card</code>
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with <code>token</code>
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with <code>remember_card</code> to tokenize or with <code>token</code> to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required when MCC is a Financial Services one (e.g. MCC 6012) and either card brand is Visa or Mastercard/Maestro with UK-based merchant, UK-based bin (domestic), and DEBIT card type
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

`required*` = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => authorize
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:54.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[authorize]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<timestamp content=[2019-03-14T12:05:54Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "authorize",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:05:54Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>authorize</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <consumer_id>123456</consumer_id>
    <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
    <avs_response_code>51</avs_response_code>
    <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
    <authorization_code>345678</authorization_code>
    <response_code>00</response_code>
    <timestamp>2019-03-14T12:05:54Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes) for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. Check Partial Approvals for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```
stdClass Object
(
    [transaction_type] => authorize
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => expiration_year is invalid
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:54.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=<
    <transaction_type content=[authorize]>
    <status content=[error]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <code content=[340]>
    <technical_message content=[expiration_year is invalid]>
    <message content=[expiration_year is invalid]>
    <timestamp content=[2019-03-14T12:05:54Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[USD]>
    <sent_to_acquirer content=[false]>
]>
```

```
{
  transaction_type: "authorize",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  code: "340",
  technical_message: "expiration_year is invalid",
  message: "expiration_year is invalid",
  timestamp: "2019-03-14T12:05:54Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>authorize</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>340</code>
  <technical_message>expiration_year is invalid</technical_message>
  <message>expiration_year is invalid</message>
  <timestamp>2019-03-14T12:05:54Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

CAPTURE

Capture settles a transaction which has been authorized before.

Do this when you are shipping goods, for example. A capture can only be used after an authorize on the same transaction.

Therefore, the reference id of the authorized transaction is mandatory.

i You can also capture a partial amount of the initially authorized amount, e.g. if you want to give customers a discount. However, you cannot capture a higher amount than initially authorized.

i This transaction type supports Level 3 travel data.

Transaction workflow:

1. The merchant sends authorize transaction to the gateway.
2. The gateway replies to it. One of returned values is the unique id of the transaction.
3. The merchant sends capture transaction. Its reference id is unique id of authorize response.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Capture');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReferenceId('43672')
    ->setAmount('100')
    ->setCurrency('USD');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.CaptureRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        CaptureRequest request = new CaptureRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("43672");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```
var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.capture(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "reference_id": "43672",
    "amount": "100",
    "currency": "USD"
})
.send()
.then(success)
.catch(failure);
```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>capture</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <reference_id>43672</reference_id>
  <amount>100</amount>
  <currency>USD</currency>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: capture
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => capture
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [authorization_code] => 345678
    [response_code] => 00
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:54.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

  <transaction_type content=[capture]>
  <status content=[approved]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <authorization_code content=[345678]>
  <response_code content=[00]>
  <technical_message content=[Transaction successful!]>
  <message content=[Transaction successful!]>
  <timestamp content=[2019-03-14T12:05:54Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[100]>
  <currency content=[USD]>
  <sent_to_acquirer content=[true]>
]>

```

```
{
  transaction_type: "capture",
  status: "approved",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  authorization_code: "345678",
  response_code: "00",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  timestamp: "2019-03-14T12:05:54Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>capture</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:54Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => capture
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 430
    [technical_message] => Reference transaction has already been captured, and acquirer does not support partial/multiple capture
    [message] => Transaction declined.
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:54.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[>
    <transaction_type content=[capture]>
    <status content=[error]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <code content=[430]>
    <technical_message content=[Reference transaction has already been captured, and acquirer does not support partial/multiple capture]>
    <message content=[Transaction declined.]>
    <timestamp content=[2019-03-14T12:05:54Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[USD]>
    <sent_to_acquirer content=[false]>
]>

```

```

{
    transaction_type: "capture",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "430",
    technical_message: "Reference transaction has already been captured, and acquirer does not support partial/multiple capture",
    message: "Transaction declined.",
    timestamp: "2019-03-14T12:05:54Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>capture</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>430</code>
    <technical_message>Reference transaction has already been captured, and acquirer does not support partial/multiple capture</technical_message>
    <message>Transaction declined.</message>
    <timestamp>2019-03-14T12:05:54Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SALE

Sale transactions combine authorize and capture into one step.

Using a sale transaction, the amount is immediately billed to the customer's credit card. It can be reversed via avoid transaction on the same day of the transaction. Use sale transactions, if you are e.g. selling non-tangible goods or services.

 Sale transactions are also available as 3dsecure transactions

 This transaction type supports Tokenization.

 This transaction type supports Level 3 travel data.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>sale</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <amount>100</amount>
  <currency>USD</currency>
  <card_holder>Travis Pastrana</card_holder>
  <card_number>4200000000000000</card_number>
  <expiration_month>12</expiration_month>
  <expiration_year>2020</expiration_year>
  <cvv>834</cvv>
  <customer_email>travis@example.com</customer_email>
  <customer_phone>+1987987987987</customer_phone>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required*	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with <code>remember_card</code>
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with <code>token</code>
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with <code>remember_card</code> to tokenize or with <code>token</code> to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required when MCC is a Financial Services one (e.g. MCC 6012) and either card brand is Visa or Mastercard/Maestro with UK-based merchant, UK-based bin (domestic), and DEBIT card type
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details

Parameter	Required	Format	Description
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => sale
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:54.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```
<payment_response content=<
<transaction_type content=[sale]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<timestamp content=[2019-03-14T12:05:54Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
>>
```

```
{
  transaction_type: "sale",
  status: "approved",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  consumer_id: "123456",
  token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
  avs_response_code: "5I",
  avs_response_text: "Response provided by issuer processor; Address information not verified",
  authorization_code: "345678",
  response_code: "00",
  timestamp: "2019-03-14T12:05:54Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "true",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sale</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
  <avs_response_code>5I</avs_response_code>
  <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <timestamp>2019-03-14T12:05:54Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. Check Partial Approvals for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```
stdClass Object
(
    [transaction_type] => sale
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [technical_message] => billing_address[zip_code] is invalid!
    [message] => billing_address[zip_code] is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:54.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[>
<transaction_type content=[sale]>
<status content=error>
<mode content=live>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[340]>
<technical_message content=[billing_address[zip_code] is invalid!]>
<message content=[billing_address[zip_code] is invalid!]>
<timestamp content=[2019-03-14T12:05:54Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "sale",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "340",
    technical_message: "billing_address[zip_code] is invalid!",
    message: "billing_address[zip_code] is invalid!",
    timestamp: "2019-03-14T12:05:54Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>sale</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<response_code>57</response_code>
<code>340</code>
<technical_message>billing_address[zip_code] is invalid!</technical_message>
<message>billing_address[zip_code] is invalid!</message>
<timestamp>2019-03-14T12:05:54Z</timestamp>
<descriptor>descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.

Parameter	Type	Description
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

ARGENCARD

Argencard is a debit or credit card used in Argentina. It allows online shoppers to pay offline for their online purchases at over 150,000 physical outlets.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>argencard</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40289 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Buenos Aires</city>
    <country>AR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: argencard
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment

Parameter	Required	Format	Description
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>argencards</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:54Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>argencard</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:54Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

 Aura is a local Brazilian credit card.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>aura</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40280 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Salvador</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: aura
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

Parameter	Required	Format	Description
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>aura</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>aura</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BANCONTACT

 Bancontact is a local Belgian debit card scheme. All Belgian debit cards are co-branded Bancontact and Maestro.

Transaction flow for a consumer is identical to a Maestro payment.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bcmc</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>12114</zip_code>
    <city>Brussels</city>
    <country>BE</country>
  </billing_address>
</payment_transaction>

```

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
  ->setPaymentType('bcmc')
  ->setTransactionId('43671')
  ->setUsage('40208 concert tickets')
  ->setRemoteIp('245.253.2.12')
  ->setReturnSuccessUrl('http://www.example.com/success')
  ->setReturnFailureUrl('http://www.example.com/failure')
  ->setAmount('100')
  ->setCurrency('EUR')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('12114')
->setBillingCity('Brussels')
->setBillingCountry('BE');

try {
  $genesis->execute();
  $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
  $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setPaymentType("bcmc");
        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("12114");
        request.setBillingCity("Brussels");
        request.setBillingCountry("BE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.ppro(
{
    "payment_type": "bcmc",
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "12114",
        "city": "Brussels",
        "country": "BE"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <payment_type>bcmc</payment_type>
  <transaction_id>43671</transaction_id>
  <usage>40201 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>12114</zip_code>
    <city>Brussels</city>
    <country>BE</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	ppro or bcmc . Contact tech support at tech-support@emerchantpay.net for more details.
payment_type	required*	bcmc	Bancontact Mr. Cash. Contact tech support for more details
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported currencies and countries:

Currency code	Country code
EUR	BE

Successful Response

```
This request is not implemented yet
```

```
This request is not implemented yet
```

```
This request is not implemented yet
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>bcmc</transaction_type>
    <status>pending_async</status>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <transaction_id>43671</transaction_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <mode>live</mode>
    <timestamp>2019-03-14T12:05:55Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => pending_async
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [transaction_id] => 43671
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [mode] => live
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:55.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[>
    <transaction_type content=[ppro]>
    <status content=[pending_async]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <transaction_id content=[43671]>
    <technical_message content=[Transaction successful!]>
    <message content=[Transaction successful!]>
    <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
    <mode content=[live]>
    <timestamp content=[2019-03-14T12:05:55Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[EUR]>
    <sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "pending_async",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    transaction_id: "43671",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    mode: "live",
    timestamp: "2019-03-14T12:05:55Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <status>pending_async</status>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <transaction_id>43671</transaction_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <mode>live</mode>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
transaction_id	string(255)	Unique transaction id defined by merchant
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bcmc</transaction_type>
  <status>error</status>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <transaction_id>43671</transaction_id>
  <code>118</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response

```

stdClass Object
(
    [transaction_type] => ppro
    [status] => error
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [transaction_id] => 43671
    [code] => 110
    [technical_message] =>
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:55.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[

<transaction_type content=[ppro]>
<status content=[error]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<transaction_id content=[43671]>
<code content=[110]>
<technical_message content=[]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:55Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
]>

```

```

{
    transaction_type: "ppro",
    status: "error",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    transaction_id: "43671",
    code: "110",
    technical_message: "",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:55Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>ppro</transaction_type>
    <status>error</status>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <transaction_id>43671</transaction_id>
    <code>110</code>
    <technical_message></technical_message>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:05:55Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
transaction_id	string(255)	Unique transaction id defined by merchant
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z

Parameter	Type	Description
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

CABAL

 Cabal is a local debit/credit card brand in Argentina which can be used for online purchases.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>cabal</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>4029 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>braney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <customer_email>travis@example.com</customer_email>
  <customer_phone>+1987987987987</customer_phone>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: cabal
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name

Parameter	Required	Format	Description
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries

Country Name	Country Code
Argentina	AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<status>pending_async</status>
<unique_id>4417a21403427eb06664a6d7e5d5d48</unique_id>
<transaction_id>43671</transaction_id>
<redirect_url>https://staging.gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61d0</redirect_url>
<mode>live</mode>
<timestamp>2019-03-14T12:05:55Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
transaction_id	string(255)	Unique transaction id defined by merchant
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

Parameter	Type	Description
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <status>error</status>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <transaction_id>43671</transaction_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <mode>live</mode>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
transaction_id	string(255)	Unique transaction id defined by merchant
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

CENOSUD

ⓘ Cencosud is a local credit card in Argentina

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>cencosud</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Buenos Aires</city>
    <country>AR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: cencosud
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>cencosud</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>4417721403427eb96664ad7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>cencosud</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <tstamp>2019-03-14T12:05:55Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

CREDIT (CFT)

Credits (also known as Credit Fund Transfer a.k.a. CFT) can be done with an initial reference transaction.

This transaction type allows you to transfer funds to a previously charged card. The amount can be higher than the charged reference. Credits can only be done on formsale, sale3d, init recurring sale, init recurring sale3d, recurring sale or capture transaction. Therefore, the **reference_id** for the corresponding transaction is mandatory.

Note that Visa credits are not authorized through the schemes but batched for offline settlement on the same day, while Mastercard/Maestro credits are authorized real-time. This means that the authorization code and issuer response code are available only for non-Visa credits.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Credit');
$request = $genesis->request();

$request
  ->setTransactionId('43671')
  ->setUsage('40208 concert tickets')
  ->setRemoteIp('245.253.2.12')
  ->setReferenceId('43672')
  ->setAmount('100')
  ->setCurrency('USD');

try {
  $genesis->execute();
  $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
  $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.CreditRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        CreditRequest request = new CreditRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("43672");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.credit(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "reference_id": "43672",
    "amount": "100",
    "currency": "USD"
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>credit</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<reference_id>43672</reference_id>
<amount>100</amount>
<currency>USD</currency>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: credit
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details

Parameter	Required	Format	Description
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => credit
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:55.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
)
```

```
<payment_response content=[<transaction_type content=[credit]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<authorization_code content=[345678]>
<response_code content=[00]>
<timestamp content=[2019-03-14T12:05:55Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
]>
```

```
{
    transaction_type: "credit",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:05:55Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>credit</transaction_type>
<status>approved</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<authorization_code>345678</authorization_code>
<response_code>00</response_code>
<timestamp>2019-03-14T12:05:55Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217

Error Response

```
stdClass Object
(
    [transaction_type] => credit
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 410
    [technical_message] => No approved reference transaction found
    [message] => No approved reference transaction found
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:55.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
)
```

```
<payment_response content=[<transaction_type content=[credit]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[410]>
<technical_message content=[No approved reference transaction found]>
<message content=[No approved reference transaction found]>
<timestamp content=[2019-03-14T12:05:55Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
]>
```

```
{
    transaction_type: "credit",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "410",
    technical_message: "No approved reference transaction found",
    message: "No approved reference transaction found",
    timestamp: "2019-03-14T12:05:55Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>credit</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<response_code>57</response_code>
<code>410</code>
<technical_message>No approved reference transaction found</technical_message>
<message>No approved reference transaction found</message>
<timestamp>2019-03-14T12:05:55Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type

Parameter	Type	Description
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

ELO

 Elo is a local Brazilian payment card.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>elo</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Salvador</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: elo
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details

Parameter	Required	Format	Description
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>lo</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
-----------	------	-------------

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>elo</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

ⓘ Hipercard is a local credit card in Brazil.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>hipercard</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40280 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Salvador</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: hipercard
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

Parameter	Required	Format	Description
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>hipercard</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>hipercard</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

NARANJA

 Naranja is a local credit card issued in Argentina which can be used for purchases over the internet.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>naranja</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Buenos Aires</city>
    <country>AR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: naranja
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada

Parameter	Required	Format	Description
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

`required*` = conditionally required

Supported countries:

Country
AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>naranja</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb06664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z

Parameter	Type	Description
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>naranja</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

NATIVA

 Nativa is an Argentinian credit card provided by the National Bank of Argentina.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>nativa</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Buenos Aires</city>
    <country>AR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: nativa
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>nativa</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664ad7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>nativa</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestampl>2019-03-14T12:05:55Z</timestampl>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

TARJETA SHOPPING

 Tarjeta Shopping is a cash payment in Argentina.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>tarjeta_shopping</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Rosario</city>
    <country>AR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: tarjeta_shopping
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>tarjeta_shopping</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>tarjeta_shopping</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>4417a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:55Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Non-financial Transactions

ACCOUNT VERIFICATION

Account Verification transactions are implemented using the so-called zero-value auths.

Using an account verification transaction, the account existence for a given cardholder can be verified without any financial impact.

Note the account verification can also carry on an AVS request, thus you can also get the AVS response code and text by the schemes along with it. Refer to section AVS Status Codes for more information.

i This transaction type supports Tokenization.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('NonFinancial\AccountVerification');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.nonfinancial.AccountVerificationRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main()  {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        AccountVerificationRequest request = new AccountVerificationRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.account_verification(
{
    "transaction_id": "43671",
    "usage": "40200 concert tickets",
    "remote_ip": "245.253.2.12",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>account_verification</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40200 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('NonFinancial\AccountVerification');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setIssuerOctEnabled('true')
->setRemoteIp('245.253.2.12')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.nonfinancial.AccountVerificationRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        AccountVerificationRequest request = new AccountVerificationRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setIssuerOctEnabled("true");
        request.setRemoteIp("245.253.2.12");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.account_verification(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "issuer_oct_enabled": true,
    "remote_ip": "245.253.2.12",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-d "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>account_verification</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<issuer_oct_enabled>true</issuer_oct_enabled>
<remote_ip>245.253.2.12</remote_ip>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: account_verification
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
issuer_oct_enabled	optional	true	Supported only by Visa. When submitted, Visa checks if the given PAN supports OCTs at the issuer. When not submitted, it is interpreted as a normal account verification.
remote_ip	required*	IPv4 address	IPv4 address of customer
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required*	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card

Parameter	Required	Format	Description
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with <code>remember_card</code>
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with <code>token</code>
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with <code>remember_card</code> to tokenize or with <code>token</code> to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

`required*` = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => account_verification
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:55.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[account_verification]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:05:55Z]>
<descriptor content=[Descriptor one]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "account_verification",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:55Z",
    descriptor: "Descriptor one",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>account_verification</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <consumer_id>123456</consumer_id>
    <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
    <avs_response_code>51</avs_response_code>
    <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
    <authorization_code>345678</authorization_code>
    <response_code>00</response_code>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:05:55Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response

```

stdClass Object
{
    [transaction_type] => account_verification
    [status] => approved
    [issuer_oct_enabled] => true
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
    (
        [date] => 2019-03-14 12:05:55.000000
        [timezone_type] => 2
        [timezone] => Z
    )
    [descriptor] => Descriptor one
    [sent_to_acquirer] => true
}

```

```

<payment_response content=[

<transaction_type content=[account_verification]>
<status content=[approved]>
<issuer_oct_enabled content=[true]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:05:55Z]>
<descriptor content=[Descriptor one]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "account_verification",
    status: "approved",
    issuer_oct_enabled: "true",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:55Z",
    descriptor: "Descriptor one",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>account_verification</transaction_type>
    <status>approved</status>
    <issuer_oct_enabled>true</issuer_oct_enabled>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <consumer_id>123456</consumer_id>
    <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
    <avs_response_code>51</avs_response_code>
    <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
    <authorization_code>345678</authorization_code>
    <response_code>00</response_code>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:05:55Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response

```

stdClass Object
(
    [transaction_type] => account_verification
    [status] => declined
    [issuer_oct_enabled] => false
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:55.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [sent_to_acquirer] => true
)

```

```

<payment_response content=>
    <transaction_type content=[account_verification]>
        <status content=[declined]>
        <issuer_oct_enabled content=[false]>
        <mode content=[live]>
            <transaction_id content=[43671]>
            <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
            <consumer_id content=[123456]>
            <token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
            <avs_response_code content=[51]>
            <avs_response_text content=[Response provided by issuer processor; Address information not verified]>
            <authorization_code content=[345678]>
            <response_code content=[00]>
            <technical_message content=[Transaction successful!]>
            <message content=[Transaction successful!]>
            <timestamp content=[2019-03-14T12:05:55Z]>
            <descriptor content=[Descriptor one]>
            <sent_to_acquirer content=[true]>
    >

```

```

{
    transaction_type: "account_verification",
    status: "declined",
    issuer_oct_enabled: "false",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:55Z",
    descriptor: "Descriptor one",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>account_verification</transaction_type>
    <status>declined</status>
    <issuer_oct_enabled>false</issuer_oct_enabled>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <consumer_id>123456</consumer_id>
    <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
    <avs_response_code>51</avs_response_code>
    <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
    <authorization_code>345678</authorization_code>
    <response_code>00</response_code>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:05:55Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
-----------	------	-------------

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
issuer_oct_enabled	string	Present only if merchant has submitted issuer oct enabled flag in the request to check if issuer supports OCTs for the given PAN. True if the issuer supports OCTs for this PAN, false otherwise.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes) for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => account_verification
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => expiration_year is invalid
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[<transaction_type content=[account_verification]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[expiration_year is invalid]>
<message content=[expiration_year is invalid]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<sent_to_acquirer content=[false]>
]>
```

```
{
  transaction_type: "account_verification",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  code: "340",
  technical_message: "expiration_year is invalid",
  message: "expiration_year is invalid",
  timestamp: "2019-03-14T12:05:56Z",
  descriptor: "Descriptor one",
  sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>account_verification</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>340</code>
  <technical_message>expiration_year is invalid</technical_message>
  <message>expiration_year is invalid</message>
  <timestamp>2019-03-14T12:05:56Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

3DS Card

AUTHORIZE 3D

Authorize3D transactions basically have the same request as standard authorize transactions.

i Authorize3D transactions can be handled synchronous or asynchronous depending on the parameters passed. If mpi params is passed the workflow will be synchronous. If notification url, return success url and return failure url are passed the workflow will be asynchronous.

i To settle Authorize3D transactions, normal capture transactions are used. As the 3-D secure process already took place, there is no need to do the verification again when capturing.

i This transaction type supports Tokenization.

i This transaction type supports Level 3 travel data.

i This transaction type supports Partial Approvals.

Synchronous Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Authorize3D');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setCardHolder('Travis Pastrana')
    ->setCardNumber('4200000000000000')
    ->setExpirationMonth('12')
    ->setExpirationYear('2020')
    ->setCvv('834')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// MPI Synchronous
->setCavv('AACAC1BHADYJkIASQkcAAAAAAA=')
->setEci('05')
->setXid('0pv62F1rT5qQ0DB7DCewKgEBAQI=');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.Authorize3DRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        Authorize3DRequest request = new Authorize3DRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // MPI Synchronous
        request.setCavv("AACAC1BHADYJkIASQkcAAAAAAA=");
        request.setEci("05");
        request.setXid("0pv62F1rT5qQ0DB7DCewKgEBAQI=");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.authorize3d(
{
    "transaction_id": "43671",
    "usage": "40288 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "mpi_params": {
        "cavv": "AAACAA1BHADYJkIASQkcAAAAAAA=",
        "eci": "05",
        "xid": "0pv62F1rT5qQ0DB7DCewKgEBAQI="
    }
},
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>authorize3d</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40288 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</mpi_params>
<cavv>AAACAA1BHADYJkIASQkcAAAAAAA=</cavv>
<eci>05</eci>
<xid>0pv62F1rT5qQ0DB7DCewKgEBAQI=</xid>
</mpi_params>
</payment_transaction>
'

```

Asynchronous Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Authorize3D');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// MPI Asynchronous
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success.html')
->setReturnFailureUrl('http://www.example.com/failure.html');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.Authorize3DRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        Authorize3DRequest request = new Authorize3DRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // MPI Asynchronous
        request.setNotificationUrl("https://www.example.com/notification");
        request.setReturnSuccessUrl("http://www.example.com/success.html");
        request.setReturnFailureUrl("http://www.example.com/failure.html");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.authorize3d(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success.html",
    "return_failure_url": "http://www.example.com/failure.html"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>authorize3d</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success.html</return_success_url>
<return_failure_url>http://www.example.com/failure.html</return_failure_url>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: authorize3d
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
notification_url	required ¹	url	URL at merchant where gateway sends outcome of transaction.

Parameter	Required	Format	Description
return_success_url	required ¹	url	URL where customer is sent to after successful payment
return_failure_url	required ¹	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with <code>remember_card</code>
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with <code>token</code>
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with <code>remember_card</code> to tokenize or with <code>token</code> to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required when MCC is a Financial Services one (e.g. MCC 6012) and either card brand is Visa or Mastercard/Maestro with UK-based merchant, UK-based bin (domestic), and DEBIT card type
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
mpi_params	required ²		
cavv	required ³	string(255)	Verification Id of the authentication. Please note this can be the CAVV for Visa Card or UCAF to identify MasterCard.

Parameter	Required	Format	Description
eci	required ³	string(255)	See Electronic Commerce Indicator as returned from the MPI for details
xid	required ³	string(255)	Transaction ID generated by the 3D Secure service that uniquely identifies a 3D Secure check request
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

1 - required if mpi_params is not present, transaction will be handled asynchronous.

2 - required if transaction should be handled synchronous.

3 - eci is always required if mpi_params is present. xid and cavv are not required for the 3D attempted only workflow, where the merchant does not have the xid/cavv, only the eci.

Successful Synchronous Response

```
stdClass Object
(
    [transaction_type] => authorize3d
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => Datetime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
    [partial_approval] => true
)
```

```
<payment_response content=[>
<transaction_type content="authorize3d">
<status content="approved">
<mode content="live">
<transaction_id content="43671">
<unique_id content="44177a21403427eb96664a6d7e5d5d48">
<consumer_id content="123456">
<token content="ee946db8-d7db-4bb7-b608-b65b153e127d">
<avs_response_code content="51">
<avs_response_text content="Response provided by issuer processor; Address information not verified">
<authorization_code content="345678">
<response_code content="00">
<timestamp content="2019-03-14T12:05:56Z">
<descriptor content="Descriptor one">
<amount content="100">
<currency content="USD">
<sent_to_acquirer content="true">
<partial_approval content="true">
]>
```

```
{
    transaction_type: "authorize3d",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
    partial_approval: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>authorize3d</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
  <avs_response_code>5I</avs_response_code>
  <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <timestamp>2019-03-14T12:05:56Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
  <partial_approval>true</partial_approval>
</payment_transaction>

```

Successful Asynchronous Response

```

stdClass Object
(
    [transaction_type] => authorize3d
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[<transaction_type content=[authorize3d]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "authorize3d",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>authorize3d</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946db8-d7db-4b7-b608-b65b153e127d</token>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <tstamp>2019-03-14T12:05:56Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. CheckPartial Approvals for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```

stdClass Object
(
    [transaction_type] => authorize3d
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [technical_message] => expiration_year is invalid
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[

<transaction_type content=[authorize3d]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[340]>
<technical_message content=[expiration_year is invalid]>
<message content=[expiration_year is invalid]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>

```

```

{
    transaction_type: "authorize3d",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "340",
    technical_message: "expiration_year is invalid",
    message: "expiration_year is invalid",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>authorize3d</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <response_code>57</response_code>
    <code>340</code>
    <technical_message>expiration_year is invalid</technical_message>
    <message>expiration_year is invalid</message>
    <timestamp>2019-03-14T12:05:56Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.

Parameter	Type	Description
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

SALE 3D

Sale3D transactions basically have the same request as standard sale transactions.

- Sale3D transactions can be handled **synchronous** or **asynchronous** depending on the parameters passed. If `mpi_params` is passed the workflow will be **synchronous**. If `notification_url`, `return_success_url` and `return_failure_url` are passed the workflow will be **asynchronous**.

- This transaction type supports Tokenization.

- This transaction type supports Level 3 travel data.

Synchronous Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale3D');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setCardHolder('Travis Pastrana')
    ->setCardNumber('4200000000000000')
    ->setExpirationMonth('12')
    ->setExpirationYear('2020')
    ->setCvv('834')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// MPI Synchronous
->setCavv('AAACAI1BHADYJKIASQkccAAAAAAA=')
->setEci('05')
->setXid('0pv62F1rT5qQ0DB7DewKgEBAQI=');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.Sale3DRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        Sale3DRequest request = new Sale3DRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // MPI Synchronous
        request.setCavv("AACAC1BHADYJkIASQkcAAAAAAA=");
        request.setEci("05");
        request.setXid("0pv62F1rT5qQ0DB7DCewKgEBAQI=");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale3d({
    "transaction_id": "43671",
    "usage": "40288 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "mpi_params": {
        "cavv": "AAACAA1BHADYJkIASQkcAAAAAAA=",
        "eci": "05",
        "xid": "0pv62F1rT5qQ0DB7DCewKgEBAQI="
    }
}).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sale3d</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40288 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</mpi_params>
<cavv>AAACAA1BHADYJkIASQkcAAAAAAA=</cavv>
<eci>05</eci>
<xid>0pv62F1rT5qQ0DB7DCewKgEBAQI=</xid>
</mpi_params>
</payment_transaction>

```

Asynchronous Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale3D');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// MPI Asynchronous
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success.html')
->setReturnFailureUrl('http://www.example.com/failure.html');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.Sale3DRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        Sale3DRequest request = new Sale3DRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // MPI Asynchronous
        request.setNotificationUrl("https://www.example.com/notification");
        request.setReturnSuccessUrl("http://www.example.com/success.html");
        request.setReturnFailureUrl("http://www.example.com/failure.html");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale3d({
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success.html",
    "return_failure_url": "http://www.example.com/failure.html"
}).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sale3d</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success.html</return_success_url>
<return_failure_url>http://www.example.com/failure.html</return_failure_url>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sale3d
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
notification_url	required ¹	url	URL at merchant where gateway sends outcome of transaction.

Parameter	Required	Format	Description
return_success_url	required ¹	url	URL where customer is sent to after successful payment
return_failure_url	required ¹	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with <code>remember_card</code>
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with <code>token</code>
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with <code>remember_card</code> to tokenize or with <code>token</code> to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required when MCC is a Financial Services one (e.g. MCC 6012) and either card brand is Visa or Mastercard/Maestro with UK-based merchant, UK-based bin (domestic), and DEBIT card type
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
mpi_params	required ²		
cavv	required ³	string(255)	Verification Id of the authentication. Please note this can be the CAVV for Visa Card or UCAF to identify MasterCard.

Parameter	Required	Format	Description
eci	required ³	string(255)	See Electronic Commerce Indicator as returned from the MPI for details
xid	required ³	string(255)	Transaction ID generated by the 3D Secure service that uniquely identifies a 3D Secure check request
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

1 - required if mpi_params is not present, transaction will be handled asynchronous.

2 - required if transaction should be handled synchronous.

3 - eci is always required if mpi_params is present. xid and cavv are not required for the 3D attempted only workflow, where the merchant does not have the xid/cavv, only the eci.

Successful Synchronous Response

```
stdClass Object
(
    [transaction_type] => sale3d
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => Datetime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
    [partial_approval] => true
)
```

```
<payment_response content=[

<transaction_type content=[sale3d]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
<partial_approval content=[true]>
]>
```

```
{
    transaction_type: "sale3d",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
    partial_approval: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sale3d</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
  <avs_response_code>5I</avs_response_code>
  <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <timestamp>2019-03-14T12:05:56Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
  <partial_approval>true</partial_approval>
</payment_transaction>

```

Successful Asynchronous Response

```

stdClass Object
(
    [transaction_type] => sale3d
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[<transaction_type content=[sale3d]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "sale3d",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sale3d</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946db8-d7db-4b7-b608-b65b153e127d</token>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <tstamp>2019-03-14T12:05:56Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. CheckPartial Approvals for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```

stdClass Object
(
    [transaction_type] => sale3d
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [technical_message] => expiration_year is invalid
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[

<transaction_type content=[sale3d]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[340]>
<technical_message content=[expiration_year is invalid]>
<message content=[expiration_year is invalid]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>

```

```

{
    transaction_type: "sale3d",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "340",
    technical_message: "expiration_year is invalid",
    message: "expiration_year is invalid",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sale3d</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <response_code>57</response_code>
    <code>340</code>
    <technical_message>expiration_year is invalid</technical_message>
    <message>expiration_year is invalid</message>
    <timestamp>2019-03-14T12:05:56Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.

Parameter	Type	Description
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

INIT RECURRING SALE 3D

InitRecurringSale3D transactions basically have the same request as standard InitRecurringSale transactions.

Info InitRecurringSale3D transactions can be handled synchronous or asynchronous depending on the parameters passed. If mpi params is passed the workflow will be synchronous. If notification url, return success url and return failure url are passed the workflow will be asynchronous.

Info This transaction type supports Tokenization.

Info This transaction type supports Level 3 travel data.

Synchronous Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Recurring\InitRecurringSale3D');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setCardHolder('Travis Pastrana')
    ->setCardNumber('4200000000000000')
    ->setExpirationMonth('12')
    ->setExpirationYear('2020')
    ->setCvv('834')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// MPI Synchronous
->setCavv('AAACAI1BHADYJKIASQkccAAAAAAA=')
->setEci('05')
->setXid('0pv62F1rT5qQ0DB7DewKgEBAQI=');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.recurring.InitRecurringSale3D;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        InitRecurringSale3D request = new InitRecurringSale3D();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // MPI Synchronous
        request.setCavv("AACAC1BHADYJkIASQkcAAAAAAA=");
        request.setEci("05");
        request.setXid("0pv62F1rT5qQ0DB7DCewKgEBAQI=");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.init_recurring_sale3d(
{
    "transaction_id": "43671",
    "usage": "40288 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "mpi_params": {
        "cavv": "AAACAA1BHADYJkIASQkcAAAAAAA=",
        "eci": "05",
        "xid": "0pv62F1rT5qQ0DB7DCewKgEBAQI="
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>init_recurring_sale3d</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40288 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</mpi_params>
<cavv>AAACAA1BHADYJkIASQkcAAAAAAA=</cavv>
<eci>05</eci>
<xid>0pv62F1rT5qQ0DB7DCewKgEBAQI=</xid>
</mpi_params>
</payment_transaction>
'

```

Asynchronous Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Recurring\InitRecurringSale3D');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// MPI Asynchronous
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success.html')
->setReturnFailureUrl('http://www.example.com/failure.html');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.recurring.InitRecurringSale3D;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        InitRecurringSale3D request = new InitRecurringSale3D();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // MPI Asynchronous
        request.setNotificationUrl("https://www.example.com/notification");
        request.setReturnSuccessUrl("http://www.example.com/success.html");
        request.setReturnFailureUrl("http://www.example.com/failure.html");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.init_recurring_sale3d(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success.html",
    "return_failure_url": "http://www.example.com/failure.html"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>init_recurring_sale3d</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success.html</return_success_url>
<return_failure_url>http://www.example.com/failure.html</return_failure_url>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: init_recurring_sale3d
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
notification_url	required ¹	url	URL at merchant where gateway sends outcome of transaction.
return_success_url	required ¹	url	URL where customer is sent to after successful payment
return_failure_url	required ¹	url	URL where customer is sent to after unsuccessful payment

Parameter	Required	Format	Description
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required*	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with remember_card
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with token
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with remember_card to tokenize or with token to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required when MCC is a Financial Services one (e.g. MCC 6012) and either card brand is Visa or Mastercard/Maestro with UK-based merchant, UK-based bin (domestic), and DEBIT card type
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
mpi_params	required ²		
cavv	required ³	string(255)	Verification Id of the authentication. Please note this can be the CAVV for Visa Card or UCAF to identify MasterCard.
eci	required ³	string(255)	See Electronic Commerce Indicator as returned from the MPI for details

Parameter	Required	Format	Description
xid	required ³	string(255)	Transaction ID generated by the 3D Secure service that uniquely identifies a 3D Secure check request
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

1 - required if mpi_params is not present, transaction will be handled asynchronous.

2 - required if transaction should be handled synchronous.

3 - eci is always required if mpi_params is present. xid and cavv are not required for the 3D attempted only workflow, where the merchant does not have the xid/cavv, only the eci.

Successful Synchronous Response

```
stdClass Object
{
    [transaction_type] => init_recurring_sale3d
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
    [partial_approval] => true
}
```

```
<payment_response content=[<transaction_type content=[init_recurring_sale3d]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
<partial_approval content=[true]>
]>
```

```
{
    transaction_type: "init_recurring_sale3d",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
    partial_approval: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>init_recurring_sale3d</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
  <avs_response_code>5I</avs_response_code>
  <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <timestamp>2019-03-14T12:05:56Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
  <partial_approval>true</partial_approval>
</payment_transaction>

```

Successful Asynchronous Response

```

stdClass Object
(
    [transaction_type] => init_recurring_sale3d
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[<transaction_type content=[init_recurring_sale3d]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "init_recurring_sale3d",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>init_recurring_sale</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946db8-d7db-4b7-b608-b65b153e127d</token>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <tstamp>2019-03-14T12:05:56Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
recurring_advice_code	string(2)	if received in the response from the issuer
recurring_advice_text	string	Optional, describes the specific recurring advice code
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. CheckPartial Approvals for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```

stdClass Object
(
    [transaction_type] => init_recurring_sale3d
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [technical_message] => expiration_year is invalid
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[

<transaction_type content=[init_recurring_sale3d]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[340]>
<technical_message content=[expiration_year is invalid]>
<message content=[expiration_year is invalid]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>

```

```

{
    transaction_type: "init_recurring_sale3d",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "340",
    technical_message: "expiration_year is invalid",
    message: "expiration_year is invalid",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>init_recurring_sale3d</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <response_code>57</response_code>
    <code>340</code>
    <technical_message>expiration_year is invalid</technical_message>
    <message>expiration_year is invalid</message>
    <timestamp>2019-03-14T12:05:56Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
code	integer	Error code according to Error code table

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

NOTIFICATION FOR ASYNCHRONOUS PAYMENTS

When using asynchronous payments like 3-D secured transactions, the transaction depends on user input. Therefore, the outcome of the transaction is not available immediately after sending the request.

The gateway will send a notification to the merchant's server as soon as the payment has been completed (either approved or declined).

If the user cancels the payment (or the user doesn't complete the payment within the given time frame, e.g. 2 hours), the transaction will time out and a notification will be sent.

The notification will be sent as an HTTP POST to the **notification_url** specified in the transaction request XML. See Notifications for the HTTP POST-Data and format. Notification will be pure HTTP or HTTPS-based, depending on the URL given by the merchant in the **notification_url**. In case it is a HTTPS-based notification, no SSL verification of the merchant SSL certificate will be performed. Until a notification echo is rendered by the merchant, there will be up to 10 notifications sent, each with a timeout of 15 minutes. Note that notifications in the PROD env will be sent from 80.82.206.228 and 5.179.225.28 for the PROD env, and only 80.82.206.228 for the STG env, so make sure these IP addresses are whitelisted respectively. Note also that notifications are delivered to either port 80 (HTTP notification) or port 443 (HTTPS notification), so make sure the correct notificationurl is passed in the transaction request in the first place.

Also see 3-D secure workflow.

Recurring Transactions

A recurring transaction describes a payment where the cardholder's account is periodically charged for a repeated delivery and use of a product or service (subscription, membership fee, etc.) over time. A recurring payment consists of an initial transaction and one or several repeated transactions. The "initial" transaction contains all relevant card and cardholder data, while the subsequent repeated transaction references an identifier which is returned with the response to the initial request.

INIT RECURRING SALE

An InitRecurringSale transaction initializes a recurring payment and is equal to a normal SaleTransaction except that it can be referenced as "initial" transaction in a RecurringSale transaction.

Note that if an InitRecurringSale is fully refunded, the recurring series is stopped and no more RecurringSales can be performed for that recurring series.

If a InitRecurringSale is partially refunded, the recurring series can continue with more RecurringSales

i This transaction type supports Tokenization.

i This transaction type supports Level 3 travel data.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Recurring\InitRecurringSale');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.recurring.InitRecurringSale;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        InitRecurringSale request = new InitRecurringSale();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.init_recurring_sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>init_recurring_sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: init_recurring_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer

Parameter	Required	Format	Description
cvv	required*	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with <code>remember_card</code>
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with <code>token</code>
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with <code>remember_card</code> to tokenize or with <code>token</code> to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required when MCC is a Financial Services one (e.g. MCC 6012) and either card brand is Visa or Mastercard/Maestro with UK-based merchant, UK-based bin (domestic), and DEBIT card type
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

`required*` = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => init_recurring_sale
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] = DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[init_recurring_sale]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "init_recurring_sale",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>init_recurring_sale</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d48</unique_id>
  <consumer_id>123456</consumer_id>
  <token>ee946dbb-d7db-4b7-b608-b65b153e127d</token>
  <avs_response_code>5I</avs_response_code>
  <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.merchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:56Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
recurring_advice_code	string(2)	Optional, if received in the response from the issuer
recurring_advice_text	string	Optional, describes the specific recurring advice code
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. Check Partial Approvals for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```

stdClass Object
(
    [transaction_type] => init_recurring_sale
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [message] => billing_address[zip_code] is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[<transaction_type content=[init_recurring_sale]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=340>
<message content=[billing_address[zip_code] is invalid!]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=100>
<currency content=USD>
<sent_to_acquirer content=false>
]>

```

```

{
    transaction_type: "init_recurring_sale",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "340",
    message: "billing_address[zip_code] is invalid!",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>init_recurring_sale</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<response_code>57</response_code>
<code>340</code>
<message>billing_address[zip_code] is invalid!</message>
<timestamp>2019-03-14T12:05:56Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

RECURRING SALE

A RecurringSale transaction is a "repeated" transaction which follows and references a Init Recurring Sale transaction.

The card and cardholder data is omitted. Note that RecurringSales can be partially or fully refunded if configuration allows it, and this will not stop the recurring series.

 This transaction type supports Level 3 travel data.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Recurring\RecurringSale');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReferenceId('43672')
    ->setAmount('100')
    ->setCurrency('USD');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.recurring.RecurringSale;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        RecurringSale request = new RecurringSale();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("43672");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
  return console.log(reason);
};

var success = function(data) {
  return console.log(data);
};

transaction.recurring_sale(
{
  "transaction_id": "43671",
  "usage": "40208 concert tickets",
  "remote_ip": "245.253.2.12",
  "reference_id": "43672",
  "amount": "100",
  "currency": "USD"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>recurring_sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<reference_id>43672</reference_id>
<amount>100</amount>
<currency>USD</currency>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: recurring_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

```

stdClass Object
(
  [transaction_type] => recurring_sale
  [status] => approved
  [mode] => live
  [transaction_id] => 43671
  [unique_id] => 44177a21403427eb96664a6d7e5d5d48
  [avs_response_code] => 51
  [avs_response_text] => Response provided by issuer processor; Address information not verified
  [authorization_code] => 345678
  [response_code] => 00
  [technical_message] => Transaction successful!
  [message] => Transaction successful!
  [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
  [timestamp] => DateTime Object
    (
      [date] => 2019-03-14 12:05:56.000000
      [timezone_type] => 2
      [timezone] => Z
    )
  [descriptor] => Descriptor one
  [amount] => 100
  [currency] => USD
  [sent_to_acquirer] => true
)

```

```

<payment_response content=[

  <transaction_type content=[recurring_sale]>
  <status content=[approved]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <avs_response_code content=[5I]>
  <avs_response_text content=[Response provided by issuer processor; Address information not verified]>
  <authorization_code content=[345678]>
  <response_code content=[00]>
  <technical_message content=[Transaction successful!]>
  <message content=[Transaction successful!]>
  <redirect_url content="https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61">
  <timestamp content="2019-03-14T12:05:56Z">
  <descriptor content="Descriptor one">
  <amount content="100">
  <currency content="USD">
  <sent_to_acquirer content=[true]>

]>

```

```

{
  transaction_type: "recurring_sale",
  status: "approved",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  avs_response_code: "5I",
  avs_response_text: "Response provided by issuer processor; Address information not verified",
  authorization_code: "345678",
  response_code: "00",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
  timestamp: "2019-03-14T12:05:56Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>recurring_sale</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <avs_response_code>5I</avs_response_code>
  <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:56Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
recurring_advice_code	string(2)	Optional, if received in the response from the issuer
recurring_advice_text	string	Optional, describes the specific recurring advice code
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z

Parameter	Type	Description
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
{
    [transaction_type] => recurring_sale
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [message] => billing_address[zip_code] is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
}
```

```
<payment_response content=[

<transaction_type content=[recurring_sale]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[340]>
<message content=[billing_address[zip_code] is invalid!]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "recurring_sale",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "340",
    message: "billing_address[zip_code] is invalid!",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>recurring_sale</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <response_code>57</response_code>
    <code>340</code>
    <message>billing_address[zip_code] is invalid!</message>
    <timestamp>2019-03-14T12:05:56Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type

Parameter	Type	Description
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Wallets

NETELLER

ⓘ Neteller transactions are only synchronous. When the payment reached a final state Genesis gateway sends notification to merchant on the configured url into its account.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Wallets\Neteller');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40288 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setNotificationUrl('https://www.example.com/notification')
    ->setReturnSuccessUrl('http://www.example.com/success')
    ->setReturnFailureUrl('http://www.example.com/failure')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setCustomerAccount('453501020503')
    ->setAccountPassword('988379')
    ->setCustomerEmail('travis@example.com')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.wALLETS.NetellerRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {
        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        NetellerRequest request = new NetellerRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal("100"));
        request.setCurrency("USD");
        request.setCustomerAccount("453501020503");
        request.setAccountPassword("908379");
        request.setCustomerEmail("travis@example.com");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.neteller(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "USD",
    "customer_account": "453501020503",
    "account_password": "908379",
    "customer_email": "travis@example.com",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>neteller</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <customer_account>453501020503</customer_account>
  <account_password>908379</account_password>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: neteller
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
customer_account	required	string(100)	Customer email/id of neteller account
account_password	required	string(6)	Account secret password
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada

Parameter	Required	Format	Description
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => neteller
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=>
<transaction_type content=[neteller]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "neteller",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>neteller</transaction_type>
<status>approved</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestamp>2019-03-14T12:05:56Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).

Parameter	Type	Description
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => neteller
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[

<transaction_type content=[neteller]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "neteller",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>neteller</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>110</code>
<message>Something went wrong, please contact support!</message>
<timestamp>2019-03-14T12:05:56Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
-----------	------	-------------

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

PAYPAL EXPRESS CHECKOUT

i Express Checkout is a fast, easy way for buyers to pay with PayPal. Express Checkout eliminates one of the major causes of checkout abandonment by giving buyers all the transaction details at once, including order details, shipping options, insurance choices, and tax totals.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PaypalExpress');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('USD')
->setCustomerEmail('travis@example.com')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PayPalExpressRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PayPalExpressRequest request = new PayPalExpressRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCustomerEmail("travis@example.com");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.paypal_express(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "USD",
    "customer_email": "travis@example.com",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>paypal_express</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: paypal_express
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => paypal_express
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

    <transaction_type content=[paypal_express]>
    <status content=[pending_async]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <technical_message content=[Transaction successful!]>
    <message content=[Transaction successful!]>
    <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
    <timestamp content=[2019-03-14T12:05:56Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[USD]>
    <sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "paypal_express",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>paypal_express</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:56Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => paypal_express
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[<transaction_type content=[paypal_express]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "paypal_express",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>paypal_express</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>110</code>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:05:56Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

QIWI

QIWI Wallet is a very popular Eastern European e-wallet.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setPaymentType('qiwi')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('5000')
->setCurrency('RUB')
->setAccountPhone('71234567891')

// Billing Address
->setBillingFirstName('Barney')
->setBillingLastName('Rubble')
->setBillingAddress1('14, Nerazdelni str')
->setBillingZipCode('1407')
->setBillingCity('Moscow')
->setBillingCountry('RU')

// Risk Params
->setRiskUserId('123456');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {
        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setTransactionId("43671");
        request.setPaymentType("qiwi");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal("5000"));
        request.setCurrency("RUB");
        request.setAccountPhone("71234567891");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Rubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("1407");
        request.setBillingCity("Moscow");
        request.setBillingCountry("RU");

        // Risk Params
        request.setRiskUserId("123456");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.ppro(
{
    "transaction_id": "43671",
    "payment_type": "qiwi",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "5000",
    "currency": "RUB",
    "account_phone": "71234567891",
    "billing_address": {
        "first_name": "Barney",
        "last_name": "Rubble",
        "address1": "14, Nerazdelni str",
        "zip_code": "1407",
        "city": "Moscow",
        "country": "RU"
    },
    "risk_params": {
        "user_id": "123456"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <transaction_id>43671</transaction_id>
  <payment_type>qwi</payment_type>
  <usage>40200 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>5000</amount>
  <currency>RUB</currency>
  <account_phone>71234567891</account_phone>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Moscow</city>
    <country>RU</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	ppro or qwi. Contact tech support at tech-support@emerchantpay.net for more details.
transaction_id	required	string(255)	Unique transaction id defined by merchant
payment_type	required ¹	qiwi	QIWI. Contact tech support at tech-support@emerchantpay.net for more details.
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
account_phone	required	string(11)	Must be a 10 digits Russian valid mobile number(either with or without international prefix +7), or International mobile phone number, starting with + followed by at least 9 digits.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

1 - payment_type must be submitted only when the transaction type is set to ppro

Supported countries and currencies

Country code	Currency code
RU	EUR, RUB
KZ	EUR, KZT
UA	USD

Successful Response

```
stdClass Object
{
    [transaction_type] => ppro
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 5000
    [currency] => RUB
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[>
<transaction_type content=[ppro]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[5000]>
<currency content=[RUB]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "5000",
    currency: "RUB",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>ppro</transaction_type>
<status>approved</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestamp>2019-03-14T12:05:56Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>5000</amount>
<currency>RUB</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:56.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 5000
    [currency] => RUB
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:56Z]>
<descriptor content=[Descriptor one]>
<amount content=[5000]>
<currency content=[RUB]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:56Z",
    descriptor: "Descriptor one",
    amount: "5000",
    currency: "RUB",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>4417a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:56Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>5000</amount>
  <currency>RUB</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

WEBMONEY

ⓘ WebMoney is a global settlement system and environment for online business activities. Over 28 million people from all over the world have joined the system. Although WebMoney targeted mainly at clients in Russia and the Former Soviet Union, it is now used worldwide.

ⓘ WebMoney transactions can be either asynchronous or synchronous, based on 'is_payout' flag. After a successful validation of transaction parameters transaction status is set to pending_async the user is redirected to WebMoney authentication page where he enters additional information to finish the payment. When the payment reached a final state Genesis gateway sends notification to merchant on the configured url into its account. When the payment is checked as payout then the transaction is synchronous and transaction status is set immediately after the response.

Auth Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Wallets\WebMoney');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setCustomerPhone('+1987987987987')
->setCustomerEmail('travis@example.com')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.wallets.WebMoneyRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        WebMoneyRequest request = new WebMoneyRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setCustomerPhone("+1987987987987");
        request.setCustomerEmail("travis@example.com");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.webmoney(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "customer_phone": "+1987987987987",
    "customer_email": "travis@example.com",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>webmoney</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<customer_phone>+1987987987987</customer_phone>
<customer_email>travis@example.com</customer_email>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Payout Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Wallets\WebMoney');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setIsPayout('true')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setCustomerPhone('+1987987987987')
->setCustomerEmail('travis@example.com')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.wallets.WebMoneyRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        WebMoneyRequest request = new WebMoneyRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setIsPayout("true");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setCustomerPhone("+1987987987987");
        request.setCustomerEmail("travis@example.com");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.webmoney(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "is_payout": "true",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "customer_phone": "+1987987987987",
    "customer_email": "travis@example.com",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>webmoney</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<is_payout>true</is_payout>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<customer_phone>+1987987987987</customer_phone>
<customer_email>travis@example.com</customer_email>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>
'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: webmoney
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
is_payout	required*	string	Value:true/false Flag for payout transaction
customer_account_id	required*	string(12)	Webmoney account ID (WMID). This field is required if is payout is set to "true"
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer

Parameter	Required	Format	Description
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Auth Response

```
stdClass Object
(
    [transaction_type] => webmoney
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:57.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=<
    <transaction_type content=[webmoney]>
        <status content=[pending_async]>
            <mode content=[live]>
                <transaction_id content=[43671]>
                    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
                        <technical_message content=[Transaction successful!]>
                            <message content=[Transaction successful!]>
                                <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
                                    <timestamp content=[2019-03-14T12:05:57Z]>
                                        <descriptor content=[Descriptor one]>
                                            <amount content=[100]>
                                                <currency content=[USD]>
                                                    <sent_to_acquirer content=[true]>
                                            ]>

```

```
{
  transaction_type: "webmoney",
  status: "pending_async",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
  timestamp: "2019-03-14T12:05:57Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "true",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>webmoney</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Payout Response

```
stdClass Object
(
  [transaction_type] => webmoney
  [status] => approved
  [mode] => live
  [transaction_id] => 43671
  [unique_id] => 44177a21403427eb96664a6d7e5d5d48
  [technical_message] => Transaction successful!
  [message] => Transaction successful!
  [timestamp] => DateTime Object
    (
      [date] => 2019-03-14 12:05:57.000000
      [timezone_type] => 2
      [timezone] => Z
    )
  [descriptor] => Descriptor one
  [amount] => 100
  [currency] => USD
  [sent_to_acquirer] => true
)
```

```
<payment_response content=[>
  <transaction_type content=[webmoney]>
  <status content=[approved]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <technical_message content=[Transaction successful!]>
  <message content=[Transaction successful!]>
  <timestamp content=[2019-03-14T12:05:57Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[100]>
  <currency content=[USD]>
  <sent_to_acquirer content=[true]>
]>
```

```
{
  transaction_type: "webmoney",
  status: "approved",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  timestamp: "2019-03-14T12:05:57Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>webmoney</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => webmoney
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:57.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[

  <transaction_type content=[webmoney]>
  <status content=[error]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <code content=[110]>
  <message content=[Something went wrong, please contact support!]>
  <timestamp content=[2019-03-14T12:05:57Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[100]>
  <currency content=[USD]>
  <sent_to_acquirer content=[false]>
]>

```

```
{
    transaction_type: "webmoney",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:57Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>webmoney</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>110</code>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:05:57Z</timestamp>
    <descriptor>descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

WECHAT

ⓘ WeChat Pay solution offers merchants access to the over 300 million WeChat users that have linked payment accounts to their WeChat account. The solution works on desktop and mobile via a QR code generation platform.

Wechat payment transaction - after a successful validation of transaction parameters, transaction status is set to pending async and the consumer is redirected to page that contains the QR Code for scan. The consumer then opens the WeChat application on phone and scans the QR Code for payment confirmation. The gateway waits for an async notification from PaySec with the payment result of the consumer bank payment and updates the transaction status accordingly.

When the payment reaches a final state, the gateway sends a notification to the merchant on the configured notification URL for the merchant.

Supported countries: All countries are supported

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\OnlineBankingPayments\WeChat');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setNotificationUrl('https://www.example.com/notification')
->setReturnUrl('https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f')
->setAmount('100')
->setCurrency('USD')
->setProductCode('product-code')
->setProductNum('1234')
->setProductDesc('Product description')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.oBeP.WechatRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        WechatRequest request = new WechatRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnUrl(new URL("https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f"));
        request.setAmount(new BigDecimal("100"));
        request.setCurrency("USD");
        request.setProductCode("product-code");
        request.setProductNum("1234");
        request.setProductDesc("Product description");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.wechat({
    "transaction_id": "43671",
    "usage": "A0208 concert tickets",
    "remote_ip": "245.253.2.12",
    "notification_url": "https://www.example.com/notification",
    "return_url": "https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f",
    "amount": "100",
    "currency": "USD",
    "product_code": "product-code",
    "product_num": "1234",
    "product_desc": "Product description",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
    <transaction_type>wechat</transaction_type>
    <transaction_id>43671</transaction_id>
    <usage>A0208 concert tickets</usage>
    <remote_ip>245.253.2.12</remote_ip>
    <notification_url>https://www.example.com/notification</notification_url>
    <return_url>https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f</return_url>
    <amount>100</amount>
    <currency>USD</currency>
    <product_code>product-code</product_code>
    <product_num>1234</product_num>
    <product_desc>Product description</product_desc>
    <billing_address>
        <first_name>Travis</first_name>
        <last_name>Pastrana</last_name>
        <address1>Muster Str. 12</address1>
        <zip_code>10178</zip_code>
        <city>Los Angeles</city>
        <state>CA</state>
        <country>US</country>
    </billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: wechat
transaction_id	required	string(30)	Unique transaction id defined by merchant
usage	required	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
notification_url	required	url	URL at merchant where gateway sends outcome of transaction.
return_url	required	url	URL where consumer is sent to after payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details Max amount in minor currency unit: 999999
currency	required	string(3)	Currency code in ISO 4217
product_code	optional	string(60)	Product code
product_num	optional	integer(10)	Product number
product_desc	optional	string(255)	Product description
customer_email	required*	e-mail address	Must contain valid e-mail of customer

Parameter	Required	Format	Description
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => wechat
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:57.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=<
<transaction_type content='wechat'>
<status content='pending_async'>
<mode content='live'>
<transaction_id content='43671'>
<unique_id content='44177a21403427eb96664a6d7e5d5d48'>
<technical_message content='[Transaction successful!]'>
<message content='[Transaction successful!]'>
<redirect_url content='[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]'>
<timestamp content='[2019-03-14T12:05:57Z]'>
<descriptor content='[Descriptor one]'>
<amount content='100'>
<currency content='USD'>
<sent_to_acquirer content='[true]'>
]>
```

```
{
    transaction_type: "wechat",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:57Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>wechat</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => wechat
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Please check input data for errors!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:57.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[<transaction_type content=[wechat]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Please check input data for errors!]>
<timestamp content=[2019-03-14T12:05:57Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>

```

```
{
  transaction_type: "wechat",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  code: "110",
  message: "Please check input data for errors!",
  timestamp: "2019-03-14T12:05:57Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "true",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>wechat</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Please check input data for errors!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

ZIMPLER

i Zimpler is a Swedish payment method

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>zimpler</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>SEK</currency>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Stockholm</city>
    <country>SE</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: zimpler
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	optional	string(32)	Must be 6, 7 or 8 digits Swedish or Finnish valid mobile number(either with or without international prefix +46, +358 or 0).
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported currencies and countries:

Currency code	Country code
EUR	FI
SEK	SE

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>zimpler</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>SEK</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>zimpler</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>SEK</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Vouchers

ASTROPAY CARD

ⓘ Astropay Card is the most popular virtual pre-paid card for making deposits and withdrawals. It is accepted at hundreds of online sites all around the globe. It is the preferred option by users because of its instantaneity, flexibility, confidentiality and safety.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>astropay_card</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Sidney</city>
    <country>AR</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: astropay_card
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code

Parameter	Required	Format	Description
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR
BR
CL
CO
CR
MX
PE
UY
VE

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>astropay_card</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb06664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway

Parameter	Type	Description
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>astropay_card</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

CASHU

i CashU transactions are only asynchronous. After a successful validation of transaction parameters transaction status is set to pending async the user is redirected to CashU authentication page where he enters additional information to finish the payment. When the payment reached a final state Genesis gateway sends notification to merchant on the configured url into its account.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\CashU');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('EUR')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.CashURequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        CashURequest request = new CashURequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.cashu({
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
    <transaction_type>cashu</transaction_type>
    <transaction_id>43671</transaction_id>
    <usage>40208 concert tickets</usage>
    <remote_ip>245.253.2.12</remote_ip>
    <return_success_url>http://www.example.com/success</return_success_url>
    <return_failure_url>http://www.example.com/failure</return_failure_url>
    <amount>100</amount>
    <currency>EUR</currency>
    <customer_email>travis@example.com</customer_email>
    <customer_phone>+1987987987987</customer_phone>
    <billing_address>
        <first_name>Travis</first_name>
        <last_name>Pastrana</last_name>
        <address1>Muster Str. 12</address1>
        <zip_code>10178</zip_code>
        <city>Los Angeles</city>
        <state>CA</state>
        <country>US</country>
    </billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: cashu
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name

Parameter	Required	Format	Description
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries

Country name	Country code
Algeria	DZ
Bahrain	BH
Egypt	EG
Gambia	GM
Ghana	GH
India	IN
Iran	IR
Iraq	IQ
Israel	IL
Jordan	JO
Kenya	KE
Korea	KP
Kuwait	KW
Lebanon	LB
Libya	LY
Malaysia	MY
Mauritania	MR
Morocco	MA
Nigeria	NG
Oman	OM
Pakistan	PK
Palestine	PS
Qatar	QA
Saudi Arabia	SA
Sierra Leone	SL

Country name	Country code
Sudan	SD
Syria	SY
Tanzania	TZ
Tunisia	TN
Turkey	TR
United Arab Emirates	AE
United States	US
Yemen	YE

Supported currencies

Currency name	Currency code
Algerian Dinar	DZD
AmericanDollar	USD
EgyptianPound	EGP
Euro	EUR
JordanianDinar	JOD
LebanesePound	LBP
MoroccanDirham	MAD
Qatar Riyal	QAR
Saudi Riyal	SAR
Turkish Lira	TRY
UAE Dirham	AED

Successful Response

```
stdClass Object
(
    [transaction_type] => cashu
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:57.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=>
<transaction_type content=[cashu]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:57Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "cashu",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:57Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>cashu</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:57Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
{
    [transaction_type] => cashu
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:57.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
}
```

```

<payment_response content=[>
  <transaction_type content=[cashu]>
  <status content=[error]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <code content=[110]>
  <message content=[Something went wrong, please contact support!]>
  <timestamp content=[2019-03-14T12:05:57Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[100]>
  <currency content=[EUR]>
  <sent_to_acquirer content=[true]>
]>

```

```
{
  transaction_type: "cashu",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  code: "110",
  message: "Something went wrong, please contact support!",
  timestamp: "2019-03-14T12:05:57Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "EUR",
  sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>cashu</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

NEOSURF

- Neosurf is a prepaid card (voucher) that is used for online shopping. The card is available in over 100,000 stores worldwide, where customers can buy the prepaid vouchers, denominated up to EUR 250.00 or its equivalent in other currencies.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>neosurf</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <voucher_number></voucher_number>
  <customer_email>travis@example.com</customer_email>
  <customer_phone>+1987987987987</customer_phone>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>23, Doestreet</address1>
    <zip_code>11923</zip_code>
    <city>New York City</city>
    <country>DE</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: neosurf
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
voucher_number	required	string(10)	Voucher number. Alphanumeric maximum 10 characters
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries

Country Name	Country code
Austria	AT
Algeria	DZ
Australia	AU
Burundi	BI
Burkina Faso	BF
Benin	BJ
Belgium	BE
Cape Verde	CV
Cyprus	CY
Canada	CA
Central African Republic	CF
Chad	TD
Colombia	CO
Congo	CG
Cameroon	CM
Democratic Republic of Congo	CD
Denmark	DK
Equatorial Guinea	GQ
France	FR
Gambia	GM
Germany	DE
Gabon	GA
Guinea	GN
Ghana	GH
Guinea-Bissau	GW
Hong Kong	HK
Ireland	IE
Italy	IT
Ivory Coast	CI
Kenya	KE
Luxembourg	LU
Malawi	MW
Mozambique	MZ
Morocco	MA
Mauritania	MR
Mali	ML
Niger	NE
Nigeria	NG

Country Name	Country code
Netherlands	NL
Norway	NO
Poland	PL
Portugal	PT
Rwanda	RW
Russia	RU
Romania	RO
Sweden	SE
Spain	ES
Sierra Leone	SL
Senegal	SN
Sao Tome and Principe	ST
Switzerland	CH
Serbia	RS
Turkey	TR
Togo	TG
Tunisia	TN
United Kingdom	GB
United Republic of Tanzania	TZ
Uganda	UG
Zimbabwe	ZW
Zambia	ZM

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>neosurf</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>4417721403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>neosurf</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

PAYSAFECARD

ⓘ Paysafecard transactions are only asynchronous. After a successful validation of transaction parameters transaction status is set to pending async the user is redirected to Paysafecard authentication page where he enters additional information to finish the payment. When the payment reached a final state Genesis gateway sends notification to merchant on the configured url into its account.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\Paysafecard');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('USD')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PaySafeCardRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PaySafeCardRequest request = new PaySafeCardRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.paysafecard(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "USD",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>paysafecard</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<amount>100</amount>
<currency>USD</currency>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: paysafecard
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name

Parameter	Required	Format	Description
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country name	Country code
Austria	AT
Belgium	BE
Canada	CA
Czech Republic	CZ
Cyprus	CY
Croatia	HR
Denmark	DK
Finland	FI
France	FR
Germany	DE
Greece	GR
Hungary	HU
Ireland	IE
Italy	IT
Luxembourg	LU
Mexico	MX
Malta	MT
Netherlands	NL
Norway	NO
Portugal	PT
Poland	PL
Romania	RO
Sweden	SE
Slovenia	SI
Slovakia	SK

Country name	Country code
Switzerland	CH
Spain	ES
Turkey	TR
United Arab Emirates	AE
United Kingdom	GB
United States	US

Successful Response

```
stdClass Object
(
    [transaction_type] => paysafecard
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:57.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[

<transaction_type content=[paysafecard]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:57Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "paysafecard",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:57Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>paysafecard</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:57Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
{
    [transaction_type] => paysafecard
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
    (
        [date] => 2019-03-14 12:05:57.000000
        [timezone_type] => 2
        [timezone] => Z
    )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
}
```

```
<payment_response content=[<transaction_type content=[paysafecard]>
<status content=error>
<mode content=live>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:57Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "paysafecard",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:57Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>paysafecard</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Online Banking ePayments (oBeP)

Online Banking ePayments refer to payment methods that are used as an alternative to credit card payments allowing consumers to pay online with their bank account.

ASTROPAY DIRECT

ⓘ Astropay Direct is Online Banking ePayment which allows the customers to pay with their bank accounts in their local currency. Customers go straight from the merchant checkout page to a payment interface, which connects the customer with their bank of preference.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>astropay_direct</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>4029 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Salvador</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: astropay_direct
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR
BR
CL
CN
CO
MX
PE
UY

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>astropay_direct</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>astrapay_direct</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestampl>2019-03-14T12:05:57Z</timestampl>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BANCO DO BRASIL

 Banco do Brasil offers online bank transfer payment service.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>banco_do_brasil</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Natal</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: banco_do_brasil
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>banco_do_brasil</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>banco_do_brasil</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BANCOMER

i Bancomer offers two options for payments in Mexico, cash payment and bank transfer.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bancomer</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Mexico City</city>
    <country>MX</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: bancomer
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
MX

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bancomer</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bancomer</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BRADESCO

 Bradesco is a payment service in Brazil

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bradesco</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Rio de Janeiro</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: bradesco
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bradesco</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bradesco</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

ENTERCASH

 Entercash is a payment method provider across Europe

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ''
<payment_transaction>
  <transaction_type>entercash</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <consumer_reference>123456</consumer_reference>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Graz</city>
    <country>AT</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: entercash
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
iban	optional	string	Valid German (when selected Germany as country) or Austrian (when selected Austria as country) IBAN
bic	optional	string	Valid BIC when Germany or Austria selected as country
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported currencies and countries:

Currency code	Country code
EUR	AT
EUR	DE
EUR	FI
SEK	SE

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>entercash</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>entercash</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>10</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:57Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant

Parameter	Type	Description
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

EPS

EPS is the main bank transfer payment method in Austria. Every transaction is guaranteed via the scheme.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setPaymentType('eps')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReturnSuccessUrl('http://www.example.com/success')
    ->setReturnFailureUrl('http://www.example.com/failure')
    ->setAmount('100')
    ->setCurrency('EUR')

// Billing Address
->setBillingFirstName('Barney')
->setBillingLastName('Rubble')
->setBillingAddress1('14, Nerazdelni str')
->setBillingZipCode('1407')
->setBillingCity('Vienna')
->setBillingCountry('AT');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setTransactionId("43671");
        request.setPaymentType("eps");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Rubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("1407");
        request.setBillingCity("Vienna");
        request.setBillingCountry("AT");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.ppro(
{
    "transaction_id": "43671",
    "payment_type": "eps",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "billing_address": {
        "first_name": "Barney",
        "last_name": "Rubble",
        "address1": "14, Nerazdelni str",
        "zip_code": "1407",
        "city": "Vienna",
        "country": "AT"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <transaction_id>43671</transaction_id>
  <payment_type>eps</payment_type>
  <usage>40200 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>vienna</city>
    <country>AT</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	ppro or eps. Contact tech support at tech-support@emerchantpay.net for more details.
transaction_id	required	string(255)	Unique transaction id defined by merchant
payment_type	required ¹	eps	EPS. Contact tech support for more details.
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

1 - payment_type must be submitted only when the transaction type is set to ppro

Supported countries and currencies

Currency code	Country code

Currency code	Country code
EUR	AT

Successful Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => Datetime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>ppro</transaction_type>
<status>pending_async</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
<timestamp>2019-03-14T12:05:58Z</timestamp>
<descriptor>descriptor one</descriptor>
<amount>100</amount>
<currency>EUR</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>ppro</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>110</code>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

GIROPAY

GiroPay is a popular real-time bank transfer payment method in Germany that integrates more than 1,500 German banks.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setPaymentType('giropay')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReturnSuccessUrl('http://www.example.com/success')
    ->setReturnFailureUrl('http://www.example.com/failure')
    ->setAmount('100')
    ->setCurrency('EUR')
    ->setBic('GENODETT488')
    ->setIban('DE0744488880123456789')

// Billing Address
->setBillingFirstName('Barney')
->setBillingLastName('Rubble')
->setBillingAddress1('14, Nerazdelni str')
->setBillingZipCode('1407')
->setBillingCity('Berlin')
->setBillingCountry('DE');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setTransactionId("43671");
        request.setPaymentType("giropay");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setBic("GENODETT488");
        request.setIban("DE07444488880123456789");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Rubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("1407");
        request.setBillingCity("Berlin");
        request.setBillingCountry("DE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.ppro(
{
    "transaction_id": "43671",
    "payment_type": "giropay",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "bic": "GENODETT488",
    "iban": "DE07444488880123456789",
    "billing_address": {
        "first_name": "Barney",
        "last_name": "Rubble",
        "address1": "14, Nerazdelni str",
        "zip_code": "1407",
        "city": "Berlin",
        "country": "DE"
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <transaction_id>43671</transaction_id>
  <payment_type>giropay</payment_type>
  <usage>40201 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <bic>GENODETT488</bic>
  <iban>DE07444488800123456789</iban>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Berlin</city>
    <country>DE</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	ppro or giropay . Contact tech support at tech-support@emerchantpay.net for more details.
transaction_id	required	string(255)	Unique transaction id defined by merchant
payment_type	required ¹	giropay	GiroPay. Contact tech support for more details.
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
bic	required	string(11)	Valid BIC string. Must be 8 or 11 characters long
iban	required*	string(22)	String must start with "DE" followed by 20 digits
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

```
1 - payment_type must be submitted only when the transaction type is set to ppro
```

Supported currencies and countries

Currency code	Country code
EUR	DE

Successful Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61>
<timestamp content="2019-03-14T12:05:58Z">
<descriptor content=[Descriptor one]>
<amount content="100">
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>ppro</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant

Parameter	Type	Description
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
{
    [transaction_type] => ppro
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
    (
        [date] => 2019-03-14 12:05:58.000000
        [timezone_type] => 2
        [timezone] => Z
    )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
}
```

```
<payment_response content=>
<transaction_type content=[ppro]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>pro</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:58Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

iDEBIT

i iDebit connects consumers to their online banking directly from checkout, enabling secure, real-time payments without a credit card. Using iDebit allows consumers to transfer funds to merchants without revealing their personal banking information.

The main difference between iDebit and InstaDebit is that InstaDebit uses eCheck, iDebit uses online bank transfer.

iDebit transactions have payins and payouts. The payin is asynchronous, while the payout is synchronous.

iDebit Payin transaction - after a successful validation of transaction parameters, transaction status is set to pending async and the consumer is redirected to the iDebit consumers page. The consumer then carries out the specified transaction details and finalizes the transaction. The gateway waits for an async notification from iDebit with the payment result of the consumer bank payment executed on the iDebit consumers page, and updates the transaction status accordingly.

When the payment reaches a final state, the gateway sends a notification to the merchant on the configured notification URL for the merchant. iDebit Payout transaction - the transaction is synchronous and transaction status is set immediately after the response.

Supported countries

Country name	Country code
Canada	CA

iDebit is available only for Canadian merchants and consumers.

PAYIN

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\OnlineBankingPayments\iDebit\Payin');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setCustomerAccountId('1534537')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setNotificationUrl('https://www.example.com/notification')
->setReturnUrl('https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f')
->setAmount('100')
->setCurrency('CAD')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('46 Donora Dr')
->setBillingZipCode('M4B1B3')
->setBillingCity('Toronto')
->setBillingState('ON')
->setBillingCountry('CA');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.oBeP.IDebitPayInRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        IDebitPayInRequest request = new IDebitPayInRequest();

        request.setTransactionId("43671");
        request.setCustomerAccountId("1534537");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnUrl(new URL("https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("CAD");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("46 Donora Dr");
        request.setBillingZipCode("M4B1B3");
        request.setBillingCity("Toronto");
        request.setBillingState("ON");
        request.setBillingCountry("CA");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.idebit_payin(
{
    "transaction_id": "43671",
    "customer_account_id": "1534537",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "notification_url": "https://www.example.com/notification",
    "return_url": "https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f",
    "amount": "100",
    "currency": "CAD",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "46 Donora Dr",
        "zip_code": "M4B1B3",
        "city": "Toronto",
        "state": "ON",
        "country": "CA"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>debit_payin</transaction_type>
<transaction_id>43671</transaction_id>
<customer_account_id>1534537</customer_account_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<notification_url>https://www.example.com/notification</notification_url>
<return_url>https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f</return_url>
<amount>100</amount>
<currency>CAD</currency>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>46 Donora Dr</address1>
<zip_code>M4B1B3</zip_code>
<city>Toronto</city>
<state>ON</state>
<country>CA</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: debit_payin
transaction_id	required	string(30)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
customer_account_id	required	string(20)	Unique consumer account ID
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address

Parameter	Required	Format	Description
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

```
stdClass Object
{
    [transaction_type] => idebit_payin
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] =>
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[

<transaction_type content=[idebit_payin]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[CAD]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "idebit_payin",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>idebit_payin</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>CAD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
-----------	------	-------------

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => idebit_payin
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 320
    [message] => amount is missing!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[<transaction_type content=[idebit_payin]>
<status content="error">
<mode content="live">
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[320]>
<message content=[amount is missing!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[CAD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "idebit_payin",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "320",
    message: "amount is missing!",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "false",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>idebit_payin</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>320</code>
  <message>amount is missing!</message>
  <timestamp>2019-03-14T12:05:58Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>CAD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

PAYOUT

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\OnlineBankingPayments\iDebit\Payout');
$request = $genesis->request();

$request
  ->setReferenceId('43672')
  ->setAmount('100')
  ->setCurrency('CAD');

try {
  $genesis->execute();
  $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
  $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.OBeP.IDebitPayInRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        IDebitPayInRequest request = new IDebitPayInRequest();

        request.setReferenceId("43672");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("CAD");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.idebit_payin(
{
    "reference_id": "43672",
    "amount": "100",
    "currency": "CAD"
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<reference_id>43672</reference_id>
<amount>100</amount>
<currency>CAD</currency>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: idebit_payin
transaction_id	required	string(30)	Unique transaction id defined by merchant
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => idebit_payin
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[idebit_payin]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<amount content=[100]>
<currency content=[CAD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "idebit_payin",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:58Z",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>idebit_payin</transaction_type>
<status>approved</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestamp>2019-03-14T12:05:58Z</timestamp>
<amount>100</amount>
<currency>CAD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => idebit_payin
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [technical_message] => amount is missing!
    [message] => Please check input data for errors!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=>
<transaction_type content=[idebit_payin]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<technical_message content=[amount is missing!]>
<message content=[please check input data for errors!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<amount content=[100]>
<currency content=[CAD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "idebit_payin",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    technical_message: "amount is missing!",
    message: "Please check input data for errors!",
    timestamp: "2019-03-14T12:05:58Z",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>idebit_payin</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>110</code>
<technical_message>amount is missing!</technical_message>
<message>Please check input data for errors!</message>
<timestamp>2019-03-14T12:05:58Z</timestamp>
<amount>100</amount>
<currency>CAD</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

IDEAL

iDeal is the most popular payment method in the Netherlands and is a real-time bank transfer system covering all major Dutch consumer banks.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setPaymentType('ideal')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('EUR')

// Billing Address
->setBillingFirstName('Barney')
->setBillingLastName('Rubble')
->setBillingAddress1('14, Nerazdelni str')
->setBillingZipCode('1407')
->setBillingCity('Amsterdam')
->setBillingCountry('NL');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setTransactionId("43671");
        request.setPaymentType("ideal");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Bubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("1407");
        request.setBillingCity("Amsterdam");
        request.setBillingCountry("NL");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.ppro(
{
    "transaction_id": "43671",
    "payment_type": "ideal",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "billing_address": {
        "first_name": "Barney",
        "last_name": "Bubble",
        "address1": "14, Nerazdelni str",
        "zip_code": "1407",
        "city": "Amsterdam",
        "country": "NL"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <transaction_id>43671</transaction_id>
  <payment_type>iDeal</payment_type>
  <usage>40200 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Amsterdam</city>
    <country>NL</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	ppro or ideal . Contact tech support at tech-support@emerchantpay.net for more details.
transaction_id	required	string(255)	Unique transaction id defined by merchant
payment_type	required ¹	ideal	iDeal. Contact tech support at tech-support@emerchantpay.net for more details.
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

1 - payment_type must be submitted only when the transaction type is set to ppro

Supported currencies and countries

Currency code	Country code

Currency code	Country code
EUR	NL

Successful Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => Datetime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[>
<transaction_type content=[ppro]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>ppro</transaction_type>
<status>pending_async</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
<timestamp>2019-03-14T12:05:58Z</timestamp>
<descriptor>descriptor one</descriptor>
<amount>100</amount>
<currency>EUR</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>ppro</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>110</code>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

INSTADEBIT

InstaDebit connects consumers to their online banking directly from checkout, enabling secure, realtime payments without a credit card. Using InstaDebit allows consumers to transfer funds to merchants without revealing their personal banking information.

The main difference between iDebit and InstaDebit is that InstaDebit uses eCheck, iDebit uses online bank transfer.

InstaDebit transactions have payins and payouts. The payin is asynchronous, while the payout is synchronous.

InstaDebit Payin transaction - after a successful validation of transaction parameters, transaction status is set to pending async and the consumer is redirected to the InstaDebit consumers page. The consumer then carries out the specified transaction details and finalizes the transaction. The gateway waits for an async notification from InstaDebit with the payment result of the consumer bank payment executed on the InstaDebit consumers page, and updates the transaction status accordingly.

When the payment reaches a final state, the gateway sends a notification to the merchant on the configured notification URL for the merchant.

InstaDebit Payout transaction - the transaction is synchronous and transaction status is set immediately after the response.

Supported countries

Country name	Country code
Canada	CA

InstaDebit is available only for Canadian merchants and consumers.

PAYIN

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\OnlineBankingPayments\InstaDebit\Payin');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setCustomerAccountId('118221674199')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setNotificationUrl('https://www.example.com/notification')
    ->setReturnUrl('https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f')
    ->setAmount('100')
    ->setCurrency('CAD')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('46 Donora Dr')
->setBillingZipCode('M4B1B3')
->setBillingCity('Toronto')
->setBillingState('ON')
->setBillingCountry('CA');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.oBeP.InstaDebitPayInRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

```

```

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        InstaDebitPayInRequest request = new InstaDebitPayInRequest();

        request.setTransactionId("43671");
        request.setCustomerAccountId("118221674199");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnUrl(new URL("https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("CAD");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("46 Donora Dr");
        request.setBillingZipCode("M4B1B3");
        request.setBillingCity("Toronto");
        request.setBillingState("ON");
        request.setBillingCountry("CA");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.insta_debit_payin(
{
    "transaction_id": "43671",
    "customer_account_id": "118221674199",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "notification_url": "https://www.example.com/notification",
    "return_url": "https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f",
    "amount": "100",
    "currency": "CAD",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "46 Donora Dr",
        "zip_code": "M4B1B3",
        "city": "Toronto",
        "state": "ON",
        "country": "CA"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>insta_debit_payin</transaction_type>
<transaction_id>43671</transaction_id>
<customer_account_id>118221674199</customer_account_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<notification_url>https://www.example.com/notification</notification_url>
<return_url>https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f</return_url>
<amount>100</amount>
<currency>CAD</currency>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>46 Donora Dr</address1>
<zip_code>M4B1B3</zip_code>
<city>Toronto</city>
<state>ON</state>
<country>CA</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: insta_debit_payin
transaction_id	required	string(30)	Unique transaction id defined by merchant
customer_account_id	required	string(20)	Unique consumer account ID
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_url	required	url	URL where consumer is sent to after payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address

Parameter	Required	Format	Description
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

```
stdClass Object
{
    [transaction_type] => insta_debit_payin
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] =>
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[

<transaction_type content=[insta_debit_payin]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[CAD]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "insta_debit_payin",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>insta_debit_payin</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>CAD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
-----------	------	-------------

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
{
    [transaction_type] => insta_debit_payin
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [message] => Please check input data for errors!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[<transaction_type content=[insta_debit_payin]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<message content=[Please check input data for errors!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[CAD]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "insta_debit_payin",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    message: "Please check input data for errors!",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>insta_debit_payin</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb06664ad7e5d5d48</unique_id>
  <message>Please check input data for errors!</message>
  <tstamp>2019-03-14T12:05:58Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>CAD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

PAYOUT

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\OnlineBankingPayments\InstaDebit\Payout');
$request = $genesis->request();

$request
  ->setReferenceId('43672')
  ->setAmount('100')
  ->setCurrency('CAD');

try {
  $genesis->execute();
  $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
  $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.OBeP.InstaDebitPayOutRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        InstaDebitPayOutRequest request = new InstaDebitPayOutRequest();

        request.setReferenceId("43672");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("CAD");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.insta_debit_payout(
{
    "reference_id": "43672",
    "amount": "100",
    "currency": "CAD"
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<reference_id>43672</reference_id>
<amount>100</amount>
<currency>CAD</currency>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: insta_debit_payout
transaction_id	required	string(30)	Unique transaction id defined by merchant
reference_id	required	string(32)	unique id of approved InstaDebit Payin transaction. See InstaDebit Payin Response, unique id
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details Max amount in minor currency unit: 999999
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => insta_debit_payout
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[insta_debit_payout]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<amount content=[100]>
<currency content=[CAD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "insta_debit_payout",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:58Z",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>insta_debit_payout</transaction_type>
<status>approved</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestamp>2019-03-14T12:05:58Z</timestamp>
<amount>100</amount>
<currency>CAD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => insta_debit_payout
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 320
    [technical_message] => amount is missing!
    [message] => Please check input data for errors!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [amount] => 100
    [currency] => CAD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=>
<transaction_type content=>insta_debit_payout</transaction_type>
<status content=>error</status>
<mode content=>live</mode>
<transaction_id content=>43671</transaction_id>
<unique_id content=>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code content=>320</code>
<technical_message content=>amount is missing!</technical_message>
<message content=>Please check input data for errors!</message>
<timestamp content=>2019-03-14T12:05:58Z</timestamp>
<amount content=>100</amount>
<currency content=>CAD</currency>
<sent_to_acquirer content=>false</sent_to_acquirer>
]>
```

```
{
    transaction_type: "insta_debit_payout",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "320",
    technical_message: "amount is missing!",
    message: "Please check input data for errors!",
    timestamp: "2019-03-14T12:05:58Z",
    amount: "100",
    currency: "CAD",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>insta_debit_payout</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>320</code>
    <technical_message>amount is missing!</technical_message>
    <message>Please check input data for errors!</message>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <amount>100</amount>
    <currency>CAD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(30)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

INSTANTTRANSFER

 InstantTransfer is a payment method in Germany

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>instant_transfer</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <iban>DE07444488880123456789</iban>
  <bic>GENODETT488</bic>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Berlin</city>
    <country>DE</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: instant_transfer
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
iban	optional	string(34)	Customer's IBAN number
bic	optional	string(11)	SWIFT/BIC code of the customer's bank
customer_email	optional	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name

Parameter	Required	Format	Description
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country code
DE

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>instant_transfer</transaction_type>
<status>pending_async</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
<timestamp>2019-03-14T12:05:58Z</timestamp>
<descriptor>descriptor one</descriptor>
<amount>100</amount>
<currency>EUR</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>instant_transfer</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb36664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:58Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

ITAU

 Itau is a real-time online bank transfer method and a virtual card.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>itau</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Rio de Janeiro</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: itau
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>itau</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:58Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>ita</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:58Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

MULTIBANCO

ⓘ Multibanco allows Portuguese shoppers to do payments through the Internet by using virtual credit cards

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ''
<payment_transaction>
  <transaction_type>multibanco</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40290 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Porto</city>
    <country>PT</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: multibanco
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	optional	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

`required*` = conditionally required

Supported countries:

Country code
PT

Successful Response

This request is not implemented yet
This request is not implemented yet
This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>multibanco</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:58Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>multibanco</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>10</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:58Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

MY BANK

My Bank is an overlay banking system for Belgium, France, Italy and Luxembourg.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setPaymentType('mybank')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReturnSuccessUrl('http://www.example.com/success')
    ->setReturnFailureUrl('http://www.example.com/failure')
    ->setAmount('100')
    ->setCurrency('EUR')

// Billing Address
->setBillingFirstName('Barney')
->setBillingLastName('Rubble')
->setBillingAddress('14, Nerazdelni str')
->setBillingZipCode('1407')
->setBillingCity('Rome')
->setBillingCountry('IT');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {
        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setTransactionId("43671");
        request.setPaymentType("mybank");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Rubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("1407");
        request.setBillingCity("Rome");
        request.setBillingCountry("IT");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.ppro(
{
    "transaction_id": "43671",
    "payment_type": "mybank",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "billing_address": {
        "first_name": "Barney",
        "last_name": "Rubble",
        "address1": "14, Nerazdelni str",
        "zip_code": "1407",
        "city": "Rome",
        "country": "IT"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <transaction_id>43671</transaction_id>
  <payment_type>mybank</payment_type>
  <usage>40200 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Rome</city>
    <country>IT</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	ppro or mybank . Contact tech support at tech-support@emerchantpay.net for more details.
transaction_id	required	string(255)	Unique transaction id defined by merchant
payment_type	required ¹	ppro	MyBank. Contact tech support at tech-support@emerchantpay.net for more details.
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

¹ - payment_type must be submitted only when the transaction type is set to ppro

Supported currencies and countries

Currency code	Country code
EUR	BE, FR, IT, LU

Successful Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[>
<transaction_type content=[ppro]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>ppro</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:58.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:58Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:58Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>ppro</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>110</code>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:05:58Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

ONLINE BANKING

Online Banking is an oBeP-style alternative payment method that allows you to pay directly with your ebank account. After initiating a transaction, the online banking will redirect you to their page. There you will find a list with available banks to finish the payment.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>online_banking</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>50000</amount>
  <currency>CNY</currency>
  <customer_email>travis@example.com</customer_email>
  <bank_code>CITIC</bank_code>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: online_banking
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment

Parameter	Required	Format	Description
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
bank_code	required	bank code	Must contain Bank code
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
payment_type	required*	string	The payment type describes the type of online banking used to process the transaction. Allowed values are quick_payment, qr_payment or online_banking, but they may vary based on the specific setup. If omitted, transaction will be processed with online_banking payment_type.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Supported currencies

Currency name	Currency code
China yen	CNY
Indonesian rupiah	IDR
Malaysian ringgit	MYR
Thai baht	THB

BANK CODES

ⓘ Bank codes may vary based on the specific setup.

For CNY currency

Bank Name	Bank Code
Agricultural Bank of China	ABC
Bank of China	BOC
China Union Pay	QUICKPAY
China Minsheng Bank	CMBC
China Construction Bank	CCB
China Citic Bank	CITIC
China Everbright Bank	CEB
China Guangfa Bank	GDB
China Postal Savings Bank	PSBC
Industrial and Commercial Bank of China	ICBC
Bank of Communications	BOCO
Pingan Bank	PINGANBANK
Shanghai Pudong Development Bank	SPDB

Bank Name	Bank Code
Industrial Bank	CIB
Huaxia Bank	HXB

For THB currency:

Bank Name	Bank Code
Bangkok Bank	BBL_THB
Kasikorn Bank	KKB_THB
Krungsri (Bank of Ayudhya Public Company Limited)	BAY_THB
Krung Thai Bank	KTB_THB
Siam Commercial Bank	SCB_THB
UOBT	UOB_THB

For MYR currency:

Bank Name	Bank Code
CIMB Clicks Bank	CIMB_MYR
Hong Leong Bank	HLE_MYR
May Bank	MAY_MYR
Public Bank	PBE_MYR
RHB Bank	RHB_MYR

For IDR currency:

Bank Name	Bank Code
Bank Central Asia	BCA_IDR
Bank Rakyat Indonesia	BRI_IDR
Bank Negara Indonesia	BNI_IDR
BTN Bank	BTN_IDR
CIMB Clicks Indonesia	CIMB_IDR
Danamon Bank	DMN_IDR
Mandiri Bank	MDR_IDR
Permata Bank	PMB_IDR
Virtual Account Bank	VA

For INR currency:

Bank Name	Bank Code
Netbanking	NB
UPI	UI

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>online_banking</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <tstamp>2019-03-14T12:05:59Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>50000</amount>
  <currency>CNY</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>online_banking</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <technical_message>amount is missing</technical_message>
  <message>Please check input data for errors!</message>
  <tstamp>2019-03-14T12:05:59Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>50000</amount>
  <currency>CNY</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

P24

Tip P24 transactions are only asynchronous. After a successful validation of transaction parameters, transaction status is set to pending async and the user is redirected to the P24 payment page where he enters additional information to finish the payment. When the payment reaches a final state, Genesis gateway sends a notification to the merchant.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\P24');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReturnSuccessUrl('http://www.example.com/success')
    ->setReturnFailureUrl('http://www.example.com/failure')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.P24Request;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        P24Request request = new P24Request();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.p24(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "USD",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>p24</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <customer_email>travis@example.com</customer_email>
  <customer_phone>+1987987987987</customer_phone>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: p24
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => p24
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

    <transaction_type content=[p24]>
    <status content=[pending_async]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <technical_message content=[Transaction successful!]>
    <message content=[Transaction successful!]>
    <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
    <timestamp content=[2019-03-14T12:05:59Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[USD]>
    <sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "p24",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>p24</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => p24
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[p24]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:05:59Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "p24",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>p24</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>110</code>
<message>Something went wrong, please contact support!</message>
<timestamp>2019-03-14T12:05:59Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

PAYU

 PayU is a payment method for Czech Republic and Poland

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>payu</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>PLN</currency>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>krakov</city>
    <country>PL</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: payu
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

Parameter	Required	Format	Description
customer_email	optional	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported currencies and countries:

Currency code	Country code
CZK	CZ
PLN	PL

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>payu</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb0664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>PLN</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant

Parameter	Type	Description
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>payu</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>10</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>PLN</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

POLI

i POLI is Australia's most popular online real time debit payment system. They process in excess of 1 billion dollars per year in payments and are trusted by a variety of Australia's most respected companies. POLI is available within Australia and New Zealand. POLI's transactions are only asynchronous. After a successful validation of transaction parameters transaction status is set to pending sync the user is redirected to POLI authentication page where he enters additional information to finish the payment. When the payment reached a

final state Genesis gateway sends notification to merchant on the configured url into its account.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\POLi');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('AUD')

// Billing Address
->setBillingFirstName('Barney')
->setBillingLastName('Rubble')
->setBillingAddress1('14, Nerazdelni str')
->setBillingZipCode('1407')
->setBillingCity('Sofia')
->setBillingCountry('AU')
->setBillingState('AC');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.POLiRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        POLiRequest request = new POLiRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("AUD");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Rubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("1407");
        request.setBillingCity("Sofia");
        request.setBillingCountry("AU");
        request.setBillingState("AC");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.poli(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "AUD",
    "billing_address": {
        "first_name": "Barney",
        "last_name": "Rubble",
        "address1": "14, Nerazdelni str",
        "zip_code": "1407",
        "city": "Sofia",
        "country": "AU",
        "state": "AC"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>poli</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<amount>100</amount>
<currency>AUD</currency>
<billing_address>
<first_name>Barney</first_name>
<last_name>Rubble</last_name>
<address1>14, Nerazdelni str</address1>
<zip_code>1407</zip_code>
<city>Sofia</city>
<country>AU</country>
<state>AC</state>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: poli
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address

Parameter	Required	Format	Description
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported bank countries:

Country name	Country code
Australia	AU
New Zealand	NZ

Supported currencies:

Currency name	Currency code
Australian dollar	AUD
New Zealand dollar	NZD

Successful Response

```
stdClass Object
(
    [transaction_type] => poli
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => AUD
    [sent_to_acquirer] => true
)
```

```

<payment_response content=[

    <transaction_type content=[poli]>
    <status content=[pending_async]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <technical_message content=[Transaction successful!]>
    <message content=[Transaction successful!]>
    <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
    <timestamp content=[2019-03-14T12:05:59Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[AUD]>
    <sent_to_acquirer content=[true]>
]
```

```
{
    transaction_type: "poli",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "AUD",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>poli</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>descriptor one</descriptor>
    <amount>100</amount>
    <currency>AUD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => poli
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => AUD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

    <transaction_type content=[poli]>
    <status content=[error]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <code content=[110]>
    <message content=[Something went wrong, please contact support!]>
    <timestamp content=[2019-03-14T12:05:59Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[AUD]>
    <sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "poli",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "AUD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>poli</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>110</code>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>AUD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:12Z

Parameter	Type	Description
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

PSE (PAGOS SEGUROS EN LINEA)

ⓘ PSE (Pagos Seguros en Linea) is the preferred alternative payment solution in Colombia. The solution consists of an interface that offers the client the option to pay for their online purchases in cash, directing it to their online banking.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>pse</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>4029 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Bogota</city>
    <country>CO</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: pse
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name

Parameter	Required	Format	Description
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
CO

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>pse</transaction_type>
<status>pending_async</status>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb0664a6d7e5d5d48</unique_id>
<redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestamp>2019-03-14T12:05:59Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>pse</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb06664abd7e5d5d48</unique_id>
  <code>10</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

QQPAY

i QQPay is a payment method provider across China.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>qqpay</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>1000</amount>
  <currency>CNY</currency>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Buenos Aires</city>
    <country>AR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: qqpay
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	optional	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>qpay</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>1000</amount>
  <currency>CNY</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>qpay</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>10</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>1000</amount>
  <currency>CNY</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant

Parameter	Type	Description
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

RAPIPAGO

ⓘ Rapipago from Argentina is an offline payment method used for online purchases. Shoppers buy their goods and services online and pay offline at one of the 6,000+ Rapipago payment locations.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>rapipago</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Buenos Aires</city>
    <country>ARG</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: rapipago
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

Parameter	Required	Format	Description
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>rapipago</transaction_type>
<status>pending_async</status>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a8d7e5d5d48</unique_id>
<redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestampl>2019-03-14T12:05:59Z</timestampl>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>rapipago</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>108</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SAFETYPAY

 Safetypay is a real-time bank transfer system that operates in more than 10 different countries. Their main market is in Latin America.

Request

```
This request is not implemented yet
```

```
This request is not implemented yet
```

```
This request is not implemented yet
```

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>safetypay</transaction_type>
  <transaction_id>43671</transaction_id>
  <payment_type>safetypay</payment_type>
  <usage>40288 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference></consumer_reference>
  <national_id></national_id>
  <birth_date></birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Tampico</city>
    <country>MX</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
  ->setTransactionId('43671')
  ->setPaymentType('safetypay')
  ->setUsage('40288 concert tickets')
  ->setRemoteIp('245.253.2.12')
  ->setReturnSuccessUrl('http://www.example.com/success')
  ->setReturnFailureUrl('http://www.example.com/failure')
  ->setAmount('100')
  ->setCurrency('USD')
  ->setConsumerReference('')
  ->setNationalId('')
  ->setBirthDate('')
  ->setCustomerEmail('travis@example.com')

// Billing Address
  ->setBillingFirstName('Barney')
  ->setBillingLastName('Rubble')
  ->setBillingAddress1('14, Nerazdelni str')
  ->setBillingZipCode('1407')
  ->setBillingCity('Tampico')
  ->setBillingCountry('MX')

// Risk Params
->setRiskUserId('123456');

try {
  $genesis->execute();
  $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
  $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setTransactionId("43671");
        request.setPaymentType("safetypay");
        request.setUsage("40288 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setConsumerReference("");
        request.setNationalId("");
        request.setBirthdate("");
        request.setCustomerEmail("travis@example.com");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Rubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("14087");
        request.setBillingCity("Tampico");
        request.setBillingCountry("MX");

        // Risk Params
        request.setRiskUserId("123456");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
  return console.log(reason);
};

var success = function(data) {
  return console.log(data);
};

transaction.ppro(
{
  "transaction_id": "43671",
  "payment_type": "safetypay",
  "usage": "40208 concert tickets",
  "remote_ip": "245.253.2.12",
  "return_success_url": "http://www.example.com/success",
  "return_failure_url": "http://www.example.com/failure",
  "amount": "100",
  "currency": "USD",
  "consumer_reference": null,
  "national_id": null,
  "birth_date": null,
  "customer_email": "travis@example.com",
  "billing_address": {
    "first_name": "Barney",
    "last_name": "Rubble",
    "address1": "14, Nerazdelni str",
    "zip_code": "1407",
    "city": "Tampico",
    "country": "MX"
  },
  "risk_params": {
    "user_id": "123456"
  }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>ppro</transaction_type>
<transaction_id>43671</transaction_id>
<payment_type>safetypay</payment_type>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<amount>100</amount>
<currency>USD</currency>
<consumer_reference></consumer_reference>
<national_id></national_id>
<birth_date></birth_date>
<customer_email>travis@example.com</customer_email>
<billing_address>
<first_name>Barney</first_name>
<last_name>Rubble</last_name>
<address1>14, Nerazdelni str</address1>
<zip_code>1407</zip_code>
<city>Tampico</city>
<country>MX</country>
</billing_address>
<risk_params>
<user_id>123456</user_id>
</risk_params>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	Two types are supported - safetypay transaction type without payment_type and ppro transaction type with payment_type . Contact tech support at tech-support@emerchantpay.net for more details.
transaction_id	required	string(255)	Unique transaction id defined by merchant
payment_type	required ¹	safetypay	SafetyPay. Contact tech support for more details
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details

Parameter	Required	Format	Description
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

1 - payment_type must be submitted only when the transaction type is set to ppro

Supported countries:

Country
AT
BE
BR
CL
CO
CR
DE
EC
ES
MX
NL
PE
PR

Supported currencies:

Currency Code
EUR
USD

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>safetypay</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[

    <transaction_type content=[ppro]>
    <status content=[pending_async]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <technical_message content=[Transaction successful!]>
    <message content=[Transaction successful!]>
    <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
    <timestamp content=[2019-03-14T12:05:59Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[USD]>
    <sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>ppro/safetypay</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SANTANDER

ⓘ Santander is an online bank transfer for ecommerce purchases. Consumers use their trusted home banking environment, merchants benefit from payment guarantee and swift settlement.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>santander</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Rio de Janeiro</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: santander
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier

Parameter	Required	Format	Description
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>santander</transaction_type>
<status>pending_async</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664ad7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
<tstamp>2019-03-14T12:05:59Z</tstamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type

Parameter	Type	Description
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>santander</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SDD INIT RECURRING SALE

An SddInitRecurringSale transaction initializes a recurring payment and is equal to a normal SddSale Transaction except that it can be referenced as "initial" transaction in a SddRecurringSale

transaction.

Note that if an SddInitRecurringSale is fully refunded, the recurring series is stopped and no more SddRecurringSales can be performed for that recurring series.

If a SddInitRecurringSale is partially refunded, the recurring series can continue with more SddRecurringSales.

 Authorize transactions are also available as 3dsecure transactions

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\SDD\Recurring\InitRecurringSale');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('EUR')
    ->setIban('DE09100100101234567891')
    ->setBic('PBNKDEFFXXX')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingCountry('DE');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.sdd.SDDInitRecurringSaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main()  {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SDDInitRecurringSaleRequest request = new SDDInitRecurringSaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setIban("DE09100100101234567891");
        request.setBic("PBNKDEFFXXX");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingCountry("DE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
  return console.log(reason);
};

var success = function(data) {
  return console.log(data);
};

transaction.sdd_init_recurring_sale(
{
  "transaction_id": "43671",
  "usage": "A0208 concert tickets",
  "remote_ip": "245.253.2.12",
  "amount": "100",
  "currency": "EUR",
  "iban": "DE09100100101234567891",
  "bic": "PBNKDEFXXX",
  "billing_address": {
    "first_name": "Travis",
    "last_name": "Pastrana",
    "country": "DE"
  }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sdd_init_recurring_sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>A0208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>EUR</currency>
<iban>DE09100100101234567891</iban>
<bic>PBNKDEFXXX</bic>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<country>DE</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sdd_init_recurring_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
iban	required	string(34)	Customer's IBAN number
bic	required	string(11)	SWIFT/BIC code of the customer's bank
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada

Parameter	Required	Format	Description
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

`required*` = conditionally required

Supported countries:

Country Name	Country Code
Austria	AT
Belgium	BE
Cyprus	CY
Estonia	EE
Finland	FI
France	FR
Germany	DE
Greece	GR
Ireland	IE
Italy	IT
Latvia	LV
Lithuania	LT
Luxembourg	LU
Malta	MT
Monaco	MC
Netherlands	NL
Portugal	PT
Slovakia	SK
San Marino	SM
Slovenia	SI
Spain	ES

Successful Response

```

stdClass Object
(
    [transaction_type] => sdd_init_recurring_sale
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[sdd_init_recurring_sale]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:05:59Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "sdd_init_recurring_sale",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sdd_init_recurring_sale</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway

Parameter	Type	Description
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
{
    [transaction_type] => sdd_init_recurring_sale
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Please check input data for errors!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => false
}
```

```
<payment_response content=<
<transaction_type content=[sdd_init_recurring_sale]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Please check input data for errors!]>
<timestamp content=[2019-03-14T12:05:59Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
}>
```

```
{
    transaction_type: "sdd_init_recurring_sale",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Please check input data for errors!",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sdd_init_recurring_sale</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>110</code>
    <message>Please check input data for errors!</message>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SDD RECURRING SALE

A SddRecurringSale transaction is a "repeated" transaction which follows and references a SddInitRecurringSale transaction.

The bank account data is omitted.

Note that SddRecurringSales can be partially or fully refunded if configuration allows it, and this will not stop the sdd recurring series.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\SDD\Recurring\RecurringSale');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('EUR')
    ->setReferenceId('2ee4287e67971380ef7f97d5743bb523');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.sdd.SDDRecurringSaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SDDRecurringSaleRequest request = new SDDRecurringSaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setReferenceId("2ee4287e67971380ef7f97d5743bb523");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sdd_recurring_sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "EUR",
    "reference_id": "2ee4287e67971380ef7f97d5743bb523"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sdd_recurring_sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>EUR</currency>
<reference_id>2ee4287e67971380ef7f97d5743bb523</reference_id>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sdd_recurring_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => sdd_recurring_sale
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

  <transaction_type content=[sdd_recurring_sale]>
  <status content=[pending_async]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <technical_message content=[Transaction successful!]>
  <message content=[Transaction successful!]>
  <timestamp content=[2019-03-14T12:05:59Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[100]>
  <currency content=[EUR]>
  <sent_to_acquirer content=[true]>
]>

```

```

(
  transaction_type: "sdd_recurring_sale",
  status: "pending_async",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  timestamp: "2019-03-14T12:05:59Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "EUR",
  sent_to_acquirer: "true",
)

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sdd_recurring_sale</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => sdd_recurring_sale
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 320
    [technical_message] => amount is missing!
    [message] => Please check input data for errors!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
)

```

```

<payment_response content=[

    <transaction_type content=[sdd_recurring_sale]>
    <status content=[error]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <code content=[320]>
    <technical_message content=[amount is missing!]>
    <message content=[Please check input data for errors!]>
    <timestamp content=[2019-03-14T12:05:59Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[EUR]>
]>

```

```

{
    transaction_type: "sdd_recurring_sale",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "320",
    technical_message: "amount is missing!",
    message: "Please check input data for errors!",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sdd_recurring_sale</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>320</code>
    <technical_message>amount is missing!</technical_message>
    <message>Please check input data for errors!</message>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway

Parameter	Type	Description
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SDD REFUND

SddRefunds allow to return already billed amounts to customers.

The amount can be fully refunded only, no partial refunds are allowed. Note that SDD refunds can only be done on former approved SDD transactions

Therefore, the reference_id for the corresponding transaction is mandatory.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\SDD\Refund');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setAmount('100')
    ->setCurrency('EUR')
    ->setReferenceId('2ee4287e67971380ef7f97d5743bb523');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.sdd.SDDRefundRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SDDRefundRequest request = new SDDRefundRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setReferenceId("2ee4287e67971380ef7f97d5743bb523");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sdd_refund(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "amount": "100",
    "currency": "EUR",
    "reference_id": "2ee4287e67971380ef7f97d5743bb523"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sdd_refund</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<amount>100</amount>
<currency>EUR</currency>
<reference_id>2ee4287e67971380ef7f97d5743bb523</reference_id>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sdd_refund
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required	string(255)	Description of the transaction for later use
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
reference_id	required	string(32)	Unique id returned by corresponding transaction

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => sdd_refund
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)

```

```

<payment_response content=>
  <transaction_type content=[sdd_refund]>
    <status content=[pending_async]>
      <mode content=[live]>
        <transaction_id content=[43671]>
        <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
          <technical_message content=[Transaction successful!]>
            <message content=[Transaction successful!]>
            <timestamp content=[2019-03-14T12:05:59Z]>
            <descriptor content=[Descriptor one]>
              <amount content=[100]>
                <currency content=EUR>
                <sent_to_acquirer content=[true]>
              >
            >
          >
        >
      >
    >
  >
</payment_response>

```

```

{
  transaction_type: "sdd_refund",
  status: "pending_async",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  timestamp: "2019-03-14T12:05:59Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "EUR",
  sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sdd_refund</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:05:59Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => sdd_refund
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 320
    [technical_message] => amount is missing!
    [message] => Please check input data for errors!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:05:59.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => false
)

```

```

<payment_response content=>
    <transaction_type content=[sdd_refund]>
        <status content=[error]>
        <mode content=[live]>
        <transaction_id content=[43671]>
        <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
        <code content=[320]>
        <technical_message content=[amount is missing!]>
        <message content=[Please check input data for errors!]>
        <timestamp content=[2019-03-14T12:05:59Z]>
        <descriptor content=[Descriptor one]>
        <amount content=[100]>
        <currency content=[EUR]>
        <sent_to_acquirer content=[false]>
    ]>

```

```

{
    transaction_type: "sdd_refund",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "320",
    technical_message: "amount is missing!",
    message: "Please check input data for errors!",
    timestamp: "2019-03-14T12:05:59Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sdd_refund</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>320</code>
    <technical_message>amount is missing!</technical_message>
    <message>Please check input data for errors!</message>
    <timestamp>2019-03-14T12:05:59Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

Parameter	Type	Description
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SDD SALE

The status of Sepa Direct Debit transactions is not available right after a transaction is made. Merchants receive the status of SDD transaction at 8:30 am (CET), 10:30 am (CET), 3:30 pm (CET) and 7:30 pm (CET). The merchant should have enabled notifications

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\SDD\Sale');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('EUR')
    ->setIban('DE09100100101234567891')
    ->setBic('PBNKDEFFXX')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingCountry('DE');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.sdd.SDDSaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SDDSaleRequest request = new SDDSaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setIban("DE09100100101234567891");
        request.setBic("PBNKDEFFXXX");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingCountry("DE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sdd_sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "EUR",
    "iban": "DE09100100101234567891",
    "bic": "PBNKDEFFXXX",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "country": "DE"
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sdd_sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>EUR</currency>
<iban>DE09100100101234567891</iban>
<bic>PBNKDEFFXXX</bic>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<country>DE</country>
</billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sdd_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
iban	required	string(34)	Customer's IBAN number
bic	required	string(11)	SWIFT/BIC code of the customer's bank
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

*Supported countries: *

The supported countries are the same as SDD Init Recurring Sale.

Successful Response

```
stdClass Object
{
    [transaction_type] => sdd_sale
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:00.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
}
```

```

<payment_response content=[

  <transaction_type content=[sdd_sale]>
  <status content=[approved]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <technical_message content=[Transaction successful!]>
  <message content=[Transaction successful!]>
  <timestamp content=[2019-03-14T12:06:00Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[100]>
  <currency content=[EUR]>
  <sent_to_acquirer content=[true]>
]>

```

```

{
  transaction_type: "sdd_sale",
  status: "approved",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  timestamp: "2019-03-14T12:06:00Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "EUR",
  sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sdd_sale</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => sdd_sale
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:00.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => false
)

```

```

<payment_response content=<
    <transaction_type content=[sdd_sale]>
    <status content=[error]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <code content=[340]>
    <message content=[expiration_year is invalid]>
    <timestamp content=[2019-03-14T12:06:00Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[EUR]>
    <sent_to_acquirer content=[false]>
]>

```

```

{
    transaction_type: "sdd_sale",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "340",
    message: "expiration_year is invalid",
    timestamp: "2019-03-14T12:06:00Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "false",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sdd_sale</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>340</code>
    <message>expiration_year is invalid</message>
    <timestamp>2019-03-14T12:06:00Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway

Parameter	Type	Description
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

SOFORT

i Sofort transactions are only asynchronous. After a successful validation of transaction parameters transaction status is set to pending async the user is redirected to Sofort authentication page where he enters additional information to finish the payment. When the payment reached a final state Genesis gateway sends notification to merchant on the configured url into its account.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\Sofort');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('EUR')
->setCustomerEmail('travis@example.com')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Berlin')
->setBillingCountry('DE');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.SofortRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SofortRequest request = new SofortRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerEmail("travis@example.com");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Berlin");
        request.setBillingCountry("DE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sofort(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "customer_email": "travis@example.com",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Berlin",
        "country": "DE"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>sofort</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Berlin</city>
    <country>DE</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sofort
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
customer_bank_id	optional	string(12)	The bank id of the bank where the customer resides
bank_account_number	optional	string(24)	Bank identification number of the customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country name	Country code
Austria	AT
Belgium	BE
France	FR
Germany	DE
Italy	IT
Netherlands	NL
Poland	PL
Spain	ES
Switzerland	CH
United Kingdom	GB

Successful Response

```
stdClass Object
{
    [transaction_type] => sofort
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
    (
        [date] => 2019-03-14 12:06:00.000000
        [timezone_type] => 2
        [timezone] => Z
    )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[

<transaction_type content=[sofort]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:06:00Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "sofort",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:06:00Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sofort</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => sofort
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:00.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[<transaction_type content=[sofort]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:06:00Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>

```

```
{
  transaction_type: "sofort",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  code: "110",
  message: "Something went wrong, please contact support!",
  timestamp: "2019-03-14T12:06:00Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "EUR",
  sent_to_acquirer: "true",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sofort</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

TRUSTLY SALE

Trustly is an oBeP-style alternative payment method that allows you to pay directly with your ebank account.

It has two transaction types sale and withdrawal. After initiating a transaction Trustly will redirect you to their page.

There you have to select your bank and log in with your regular access codes. Choose the account from which you wish to pay (for example, your savings account or current account).

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\Trustly\Sale');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setPaymentType('')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('EUR')
->setCustomerEmail('travis@example.com')

// Billing Address
->setBillingFirstName('Max')
->setBillingLastName('Mustermann')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Berlin')
->setBillingCountry('DE');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.TrustlySaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        TrustlySaleRequest request = new TrustlySaleRequest();

        request.setTransactionId("43671");
        request.setPaymentType("");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setCustomerEmail("travis@example.com");

        // Billing Address
        request.setBillingFirstname("Max");
        request.setBillingLastname("Mustermann");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Berlin");
        request.setBillingCountry("DE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.trustly_sale(
{
    "transaction_id": "43671",
    "payment_type": null,
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "customer_email": "travis@example.com",
    "billing_address": {
        "first_name": "Max",
        "last_name": "Mustermann",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Berlin",
        "country": "DE"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>trustly_sale</transaction_type>
<transaction_id>43671</transaction_id>
<payment_type></payment_type>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<amount>100</amount>
<currency>EUR</currency>
<customer_email>travis@example.com</customer_email>
<billing_address>
<first_name>Max</first_name>
<last_name>Mustermann</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Berlin</city>
<country>DE</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: trustly_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name

Parameter	Required	Format	Description
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country name	Country code
Austria	AT
Belgium	BE
Bulgaria	BG
Croatia	HR
Czech Republic	CZ
Denmark	DK
Estonia	EE
Finland	FI
Germany	DE
Greece	GR
Hungary	HU
Ireland	IE
Italy	IT
Latvia	LV
Lithuania	LT
Netherlands	NL
Norway	NO
Poland	PL
Portugal	PT
Romania	RO
Slovakia	SK
Slovenia	SI
Spain	ES
Sweden	SE
United Kingdom	GB

Successful Response

```

stdClass Object
(
    [transaction_type] => trustly_sale
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:00.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

    <transaction_type content=[trustly_sale]>
    <status content=[pending_async]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <technical_message content=[Transaction successful!]>
    <message content=[Transaction successful!]>
    <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
    <timestamp content=[2019-03-14T12:06:00Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[EUR]>
    <sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "trustly_sale",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:06:00Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>trustly_sale</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:06:00Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => trustly_sale
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:00.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[trustly_sale]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:06:00Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "trustly_sale",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:06:00Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>trustly_sale</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>110</code>
<message>Something went wrong, please contact support!</message>
<timestamp>2019-03-14T12:06:00Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>EUR</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

TRUSTPAY

TrustPay is a real-time bank transfer payment service, which is widely used in the Czech Republic and Slovakia.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\PPRO');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setPaymentType('trustpay')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('EUR')

// Billing Address
->setBillingFirstName('Barney')
->setBillingLastName('Rubble')
->setBillingAddress('14, Nerazdelni str')
->setBillingZipCode('1407')
->setBillingCity('Prague')
->setBillingCountry('CZ');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.PProRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PProRequest request = new PProRequest();

        request.setTransactionId("43671");
        request.setPaymentType("trustpay");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");

        // Billing Address
        request.setBillingFirstname("Barney");
        request.setBillingLastname("Bubble");
        request.setBillingPrimaryAddress("14, Nerazdelni str");
        request.setBillingZipCode("1407");
        request.setBillingCity("Prague");
        request.setBillingCountry("CZ");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.ppro(
{
    "transaction_id": "43671",
    "payment_type": "trustpay",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "EUR",
    "billing_address": {
        "first_name": "Barney",
        "last_name": "Bubble",
        "address1": "14, Nerazdelni str",
        "zip_code": "1407",
        "city": "Prague",
        "country": "CZ"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <transaction_id>43671</transaction_id>
  <payment_type>trustpay</payment_type>
  <usage>40200 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>EUR</currency>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdeleni str</address1>
    <zip_code>1407</zip_code>
    <city>Prague</city>
    <country>CZ</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	ppro or trustpay . Contact tech support attech-support@emerchantpay.net for more details.
transaction_id	required	string(255)	Unique transaction id defined by merchant
payment_type	required ¹	ppro	TrustPay. Contact tech support attech-support@emerchantpay.net for more details.
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

1 - payment_type must be submitted only when the transaction type is set to ppro

Supported countries

Country code

Country code
CZ
SK

Supported currencies

Currency code
CZK
EUR

Successful Response

```
stdClass Object
{
    [transaction_type] => ppro
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:00.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:06:00Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:06:00",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>ppro</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:06:00Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => ppro
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:00.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[<transaction_type content=[ppro]>
<status content="error">
<mode content="live">
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:06:00Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "ppro",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:06:00Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>ppro</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

WEBPAY

Webpay Webpay is a payment solution in Chile that allows shoppers to pay online with their credit card.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ''
<payment_transaction>
  <transaction_type>webpay</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>john_doe</consumer_reference>
  <national_id>8812128812</national_id>
  <customer_email>travis@example.com</customer_email>
  <customer_phone>+1987987987987</customer_phone>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: webpay
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries

Country Name	Country code
Chile	CL

Successful Response

This request is not implemented yet
This request is not implemented yet
This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>108</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z

Parameter	Type	Description
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Cash Payments

BALOTO

Info Baloto is a cash payment option in Colombia. It allows the customers to receive a voucher at check-out. The voucher can then be paid in any of the Via Boleto offices in cash.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>baloto</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Bogota</city>
    <country>CO</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: baloto
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer

Parameter	Required	Format	Description
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
CO

Successful Response

This request is not implemented yet
This request is not implemented yet
This request is not implemented yet
<pre><?xml version="1.0" encoding="UTF-8"?> <payment_transaction> <transaction_type>baloto</transaction_type> <status>pending_async</status> <mode>live</mode> <transaction_id>43671</transaction_id> <unique_id>44177a21403427eb96664ad7e5d5d48</unique_id> <technical_message>Transaction successful!</technical_message> <message>Transaction successful!</message> <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url> <tstamp>2019-03-14T12:06:00Z</tstamp> <descriptor>Descriptor one</descriptor> <amount>100</amount> <currency>USD</currency> <sent_to_acquirer>true</sent_to_acquirer> </payment_transaction></pre>

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>baloto</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BANAMEX

 Banamex is local card payment in Mexico

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>banamex</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40296 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Monterrey</city>
    <country>MX</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: banamex
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name

Parameter	Required	Format	Description
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

`required*` = conditionally required

Supported countries:

Country
MX

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>banamex</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>banamex</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BANCO DE OCCIDENTE

 Banco de Occidente is a cash payment method for Colombia

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>banco_de_occidente</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Bogota</city>
    <country>CO</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: banco_de_occidente
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
CO

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>banco_de_occidente</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>banco_de_occidente</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BOLETO

 Boleto is a payment service in Brazil

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>boleto</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Rio de Janeiro</city>
    <country>BR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: boleto
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
BR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>boleto</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>boleto</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

CARULLA

 Carulla is a payment service in Columbia that allows its users to send money, top up their cell phone and payments.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>carulla</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Bogota</city>
    <country>CO</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: carulla
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
CO

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>carulla</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>4417a21403427eb96664ad7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>carulla</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <tstamp>2019-03-14T12:06:00Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

EFFECTY

 Effecty is an offline cash payment voucher option in Colombia.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>efecty</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Bogota</city>
    <country>CO</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: efecty
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
CO

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>efecty</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664ad7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:00Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>fecty</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestampl>2019-03-14T12:06:01Z</timestampl>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

EMPRESE DE ENERGIA

 Emprese De Energia is a cash payment in Colombia

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>emprese_de_energia</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Bogota</city>
    <country>CO</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: emprese_de_energia
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
CO

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>emprese_de_energia</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>empresas_de_energia</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

OXXO

 OXXO is the preferred payment method in Mexico. It is a cash payment via a barcode document that is accepted in more than 14,000 stores.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>oxxo</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Mexico City</city>
    <country>MX</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: oxxo
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
MX

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>oxxo</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>4417721403427eb96664ad7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>xxx</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestampl>2019-03-14T12:06:01Z</timestampl>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

PAGO FACIL

i Pago Facil is a payment service in Argentina that allows its users to send money, top up their cell phone and payments.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>pago_facil</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Buenos Aires</city>
    <country>AR</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: pago_facil
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
AR

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>pago_facil</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>4417721403427eb96664ad7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>pago_facil</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestampl>2019-03-14T12:06:01Z</timestampl>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

REDPAGOS

 Redpagos is a cash payment in Uruguay

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>redpagos</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Montevideo</city>
    <country>UY</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: redpagos
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
UY

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>redpagos</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>redpagos</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SANTANDER CASH

 Santander Cash is local card payment in Mexico

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>santander_cash</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rubble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Tampico</city>
    <country>MX</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: santander_cash
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	string(20)	Birth date of the customer
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
MX

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>santander_cash</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>santander_cash</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SURTIMAX

i Surtimax is a cash payment method in Columbia.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>surtimax</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_reference>barney_rumble</consumer_reference>
  <national_id>8812128812</national_id>
  <birth_date>30-12-1992</birth_date>
  <customer_email>barney@example.com</customer_email>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Bubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Bogota</city>
    <country>CO</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: surtimax
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
consumer_reference	required	string(20)	Consumer reference is a unique consumer identifier
national_id	required	string(20)	National Identifier number of the customer
birth_date	optional	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City

Parameter	Required	Format	Description
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country
CO

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>surtimax</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664ad7e5d5d48</unique_id>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <technical_message>Transaction successful</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>surtimax</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <tstamp>2019-03-14T12:06:01Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Gift Cards

INTERSOLVE

These transactions can be used for gift cards provided by Intersolve.

Using Intersolve transaction, the amount is immediately billed to the customer's gift card.

It can be reversed using void transaction.

 This transaction type supports Tokenization.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\GiftCards\Intersolve');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardNumber('7000001163991388834')
->setCvv('944062')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.giftcards.IntersolveRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        IntersolveRequest request = new IntersolveRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardNumber("7000001163991388834");
        request.setCvv("944062");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>intersolve</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <amount>100</amount>
  <currency>USD</currency>
  <card_number>7000001163991388834</card_number>
  <cvv>944062</cvv>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: intersolve
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_number	required	string(19..21)	Gift card number
cvv	required*	5 to 8 digits	Verification code of the gift card, requirement is based on terminal configuration
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with remember_card
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with token
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with remember_card to tokenize or with token to use token
billing_address	required*		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor

Parameter	Required	Format	Description
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

`required*` = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => intersolve
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[>
<transaction_type content=[intersolve]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>
```

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>intersolve</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <consumer_id>123456</consumer_id>
    <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:06:01Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

Parameter	Type	Description
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```
stdClass Object
(
    [transaction_type] => intersolve
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => Transaction_id is invalid!
    [message] => Transaction_id is invalid!
    [timestamp] => Datetime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[>
<transaction_type content=[intersolve]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[Transaction_id is invalid!]>
<message content=[Transaction_id is invalid!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>intersolve</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>340</code>
<technical_message>Transaction_id is invalid!</technical_message>
<message>Transaction_id is invalid!</message>
<timestamp>2019-03-14T12:06:01Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

FASHIONCHEQUE

Fashioncheque transactions are made using gift card provided by Fashioncheque

Using a fashioncheque transaction, the amount is immediately billed to the customer's gift card.

It can be reversed via a void transaction on the same day of the transaction. They can also be refunded.

Use fashioncheque transactions, if you are using gift cards provided by Fashioncheque.

 This transaction type supports Tokenization.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\GiftCards\Fashioncheque');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardNumber('6046425117120757123')
->setCvv('121839')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.giftcards.FashionchequeRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        FashionchequeRequest request = new FashionchequeRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardNumber("6046425117120757123");
        request.setCvv("121839");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>fashioncheque</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_number>6046425117120757123</card_number>
<cvv>121839</cvv>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: fashioncheque
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Only USD and EUR

Parameter	Required	Format	Description
card_number	required	string(19..21)	Gift card number
cvv	required*	5 to 8 digits	Verification code of the gift card, requirement is based on terminal configuration
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted
billing_address	required*		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

Successful Response

```
stdClass Object
{
    [transaction_type] => fashioncheque
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[<transaction_type content=[fashioncheque]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>
```

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>fashioncheque</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```
stdClass Object
(
    [transaction_type] => fashioncheque
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => Transaction_id is invalid!
    [message] => Transaction_id is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[

<transaction_type content=[fashioncheque]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[Transaction_id is invalid!]>
<message content=[Transaction_id is invalid!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>fashioncheque</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>340</code>
  <technical_message>Transaction_id is invalid!</technical_message>
  <message>Transaction_id is invalid!</message>
  <tstamp>2019-03-14T12:06:01Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

TCS

The container store **transactions are made using gift cards provided by TCS**

The amount from a Container Store Transactions is immediately billed to the customer's gift card.

It can be reversed via a void transaction.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\GiftCards\Tcs');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardNumber('6046425117120757123')
->setCvv('121839')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.giftcards.TCSRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        TCSRequest request = new TCSRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardNumber("6046425117120757123");
        request.setCvv("121839");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>container_store</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <amount>100</amount>
  <currency>USD</currency>
  <card_number>6046425117120757123</card_number>
  <cvv>121839</cvv>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: container_store
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Only USD and EUR
card_number	required	string(19..21)	Gift card number
cvv	required*	5 to 8 digits	Verification code of the gift card, requirement is based on terminal configuration
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted
billing_address	required*		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => container_store
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[

<transaction_type content=[container_store]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>
```

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>container_store</transaction_type>
<status>approved</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestamp>2019-03-14T12:06:01Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```

stdClass Object
(
    [transaction_type] => container_store
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => Transaction_id is invalid!
    [message] => Transaction_id is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[>
    <transaction_type content=[container_store]>
    <status content=[error]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <code content=[340]>
    <technical_message content=[Transaction_id is invalid!]>
    <message content=[Transaction_id is invalid!]>
    <timestamp content=[2019-03-14T12:06:01Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[USD]>
    <sent_to_acquirer content=[false]>
]>

```

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>container_store</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>340</code>
    <technical_message>Transaction_id is invalid!</technical_message>
    <message>Transaction_id is invalid!</message>
    <timestamp>2019-03-14T12:06:01Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

SPLIT PAYMENTS

Split payments are performed on gift card transaction types when there isn't enough balance in the gift card In order to use split payments you need to enable them on terminal. For more information please contact tech support.

Split payments follow this workflow:

- Split payment can be initiated only on gift card transaction.
- You can have maximum three payment series including the initial transaction.
- If the gift card does not have enough balance to perform the transaction, the whole available balance is taken from the gift card and new split payment is initiated.
- You can continue the split payment with another gift card
- You can finish the split payment with either gift card or credit card by submitting the 'unique id' of the initial transaction as 'reference id' in the request.
- Any failure during split payment causes rollback of all split payment series transactions.

i Credit card transaction can be only last in split payment series and any series transaction must be submitted with the actual leftover amount.

Example for initial split payment transaction:

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\GiftCards\Fashioncheque');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('5000')
    ->setCurrency('EUR')
    ->setCardNumber('6046425117120757123')
    ->setCvv('121839')

// Billing Address
    ->setBillingFirstName('Travis')
    ->setBillingLastName('Pastrana')
    ->setBillingAddress1('Muster Str. 12')
    ->setBillingZipCode('10178')
    ->setBillingCity('Los Angeles')
    ->setBillingState('CA')
    ->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.giftcards.FashionchequeRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        FashionchequeRequest request = new FashionchequeRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal("5000"));
        request.setCurrency("EUR");
        request.setCardNumber("6046425117120757123");
        request.setCvv("121839");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>fashioncheque</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>5000</amount>
<currency>EUR</currency>
<card_number>6046425117120757123</card_number>
<cvv>121839</cvv>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: fashioncheque
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Only USD and EUR

Parameter	Required	Format	Description
card_number	required	string(19..21)	Gift card number
cvv	required*	5 to 8 digits	Verification code of the gift card, requirement is based on terminal configuration
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted
billing_address	required*		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

Successful Response

```
stdClass Object
{
    [transaction_type] => fashioncheque
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 406bc1b340472db4dbba4b749850234
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 2000
    [currency] => EUR
    [split_payment] => initiated
    [leftover_amount] => 3000
    [sent_to_acquirer] => true
}
```

```

<payment_response content=[

  <transaction_type content=[fashioncheque]>
  <status content=[pending_async]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[406bc1b340472db4dbbba4b749850234]>
  <technical_message content=[Transaction successful!]>
  <message content=[Transaction successful!]>
  <timestamp content=[2019-03-14T12:06:01Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[2000]>
  <currency content=[EUR]>
  <split_payment content=[initiated]>
  <leftover_amount content=[3000]>
  <sent_to_acquirer content=[true]>

]>

```

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>fashioncheque</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>406bc1b340472db4dbbba4b749850234</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>2000</amount>
  <currency>EUR</currency>
  <split_payment>initiated</split_payment>
  <leftover_amount>3000</leftover_amount>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
split_payment	string	Split payment status for this transaction. Should be 'initiated'.
leftover_amount	integer	Leftover amount of transaction in minor currency unit, seeCurrency Handling for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```

stdClass Object
(
    [transaction_type] => fashioncheque
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => Transaction_id is invalid!
    [message] => Transaction_id is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 5000
    [currency] => EUR
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[<transaction_type content=[fashioncheque]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[Transaction_id is invalid!]>
<message content=[Transaction_id is invalid!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[5000]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
]>

```

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>fashioncheque</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>340</code>
<technical_message>Transaction_id is invalid!</technical_message>
<message>Transaction_id is invalid!</message>
<timestamp>2019-03-14T12:06:01Z</timestamp>
<descriptor>descriptor one</descriptor>
<amount>5000</amount>
<currency>EUR</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Example for continued split payment transaction:

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\GiftCards\Intersolve');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReferenceId('406bc1b340472db4dbbba4b749850234')
->setAmount('3000')
->setCurrency('EUR')
->setCardNumber('7000001163991388834')
->setCvv('944062')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.giftcards.IntersolveRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        IntersolveRequest request = new IntersolveRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("406bc1b340472db4dbbba4b749850234");
        request.setAmount(new BigDecimal(3000));
        request.setCurrency("EUR");
        request.setCardNumber("7000001163991388834");
        request.setCvv("944062");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>intersolve</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <reference_id>406bc1b349472db4dbba4b749850234</reference_id>
  <amount>3000</amount>
  <currency>EUR</currency>
  <card_number>7000001163991388834</card_number>
  <cvv>944062</cvv>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: intersolve
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	The 'unique id' of the initial split payment transaction.
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_number	required	string(19..21)	Gift card number
cvv	required*	5 to 8 digits	Verification code of the gift card, requirement is based on terminal configuration
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted
billing_address	required*		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor

Parameter	Required	Format	Description
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => intersolve
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 2500
    [currency] => EUR
    [split_payment] => continued
    [leftover_amount] => 500
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[

<transaction_type content=[intersolve]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[2500]>
<currency content=[EUR]>
<split_payment content=[continued]>
<leftover_amount content=[500]>
<sent_to_acquirer content=[true]>
]>
```

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>intersolve</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:06:01Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>2500</amount>
    <currency>EUR</currency>
    <split_payment>continued</split_payment>
    <leftover_amount>500</leftover_amount>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway

Parameter	Type	Description
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
split_payment	string	Split payment status for this transaction. Should be 'continued'.
leftover_amount	integer	Leftover amount of transaction in minor currency unit, see Currency Handling for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```
stdClass Object
{
    [transaction_type] => intersolve
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => Transaction_id is invalid!
    [message] => Transaction_id is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 3000
    [currency] => EUR
    [sent_to_acquirer] => false
}
```

```
<payment_response content=[>
<transaction_type content=[intersolve]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[Transaction_id is invalid!]>
<message content=[Transaction_id is invalid!]>
<timestamp content=[2019-03-14T12:06:01Z]>
<descriptor content=[Descriptor one]>
<amount content=[3000]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
]>
```

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>intersolve</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>340</code>
    <technical_message>Transaction_id is invalid!</technical_message>
    <message>Transaction_id is invalid!</message>
    <timestamp>2019-03-14T12:06:01Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>3000</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant

Parameter	Type	Description
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Example for finalized split payment transaction:

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\GiftCards\Intersolve');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReferenceId('406bc1b340472db4dbbbba4b749850234')
    ->setAmount('500')
    ->setCurrency('EUR')
    ->setCardNumber('7000001163991388834')
    ->setCvv('944062')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.giftcards.IntersolveRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        IntersolveRequest request = new IntersolveRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("A06bc1b340472db4dbba4b749850234");
        request.setAmount(new BigDecimal(500));
        request.setCurrency("EUR");
        request.setCardNumber("7000001163991388834");
        request.setCvv("944062");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
    <transaction_type>intersolve</transaction_type>
    <transaction_id>43671</transaction_id>
    <usage>40208 concert tickets</usage>
    <remote_ip>245.253.2.12</remote_ip>
    <reference_id>A06bc1b340472db4dbba4b749850234</reference_id>
    <amount>500</amount>
    <currency>EUR</currency>
    <card_number>7000001163991388834</card_number>
    <cvv>944062</cvv>
    <billing_address>
        <first_name>Travis</first_name>
        <last_name>Pastrana</last_name>
        <address1>Muster Str. 12</address1>
        <zip_code>10178</zip_code>
        <city>Los Angeles</city>
        <state>CA</state>
        <country>US</country>
    </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: intersolve
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	The 'unique id' of the initial split payment transaction.

Parameter	Required	Format	Description
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_number	required	string(19..21)	Gift card number
cvv	required*	5 to 8 digits	Verification code of the gift card, requirement is based on terminal configuration
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted
billing_address	required*		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => intersolve
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:01.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 500
    [currency] => EUR
    [split_payment] => finalized
    [leftover_amount] => 0
    [sent_to_acquirer] => true
)
```

```

<payment_response content=[

  <transaction_type content=[intersolve]>
  <status content=[approved]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <technical_message content=[Transaction successful!]>
  <message content=[ Transaction successful!]>
  <timestamp content=[2019-03-14T12:06:01Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[500]>
  <currency content=[EUR]>
  <split_payment content=[finalized]>
  <leftover_amount content=[0]>
  <sent_to_acquirer content=[true]>

]>

```

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>intersolve</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:01Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>500</amount>
  <currency>EUR</currency>
  <split_payment>finalized</split_payment>
  <leftover_amount>0</leftover_amount>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
split_payment	string	Split payment status for this transaction. Should be 'finalized'.
leftover_amount	integer	Leftover amount of transaction in minor currency unit, seeCurrency Handling for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```

stdClass Object
(
    [transaction_type] => intersolve
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => Transaction_id is invalid!
    [message] => Transaction_id is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 500
    [currency] => EUR
    [sent_to_acquirer] => false
)

```

```

<payment_response content=[<transaction_type content=[intersolve]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[Transaction_id is invalid!]>
<message content=[Transaction_id is invalid!]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[500]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
]>

```

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>intersolve</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>340</code>
<technical_message>Transaction_id is invalid!</technical_message>
<message>Transaction_id is invalid!</message>
<timestamp>2019-03-14T12:06:02Z</timestamp>
<descriptor>descriptor one</descriptor>
<amount>500</amount>
<currency>EUR</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

ⓘ Split Payment can also be finalized using Sale or Sale3D

Example for finalized Sale split payment transaction:

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReferenceId('406bc1b340472db4dbba4b749850234')
    ->setAmount('500')
    ->setCurrency('EUR')
    ->setCardHolder('Travis Pastrana')
    ->setCardNumber('4200000000000000')
    ->setExpirationMonth('12')
    ->setExpirationYear('2020')
    ->setCvv('834')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("406bc1b340472db4dbbba4b749850234");
        request.setAmount(new BigDecimal("500"));
        request.setCurrency("EUR");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "reference_id": "406bc1b340472db4dbbba4b749850234",
    "amount": "500",
    "currency": "EUR",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>sale</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40290 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <reference_id>406bc1b349472db4dbba4b749850234</reference_id>
  <amount>500</amount>
  <currency>EUR</currency>
  <card_holder>Travis Pastrana</card_holder>
  <card_number>4200000000000000</card_number>
  <expiration_month>12</expiration_month>
  <expiration_year>2020</expiration_year>
  <cvv>834</cvv>
  <customer_email>travis@example.com</customer_email>
  <customer_phone>+1987987987987</customer_phone>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required*	string(32)	The 'unique id' of the initial split payment transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required*	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		

Parameter	Required	Format	Description
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => sale
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 500
    [currency] => EUR
    [split_payment] => finalized
    [leftover_amount] => 0
    [sent_to_acquirer] => true
)
```

```
<payment_response content=<
<transaction_type content=[sale]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[500]>
<currency content=EUR>
<split_payment content=[finalized]>
<leftover_amount content=[0]>
<sent_to_acquirer content=[true]>
]>
```

```
{
  transaction_type: "sale",
  status: "approved",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  avs_response_code: "5I",
  avs_response_text: "Response provided by issuer processor; Address information not verified",
  authorization_code: "345678",
  response_code: "00",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  timestamp: "2019-03-14T12:06:02Z",
  descriptor: "Descriptor one",
  amount: "500",
  currency: "EUR",
  split_payment: "finalized",
  leftover_amount: "0",
  sent_to_acquirer: "true",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sale</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <avs_response_code>5I</avs_response_code>
  <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>500</amount>
  <currency>EUR</currency>
  <split_payment>finalized</split_payment>
  <leftover_amount>0</leftover_amount>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
split_payment	string	Split payment status for this transaction. Should be 'finalized'.
leftover_amount	integer	Leftover amount of transaction in minor currency unit, see Currency Handling for details
sent_to_acquirer	string	"true" or "false"

Parameter	Type	Description
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. CheckPartial Approvals for details
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```
stdClass Object
(
    [response_code] => 57
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => billing_address[zip_code] is invalid!
    [message] => billing_address[zip_code] is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 500
    [currency] => EUR
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[<
<response_code content=[57]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[billing_address[zip_code] is invalid!]>
<message content=[billing_address[zip_code] is invalid!]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[500]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    response_code: "57",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "340",
    technical_message: "billing_address[zip_code] is invalid!",
    message: "billing_address[zip_code] is invalid!",
    timestamp: "2019-03-14T12:06:02Z",
    descriptor: "Descriptor one",
    amount: "500",
    currency: "EUR",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <response_code>57</response_code>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>340</code>
    <technical_message>billing_address[zip_code] is invalid!</technical_message>
    <message>billing_address[zip_code] is invalid!</message>
    <timestamp>2019-03-14T12:06:02Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>500</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z

Parameter	Type	Description
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Example for finalized Sale 3D split payment transaction:

Asynchronous Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale3D');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReferenceId('406bc1b340472db4dbbba4b749850234')
    ->setAmount('500')
    ->setCurrency('EUR')
    ->setCardHolder('Travis Pastrana')
    ->setCardNumber('4711000000000000')
    ->setExpirationMonth('12')
    ->setExpirationYear('2020')
    ->setCvv('834')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// MPI Asynchronous
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success.html')
->setReturnFailureUrl('http://www.example.com/failure.html');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.Sale3DRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        Sale3DRequest request = new Sale3DRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("406bc1b340472db4dbba4b749850234");
        request.setAmount(new BigDecimal(500));
        request.setCurrency("EUR");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4711100000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // MPI Asynchronous
        request.setNotificationUrl("https://www.example.com/notification");
        request.setReturnSuccessUrl("http://www.example.com/success.html");
        request.setReturnFailureUrl("http://www.example.com/failure.html");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale3d({
    "transaction_id": "43671",
    "usage": "A0208 concert tickets",
    "remote_ip": "245.253.2.12",
    "reference_id": "406bc1b340472db4dbbbba4b749850234",
    "amount": "500",
    "currency": "EUR",
    "card_holder": "Travis Pastrana",
    "card_number": "4711100000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success.html",
    "return_failure_url": "http://www.example.com/failure.html"
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TOKEN \ 
-H "Content-Type: text/xml" \
-d ' 
<payment_transaction>
<transaction_type>sale3d</transaction_type>
<transaction_id>43671</transaction_id>
<usage>A0208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<reference_id>406bc1b340472db4dbbbba4b749850234</reference_id>
<amount>500</amount>
<currency>EUR</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4711100000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success.html</return_success_url>
<return_failure_url>http://www.example.com/failure.html</return_failure_url>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sale3d
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	The 'unique id' of the initial split payment transaction

Parameter	Required	Format	Description
notification_url	required ¹	url	URL at merchant where gateway sends outcome of transaction.
return_success_url	required ¹	url	URL where customer is sent to after successful payment
return_failure_url	required ¹	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
mpi_params	required ²		
cavv	required ³	string(255)	Verification Id of the authentication. Please note this can be the CAVV for Visa Card or UCAF to identify MasterCard.
eci	required ³	string(255)	See Electronic Commerce Indicator as returned from the MPI for details
xid	required ³	string(255)	Transaction ID generated by the 3D Secure service that uniquely identifies a 3D Secure check request
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number

required* = conditionally required

1 - required if mpi_params is not present, transaction will be handled asynchronous.

2 - required if transaction should be handled synchronous.

3 - eci is always required if mpi_params is present. xid and cavv are not required for the 3D attempted only workflow, where the merchant does not have the xid/cavv, only the eci.)

Successful Asynchronous Response

```
stdClass Object
(
    [transaction_type] => sale3d
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 500
    [currency] => EUR
    [split_payment] => finalized
    [leftover_amount] => 0
    [sent_to_acquirer] => true
)
```

```
<payment_response content=<
<transaction_type content=[sale3d]>
<status content=[pending_async]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[500]>
<currency content=[EUR]>
<split_payment content=[finalized]>
<leftover_amount content=[0]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "sale3d",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    timestamp: "2019-03-14T12:06:02Z",
    descriptor: "Descriptor one",
    amount: "500",
    currency: "EUR",
    split_payment: "finalized",
    leftover_amount: "0",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sale3d</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:06:02Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>500</amount>
    <currency>EUR</currency>
    <split_payment>finalized</split_payment>
    <leftover_amount>0</leftover_amount>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes) for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
partial_approval	string(4)	Optional, set to 'true' if partial approval happened. Partially approved amount is then in the amount field. Check Partial Approvals for details
split_payment	string	Split payment status for this transaction. Should be 'finalized'.
leftover_amount	integer	Leftover amount of transaction in minor currency unit, see Currency Handling for details
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Error Response

```
stdClass Object
(
    [transaction_type] => sale3d
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [technical_message] => expiration_year is invalid
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 500
    [currency] => EUR
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[

<transaction_type content=[sale3d]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[340]>
<technical_message content=[expiration_year is invalid]>
<message content=[expiration_year is invalid]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[500]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "sale3d",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    response_code: "57",
    code: "340",
    technical_message: "expiration_year is invalid",
    message: "expiration_year is invalid",
    timestamp: "2019-03-14T12:06:02Z",
    descriptor: "Descriptor one",
    amount: "500",
    currency: "EUR",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sale3d</transaction_type>
    <status>error</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <response_code>57</response_code>
    <code>340</code>
    <technical_message>expiration_year is invalid</technical_message>
    <message>expiration_year is invalid</message>
    <timestamp>2019-03-14T12:06:02Z</timestamp>
    <descriptor>descriptor one</descriptor>
    <amount>500</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
gaming	string	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	string	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"
dynamic_descriptor_params	section	Optional, returned only if dynamic desc params are submitted on the API. Note here that the formatted dyn desc params are returned - as they would be submitted to the schemes for settlement.

Voiding of split payments:

- Voiding of any transaction in unfinished split payment (while still pending async) will cause rollback of all other transactions in split payment series. The current transaction will appear as voided while the other transaction will become declined.
- Voiding any transaction after the split payment has been completed will cause voiding only of the single transaction. In order to revert such split payment you need to manually void all transactions in it.
- The above points are valid also for refunding the transactions if the gift card gateway supports refund.

Split Payment Timeouts:

- All unfinished split payments will be automatically timed out after a period of time and all transactions in them will be rolled back.
- If the split payment is finished with async 3D credit card transaction the split payment will be timed out according to the mpi timeout of the final transaction.

Invoice Payment Methods

Alternative payments refers to payment methods that are used as an alternative to credit card payments.

Each alternative payment method has its own unique application, settlement process and currency support.

KLARNA AUTHORIZE

 Klarna is a Swedish e-commerce company that provides payment services for online stores.

With Klarna Authorize transactions, you can confirm that an order is successful.

After settling the transaction (e.g. shipping the goods), you should use klarna capture transaction type to capture the amount.

Klarna authorize transaction will automatically be cancelled after a certain time frame, most likely two weeks.

For a typical e-commerce application it is recommended to authorize the amount on incoming orders and capture it when shipping the goods.

If you choose not to serve the customer, consider to void the klarna authorize to cancel the initial transaction.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\Klarna\Authorize');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setNotificationUrl('https://www.example.com/notification')
    ->setReturnSuccessUrl('http://www.example.com/success')
    ->setReturnFailureUrl('http://www.example.com/failure')
    ->setReturnCancelUrl('http://www.example.com/cancel')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('60')
    ->setCurrency('USD')
    ->setCustomerPhone('+1987987987987')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerGender('male')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// Shipping Address
->setShippingFirstName('Travis')
->setShippingLastName('Pastrana')
->setShippingAddress1('Muster Str. 12')
->setShippingZipCode('10001')
->setShippingCity('Los Angeles')
->setShippingState('CA')
->setShippingCountry('US');

// Klarna Items
$items = new \Genesis\API\Request\Financial\Alternatives\Klarna\Items('USD');
$item = new \Genesis\API\Request\Financial\Alternatives\Klarna\Item();

$item
    ->setItemType('physical')
    ->setReference('19-402-USA')
    ->setName('BatteryPowerPack')
    ->setQuantity('1')
    ->setUnitPrice('60')
    ->setTaxRate('0')
    ->setTotalAmount('60')
    ->setTotalDiscountAmount('0')
    ->setTotalTaxAmount('0')
    ->setImageUrl('https://example.com/image_url')
    ->setProductUrl('https://example.com/product_url')
    ->setQuantityUnit('pcs')
    ->addMerchantMarketplaceSellerInfo('Electronic gadgets')
$items->addItem($item);

$request->setItems($items);

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>klarna_authorize</transaction_type>
  <transaction_id>43671</transaction_id>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <return_cancel_url>http://www.example.com/cancel</return_cancel_url>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <amount>60</amount>
  <currency>USD</currency>
  <customer_phone>+1987987987987</customer_phone>
  <customer_email>travis@example.com</customer_email>
  <customer_gender>male</customer_gender>
  <order_tax_amount>0</order_tax_amount>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
  <shipping_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10001</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </shipping_address>
</items>
<item>
  <item_type>physical</item_type>
  <reference>19-402-USA</reference>
  <name>BatteryPowerPack</name>
  <quantity>1</quantity>
  <unit_price>60</unit_price>
  <tax_rate>0</tax_rate>
  <total_amount>60</total_amount>
  <total_discount_amount>0</total_discount_amount>
  <total_tax_amount>0</total_tax_amount>
  <image_url>https://example.com/image_url</image_url>
  <product_url>https://example.com/product_url</product_url>
  <quantity_unit>pcs</quantity_unit>
  <merchant_data>
    <marketplace_seller_info>Electronic gadgets</marketplace_seller_info>
  </merchant_data>
</item>
</items>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: klarna_authorize
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address

Parameter	Required	Format	Description
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
customer_gender	optional		Customer gender
order_tax_amount	required		Non-negative, minor units. The total tax amount of the order
items	required		List with items
item_type	required	string(255)	Order line type. Possible values: Supported item types
quantity	required	integer	Non-negative. The item quantity
unit_price	required	integer	Minor units. Includes tax, excludes discount(max value: 100000000)
total_amount	required	integer	Includes tax and discount. Must match (quantity unit price) - total discount amount divided by quantity (max value: 100000000)
reference	optional	string(255)	Article number, SKU or similar
name	optional	string(255)	Descriptive item name
tax_rate	optional	integer	Non-negative. In percent, two implicit decimals. I.e 2500 = 25.00 percent
total_discount_amount	optional	integer	Non-negative minor units. Includes tax
total_tax_amount	optional	integer	Must be within 1 of total amount - total_amount * 10000 / (10000 + tax rate). Negative when type is discount
image_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
product_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
quantity_unit	optional	string(8)	Unit used to describe the quantity, e.g. kg, pcs... If defined has to be 1-8 characters
product_identifiers	optional		List with product identifiers
brand	optional	string(255)	The product's brand name as generally recognized by consumers. If no brand is available for a product, do not supply any value
category_path	optional	string(255)	The product's category path as used in the merchant's webshop. Include the full and most detailed category and separate the segments with '>'
global_trade_item_number	optional	string(255)	The product's Global Trade Item Number (GTIN). Common types of GTIN are EAN, ISBN or UPC. Exclude dashes and spaces, where possible
manufacturer_part_number	optional	string(255)	The product's Manufacturer Part Number (MPN), which - together with the brand - uniquely identifies a product. Only submit MPNs assigned by a manufacturer and use the most specific MPN possible
merchant_data	optional		List with merchant data
marketplace_seller_info	optional	string(255)	Information for merchant marketplace

required* = conditionally required

Supported countries:

Country	Country code
Austria	AT
Denmark	DK

Country	Country code
Finland	FI
Germany	DE
Netherlands	NL
Norway	NO
Sweden	SE

Supported item types:

Item Types
physical
discount
shipping fee
sales tax
digital
gift card
store credit
surcharge

Successful Response

```
stdClass Object
(
    [transaction_type] => klarna_authorize
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 60
    [currency] => USD
    [sent_to_acquirer] => true
)
```

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>klarna_authorize</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <timestamp>2019-03-14T12:06:02Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>60</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant

Parameter	Type	Description
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
{
    [transaction_type] => klarna_authorize
    [status] => error
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 60
    [currency] => USD
    [sent_to_acquirer] => false
}
```

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>klarna_authorize</transaction_type>
    <status>error</status>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <code>340</code>
    <message>Something went wrong, please contact support!</message>
    <timestamp>2019-03-14T12:06:02Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>60</amount>
    <currency>USD</currency>
    <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z

Parameter	Type	Description
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
sent_to_acquirer	string	"true" or "false"

KLARNA CAPTURE

Klarna capture settles a Klarna transaction.

Do this when you are shipping goods, for example. A Klarna capture can only be used after arklarna Authorize on the same transaction.

Therefore, the reference_id of the Klarna transaction is mandatory.

i You can also use klarna capture for partial amount of the initial klarna authorize amount but klarna capture amount should be the same as the sum of items total amount. However, you cannot capture a higher amount than initially authorized.

Transaction workflow:

1. The merchant sends Klarna transaction to the gateway.
2. The gateway replies to it. One of returned values is the unique id of the transaction.
3. The merchant sends Klarna capture transaction. Its reference id is unique id of Klarna response.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\Klarna\Capture');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReferenceId('43672')
    ->setAmount('60')
    ->setCurrency('USD');

// Klarna Items
$items = new \Genesis\API\Request\Financial\Alternatives\Klarna\Items('USD');
$item = new \Genesis\API\Request\Financial\Alternatives\Klarna\Item();
$item
    ->setItemType('physical')
    ->setReference('19-402-USA')
    ->setName('BatteryPowerPack')
    ->setQuantity('1')
    ->setUnitPrice('60')
    ->setTaxRate('0')
    ->setTotalAmount('60')
    ->setTotalDiscountAmount('0')
    ->setTotalTaxAmount('0')
    ->setImageUrl('https://example.com/image_url')
    ->setProductUrl('https://example.com/product_url')
    ->setQuantityUnit('pcs')
    ->addMerchantMarketplaceSellerInfo('Electronic gadgets')
$items->addItem($item);

$request->setItems($items);

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>klarna_capture</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <reference_id>43672</reference_id>
  <amount>60</amount>
  <currency>USD</currency>
  <items>
    <item>
      <item_type>physical</item_type>
      <reference>19-402-USA</reference>
      <name>BatteryPowerPack</name>
      <quantity>1</quantity>
      <unit_price>60</unit_price>
      <tax_rate>0</tax_rate>
      <total_amount>60</total_amount>
      <total_discount_amount>0</total_discount_amount>
      <total_tax_amount>0</total_tax_amount>
      <image_url>https://example.com/image_url</image_url>
      <product_url>https://example.com/product_url</product_url>
      <quantity_unit>pcs</quantity_unit>
      <merchant_data>
        <marketplace_seller_info>Electronic gadgets</marketplace_seller_info>
      </merchant_data>
    </item>
  </items>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: klarna_capture
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
items	required		List with items
item_type	required	string(255)	Order line type. Possible values: Supported item types
quantity	required	integer	Non-negative. The item quantity
unit_price	required	integer	Minor units. Includes tax, excludes discount(max value: 100000000)
total_amount	required	integer	Includes tax and discount. Must match (quantity unit price) - total discount amount divided by quantity (max value: 100000000)
reference	optional	string(255)	Article number, SKU or similar
name	optional	string(255)	Descriptive item name
tax_rate	optional	integer	Non-negative. In percent, two implicit decimals. I.e 2500 = 25.00 percent
total_discount_amount	optional	integer	Non-negative minor units. Includes tax
total_tax_amount	optional	integer	Must be within 1 of total amount - total_amount * 10000 / (10000 + tax rate). Negative when type is discount
image_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
product_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
quantity_unit	optional	string(8)	Unit used to describe the quantity, e.g. kg, pcs.... If defined has to be 1-8 characters
product_identifiers	optional		List with product identifiers
brand	optional	string(255)	The product's brand name as generally recognized by consumers. If no brand is available for a product, do not supply any value
category_path	optional	string(255)	The product's category path as used in the merchant's webshop. Include the full and most detailed category and separate the segments with ' > '
global_trade_item_number	optional	string(255)	The product's Global Trade Item Number (GTIN). Common types of GTIN are EAN, ISBN or UPC. Exclude dashes and spaces, where possible
manufacturer_part_number	optional	string(255)	The product's Manufacturer Part Number (MPN), which - together with the brand - uniquely identifies a product. Only submit MPNs assigned by a manufacturer and use the most specific MPN possible

Parameter	Required	Format	Description
merchant_data	optional		List with merchant data
marketplace_seller_info	optional	string(255)	Information for merchant marketplace

`required*` = conditionally required

Supported countries:

Country	Country code
Austria	AT
Denmark	DK
Finland	FI
Germany	DE
Netherlands	NL
Norway	NO
Sweden	SE

Supported item types:

Item Types
physical
discount
shipping_fee
sales_tax
digital
gift_card
store_credit
surcharge

Successful Response

```
stdClass Object
{
    [transaction_type] => klarna_capture
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 60
    [currency] => USD
    [sent_to_acquirer] => true
}
```

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>klarna_capture</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>60</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```

stdClass Object
(
    [transaction_type] => klarna_capture
    [status] => error
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 60
    [currency] => USD
    [sent_to_acquirer] => false
)

```

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>klarna_capture</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>340</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>0@</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
sent_to_acquirer	string	"true" or "false"

Crypto

Alternative payment methods supporting digital cryptocurrencies.

BITPAY SALE

BitPay is a cryptocurrency payments provider supporting blockchain payments with Bitcoin (BTC) and BitcoinCash (BCH).

BitPay Sale is an asynchronous transaction type.

When this payment method is selected at checkout, the customer will be redirected to the BitPay system window including all the data for the payment: Bitcoin/BitcoinCash account, amount to be paid in cryptocurrency and the Fiat equivalent.

If the customer possesses a BitPay wallet or another BitPay compatible crypto wallet, the payment can be done from that window with one click, otherwise a QR CODE containing all the payment data can be scanned and used in any crypto wallet.

Then the customer has 15 minutes to fulfill the generated invoice.

If that timeframe is not met, the invoice will expire and the Merchant will be notified.

If the invoice is fulfilled in the timeframe, it needs to obtain 6 blockchain confirmations (1 hour) before it's safe for the payment to be considered as completed.

At that point, the Merchant will be notified for the approved payment.

After the 6th confirmation, when the transaction is completed, the Merchant can process a refund if it's needed.

- Each transaction has amount limits of minimum 1 USD and maximum of 950 000 USD or its equivalent in EUR

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bitpay_sale</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_url>https://gate.emerchantpay.net/redirect/to_acquirer/a55ab44d242f</return_url>
  <amount>3000</amount>
  <currency>EUR</currency>
  <customer_email>travis@example.com</customer_email>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Berlin</city>
    <country>DE</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: bitpay_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	optional	IPv4 address	IPv4 address of customer
return_url	required	url	URL where consumer is sent to after payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
billing_address	required*		See Required vs Optional API params for details
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bitpay_sale</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>3000</amount>
  <currency>EUR</currency>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bitpay_sale</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <technical_message>Something went wrong, please contact support!</technical_message>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>3000</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant

Parameter	Type	Description
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Payouts

BANK PAY-OUT

Bank Pay-out is a bank pay-out method. It allows merchants to transfer funds directly to customers' bank accounts.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bank_payout</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>50000</amount>
  <currency>THB</currency>
  <customer_phone>+1987987987987</customer_phone>
  <customer_email>travis@example.com</customer_email>
  <bank_name>Siam Commercial Bank</bank_name>
  <bank_branch>BANGKOK</bank_branch>
  <bank_account_number>1234123412341234</bank_account_number>
  <bank_account_name>Anurak Nghuen</bank_account_name>
  <bank_province>BANGKOK Center</bank_province>
  <billing_address>
    <first_name>Anuraks</first_name>
    <last_name>Nghuen</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Bangkok</city>
    <state>Bangkok</state>
    <country>TH</country>
  </billing_address>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: bank_payout
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
notification_url	required	url	URL at merchant where gateway sends outcome of transaction.
return_success_url	required	url	URL where customer is sent to after successful payment

Parameter	Required	Format	Description
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
bank_name	required	bank name	Must contain Bank Names
bank_branch	required	bank branch	Name of the Bank branch
bank_account_name	required	bank account name	Bank account name is required, for CNY currency and should be in Simplified Chinese. For other currency, must be in English Language.
bank_account_number	required	bank account number	Bank account number of the customer.
bank_province	required	bank province	Name of the province that the bank is located.
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Supported currencies

Currency name	Currency code
China yen	CNY
Indonesian rupiah	IDR
Malaysian ringgit	MYR
Thai baht	THB

BANK NAMES

For CNY currency:

Bank Name

For MYR currency:

Bank Name
423
CIMB Clicks Bank
Hong Leong Bank
May Bank
Public Bank
RHB Bank

For THB currency:

Bank Name
Bangkok Bank
Kasikorn Bank
Krungsri (Bank of Ayudhya Public Company Limited)
Krung Thai Bank
Siam Commercial Bank
UOBT

For IDR currency:

Bank Name

Bank Name
Bank Rakyat Indonesia
Bank Negara Indonesia
BTN Bank
CIMB Clicks Indonesia
Danamon Bank
Mandiri Bank
Permata Bank

For INR currency:

Bank Name	Bank Code
Netbanking	NB
UPI	UI

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bank_payout</transaction_type>
  <status>pending_async</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>4417a21403427eb96664ad7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>50000</amount>
  <currency>INR</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bank_payout</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>110</code>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>50000</amount>
  <currency>THB</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BITPAY PAYOUT

BitPay Payout is a crypto currency payout method where merchants are requesting payouts in FIAT currency and the funds are transferred in Bitcoin equivalent to a crypto wallet address.

BitPay Payout is an asynchronous transaction type supported through the Processing API, Virtual Terminal and Web Payment Form.

The payout requests are processed once a day at 11:00 GMT and the settlement usually takes 24 hours.

i For amounts greater than 3000 USD or equivalent in other currency, additional KYC authentication might be required by BitPay

i Each transaction has amount limits of minimum 1 USD and maximum of 950 000 USD or its equivalent in EUR

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bitpay_payout</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40280 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>2000</amount>
  <currency>USD</currency>
  <crypto_address>n1jE32b88mtT7UETWvV6WgrV5AUVTxDxW8</crypto_address>
  <crypto_wallet_provider>other</crypto_wallet_provider>
  <customer_email>travis@example.com</customer_email>
</payment_transaction>
'

```

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bitpay_payout</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40280 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>500000</amount>
  <currency>USD</currency>
  <crypto_address>n1jE32b88mtT7UETWvV6WgrV5AUVTxDxW7</crypto_address>
  <crypto_wallet_provider>kraken</crypto_wallet_provider>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: bitpay_payout
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
notification_url	required	url	URL at merchant where gateway sends outcome of transaction.
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
customer_email	required*	e-mail address	Must contain valid e-mail of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
crypto_address	required	string(255)	Valid crypto address where the funds will be received
crypto_wallet_provider	required	string(255)	If crypto wallet provider is not in the table below, you must send 'other'
billing_address	required*		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name

Parameter	Required	Format	Description
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Crypto wallet providers with additional requirements

crypto wallet provider	description	website
BitGo	crypto wallet provider	official website
Uphold	crypto wallet provider	official website
Circle	crypto exchange	official website
Coinbase	crypto wallet provider	official website
GDax	crypto exchange	official website
Gemini	crypto exchange	official website
ITBit	crypto exchange	official website
Kraken	crypto exchange	official website

i Address fields are required in case the crypto wallet provider is in the list above and the payout amount is greater than 3000 USD or the equivalent in other currency

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bitpay_payout</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>500000</amount>
  <currency>USD</currency>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bitpay_payout</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <response_code></response_code>
  <code>940</code>
  <technical_message>Bitcoin address is invalid</technical_message>
  <message>Something went wrong, please contact support!</message>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>2000</amount>
  <currency>USD</currency>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

EZEECARD PAYOUT

eZeeCard Payout is a sync based payout method. It's merchant initiated and can only reference specific transaction types:

- Capture

- Sale
- Sale3d
- InitRecurringSale
- InitRecurringSale3d
- RecurringSale

Those need to have been completed using a card issued by our Issuing API.

i eZeeCard Payout is available through Processing API and VT only!

i eZeeCard Payout has amount limits of minimum 10 EUR and maximum of 800 EUR per transaction or its equivalent in other currencies

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ''
<payment_transaction>
<transaction_type>ezecard_payout</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40288 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>1000</amount>
<currency>EUR</currency>
<reference_id>43672</reference_id>
</payment_transaction>
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: ezecard_payout
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
reference_id	required	string(32)	Unique id returned by corresponding transaction

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>ezecard_payout</transaction_type>
<status>approved</status>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<transaction_id>43671</transaction_id>
<mode>live</mode>
<timestamp>2019-03-14T12:06:02Z</timestamp>
<amount>1000</amount>
<currency>EUR</currency>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
-----------	------	-------------

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
transaction_id	string(255)	Unique transaction id defined by merchant
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>zeecard_payout</transaction_type>
  <status>error</status>
  <unique_id>44177a21403427eb6664ad7e5d5d48</unique_id>
  <transaction_id>43671</transaction_id>
  <technical_message>invalid deposit transaction</technical_message>
  <message></message>
  <mode>live</mode>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <amount>1000</amount>
  <currency>EUR</currency>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
transaction_id	string(255)	Unique transaction id defined by merchant
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

PAYOUT

Payouts are credits without a reference transaction and as such are highly regulated and need specific gateway terminal configuration, so be sure to contact the IT Support team at tech-support@merchantpay.net in case you want Payouts to be enabled.

Using a payout, the amount is billed to the customer's credit card. It can be reversed via a void transaction on the same day of the transaction.

Note that Visa payouts are not authorized through the schemes but batched for offline settlement on the same day, while Mastercard/Maestro Payouts are authorized real-time. This means that the authorization code and issuer response code are available only for non-Visa payouts.

i This transaction type supports Tokenization.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Payout');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.PayoutRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        PayoutRequest request = new PayoutRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.payout(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TOKEN \ 
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>payout</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: payout
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
gaming	optional	"true"	Signifies whether a gaming transaction is performed. Gaming transactions usually use MCC 7995, contact tech support for more details.
moto	optional	"true"	Signifies whether a MOTO (mail order telephone order) transaction is performed. Contact tech support for more details.
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
card_holder	required	string(255)	Full name of customer as printed on credit card (first name and last name at least)

Parameter	Required	Format	Description
card_number	required	13 to 16 digits	Complete cc number of customer
cvv	required*	3 to 4 digits	cvv of cc, requirement is based on terminal configuration
expiration_month	required	MM	Expiration month as printed on credit card
expiration_year	required	YYYY	Expiration year as printed on credit card
token	optional	string(36)	See Tokenization for more details. If present, the cardholder parameters can be omitted. Cannot be set together with <code>remember_card</code>
remember_card	optional	"true"	See Tokenize. Tokenizes cardholder parameters. Cannot be set together with <code>token</code>
consumer_id	optional	string(10)	See Consumers and Tokenization. Combine with <code>remember_card</code> to tokenize or with <code>token</code> to use token
credential_on_file	required*		See Credential On File (COF) for more details
initial_customer_initiated	required*	string(18)	Initial transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	required*	string(18)	Subsequent transaction initiated by customer. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	optional	string(20)	Transaction is initiated by the merchant
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required*	dd-mm-yyyy	Required when MCC is a Financial Services one (e.g. MCC 6012) and either card brand is Visa or Mastercard/Maestro with UK-based merchant, UK-based bin (domestic), and DEBIT card type
document_id	required*	string(20)	Document ID of the consumer. See Document ID Parameter for more details.
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

`required*` = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => payout
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [consumer_id] => 123456
    [token] => ee946db8-d7db-4bb7-b608-b65b153e127d
    [avs_response_code] => 51
    [avs_response_text] => Response provided by issuer processor; Address information not verified
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[payout]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<consumer_id content=[123456]>
<token content=[ee946db8-d7db-4bb7-b608-b65b153e127d]>
<avs_response_code content=[51]>
<avs_response_text content=[Response provided by issuer processor; Address information not verified]>
<authorization_code content=[345678]>
<response_code content=[00]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "payout",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    consumer_id: "123456",
    token: "ee946db8-d7db-4bb7-b608-b65b153e127d",
    avs_response_code: "51",
    avs_response_text: "Response provided by issuer processor; Address information not verified",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:06:02Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>payout</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <consumer_id>123456</consumer_id>
    <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
    <avs_response_code>51</avs_response_code>
    <avs_response_text>Response provided by issuer processor; Address information not verified</avs_response_text>
    <authorization_code>345678</authorization_code>
    <response_code>00</response_code>
    <timestamp>2019-03-14T12:06:02Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenization
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check [AVS Status Codes](#avs-status-codes) for details.
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => payout
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [response_code] => 57
    [code] => 340
    [technical_message] => billing_address[zip_code] is invalid!
    [message] => billing_address[zip_code] is invalid!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=<
<transaction_type content=[payout]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<response_code content=[57]>
<code content=[340]>
<technical_message content=[billing_address[zip_code] is invalid!]>
<message content=[billing_address[zip_code] is invalid!]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
  transaction_type: "payout",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  response_code: "57",
  code: "340",
  technical_message: "billing_address[zip_code] is invalid!",
  message: "billing_address[zip_code] is invalid!",
  timestamp: "2019-03-14T12:06:02Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
  sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>payout</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <response_code>57</response_code>
  <code>340</code>
  <technical_message>billing_address[zip_code] is invalid!</technical_message>
  <message>billing_address[zip_code] is invalid!</message>
  <timestamp>2019-03-14T12:06:02Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

SCT PAYOUT

SCT payouts are Sepa-based payouts to consumers done without a reference transaction and as such are regulated and need specific gateway terminal configuration, so be sure to contact the IT Support team at tech-support@emerchantpay.net) in case you want SCT payouts to be enabled.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\SDD\Payout');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('EUR')
->setIban('DE09100100101234567891')
->setBic('PBNKDEFFXXX')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingCountry('DE');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.sdd.SDDPayoutRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SDDPayoutRequest request = new SDDPayoutRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("EUR");
        request.setIban("DE09100100101234567891");
        request.setBic("PBNKDEFFXXX");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingCountry("DE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();
};

var failure = function(reason) {
  return console.log(reason);
};

var success = function(data) {
  return console.log(data);
};

transaction.sct_payout(
{
  "transaction_id": "43671",
  "usage": "A0208 concert tickets",
  "remote_ip": "245.253.2.12",
  "amount": "100",
  "currency": "EUR",
  "iban": "DE09100100101234567891",
  "bic": "PBNKDEFXXX",
  "billing_address": {
    "first_name": "Travis",
    "last_name": "Pastrana",
    "country": "DE"
  }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sct_payout</transaction_type>
<transaction_id>43671</transaction_id>
<usage>A0208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>EUR</currency>
<iban>DE09100100101234567891</iban>
<bic>PBNKDEFXXX</bic>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<country>DE</country>
</billing_address>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
iban	required	string(34)	Customer's IBAN number
bic	required	string(11)	SWIFT/BIC code of the customer's bank
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name

Parameter	Required	Format	Description
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: sct_payout
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
iban	required	string(34)	Customer's IBAN number
bic	required	string(11)	SWIFT/BIC code of the customer's bank
billing_address	required		See Required vs Optional API params for details
first_name	required	string(255)	Customer first name
last_name	required	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Allowed countries include supported countries for SDD Init Recurring Sale and the list below:

Country Name	Country Code
Bulgaria	BG
Croatia	HR
Czech Republics	CZ
Denmark	DK

Country Name	Country Code
United Kingdom	UK
Hungary	HU
Iceland	IS
Liechtenstein	LI
Norway	NO
Poland	PL
Romania	RO
Sweden	SE
Switzerland	CH

Successful Response

```
stdClass Object
{
    [transaction_type] => sct_payout
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => true
}
```

```
<payment_response content=[<transaction_type content=[sct_payout]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<technical_message content=[Transaction successful!]>
<message content=[Transaction successful!]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "sct_payout",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:06:02Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>sct_payout</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:06:02Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => sct_payout
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 340
    [technical_message] => expiration_year is invalid
    [message] => expiration_year is invalid
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:02.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => EUR
    [sent_to_acquirer] => false
)
```

```
<payment_response content=>
<transaction_type content=[sct_payout]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[340]>
<technical_message content=[expiration_year is invalid]>
<message content=[expiration_year is invalid]>
<timestamp content=[2019-03-14T12:06:02Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[EUR]>
<sent_to_acquirer content=[false]>
</>
```

```
{
    transaction_type: "sct_payout",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "340",
    technical_message: "expiration_year is invalid",
    message: "expiration_year is invalid",
    timestamp: "2019-03-14T12:06:02Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "EUR",
    sent_to_acquirer: "false",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sct_payout</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb6664a6d7e5d5d48</unique_id>
  <code>340</code>
  <technical_message>expiration_year is invalid</technical_message>
  <message>expiration_year is invalid</message>
  <timestampl>2019-03-14T12:06:02Z</timestampl>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>EUR</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

TRUSTLY WITHDRAWAL

Trustly Withdrawal is an oBeP-style alternative payment method that allows you to transfer money directly to your customers ebank account.

After initiating a transaction Trustly will redirect the customer to their page.

There they have to select their bank and log in with their regular access codes.

Then the customer has to choose the account where they wish to receive the payment (for example, their savings account or current account).

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Alternatives\Trustly\Withdrawal');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setAmount('100')
->setCurrency('USD')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')
->setBirthDate('21-10-1980')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('12114')
->setBillingCity('Berlin')
->setBillingCountry('DE');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.apm.TrustlyWithdrawalRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;
import java.net.URLEncoder;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        TrustlyWithdrawalRequest request = new TrustlyWithdrawalRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");
        request.setBirthDate("21-10-1980");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("12114");
        request.setBillingCity("Berlin");
        request.setBillingCountry("DE");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.trustly_withdrawal(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "amount": "100",
    "currency": "USD",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "birth_date": "21-10-1980",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "12114",
        "city": "Berlin",
        "country": "DE"
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TOKEN \ 
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>trustly_withdrawal</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<amount>100</amount>
<currency>USD</currency>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<birth_date>21-10-1980</birth_date>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>12114</zip_code>
<city>Berlin</city>
<country>DE</country>
</billing_address>
</payment_transaction>' 

```

Request Parameters

Parameter	Required	Format	Description
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
customer_email	required	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
birth_date	required	dd-mm-yyyy	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address

Parameter	Required	Format	Description
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries:

Country name	Country code
Austria	AT
Bulgaria	BG
Belgium	BE
Croatia	HR
Czech Republic	CZ
Cyprus	CY
Denmark	DK
Estonia	EE
Finland	FI
France	FR
Germany	DE
Greece	GR
Hungary	HU
Italy	IT
Ireland	IE
Lithuania	LT
Latvia	LV
Luxembourg	LU
Malta	MT
Norway	NO
Netherlands	NL
Portugal	PT
Poland	PL
Romania	RO
Slovakia	SK
Slovenia	SI
Sweden	SE
Spain	ES
United Kingdom	GB

Successful Response

```

stdClass Object
(
    [transaction_type] => trustly_withdrawal
    [status] => pending_async
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [redirect_url] => https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[>
    <transaction_type content=[trustly_withdrawal]>
    <status content=[pending_async]>
    <mode content=[live]>
    <transaction_id content=[43671]>
    <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
    <redirect_url content=[https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61]>
    <technical_message content=[Transaction successful!]>
    <message content=[Transaction successful!]>
    <timestamp content=[2019-03-14T12:06:03Z]>
    <descriptor content=[Descriptor one]>
    <amount content=[100]>
    <currency content=[USD]>
    <sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "trustly_withdrawal",
    status: "pending_async",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    redirect_url: "https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61",
    technical_message: "Transaction successful!",
    message: "Transaction successful!",
    timestamp: "2019-03-14T12:06:03Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>trustly_withdrawal</transaction_type>
    <status>pending_async</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/649e1ff35c61</redirect_url>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <timestamp>2019-03-14T12:06:03Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
redirect_url	url	URL where user has to be redirected to complete payment process. It is available for asynchronous mode
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

Parameter	Type	Description
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => trustly_withdrawal
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 110
    [message] => Something went wrong, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=[<transaction_type content=[trustly_withdrawal]>
<status content=[error]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<code content=[110]>
<message content=[Something went wrong, please contact support!]>
<timestamp content=[2019-03-14T12:06:03Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[false]>
]>
```

```
{
    transaction_type: "trustly_withdrawal",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "110",
    message: "Something went wrong, please contact support!",
    timestamp: "2019-03-14T12:06:03Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>trustly_withdrawal</transaction_type>
<status>error</status>
<mode>live</mode>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
<code>110</code>
<message>Something went wrong, please contact support!</message>
<timestamp>2019-03-14T12:06:03Z</timestamp>
<descriptor>Descriptor one</descriptor>
<amount>100</amount>
<currency>USD</currency>
<sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states

Parameter	Type	Description
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

TOLA PAYOUT

ⓘ Tola Payout, or otherwise known as Disbursement, is an APM used to process Mobile network operator payments. It is an async payment method and will be approved once Tola processes the payment with the Mobile network operator

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>tola_payout</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40289 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>KES</currency>
  <customer_email>barney.rubble@example.com</customer_email>
  <customer_phone>254701123456</customer_phone>
  <operator>SAFARICOM</operator>
  <target>000010</target>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Nairobi</city>
    <country>KE</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: tola_payout
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	required*	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment

Parameter	Required	Format	Description
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
operator	required	string(20)	Name of the Mobile network operator (MNO) which should process the transaction
target	required	string(20)	Number of the Paybill for which the transaction is intended
customer_phone	required	string(32)	Must contain valid phone number of customer
customer_email	required*	e-mail address	Must contain valid e-mail of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries, operators and currencies:

Country code	Operator	Currency code
GH	VODACOM, AIRTEL, MTN, TIGO	GHS
TZ	VODACOM, AIRTEL, TIGO	TZS
MZ	VODACOM, MOVITEL	MZN
RW	MTN, TIGO	RWF
KE	SAFARICOM, AIRTEL	KES
UG	AIRTEL, MTN	UGX

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>tola_payout</transaction_type>
  <status>pending_async</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>KES</currency>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>tola_payout</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <message>Something went wrong, please contact support!</message>
  <technical_message>operator is not supported!</technical_message>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>KES</currency>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
message	string(255)	Human readable error message which can be displayed to users.
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details

Parameter	Type	Description
currency	string	Currency code in ISO 4217

Mobile Payments

TOLA SALE

ⓘ Tola Sale, otherwise known as Charge, is an APM used to process Mobile network operator payments. It is an async payment method and will be approved once Tola processes the payment with the Mobile network operator

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>tola_sale</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40298 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <amount>100</amount>
  <currency>KES</currency>
  <customer_email>barney.rubble@example.com</customer_email>
  <customer_phone>+254701123456</customer_phone>
  <operator>SAFARICOM</operator>
  <target>>000010</target>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Nairobi</city>
    <country>KE</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: tola_sale
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
operator	required	string(20)	Name of the Mobile network operator (MNO) which should process the transaction
target	required	string(20)	Number of the Paybill for which the transaction is intended
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required	string(32)	Must contain valid phone number of customer
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name

Parameter	Required	Format	Description
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Supported countries, operators and currencies:

Country code	Operator	Currency code
GH	VODACOM	GHS
KE	SAFARICOM	KES
UG	AIRTEL, MTN	UGX

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
<transaction_type>tola_sale</transaction_type>
<status>pending_async</status>
<transaction_id>43671</transaction_id>
<unique_id>44177a21403427eb06664a6d7e5d5d48</unique_id>
<technical_message>Transaction successful!</technical_message>
<message>Transaction successful!</message>
<timestamp>2019-03-14T12:06:03Z</timestamp>
<descriptor>descriptor one</descriptor>
<amount>100</amount>
<currency>KES</currency>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>tola_sale</transaction_type>
  <status>error</status>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <message>Something went wrong, please contact support!</message>
  <technical_message>operator is not supported</technical_message>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>KES</currency>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
message	string(255)	Human readable error message which can be displayed to users.
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

Reversals

Reversal transactions serve to change the state of the original transaction and return money back to customer's account. They can be used with Card, 3DS Card, and different APM transactions.

REFUND

Refunds allow to return already billed amounts to customers.

The amount can be fully or partially refunded. Refunds can only be done on formercapture(settled) or sale transactions.

Therefore, the reference id for the corresponding transaction is mandatory.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Refund');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setReferenceId('43672')
    ->setAmount('100')
    ->setCurrency('USD');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.RefundRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        RefundRequest request = new RefundRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("43672");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```
var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.refund(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "reference_id": "43672",
    "amount": "100",
    "currency": "USD"
})
.send()
.then(success)
.catch(failure);
```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>refund</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <reference_id>43672</reference_id>
  <amount>100</amount>
  <currency>USD</currency>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: refund
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

```

stdClass Object
(
    [transaction_type] => refund
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
)

```

```

<payment_response content=[

  <transaction_type content=[refund]>
  <status content=[approved]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <authorization_code content=[345678]>
  <response_code content=[00]>
  <timestamp content=[2019-03-14T12:06:03Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[100]>
  <currency content=[USD]>
]>

```

```

{
    transaction_type: "refund",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:06:03Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>refund</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217

Error Response

```

stdClass Object
(
    [transaction_type] => refund
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 410
    [technical_message] => no approved reference transaction found
    [message] => no approved reference transaction found
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
)

```

```

<payment_response content=[

  <transaction_type content=[refund]>
    <status content=[error]>
      <mode content=[live]>
        <transaction_id content=[43671]>
          <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
            <code content=[410]>
              <technical_message content=[no approved reference transaction found]>
                <message content=[no approved reference transaction found]>
                  <timestamp content=[2019-03-14T12:06:03Z]>
                    <descriptor content=[Descriptor one]>
                      <amount content=[100]>
                        <currency content=[USD]>
                      ]>

```

```
{
  transaction_type: "refund",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  code: "410",
  technical_message: "no approved reference transaction found",
  message: "no approved reference transaction found",
  timestamp: "2019-03-14T12:06:03Z",
  descriptor: "Descriptor one",
  amount: "100",
  currency: "USD",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>refund</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>410</code>
  <technical_message>no approved reference transaction found</technical_message>
  <message>no approved reference transaction found</message>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217

VOID

Void transactions undo other transactions.

Transactions of types authorize, capture, sale, refund, recurring sale, and init recurring sale along with their 3D variants can be reversed on the same day the transaction took place. The transaction will not show up on the customer's credit card statement if voided on the same day.

Tip: The same day is dependent of the timezone of the acquiring bank.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cancel');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setReferenceId('43672');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.VoidRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        VoidRequest request = new VoidRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setReferenceId("43672");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.cancel(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "reference_id": "43672"
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>void</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<reference_id>43672</reference_id>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: void
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => void
    [status] => approved
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [authorization_code] => 345678
    [response_code] => 00
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => true
)
```

```
<payment_response content=[

<transaction_type content=[void]>
<status content=[approved]>
<mode content=[live]>
<transaction_id content=[43671]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<authorization_code content=[345678]>
<response_code content=[00]>
<timestamp content=[2019-03-14T12:06:03Z]>
<descriptor content=[Descriptor one]>
<amount content=[100]>
<currency content=[USD]>
<sent_to_acquirer content=[true]>
]>
```

```
{
    transaction_type: "void",
    status: "approved",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    authorization_code: "345678",
    response_code: "00",
    timestamp: "2019-03-14T12:06:03Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "true",
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
    <transaction_type>void</transaction_type>
    <status>approved</status>
    <mode>live</mode>
    <transaction_id>43671</transaction_id>
    <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
    <authorization_code>345678</authorization_code>
    <response_code>00</response_code>
    <timestamp>2019-03-14T12:06:03Z</timestamp>
    <descriptor>Descriptor one</descriptor>
    <amount>100</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type

Parameter	Type	Description
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
authorization_code	string(6)	Generated by the card network when an authorisation has occurred, used to identify that auth. Consists of 6 alphanumeric chars
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08- 30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

```
stdClass Object
(
    [transaction_type] => void
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 420
    [technical_message] => can not do void on void reference
    [message] => can not do void on void reference
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [descriptor] => Descriptor one
    [amount] => 100
    [currency] => USD
    [sent_to_acquirer] => false
)
```

```
<payment_response content=>
    <transaction_type content=[void]>
        <status content=[error]>
        <mode content=[live]>
        <transaction_id content=[43671]>
        <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
        <code content=[420]>
        <technical_message content=[can not do void on void reference]>
        <message content=[can not do void on void reference]>
        <timestamp content=[2019-03-14T12:06:03Z]>
        <descriptor content=[Descriptor one]>
        <amount content=[100]>
        <currency content=[USD]>
        <sent_to_acquirer content=[false]>
    >
```

```
{
    transaction_type: "void",
    status: "error",
    mode: "live",
    transaction_id: "43671",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    code: "420",
    technical_message: "can not do void on void reference",
    message: "can not do void on void reference",
    timestamp: "2019-03-14T12:06:03Z",
    descriptor: "Descriptor one",
    amount: "100",
    currency: "USD",
    sent_to_acquirer: "false",
}
```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>void</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>4417a21403427eb6664a6d7e5d5d48</unique_id>
  <code>420</code>
  <technical_message>can not do void on void reference</technical_message>
  <message>can not do void on void reference</message>
  <tstamp>2019-03-14T12:06:03Z</tstamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>

```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

KLARNA REFUND

Klarna Refunds allow to return already billed amounts to customers.

The amount can be fully or partially refunded. Klarna refunds can only be done on former Klarna Capture (settled) transactions.

Therefore, the reference_id for the corresponding transaction is mandatory.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>klarna_refund</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <reference_id>43672</reference_id>
  <amount>60</amount>
  <currency>USD</currency>
  <items>
    <item>
      <item_type>physical</item_type>
      <reference>19-402-USA</reference>
      <name>BatteryPowerPack</name>
      <quantity>1</quantity>
      <unit_price>60</unit_price>
      <tax_rate>0</tax_rate>
      <total_amount>60</total_amount>
      <total_discount_amount>0</total_discount_amount>
      <total_tax_amount>0</total_tax_amount>
      <image_url>https://example.com/image_url</image_url>
      <product_url>https://example.com/product_url</product_url>
      <quantity_unit>pcs</quantity_unit>
      <merchant_data>
        <marketplace_seller_info>Electronic gadgets</marketplace_seller_info>
      </merchant_data>
    </item>
  </items>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: klarna_refund
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	Unique id returned by corresponding transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
items	required		List with items
item_type	required	string(255)	Order line type. Possible values: Supported item types
quantity	required	integer	Non-negative. The item quantity
unit_price	required	integer	Minor units. Includes tax, excludes discount(max value: 100000000)
total_amount	required	integer	Includes tax and discount. Must match (quantity unit price) - total discount amount divided by quantity (max value: 100000000)
reference	optional	string(255)	Article number, SKU or similar
name	optional	string(255)	Descriptive item name
tax_rate	optional	integer	Non-negative. In percent, two implicit decimals. I.e 2500 = 25.00 percent
total_discount_amount	optional	integer	Non-negative minor units. Includes tax
total_tax_amount	optional	integer	Must be within 1 of total amount - total_amount * 10000 / (10000 + tax rate). Negative when type is discount
image_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
product_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
quantity_unit	optional	string(8)	Unit used to describe the quantity, e.g. kg, pcs... If defined has to be 1-8 characters
product_identifiers	optional		List with product identifiers
brand	optional	string(255)	The product's brand name as generally recognized by consumers. If no brand is available for a product, do not supply any value
category_path	optional	string(255)	The product's category path as used in the merchant's webshop. Include the full and most detailed category and separate the segments with ' > '
global_trade_item_number	optional	string(255)	The product's Global Trade Item Number (GTIN). Common types of GTIN are EAN, ISBN or UPC. Exclude dashes and spaces, where possible
manufacturer_part_number	optional	string(255)	The product's Manufacturer Part Number (MPN), which - together with the brand - uniquely identifies a product. Only submit MPNs assigned by a manufacturer and use the most specific MPN possible

Parameter	Required	Format	Description
merchant_data	optional		List with merchant data
marketplace_seller_info	optional	string(255)	Information for merchant marketplace

`required*` = conditionally required

Supported item types:

Item Types
physical
discount
shipping_fee
sales_tax
digital
gift_card
store_credit
surcharge

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>klarna_refund</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>0</amount>
  <currency>USD</currency>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_transaction>
```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>klarna_refund</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb9664a6d7e5d5d48</unique_id>
  <code>420</code>
  <technical_message>can not do void on void reference</technical_message>
  <message>can not do void on void reference</message>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>60</amount>
  <currency>USD</currency>
  <sent_to_acquirer>false</sent_to_acquirer>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217
sent_to_acquirer	string	"true" or "false"

BITPAY REFUND

BitPay Refund is a custom refund method which will handle the asynchronous BitPay refund workflow. BitPay refunds can only be done on former transactions. Therefore, the reference id for the corresponding BitPay Sale transaction is mandatory.

BitPay Refund is an asynchronous transaction type.

When a BitPay Refund is requested, BitPay will send an email to the consumer with a request to provide the refund crypto address. This request will be valid for 3 days and will expire afterwards. When the crypto address is provided, the refund will be processed (processing usually takes 24 hours).

A Notification will be sent to the Merchant when the Bitpay refund is completed.

i Only full refunds are supported at the moment.

i BitPay Refunds can be voided only in the 24-hour processing period.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>bitpay_refund</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40209 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <reference_id>43672</reference_id>
  <amount>100</amount>
  <currency>USD</currency>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
transaction_type	required	string(255)	The transaction type: bitpay_refund
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
remote_ip	required*	IPv4 address	IPv4 address of customer
reference_id	required	string(32)	The reference_id must be a BitPay Sale transaction
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bitpay_refund</transaction_type>
  <status>approved</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
</payment_transaction>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	string	Currency code in ISO 4217

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>bitpay_refund</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>410</code>
  <technical_message>no approved reference transaction found</technical_message>
  <message>no approved reference transaction found</message>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>Descriptor one</descriptor>
  <amount>100</amount>
  <currency>USD</currency>
</payment_transaction>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
response_code	string(2)	Defines the issuer result of a transaction, the status of a message or some action taken or required. See issuer response codes for details
code	integer	Error code according to Error code table
mode	string	Mode of the transaction's terminal, can be "live" or "test"
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
descriptor	string	Static descriptor MID info as configured on the gateway
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217

Alternative Payment Method External Events

INTRODUCTION

For some alternative payment method (APM) transactions additional events may occur resulting from various actions from the part of the consumer or the merchant. Examples: returned/reversed bank transfers, funds not received, additional bank transfers made using the same transaction reference number etc.

In Genesis these are called external events and are handled in the following manner:

1. A transaction note is created for the external event (visible under the "Transaction Notes" section on the corresponding payment transaction page in the merchant console).
2. An API notification is sent to the merchant notification endpoint
3. An email notification is sent to the merchant admin email address
4. The original transaction status might be updated depending on the nature of the external event

LIST OF EXTERNAL EVENTS PER ALTERNATIVE PAYMENT METHOD

APM	External event	Description	Status change
InstaDebit Payin	instadebit_payin_return	Payment has been returned to the consumer	voided
InstaDebit Payin	instadebit_payin_adjustment	Payment has been adjusted	none
InstaDebit Payout	instadebit_payout_return	Payment has been returned to the consumer	voided
InstaDebit Payout	instadebit_payout_adjustment	Payment has been adjusted	none
iDebit Payin	idebit_payin_return	Payment has been returned to the consumer	voided
iDebit Payin	idebit_payin_adjustment	Payment has been adjusted	none
iDebit Payout	idebit_payout_return	Payment has been returned to the consumer	voided
iDebit Payout	idebit_payout_adjustment	Payment has been adjusted	none

APM	External event	Description	Status change
P24	p24_external_refund	Payment has been rescinded by the consumer or was never received	refunded
Argencard	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Aura	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Cabal	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Cencosud	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Elo	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Hipercard	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Naranja	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Nativa	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked
Tarjeta Shopping	chargeback_external_event	Payment has been considered fraudulent by the card issuer and was reversed	chargebacked

EMAIL NOTIFICATION

An email is sent to the merchant admin's email address detailing the external event type and any other relevant details together with a link to the original payment transaction.

API NOTIFICATION

MERCHANTS will receive API notifications every time Genesis obtains information about APM external events. Notifications are transmitted via HTTP POST (application/x-www-form-urlencoded) to the notification url endpoint provided in the XML request or to the Notification URL from the merchant account

An example notification:

```
&notification_type=apm_external_event
&signature=8216b1b4929c0a41ed440bf51726c10872a78f181b26d1427e15410da56803fc0a2f
&payment_transaction_unique_id=64216236bcd683952325b6698b3954a
&category=citadel_payin_chargeback
&priority=info
&code=SDR
&info=Revoked+payment+due+to+instant+payment+funds+not+received
&message=A+Citadel+Payin+transaction+has+been+reversed%2FRevoked.+Payment+has+been+rescinded+by+the+consumer+or+funds+were+never+received+for+the+payment.
&payload=...

```

Parameters:

Name	Type	Description
notification_type	string	constant value "apm external event"
signature	string	the signature of the notification, should be used to verify the the notification was sent by Genesis
payment_transaction_unique_id	string	unique id of the original transaction, generated by Genesis
category	string	type of the external event
priority	string	can be one of "info", "normal" or "urgent"
code	string	code for the external event from the APM provider system
info	string	a short description of the external event
message	string	full short description of the external event
payload	string	the raw response for the external event as received from the APM provider

The signature is a security measure meant to ensure that the gateway is really the sender of the notification. It is generated by concatenating the unique id of the payment with your API password and generating a SHA-512 Hash (Hex) of the string:

SHA-512 Hash Hex of [payment_transaction_unique_id][Your Merchant API password]

Notification signature examples

payment_transaction_unique_id	API password	signature
26aa150ee68b1b2d6758a0e6c44fce4c	50fd87e65eb415f42fb5af4c9cf497662e00b785	c5219b3d385e74496b2b48a549
3f760162ef57a829011e5e2379b3fa17	50fd87e65eb415f42fb5af4c9cf497662e00b785	14519d0db2f7f8f407efcc9b09

```

<?xml version="1.0" encoding="UTF-8"?>
<notification_echo>
  <unique_id>3f760162ef57a829011e5e2379b3fa17</unique_id>
</notification_echo>

```

When receiving the notification, you are required to render an XML page containing the transaction's payment transaction unique id so that the gateway knows that you have accepted the notification. If the XML is not delivered, the notification is sent periodically as per the rules for notifications delivery.

Advanced risk management with RiskParams

The risk params section in the payment transaction xml allows you to pass user specific values along with the payment transaction. These values may be used by advanced risk management features and checked against a blacklist.

RiskParams can be used in any user triggered payment transaction. User triggered transactions types are Authorize, Authorize3d, Sale, Sale3d, InitRecurringSale, InitRecurringSale3d, and AccountVerification.

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_transaction>
  <transaction_type>sale</transaction_type>
  <transaction_id>43671</transaction_id>
  <usage>40208 concert tickets</usage>
  <remote_ip>245.253.2.12</remote_ip>
  <amount>$000</amount>
  <currency>USD</currency>
  <card_holder>Emil Example</card_holder>
  <card_number>4200000000000000</card_number>
  <cvv>123</cvv>
  <expiration_month>2</expiration_month>
  <expiration_year>2015</expiration_year>
  <customer_email>email@example.com</customer_email>
  <customer_phone>+49301234567</customer_phone>
  <billing_address>
    <first_name>Max</first_name>
    <last_name>Mustermann</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Berlin</city>
    <state>DE1</state>
    <country>DE</country>
  </billing_address>
  <risk_params>
    <ssn>987-65-4320</ssn>
    <mac_address>12-34-56-78-9A-BC</mac_address>
    <session_id>1DA53551-5C60-498C-9C18-8456BDBA74A9</session_id>
    <user_id>1002547</user_id>
    <user_level>vip</user_level>
    <email>email@example.com</email>
    <phone>+49301234567</phone>
    <remote_ip>245.253.2.12</remote_ip>
  </risk_params>
</payment_transaction>

```

Parameter	Required	Format	Description
risk_params	optional		
- ssn	optional	string(128)	Social Security number or equivalent value for non US customers.
- mac_address	optional	string(128)	the customers mac address.
- session_id	optional	string(128)	the customers session_id.
- user_id	optional	string(128)	the customers user_id.
- user_level	optional	string(128)	a value describing the customers trust level, may be used by the risk management for configurable differentiated limits.
- email	optional	string(128)	the customers email.
- phone	optional	string(128)	the customers phone.
- remote_ip	optional	string(128)	the customers ip address.
- serial_number	optional	string(128)	custom serial number.
- pan_tail	optional	string(128)	The last 4 digits of the card number.
- bin	optional	string(128)	The first 6 digits of the card number.
- first_name	optional	string(128)	Customer first name.
- last_name	optional	string(128)	Customer last name.
- country	optional	string(128)	The country of the customer.
- pan.	optional	string(128)	The PAN hash of the customer card number.

Parameter	Required	Format	Description
- forwarded_ip	optional	string(128)	MaxMind specific risk param.
- username	optional	string(128)	MaxMind specific risk param.
- password	optional	string(128)	MaxMind specific risk param.
- bin_name	optional	string(128)	MaxMind specific risk param.
- bin_phone	optional	string(128)	MaxMind specific risk param.

i The risk management needs to be configured to use these values, passing the values alone will not trigger any risk management features.

To use these values for risk management please contact our Risk team.

Credential On File (COF)

As the payment ecosystem has evolved, instances in which a transaction is initiated with a stored credential based on cardholder consent for future use have significantly increased. Growth in digital commerce, together with the emergence of new business models, has increased the number of transactions where a merchant or its agent, a payment facilitator (PF), or a staged digital wallet operator (SDWO) uses cardholder payment credentials (i.e., account details) that they previously stored for future purchases.

In Genesis, the COF indicator can be used for the following transaction types: Account Verification, Authorize, Authorize3D, Sale, Sale3D, InitRecurringSale, InitRecurringSale3D, Payout to mark a transaction as **initial customer initiated, subsequent customer initiated or as unscheduled merchant initiated (UCOF)**

The UCOF transaction uses a previously stored credential for a fixed or variable amount and it does not occur on a scheduled or regularly occurring transaction date. With it, the cardholder has provided consent to the merchant to initiate one or more future transactions. An example of such a transaction is an account auto-top up.

Supported options for Credential On File (COF) field:

COF	Description
initial_customer_initiated	Initial transaction used to store payment credentials for future customer initiated payments while processing. Required for external tokenization, and optional for gateway-based tokenization
subsequent_customer_initiated	Subsequent customer initiated transaction using previously stored payment credentials. Required for external tokenization, and optional for gateway-based tokenization
merchant_unscheduled	Merchant initiated transaction where the customer has given prior consent for the merchant to store and use payment credentials, UCOF transaction

Currency and Amount Handling

The gateway handles all types of processing currencies, with exponents ranging from 0 (e.g. JPY), 2 (e.g. CNY, USD, EUR, GBP), to 3 (e.g. KWD). Processing currencies are configured on terminal level.

Transaction amounts on the API level should be submitted in the minor currency unit for the given currency, e.g.:

Amount currencies:

Name	Type	Description
USD	100.33	Should be submitted as 10033 in the amount API field (exponent 2)
EUR	3	Should be submitted as 300 in the amount API field (exponent 2)
JPY	150	Should be submitted as 150 in the amount API field (exponent 0)
KWD	100.333	Should be submitted as 100333 in the amount API field (exponent 3)

Amount limits: Amount has to be provided within limit for listed transaction types and currencies:

Transaction Type	Currency	minimum	maximum
OnlineBankingTransaction	CNY*	10.00	50,000.00
	CNY*	100.00	5,000.00
	CNY*	100.00	20,000.00
	CNY*	100.00	1,000.00
	THB	10.00	500,000.00
	IDR	10,000.00	50,000,000.00
	MYR	10.00	20,000.00

Transaction Type	Currency	minimum	maximum
BankPayoutTransaction	CNY	60.00	49,000.00
	THB	350.00	175,000.00
	IDR	50,000.00	25,000,000.00
	MYR	50.00	20,000.00
WechatTransaction	All	10.00	3,000.00

* = Depends on the setup

Check the ISO 4217 standard for details on currencies and their exponents/minor currency units.

Dynamic Descriptor

Dynamic descriptor functionality is available as part of the gateway. It is enabled on terminal level, so contact the IT Support team attech-support@emerchantpay.net if you wish to use it.

Currently, the transactions types that support dynamic descriptor parameters are Authorize, Authorize3d, Sale, Sale3d, InitRecurringSale, InitRecurringSale3d, Payout, and PaybyvoucherSale.

WPF payments also support dynamic descriptor.

The currently supported dynamic descriptor parameters are:

Name	Type	Description
merchant_name	string(25)	Needed by merchants/PSPs to change the charge description. Any chars above 25 are truncated. If the merchant name is less than 25 chars, it is right padded with whitespace before sent to the schemes
merchant_city	string(13)	Contains the city of the merchant for card-present merchants and the merchant phone number for CNP merchants. Formatting rules applied as mentioned above

If the terminal is configured with dynamic descriptor, but the merchant does not send the dynamic descriptor parameter in question at all or sends whitespace, this defaults the given dynamic descriptor parameter to the static descriptor configured on MID level when submitted to the schemes.

Note also that the dynamic descriptor params section with the properly formatted individual dynamic descriptor params is returned in the payment transaction response on the API if those params have been submitted in the transaction API request beforehand.

Regarding reference-based transactions, since they do not accept any dynamic descriptor params in the request, there is no dynamic descriptor params section in the response as well. Reference-based transactions reuse the dynamic descriptor params of their original transaction.

Electronic Commerce Indicator

Electronic Commerce Indicator (ECI) is a value that is returned from the Directory Server (Visa, MasterCard, etc.) to indicate the authentication results of your customer's credit card payment on 3D Secure.

Visa

ECI Code	Description
05	Both cardholder and card issuing bank are 3D enabled. 3D card authentication is successful
06	Either cardholder or card issuing bank is not 3D enrolled. 3D card authentication is unsuccessful, in sample situations as: 1. 3D cardholder not enrolled 2. Card issuing bank is not 3D Secure ready
07	Authentication is unsuccessful or not attempted. The credit card is either a non-3D card or card issuing bank does not handle it as a 3D transaction

MasterCard/Maestro

ECI Code	Description
02	Both cardholder and card issuing bank are 3D enabled. 3D card authentication is successful
01	Either cardholder or card issuing bank is not 3D enrolled. 3D card authentication is unsuccessful, in sample situations as: 1. 3D Cardholder not enrolled 2. Card issuing bank is not 3D Secure ready
00 (or empty)	Authentication is unsuccessful or not attempted. The credit card is either a non-3D card or card issuing bank does not handle it as a 3D transaction

JCB

ECI Code	Description
05	Both cardholder and card issuing bank are 3D enabled. 3D card authentication is successful

ECI Code	Description
06	Either cardholder or card issuing bank is not 3D enrolled. 3D card authentication is unsuccessful, in sample situations as: 1. 3D Cardholder not enrolled 2. Card issuing bank is not 3D Secure ready
07	Authentication is unsuccessful or not attempted. The credit card is either a non-3D card or card issuing bank does not handle it as a 3D transaction

Diners

ECI Code	Description
05	Both cardholder and card issuing bank are 3D enabled. 3D card authentication is successful
06	Either cardholder or card issuing bank is not 3D enrolled. 3D card authentication is unsuccessful, in sample situations as: 1. 3D Cardholder not enrolled 2. Card issuing bank is not 3D Secure ready
07	Authentication is unsuccessful or not attempted. The credit card is either a non-3D card or card issuing bank does not handle it as a 3D transaction

American Express

ECI Code	Description
05	Both cardholder and card issuing bank are 3D enabled. 3D card authentication is successful
06	Either cardholder or card issuing bank is not 3D enrolled. 3D card authentication is unsuccessful, in sample situations as: 1. 3D Cardholder not enrolled 2. Card issuing bank is not 3D Secure ready
07	Authentication is unsuccessful or not attempted. The credit card is either a non-3D card or card issuing bank does not handle it as a 3D transaction

Issuer Response Codes

See below a list of issuer response codes with the corresponding messages. Issuer response codes (response code element) are different than the regular gateway codes (code element) - the issuer response code maps to the issuer code while the code is the gateway internal code mapping and part of the API, as described in the Errors section. Transaction responses will return the relevant issuer response code (note that both issuer response code and authorization code are optional in the API responses and will be returned only if the transaction reached the issuer)

Issuer Response Code	Issuer Message
00	Approved or completed successfully
02	Refer to card issuer
03	Invalid merchant
04	Do not honour
05	Do not honour
06	Invalid Transaction for Terminal
07	Honour with ID
08	Time-Out
09	No Original
10	Unable to Reverse
11	Partial Approval
12	Invalid transaction card / issuer / acquirer
13	Invalid amount
14	Invalid card number
17	Invalid Capture date, terminal business date
19	System Error, Re-enter transaction
20	No From Account
21	No To Account
22	No Checking Account
23	No Saving Account

Issuer Response Code	Issuer Message
24	No Credit Account
30	Format error
34	Implausible card data
39	Transaction Not Allowed
41	Pick-up card
42	Special Pickup
43	Hot Card, Pickup if possible
44	Pickup Card
45	Transaction Back Out
51	Not sufficient funds
54	Expired card
55	Incorrect PIN, Re-enter
57	Not permitted on card
58	Txn Not Permitted On Term
61	Exceeds amount limit
62	Restricted card
63	MAC Key Error
65	Exceeds frequency limit
66	Exceeds Acquirer Limit
67	Retain Card, no reason specified
68	Response received too late
75	Exceeds PIN Retry
76	Invalid Account
77	Issuer Does Not Participate In The Service
78	Function Not Available
79	Key Validation Error
80	Approval for Purchase Amount Only
81	Unable to Verify PIN
82	Invalid Card Verification Value
83	Not declined, AVS Only
84	Invalid Life Cycle of transaction
85	No Keys To Use
86	KME Sync Error
87	PIN Key Error
88	MAC sync Error
89	Security Violation
91	Issuer not available
92	Invalid Issuer
93	Transaction cannot be completed
94	Invalid originator
96	System malfunction
97	No Funds Transfer
98	Duplicate Reversal

Issuer Response Code	Issuer Message
99	Duplicate Transaction
N3	Cash Service Not Available
N4	Cash Back Request Exceeds Issuer Limit
N7	CVV2 Failure
R0	Stop Payment Order
R1	Revocation of Authorisation Order
R3	Revocation of all Authorisations Order

Manually Reviewed Transactions

Under certain conditions, transactions can be stopped for manual review by the Risk team. This happens when the appropriate risk rules have been enabled for the merchant in question. Feel free to discuss enabling of manual reviews for transactions with our Risk team. Transactions that are stopped for manual review are returned with status status 'pending review' in the API response, together with a detailed message specifying a manual review of this transaction follows. Note that transactions will be manually reviewed by the Risk team in the next 24 hours. In the process, each transaction will be manually approved or manually declined, and at this point the merchant will receive a notification with the status of the transaction, see Notifications.

Special case for manual reviewing is when the transaction is 3D async, in this case the merchant receives one notification if the transaction is manually declined by the Risk team, and two notifications if the transaction is manually approved. On manual approval, the first notification is sent once the transaction is manually approved and is sent for enrollment check to the MPI provider - the notification will contain status pending_async together with the redirect url where the consumer needs to be redirected to by the merchant. The second notification is the standard 3D notification, once a consumer has been redirected to the given redirect url, has entered his/her MPI password, and contains the final status of the transaction if it was approved by the issuer, or declined for invalid 3D password, and so on

The format of the first notification for manual review and following approval is:

```
?transaction_id=82803B4C-70CC-43BD-8B21-FD0395285B40
&unique_id=44177a21403427eb96664a6d7e5d5d48
&transaction_type=sale3d
&terminal_token=394f2ebc3646d3c017fa1e1cbc4a1e20
&status=pending_async
&amount=500
&signature=088e16a1019277b15d58faf0541e11910eb756f
&eci=06
&redirect_url=http://example.com/redirect_url
```

The second notification is the same as the typical 3D notifications for final statuses after the consumer has performed the 3D workflow.

Partial Approvals

Credit cards that do not have sufficient funds in their account for the full purchase amount may be provided with a partial approval response from the issuer. When a partial approval happens, there will be a flag confirming the partial approval in the response (partial approval set to 'true') and the amount field in the response will contain the actual partially approved amount instead of the requested one in the API request. The cardholder can then choose to use a supplemental payment method to pay the balance and complete the purchase, if so desired. Merchants that accept partial approvals should note that issuers may return a partial approval response on a pre-paid/debit card at any time, and issuers may also respond with a partial approval response amount that is equal to the requested amount.

Have in mind that full/partial refunds or captures need to reference the partially approved initial transaction, you will get a workflow error if trying to capture or refund more than the partially approved amount. So make sure you check for the partial approval flag in the API response for the relevant transaction types, and handle follow-up transaction amounts properly.

With 3-D secure transactions, if a partial approval happened, the partially approved amount will be returned in the async API notification to the merchant. This is because actual communication with the acquirers happen after 3D authentication by the cardholder, in the initial API response the merchant will get the requested amount with the status 'pending async' for the transaction.

Note that partial approval support is disabled by default, feel free to contact our Risk team to enable it.

Required vs Optional API params

There are some API params which can be configured as either optional or required on the terminal level. Contact the IT Support team tech-support@emerchantpay.net if you wish to disable or enable some API params based on your business model and integration type. Note also that if all the billing address params are configured as optional, then the whole billing address XML tag can be dismissed and not sent in the API requests.

Name	Type	Description
customer_email	email address	By default, customer email is a required API param
customer_phone	string(32)	By default, customer phone is an optional API param
remote_ip	string(40)	By default, customer IP is a required API param
first_name	string(255)	By default, customer first name is a required API param

Name	Type	Description
last_name	string(255)	By default, customer last name is a required API param
address1	string(255)	By default, primary address is a required API param. Cannot be configured as optional for account verification transaction type
address2	string(255)	By default, secondary address is an optional API param
city	string(255)	By default, city is a required API param. Cannot be configured as optional for account verification transaction type
zip_code	string	By default, zip code is a required API param. Cannot be configured as optional for account verification transaction type
state	string(2)	By default, state is an optional API param (unless country is US or CA)
country	string(2)	By default, country code is a required API param
usage	string(255)	By default, usage will be configured as a required API param for SDD and P24, optional for the rest

Transaction States

Transactions will have one of the following states. These will be returned by transaction responses, reconcile responses and will be shown in the browser interface

Status	Description
approved	Transaction was approved by the schemes and is successful.
declined	Transaction was declined by the schemes or risk management.
pending_async	An asynchronous transaction (3-D secure payment) has been initiated and is waiting for user input. Updates of this state will be sent to the notification url specified in request.
pending	The outcome of the transaction could not be determined, e.g. at a timeout situation. Transaction state will eventually change, so make a reconcile after a certain time frame.
error	An error has occurred while negotiating with the schemes.
refunded	Once an approved transaction is refunded the state changes to refunded.
chargebacked	Once an approved transaction is chargeback the state changes to chargebacked. Chargeback is the state of rejecting an accepted transaction (with funds transferred) by the cardholder or the issuer
voided	Transaction was authorized, but later the merchant canceled it.
chargeback_reversed	Once a chargebacked transaction is charged, the state changes to chargeback reversed. Chargeback has been canceled.
second_chargebacked	Once a chargeback reversed transaction is chargebacked the state changes to second chargebacked.
pending_review	Transaction on hold, a manual review will be done

Supported Card Brands

Card Brands are specific per acquirer. If you want to use a specific card brand you can contact tech-support@<%= domain_name %>.

Supported card brands
Visa
Master
Intl Maestro
Discover
Diners
AMEX
JCB

Document ID Parameter

Document ID is consumer personal identification. It is different for every country and is described more specifically in the table below. Document ID is required for some of the acquirers, please contact the IT Support team at tech-support@emerchantpay.net for more information.

Country	Name	Type	Description
India	document_id	string(10)	Consumer's Indian PAN. Must be string with 10 alphanumeric letters. 5 letters, followed by 4 numbers, followed by 1 letter or number. Example: ABCDE1234F
Turkey	document_id	string(10)	Consumer's Turkish Identification Number(T.C. Kimlik No.). Must be string between 5 and 20 digits.

Reconcile

Reconcile can be used to retrieve data about a transaction. This can be useful if you want to retrieve information about a transaction whose status is timeout, which returned an error or has changed eg. has been chargebacked.

Reconcile requests are handled exactly like transaction requests via XML.

Single Transaction

The URL for single transaction reconciling is similar to the processing url:

<https://username:password@gate.emerchantpay.net/reconcile/TOKEN>

Reconcile By Unique Id Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('NonFinancial\Reconcile\Transaction');
$request = $genesis->request();

$request
->setUniqueId('44177a21403427eb96664a6d7e5d5d48');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.nonfinancial.reconcile.ReconcileRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        ReconcileRequest request = new ReconcileRequest();

        request.setUniqueId("44177a21403427eb96664a6d7e5d5d48");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.reconcile(
{
    "unique_id": "44177a21403427eb96664a6d7e5d5d48"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/reconcile/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<reconcile>
<unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
</reconcile>'

```

Reconcile By Transaction Id Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('NonFinancial\Reconcile\Transaction');
$request = $genesis->request();

$request
->setTransactionId('merchant-transaction-id-here');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.nonfinancial.reconcile.ReconcileRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main()  {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        ReconcileRequest request = new ReconcileRequest();

        request.setTransactionId("merchant-transaction-id-here");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.reconcile(
{
    "transaction_id": "merchant-transaction-id-here"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/reconcile/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<reconcile>
<transaction_id>merchant-transaction-id-here</transaction_id>
</reconcile>'

```

XML Request to reconcile:

Note that reconcile can be done via either unique_id or transaction_id

XML Response:

Response is a standard payment response like it would be returned by any transaction. It can have either state as shown in the states section.

Successful Sale Transaction Reconciliation Response

```

stdClass Object
(
    [transaction_type] => sale
    [status] => approved
    [authorization_code] => 005645
    [response_code] => 00
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [transaction_id] => 119643250547501c79d8295
    [mode] => live
    [timestamp] => 2019-03-14T12:06:03Z
    [descriptor] => Descriptor one
    [amount] => 9000
    [currency] => USD
    [card_brand] => visa
    [card_number] => 420000...0000
    [sent_to_acquirer] => true
)

```

```

<payment_response content=[

<transaction_type content=[sale]>
<status content=[approved]>
<authorization_code content=[005645]>
<response_code content=[00]>
<unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
<transaction_id content=[119643250547501c79d8295]>
<mode content=[live]>
<timestamp content=[2019-03-14T12:06:03Z]>
<descriptor content=[Descriptor one]>
<amount content=[9000]>
<currency content=[USD]>
<card_brand content=[visa]>
<card_number content=[420000...0000]>
<sent_to_acquirer content=[true]>
]>

```

```

{
    transaction_type: "sale",
    status: "approved",
    authorization_code: "005645",
    response_code: "00",
    unique_id: "44177a21403427eb96664a6d7e5d5d48",
    transaction_id: "119643250547501c79d8295",
    mode: "live",
    timestamp: "2019-03-14T12:06:03Z",
    descriptor: "Descriptor one",
    amount: "9000",
    currency: "USD",
    card_brand: "visa",
    card_number: "420000...0000",
    sent_to_acquirer: "true",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_response>
  <transaction_type>sale</transaction_type>
  <status>approved</status>
  <authorization_code>005645</authorization_code>
  <response_code>00</response_code>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <transaction_id>119643250547501c79d8295</transaction_id>
  <mode>live</mode>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>9000</amount>
  <currency>USD</currency>
  <card_brand>visa</card_brand>
  <card_number>420000...0000</card_number>
  <sent_to_acquirer>true</sent_to_acquirer>
</payment_response>

```

i Card brand and card number will be available in response only for card transaction types.

Successful Refund Transaction Reconciliation Response

```

stdClass Object
(
    [transaction_type] => refund
    [status] => approved
    [authorization_code] => 005645
    [response_code] => 00
    [unique_id] => 5de39380bf7ac7e1fc31cbd7805dc0ec
    [transaction_id] => 119643250547501c79d8295
    [mode] => live
    [timestamp] => 2019-03-14T12:06:03Z
    [descriptor] => Descriptor one
    [amount] => 9000
    [currency] => USD
    [card_brand] => visa
    [card_number] => 420000...0000
    [sent_to_acquirer] => true
    [reference_transaction_unique_id] => 44177a21403427eb96664a6d7e5d5d48
)

```

```

<payment_response content=[<transaction_type content=[refund]>
  <status content=[approved]>
  <authorization_code content=[005645]>
  <response_code content=[00]>
  <unique_id content=[5de39380bf7ac7e1fc31cbd7805dc0ec]>
  <transaction_id content=[119643250547501c79d8295]>
  <mode content=[live]>
  <timestamp content=[2019-03-14T12:06:03Z]>
  <descriptor content=[Descriptor one]>
  <amount content=[9000]>
  <currency content=[USD]>
  <card_brand content=[visa]>
  <card_number content=[420000...0000]>
  <sent_to_acquirer content=[true]>
  <reference_transaction_unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
]>

```

```

{
    transaction_type: "refund",
    status: "approved",
    authorization_code: "005645",
    response_code: "00",
    unique_id: "5de39380bf7ac7e1fc31cbd7805dc0ec",
    transaction_id: "119643250547501c79d8295",
    mode: "live",
    timestamp: "2019-03-14T12:06:03Z",
    descriptor: "Descriptor one",
    amount: "9000",
    currency: "USD",
    card_brand: "visa",
    card_number: "420000...0000",
    sent_to_acquirer: "true",
    reference_transaction_unique_id: "44177a21403427eb96664a6d7e5d5d48",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_response>
  <transaction_type>refund</transaction_type>
  <status>approved</status>
  <authorization_code>005645</authorization_code>
  <response_code>00</response_code>
  <unique_id>5de39380bf7ac7e1fc31cb7805dc0ec</unique_id>
  <transaction_id>119643250547501c79d8295</transaction_id>
  <mode>live</mode>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <descriptor>descriptor one</descriptor>
  <amount>9000</amount>
  <currency>USD</currency>
  <card_brand>visa</card_brand>
  <card_number>420000...0000</card_number>
  <sent_to_acquirer>true</sent_to_acquirer>
  <reference_transaction_unique_id>44177a21403427eb96664a6d7e5d5d48</reference_transaction_unique_id>
</payment_response>

```

i The reference transaction unique id is also returned when a reference-based transaction has been queried via the Reconcile API.

By date range

Date range based reconciliation allows you to fetch information for all payment transactions from a terminal within a given date range. The response is paginated, each request will return 100 entries max.

The URL for date range reconciling is:

https://username:password@gate.emerchantpay.net/reconcile/by_date/TOKEN

Reconcile By Date Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('NonFinancial\Reconcile\DateRange');
$request = $genesis->request();

$request
    ->setStartDate('2014-01-01')
    ->setEndDate('2014-01-31')
    ->setPage('2');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.nonfinancial.reconcile.ReconcileByDate;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        ReconcileByDate request = new ReconcileByDate();

        request.setStartDate("2014-01-01");
        request.setEndDate("2014-01-31");
        request.setPage("2");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
  return console.log(reason);
};

var success = function(data) {
  return console.log(data);
};

transaction.reconcile_by_date(
{
  "start_date": "2014-01-01",
  "end_date": "2014-01-31",
  "page": 2
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/reconcile/by_date/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<reconcile>
<start_date>2014-01-01</start_date>
<end_date>2014-01-31</end_date>
<page>2</page>
</reconcile>'

```

Parameter	Required	Format	Description
start_date	required	yyyy-mm-dd	start of the requested date range
end_date	optional	yyyy-mm-dd	end of the requested date range
page	optional	integer the page within the paginated result, defaults to 1	

Response:

The attributes in the root node payment responses includes information about the pagination of the response.

```

<?xml version="1.0" encoding="UTF-8"?>
<payment_responses per_page="100" page="2" total_count="19" pages_count="7">
  <payment_response>
    <transaction_type>sale</transaction_type>
    <status>approved</status>
    <authorization_code>005645</authorization_code>
    <response_code>00</response_code>
    <unique_id>130319cfb3bf65ff3c4a4045487b174f</unique_id>
    <transaction_id>EFBFB7D-82CD-4275-9A69-15F19C88A134</transaction_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <mode>live</mode>
    <timestamp>2014-01-03T15:04:00Z</timestamp>
    <descriptor>descriptor one</descriptor>
    <amount>500</amount>
    <currency>USD</currency>
    <card_brand>visa</card_brand>
    <card_number>420000...0000</card_number>
    <sent_to_acquirer>true</sent_to_acquirer>
  </payment_response>
  <payment_response>
    <transaction_type>sale</transaction_type>
    <status>approved</status>
    <authorization_code>638745</authorization_code>
    <response_code>00</response_code>
    <unique_id>130319cfb3bf65ff3c4a4045487b173f</unique_id>
    <transaction_id>BB07945B-BE57-4A14-A7FB-47FAE928D95</transaction_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <mode>live</mode>
    <timestamp>2014-01-05T15:04:00Z</timestamp>
    <descriptor>descriptor one</descriptor>
    <amount>500</amount>
    <currency>USD</currency>
    <card_brand>visa</card_brand>
    <card_number>420000...0000</card_number>
    <sent_to_acquirer>true</sent_to_acquirer>
  </payment_response>
  <payment_response>
    <transaction_type>sale</transaction_type>
    <status>approved</status>
    <authorization_code>226534</authorization_code>
    <response_code>00</response_code>
    <unique_id>1e8a6f99253eb04f8fc84cd8803713e</unique_id>
    <transaction_id>_5041_2013041012_22_10_545</transaction_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <mode>live</mode>
    <timestamp>2013-01-09T10:22:13Z</timestamp>
    <descriptor>test_descriptor</descriptor>
    <amount>50422</amount>
    <currency>EUR</currency>
    <card_brand>visa</card_brand>
    <card_number>420000...0000</card_number>
    <sent_to_acquirer>true</sent_to_acquirer>
  </payment_response>
  <payment_response>
    <transaction_type>sale3d</transaction_type>
    <status>pending_async</status>
    <unique_id>5dbdb4c677ee1608fb1ed43483164be2c</unique_id>
    <transaction_id>_6547_2013041012_23_08_470</transaction_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <redirect_url>https://gate.emerchantpay.net/redirect/to_acquirer/5dbdb4c677</redirect_url>
    <mode>live</mode>
    <timestamp>2014-01-10T10:23:10Z</timestamp>
    <descriptor>test_descriptor</descriptor>
    <amount>100</amount>
    <currency>EUR</currency>
    <card_brand>visa</card_brand>
    <card_number>471110...0000</card_number>
    <sent_to_acquirer>true</sent_to_acquirer>
  </payment_response>
  <payment_response>
    <transaction_type>refund</transaction_type>
    <status>approved</status>
    <authorization_code>005645</authorization_code>
    <response_code>00</response_code>
    <unique_id>44177a21403427eb96664a6d7e5d5d49</unique_id>
    <transaction_id>119643250547581c79d8296</transaction_id>
    <technical_message>Transaction successful!</technical_message>
    <message>Transaction successful!</message>
    <mode>test</mode>
    <timestamp>2014-01-30T14:21:48Z</timestamp>
    <descriptor>descriptor one</descriptor>
    <amount>9000</amount>
    <currency>USD</currency>
    <sent_to_acquirer>true</sent_to_acquirer>
    <reference_transaction_unique_id>44177a21403427eb96664a6d7e5d5d48</reference_transaction_unique_id>
  </payment_response>
  ...
</payment_responses>

```

Name	Type	Description
------	------	-------------

Name	Type	Description
@per_page	integer	number of entries per page
@page	integer	the current page
@total_count	integer	total number of all entries
@pages_count	integer	total number of pages

Chargebacks

Chargebacks are a special type of transactions as they cannot be triggered by the merchant. Chargebacks occur if a customer disputes to an item of his credit card bill at his issuing bank and the bank requests a chargeback. In this case, the amount is automatically refunded to the customers cc account and deducted from your merchant account.

Customers who initiate chargebacks will automatically be blocked for future transactions. For details, please contact ourRisk team.

You can see also see a chargeback overview in the merchant console under the Risk Management menu.

CHARGEBACK NOTIFICATIONS

You now have the option to receive API and/or email notifications for each chargeback event that occurs - e.g. for first chargebacks, second chargebacks, and representments. Enable this feature by emailing the IT Support team at tech-support@emerchantpay.net with the chargeback notification URL if needed.

The email notifications are sent to the merchant user with role 'admin' which is configured for managing the merchant entity on the gateway platform. The API notifications are equal to Notification for asynchronous payments, please refer to the section [Notification for asynchronous payments](#) to understand how notifications work.

Chargeback Notification Example

```
?transaction_id=343d9040a671c45832ee5381860e2996
&terminal_token=f4266042a6131b666060beb75691341d78ee5b4f
&unique_id=57ff74dica8727f59f243de0d01ff027
&transaction_type=sale
&status=chargebacked
&signature=ab4348afa9830834df90069646e4ce66c39a5358
&amount=100
&event=chargeback
```

CHARGEBACK API

The Chargeback API can be used to retrieve data about chargebacks.

SINGLE CHARGEBACK

Single chargeback retrieval allows to get a certain chargeback by passing the unique ID of the original transaction.

```
<?xml version="1.0" encoding="UTF-8"?>
<chargeback_request>
  <original_transaction_unique_id>53b1f5eacc9e4d3a3afebb4e993fe962</original_transaction_unique_id>
</chargeback_request>
```

The URLs for the single chargeback API are:

Production: <https://gate.emerchantpay.net/chargebacks>

Staging (for integration): <https://staging.gate.emerchantpay.net/chargebacks>

```

<?xml version="1.0" encoding="UTF-8"?>
<chargeback_response>
<type>1st Chargeback </type>
<post_date>2014-01-24</post_date>
<reason_code>4855</reason_code>
<reason_description>Non-receipt of merchandise</reason_description>
<authorization_code>811714</authorization_code>
<amount> 14625</amount>
<currency>USD</currency>
<chargeback_amount>300.0</chargeback_amount>
<chargeback_currency>EUR</chargeback_currency>
<card_number>554960*****5069</card_number>
<card_brand>master</card_brand>
<customer_email>john_doe@example.com</customer_email>
<customer_phone>3598851248512</customer_phone>
<transaction_type>sale3d</transaction_type>
<original_transaction_unique_id>f9634ec5e7dbe6ca3871974accb875cd</original_transaction_unique_id>
</chargeback_response>

```

Response parameters:

Name	Type	Description
type	string	The chargeback type. See chargeback types for details
post_date	string	The date of the chargeback
reason_code	string	Reason code of the chargeback
reason_description	string	Reason description of the chargeback
authorization_code	string	Authorization code of the chargeback's transaction
amount	float	Amount in the cardholder account currency. Amount can be negative for: 1st chargeback, 2nd chargeback, transfer reversal and positive for all other types.
currency	string(3)	Currency of the cardholder account. See ISO 4217
chargeback_amount	float	The amount in the chargeback's transaction currency.
chargeback_currency	string(3)	The currency of the chargeback's transaction. See ISO 4217
card_number	string	Card number used for the chargeback's transaction
card_brand	string	Card brand of the card number
customer_email	string	The email of the cardholder
customer_phone	integer	The phone of the cardholder
transaction_type	string	The type of the chargeback's transaction
original_transaction_unique_id	string	The unique id of the chargeback's transaction

```

<?xml version="1.0" encoding="UTF-8"?>
<chargeback_response>
<technical_message>Chargeback by the given criteria cannot be found!</technical_message>
<status>error</status>
<message>Chargeback not found!</message>
<code>470</code>
</chargeback_response>

```

In case no chargeback is found the given ARN or unique ID, a corresponding XML response is as follows:

BY DATE RANGE

Date range based chargeback retrieval allows you to fetch information for all chargebacks for a given merchant within a given date range. Date range searches for chargebacks by their posting date. The response is paginated, each request will return 100 entries max.

The URLs for date range chargeback retrieval are:

Production: https://gate.emerchantpay.net/chargebacks/by_date

Staging (for integration): https://staging.gate.emerchantpay.net/chargebacks/by_date

Request parameters:

```

<?xml version="1.0" encoding="UTF-8"?>
<chargeback_request>
<start_date>2014-01-01</start_date>
<end_date>2014-01-31</end_date>
<page>2</page>
</chargeback_request>

```

Parameter	Required	Format	Description
start_date	required	yyyy-mm-dd	start of the requested date range

Parameter	Required	Format	Description
end_date	optional	yyyy-mm-dd	end of the requested date range
page	optional	integer	the page within the paginated result, defaults to 1

Response parameters:

The attributes in the root node chargeback responses includes information about the pagination of the response.

```
<?xml version="1.0" encoding="UTF-8"?>
<chargeback_responses per_page="100" page="2" total_count="19" pages_count="7">
  <chargeback_response>
    <type>1st Chargeback</type>
    <post_date>2014-01-24</post_date>
    <reason_code>4855</reason_code>
    <reason_description>Non-receipt of merchandise</reason_description>
    <authorization_code>811714</authorization_code>
    <amount> 14625</amount>
    <currency>USD</currency>
    <chargeback_amount>300.0</chargeback_amount>
    <chargeback_currency>EUR</chargeback_currency>
    <card_number>554960*****5069</card_number>
    <card_brand>master</card_brand>
    <customer_email>john_doe@example.com</customer_email>
    <customer_phone>3598851248512</customer_phone>
    <transaction_type>sale3d</transaction_type>
    <original_transaction_unique_id>f9634ec5e7dbe6ca3871974accb875cd</original_transaction_unique_id>
  </chargeback_response>
  <chargeback_response>
    <type>2nd Chargeback </type>
    <post_date>2014-01-27</post_date>
    <reason_code>3456</reason_code>
    <reason_description>Credit not processed</reason_description>
    <authorization_code>123456</authorization_code>
    <amount>3456</amount>
    <currency>EUR</currency>
    <chargeback_amount>300.0</chargeback_amount>
    <chargeback_currency>EUR</chargeback_currency>
    <card_number>454360*****5008</card_number>
    <card_brand>visa</card_brand>
    <customer_email>jenny_doe@example.com</customer_email>
    <customer_phone>3598851248123</customer_phone>
    <transaction_type>sale</transaction_type>
    <original_transaction_unique_id>67fbebc172b743a164a3f3af3d010457</original_transaction_unique_id>
  </chargeback_response>
  ...
</chargeback_responses>
```

Name	Type	Description
@per_page	integer	number of entries per page
@page	integer	the current page
@total_count	integer	total number of all entries
@pages_count	integer	total number of pages

CHARGEBACK TYPES

Chargebacks will have one of the following type:

Status	Description
1st Chargeback	
2nd Chargeback	
1st Chargeback Reversal	
2nd Chargeback Reversal	
Transfer Reversal	
Re-presentment	
Chargeback Transfer to Merchant Hold Acc	
Chargeback Transfer to Writeoff Account Acq	
Chargeback Transfer to Paymnt Acct Retail	
Chargeback Transfer to Writeoff SP	

Retrieval Requests

Retrieval requests are a special type of transactions as they cannot be triggered by the merchant. Retrieval requests occur if the issuer requests additional documentation for a transaction. Retrieval requests do not have financial implication, but they indicate the issuer doubts a given transaction and can initiate a chargeback.

For details, please contact our Risk team.

You can see also see a retrieval request overview in the merchant console under the Risk Management menu.

Retrieval Request notifications

You now have the option to receive API and/or email notifications for each retrieval request event. Enable this feature by emailing the IT Support team atech-support@emerchantpay.net with the desired notification URL.

The email notifications are sent to the merchant user with role 'admin' which is configured for managing the merchant entity on the gateway platform. The API notifications are equal to Notification for asynchronous payments, please refer to the section [Notification for asynchronous payments](#) to understand how notifications work.

Retrieval Notification Example

```
?transaction_id=30450
&terminal_token=c5d77214de104fa0dd9c28486b3c817fd08c89a6
&unique_id=5de39380bf7ac7e1fc31cbd7805dc0ec
&transaction_type=sale
&status=chargebacked
&signature=98676c91391094b823d1f521d06cc129195952f9
&amount=4.00
&currency=USD
&avs_response_code=51
&avs_response_text=Response+provided+by+issuer+processor%3B+Address+information+not+verified
&reason_code=10
&reason_description=Dispute+Transaction
&post_date=2014-07-16
&event=retrieval_request
```

Retrieval Request API

The retrieval request API can be used to get info for retrieval requests.

Single Retrieval Request

Single retrieval request retrieval allows to get a certain retrieval request by its ARN or by passing the unique ID of the original transaction.

```
<?xml version="1.0" encoding="UTF-8"?>
<retrieval_request_request>
  <original_transaction_unique_id>53b1f5eacc9e4d3a3afebb4e993fe962</original_transaction_unique_id>
</retrieval_request_request>
```

The URLs for the single retrieval request API are:

Production: https://gate.emerchantpay.net/retrieval_requests

Staging (for integration) https://staging.gate.emerchantpay.net/retrieval_requests

```

<?xml version="1.0" encoding="UTF-8"?>
<retrieval_request_response>
  <type>Retrieval request</type>
  <post_date>2014-01-24</post_date>
  <reason_code>42</reason_code>
  <reason_description>Potential Chargeback</reason_description>
  <authorization_code>811714</authorization_code>
  <card_number>554960*****5069</card_number>
  <card_brand>master</card_brand>
  <customer_email>john_doe@example.com</customer_email>
  <customer_phone>3598851248512</customer_phone>
  <transaction_type>sale3d</transaction_type>
  <original_transaction_unique_id>f9634ec5e7dbe6ca3871974accb875cd</original_transaction_unique_id>
</retrieval_request_response>

```

Response parameters:

Name	Type	Description
type	string	The chargeback type. See chargeback types for details
post_date	string	The date of the chargeback
reason_code	string	Reason code of the chargeback
reason_description	string	Reason description of the chargeback
authorization_code	string	Authorization code of the chargeback's transaction
card_number	string	Card number used for the chargeback's transaction
card_brand	string	Card brand of the card number
customer_email	string	The email of the cardholder
customer_phone	integer	The phone of the cardholder
transaction_type	string	The type of the chargeback's transaction
original_transaction_unique_id	string	The unique id of the chargeback's transaction

```

<?xml version="1.0" encoding="UTF-8"?>
<retrieval_request_response>
  <technical_message>Retrieval request by the given criteria cannot be found!</technical_message>
  <status>error</status>
  <message>Retrieval request not found!</message>
  <code>404</code>
</retrieval_request_response>

```

In case no retrieval request is found with the given ARN or unique ID, a corresponding XML response is as follows:

By date range

Date range based retrieval request retrieval allows you to fetch information for all retrieval requests for a given merchant within a given date range. Date range searches for chargebacks by their posting date. The response is paginated, each request will return 100 entries max.

The URLs for date range retrieval request retrieval are:

Production: https://gate.emerchantpay.net/retrieval_requests/by_date

Staging (for integration): https://staging.gate.emerchantpay.net/retrieval_requests/by_date

Request parameters:

```

<?xml version="1.0" encoding="UTF-8"?>
<chargeback_request>
  <start_date>2014-01-01</start_date>
  <end_date>2014-01-31</end_date>
  <page></page>
</chargeback_request>

```

Parameter	Required	Format	Description
start_date	required	yyyy-mm-dd	start of the requested date range
end_date	optional	yyyy-mm-dd	end of the requested date range
page	optional	integer	the page within the paginated result, defaults to 1

Response parameters:

The attributes in the root node **retrieval_request_responses** includes information about the pagination of the response.

```

<?xml version="1.0" encoding="UTF-8"?>
<retrieval_request_responses per_page="100" page="2" total_count="19" pages_count="7">
  <retrieval_request_response>
    <type>Retrieval request</type>
    <post_date>2014-01-24</post_date>
    <reason_code>42</reason_code>
    <reason_description>Potential Chargeback</reason_description>
    <authorization_code>811714</authorization_code>
    <card_number>554960*****5069</card_number>
    <card_brand>master</card_brand>
    <customer_email>ml@merchantpay.net</customer_email>
    <customer_phone>3598851248512</customer_phone>
    <transaction_type>sale3d</transaction_type>
    <original_transaction_unique_id>f9634ec5e7dbe6ca3871974accb875cd</original_transaction_unique_id>
  </retrieval_request_response>
  <retrieval_request_response>
    <type>Retrieval request</type>
    <post_date>2014-01-27</post_date>
    <reason_code>42</reason_code>
    <reason_description>Potential Chargeback</reason_description>
    <authorization_code>123456</authorization_code>
    <card_number>454360*****5008</card_number>
    <card_brand>visa</card_brand>
    <customer_email>ivan@merchantpay.net</customer_email>
    <customer_phone>3598851248123</customer_phone>
    <transaction_type>sale</transaction_type>
    <original_transaction_unique_id>67fbebci72b743a164a3f3af3d010457</original_transaction_unique_id>
  </retrieval_request_response>
  ...
</retrieval_request_responses>

```

Name	Type	Description
@per_page	integer	number of entries per page
@page	integer	the current page
@total_count	integer	total number of all entries
@pages_count	integer	total number of pages

Fraud reports

SAFE/TC40 reports are information for transactions reported as fraud to MasterCard or VISA.

You can see a SAFE/TC40 reports overview in the merchant console under the Risk management menu.

SAFE/TC40 API

The SAFE/TC40 API can be used to retrieve data about SAFE/TC40 reports.

Single SAFE/TC40 report

Single SAFE/TC40 retrieval allows to get a certain SAFE/TC40 by its ARN or by passing the unique ID of the original transaction.

```

<?xml version="1.0" encoding="UTF-8"?>
<fraud_report_request>
  <original_transaction_unique_id>53b1f5eacc9e4d3a3afebb4e993fe962</original_transaction_unique_id>
</fraud_report_request>

```

The URLs for the single SAFE/TC40 API are:

Production: https://gate.emerchantpay.net/fraud_reports

Staging (for integration): https://staging.gate.emerchantpay.net/fraud_reports

```

<?xml version="1.0" encoding="UTF-8"?>
<fraud_report_response>
<transaction_date>2014-01-24</transaction_date>
<fraud_type_code>6</fraud_type_code>
<amount>@0</amount>
<currency>GBP</currency>
<card_number>554960*****5069</card_number>
<card_brand>master</card_brand>
<customer_email>john_doe@example.com</customer_email>
<customer_phone>3598851248512</customer_phone>
<transaction_type>sale3d</transaction_type>
<original_transaction_unique_id>f9634ec5e7dbe6ca3871974accb875cd</original_transaction_unique_id>
<original_merchant_transaction_id>123294sss</original_merchant_transaction_id>
</fraud_report_response>

```

Response parameters:

Name	Type	Description
transaction_date	yyyy-mm-dd	The date transaction is made
amount	float	Amount in the cardholder account currency. Amount can be negative for: 1st chargeback, 2nd chargeback, transfer reversal and positive for all other types.
currency	string(3)	Currency of the cardholder account. See ISO 4217
card_number	string	Card number used for the chargeback's transaction
card_brand	string	Card brand of the card number
customer_email	string	The email of the cardholder
customer_phone	integer	The phone of the cardholder
transaction_type	string	The type of the chargeback's transaction
original_transaction_unique_id	string	The unique id of the chargeback's transaction

```

<?xml version="1.0" encoding="UTF-8"?>
<fraud_report_response>
<technical_message>Mastercard fraud report by the given criteria cannot be found!</technical_message>
<status>error</status>
<message>Mastercard Fraud Report not found!</message>
<code>490</code>
</fraud_report_response>

```

In case no SAFE/TC40 is found the given ARN or unique ID, a corresponding XML response is as follows:

By date range

Date range based SAFE/TC40 retrieval allows you to fetch information for all SAFE/TC40 reports for a given merchant within a given date range. Date range searches for SAFE/TC40 reports by their posting date. The response is paginated, each request will return 100 entries max.

The URLs for date range SAFE/TC40 retrieval are:

Production: https://gate.emerchantpay.net/fraud_reports/by_date Staging (for integration): https://staging.gate.emerchantpay.net/fraud_reports/by_date

Request parameters:

```

<?xml version="1.0" encoding="UTF-8"?>
<fraud_report_request>
<start_date>2014-01-01</start_date>
<end_date>2014-01-31</end_date>
<page>2</page>
</fraud_report_request>

```

Parameter	Required	Format	Description
start_date	required	yyyy-mm-dd	start of the requested date range
end_date	optional	yyyy-mm-dd	end of the requested date range
page	optional	integer	the page within the paginated result, defaults to 1

Response parameters:

The attributes in the root node mastercard fraud report responses includes information about the pagination of the response.

```

<?xml version="1.0" encoding="UTF-8"?>
<fraud_report_responses per_page="100" page="2" total_count="19" pages_count="7">
  <fraud_report_response>
    <transaction_date>2014-01-24</transaction_date>
    <fraud_type_code>6</fraud_type_code>
    <amount>14625</amount>
    <currency>USD</currency>
    <card_number>554960*****5069</card_number>
    <card_brand>master</card_brand>
    <customer_email>john_doe@example.com</customer_email>
    <customer_phone>3598851248512</customer_phone>
    <transaction_type>sale3d</transaction_type>
    <original_transaction_unique_id>f9634ec5e7d8eeaca3671974accc875cd</original_transaction_unique_id>
    <original_merchant_transaction_id>f9634ec5e7d5cd</original_merchant_transaction_id>
  </fraud_report_response>
  <fraud_report_response>
    <transaction_date>2014-01-27</transaction_date>
    <fraud_type_code>4</fraud_type_code>
    <amount>3456</amount>
    <currency>EUR</currency>
    <card_number>454360*****5008</card_number>
    <card_brand>visa</card_brand>
    <customer_email>jenny_doe@example.com</customer_email>
    <customer_phone>3598851248123</customer_phone>
    <transaction_type>sale</transaction_type>
    <original_transaction_unique_id>67fbefbc172b743a164a3f3af3d010457</original_transaction_unique_id>
    <original_merchant_transaction_id>67fbefbc172b743a164a3f3af3d010457</original_merchant_transaction_id>
  </fraud_report_response>
  ...
</fraud_report_responses>

```

Name	Type	Description
@per_page	integer	number of entries per page
@page	integer	the current page
@total_count	integer	total number of all entries
@pages_count	integer	total number of pages

Blacklists

With the Blacklist API you can check if a certain credit card is blacklisted within the gateway. If a terminal token is not passed, the merchant and global PAN blacklists will be checked for the given card number. If a terminal token is passed, the terminal, its merchant, and the global PAN blacklists will be checked for blacklist matches.

The URLs for the Blacklist API are:

Production: <https://gate.emerchantpay.net/blacklists>

Staging (for integration): <https://staging.gate.emerchantpay.net/blacklists>

Invoking a Request

A transaction is invoked via HTTPS POST, parameters are passed as XML with UTF-8 encoding.

```

<?xml version="1.0" encoding="UTF-8"?>
<blacklist_request>
  <card_number>4200000000000000</card_number>
  <terminal_token>ab3bed00f8f838c5d233ccb62b6da0b69267b4</terminal_token>
</blacklist_request>

```

Parameter	Required	Format	Description
card_number	required	int(13..16)	the credit card number to be checked
terminal_token	optional	string(40)	the terminal token

Response

Successful response:

```
<?xml version="1.0" encoding="UTF-8"?>
<blacklist_response>
  <blacklisted>true</blacklisted>
</blacklist_response>
```

Name	Type	Description
blacklisted	boolean	credit card number is blacklisted or not

Error response:

```
<?xml version="1.0" encoding="UTF-8"?>
<blacklist_response>
  <code>350</code>
  <message>Invalid XML: No close tag for /blacklist_request</message>
</blacklist_response>
```

Name	Type	Description
code	integer	error code of the error that occurred
message	string	info about the error

Asynchronous Transactions and Notifications

Asynchronous Transactions

3-D secure transactions are always processed **asynchronously**, while the other transactions are processed **synchronously**.

This means that the final result of the transaction will not be available immediately and the status is pending async. Once the transaction has reached a final status, a notification is sent to the merchant.

- Whenever the status is pending async the transaction gets processed asynchronously, and a [Notification](#notifications) is sent to the merchant once the transaction has reached a final status.

Overview

Transaction type	async?
Authorize	never
Authorize3d	always
Sale	never
Sale3d	always
Capture	never
Refund	never
Void	never
InitRecurringSale	never
InitRecurringSale3D	always
RecurringSale	never
Credit	never
BitPay Sale	always
BitPay Refund	always

Notifications

For asynchronous payments a notification is always sent to the **notification_url** within the payment transaction.

The payment gateway can be configured to also send a notification after each synchronous payment transaction. The notification is sent to the **notification_url** which is configured per merchant.

Also see 3-D Secure Transactions and Notification for asynchronous payments.

The format of the notification in both cases is the same.

Notification Example

```
?transaction_id=82803B4C-70CC-43BD-8B21-FD0395285B40
&unique_id=44177a21403427eb96664a6d7e5d5d48
&transaction_type=sale3d
&terminal_token=394f2ebc3646d3c017fa1e1cbc4a1e20
&status=approved
&amount=500
&signature=088e16a1019277b15d58faf0541e11910eb756f6
&eci=05
&avs_response_code=5I
&avs_response_text=Response+provided+by+issuer+processor%3B+Address+information+not+verified
```

Parameters

Name	Type	Description
transaction_id	string	merchant generated transaction id
unique_id	string	unique id generated by Genesis
transaction_type	string	transaction type for the transaction eg: sale3d
terminal_token	string	the terminal token as used in the processing url
status	string	status of the payment transaction
amount	string	amount of the payment transaction. If the transaction is partially approved, this is the partially approved amount. CheckPartial Approvals for details
partial_approval	string	If the transaction is partially approved, this is set to 'true'. CheckPartial Approvals for details
signature	string	the signature of the notification, should be used to verify the notification was sent by Genesis
eci	string	See Electronic Commerce Indicator as returned from the MPI for details
event	string	The event that caused the notification
rc_code	string	The reason code for the event
rc_description	string	The reason description for the event
avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.

Status will be either "declined", "approved" or "error", like shown in the states table.

The event parameter is added only for fraud transactions eg: chargeback, chargeback_reversal, second_chargeback or retrieval_request.

The signature is a mean of security to ensure that the gate is really the sender of the notification. It is generated by concatenating the unique id of the transaction with your API password and generating a SHA1 Hash (Hex) of the string:

```
SHA1 Hash Hex of <unique_id><Your API password>
```

Notification signature examples

unique_id	API password	signature
fc6c3c8c0219730c7a099eaa540f70dc	bogus	08d01ae1ebdc22b6a1a764257819bb26e9e94e8d
130319cfb3bf65ff3c4a4045487b173e	test123	1b34dabed996788efcc049567809484454ee8b17

You can use the signature to verify the integrity of the notification, ensuring that it was really sent by the gate.

Info You must either use the signature to verify the notification's integrity or make a reconcile to check the final transaction status.

```
<?xml version="1.0" encoding="UTF-8"?>
<notification_echo>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
</notification_echo>
```


When receiving the notification, you are required to render an XML page containing the transaction's unique id so that the gateway knows that you have accepted the notification. If the XML is not delivered, the notification is sent periodically until the XML is received.

WPF

The WPF (Web Payment Form) is a customizable component of the Genesis payment gateway. It provides merchants with an intuitive user interface to easily process their customers' payments.

payments. Through a single point of integration, the merchant can offer his customers multiple payment methods instantly and since the WPF is hosted on the secure Genesis infrastructure, it is already PCI-DSS compliant.

Workflow

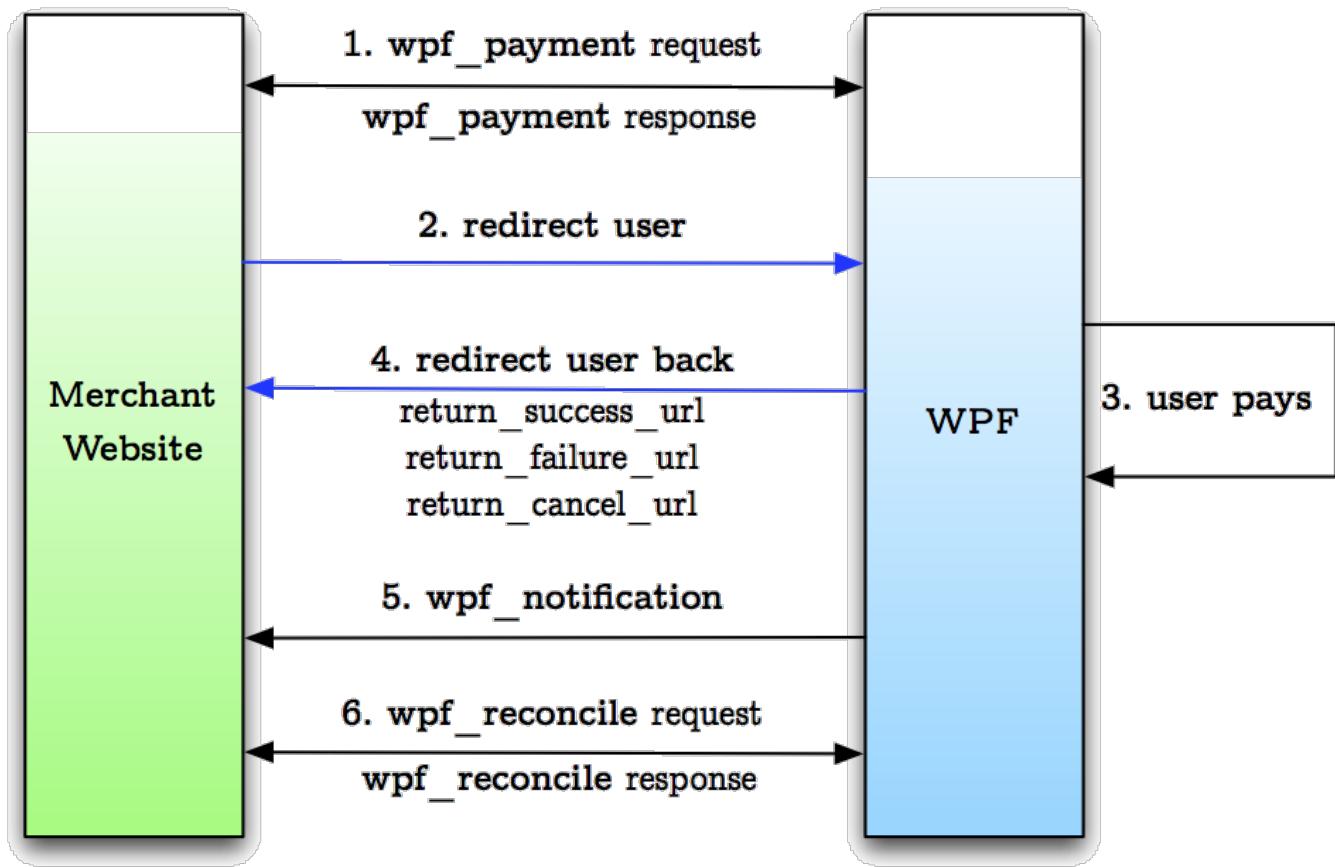

In the example above the customer visits the merchant's website and does a checkout.

(1), the merchant initiates the payment on the Genesis payment gateway through a request to the WPF API, which carries the mandatory, initial payload (e.g. amount, currency, etc.). The response to this request (if successful) is a redirect URL, which the merchant hands over to the customer. Following this redirect URL

(2), the customer is then directed to the actual payment form (WPF), which gets served from the Genesis servers. Because the merchant has previously transmitted most of the relevant payment information, the form is pre-filled with these values and the customer only needs to add personal data. The customer then selects one of the payment methods offered by the merchant and fills in his payment information

(3) (e.g. credit card data). Upon completion the customer is redirected back to the merchant

(4)¹. After the payment has been processed and reached a final state the merchant is sent a notification

(5) to the notification url supplied in the initial create request (1). The merchant must either use the notification's signature to verify the payment's integrity or make a reconcile

(6) to check the final payment status. However, we urge all merchants to always do a reconcile.

¹ - Particularly to the return success url defined by the merchant in his initial request. If the customer has selected an asynchronous payment method, he is redirected to the MPI provider before this step

Info 3D secure WPF payments are always performed asynchronously. After submitting the web payment form, the customer is redirected to the MPI provider to enter his personal data. In the case when cardholder is not enrolled customer is redirected to the failure url.

As with all other asynchronous payment transactions, the return-, success- and cancel-URLs are only meant to display a useful page/message to the customer. A redirect of the customer to one of these URLs never gives any form of indication of the payment's state. To find out whether the payment has gone through or not the merchant must always wait for the notification or (even better) do a reconcile.

Please also note that there is no specific order in which notification and redirect will occur (that means that the notification may also arrive before the customer's redirect).

WPF API

URLS

Create:

The URL for the WPF API create method is:

<https://wpf.emerchantpay.net/<locale>/wpf>

For the test system the URL is:

<https://staging.wpf.emerchantpay.net/<locale>/wpf>

Note that if you do not submit one of the available locales, defaults to 'en' (English).

Check the WPF Internationalization (i18n) for details.

Reconcile:

The URL for the WPF API reconcile method is:

<https://wpf.emerchantpay.net/wpf/reconcile>

For the test system the URL is:

<https://staging.wpf.emerchantpay.net/wpf/reconcile>

CREATE

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('WPF\Create');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setDescription('You are about to buy 3 shoes at www.shoes.com!')
    ->setNotificationUrl('https://www.example.com/notification')
    ->setReturnSuccessUrl('http://www.example.com/success')
    ->setReturnFailureUrl('http://www.example.com/failure')
    ->setReturnCancelUrl('http://www.example.com/cancel.html')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setConsumerId('123456')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')
    ->setRememberCard('true')
    ->setLifetime('60')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// Risk Params
->setRiskUserId('123456')

// Transaction Types
->addTransactionType('authorize')
->addTransactionType('sale')
->setPayLater('true')
->setReminders('{"reminder":>{"channel":>"email", "after":>40}}');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.wpf.WPFCREATERequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        WPFCREATERequest request = new WPFCREATERequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setDescription("You are about to buy 3 shoes at www.shoes.com!");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setReturnCancelUrl(new URL("http://www.example.com/cancel.html"));
        request.setAmount(new BigDecimal("100"));
        request.setCurrent("USD");
        request.setConsumerId("123456");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");
        request.setRememberCard("true");
        request.setLifetime(60);

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // Risk Params
        request.setRiskUserId("123456");

        // Transaction Types
        request.addTransactionType("authorize").done();
        request.addTransactionType("sale").done();
        request.setPayLater("true");
        request.setReminders("{\"reminder=>{\"channel=>\"email\", \"after\"=>40}}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```
var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.wpf_create(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "description": "You are about to buy 3 shoes at www.shoes.com!",
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "return_cancel_url": "http://www.example.com/cancel.html",
    "amount": "100",
    "currency": "USD",
    "consumer_id": "123456",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "remember_card": "true",
    "lifetime": 60,
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "risk_params": {
        "user_id": "123456"
    },
    "transaction_types": [
        "authorize",
        "sale"
    ],
    "pay_later": true,
    "reminders": {
        "reminder": {
            "channel": "email",
            "after": 40
        }
    }
}
).send()
.then(success)
.catch(failure);
```

```

curl https://wpf.emerchantpay.net/wpf \
-H "Content-Type: text/xml" \
-d '
<wpf_payment>
  <transaction_id>43671</transaction_id>
  <usage>40288 concert tickets</usage>
  <description>You are about to buy 3 shoes at www.shoes.com</description>
  <notification_url>https://www.example.com/notification</notification_url>
  <return_success_url>http://www.example.com/success</return_success_url>
  <return_failure_url>http://www.example.com/failure</return_failure_url>
  <return_cancel_url>http://www.example.com/cancel.html</return_cancel_url>
  <amount>100</amount>
  <currency>USD</currency>
  <consumer_id>123456</consumer_id>
  <customer_email>travis@example.com</customer_email>
  <customer_phone>+1987987987987</customer_phone>
  <remember_card>true</remember_card>
  <lifetime>60</lifetime>
  <billing_address>
    <first_name>Travis</first_name>
    <last_name>Pastrana</last_name>
    <address1>Muster Str. 12</address1>
    <zip_code>10178</zip_code>
    <city>Los Angeles</city>
    <state>CA</state>
    <country>US</country>
  </billing_address>
  <risk_params>
    <user_id>123456</user_id>
  </risk_params>
  <transaction_types>
    <transaction_type name="authorize" />
    <transaction_type name="sale" />
  </transaction_types>
  <pay_later>true</pay_later>
  <reminders>
    <reminder>
      <channel>email</channel>
      <after>40</after>
    </reminder>
  </reminders>
</wpf_payment>
'

```

Request Parameters

Parameter	Required	Format	Description
transaction_id	required	string(255)	Unique transaction id defined by merchant
usage	optional	string(255)	Description of the transaction for later use
amount	required	integer > 0	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	required	string(3)	Currency code in ISO 4217
description	optional	string	a text describing the reason of the payment (e.g. "you're buying concert tickets")
consumer_id	required*	string(10)	See Consumers and Tokenization. Saved cards will be listed for user to select
customer_email	required*	e-mail address	Must contain valid e-mail of customer
customer_phone	required*	string(32)	Must contain valid phone number of customer
notification_url	required	url	URL at merchant where gateway sends outcome of transaction.
return_success_url	required	url	URL where customer is sent to after successful payment
return_failure_url	required	url	URL where customer is sent to after unsuccessful payment
return_cancel_url	required	string	URL where customer is sent to when the customer cancels the payment process within the WPF
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required*	string(2)	Country code in ISO 3166
shipping_address	optional		

Parameter	Required	Format	Description
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
transaction_types	required		The transaction types that the merchant is willing to accept payments for
transaction_type	required	string	One of the available WPF transaction types. Multiple transaction type elements supported. Attribute 'name' contains the transaction type name in question
remember_card	optional	"true"	See Tokenize. Offer the user the option to save cardholder details for future use (tokenize).
lifetime	optional	integer	number of minutes determining how long the WPF will be valid. Will be set to 30 minutes by default. Valid value ranges between 1 minute and 31 days given in minutes
risk_params	optional		list of risk params as described in the Advanced risk management with RiskParams section
user_id (example)	optional	string	the customer's ID within the merchant's system (example)
session_id (example)	optional	string	the customer's session ID within the merchant's system (example)
dynamic_descriptor_params	optional		
merchant_name	optional	string(25)	Allows to dynamically override the charge descriptor
merchant_city	optional	string(13)	Allows to dynamically override the merchant phone number
pay_later	optional	"true"	Signifies whether the 'Pay Later' feature would be enabled on the WPF
reminders	optional		Settings for reminders sending when using the 'Pay Later' feature
reminder	optional		Settings for a single reminder. Up to three reminders are allowed
channel	optional	string	Channel for sending WPF reminder. Valid values are 'email' and 'sms'
after	optional	integer	Number of minutes after WPF creation when the reminder should be sent. Valid value ranges between 1 minute and 31 days given in minutes

required* = conditionally required

Successful Response

```
stdClass Object
(
    [transaction_type] => wpf_create
    [status] => new
    [mode] => live
    [transaction_id] => 43671
    [consumer_id] => 123456
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [technical_message] => Transaction successful!
    [message] => Transaction successful!
    [redirect_url] => https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [amount] => 100
    [currency] => USD
)

```

```

<payment_response content=[

  <transaction_type content=[wpf_create]>
  <status content=[new]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <consumer_id content=[123456]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <technical_message content=[Transaction successful!]>
  <message content=[Transaction successful!]>
  <redirect_url content=[https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1]>
  <timestamp content=[2019-03-14T12:06:03Z]>
  <amount content=[100]>
  <currency content=[USD]>
]>

```

```
{
  transaction_type: "wpf_create",
  status: "new",
  mode: "live",
  transaction_id: "43671",
  consumer_id: "123456",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  technical_message: "Transaction successful!",
  message: "Transaction successful!",
  redirect_url: "https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1",
  timestamp: "2019-03-14T12:06:03Z",
  amount: "100",
  currency: "USD",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
  <transaction_type>wpf_create</transaction_type>
  <status>new</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <consumer_id>123456</consumer_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <technical_message>Transaction successful!</technical_message>
  <message>Transaction successful!</message>
  <redirect_url>https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1</redirect_url>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <amount>100</amount>
  <currency>USD</currency>
</wpf_payment>

```

Successful With Optional Invalid Transactions For Amount Response

```

stdClass Object
{
  [consumer_id] => 123456
  [timestamp] => DateTime Object
  (
    [date] => 2019-03-14 12:06:03.000000
    [timezone_type] => 2
    [timezone] => Z
  )
  [amount] => 100
  [currency] => USD
  [redirect_url] => https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1
  [invalid_transactions_for_amount] => alipay
}

```

```

<payment_response content=[

  <consumer_id content=[123456]>
  <timestamp content=[2019-03-14T12:06:03Z]>
  <amount content=[100]>
  <currency content=[USD]>
  <redirect_url content=[https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1]>
  <invalid_transactions_for_amount content=[alipay]>
]>

```

```
{
  consumer_id: "123456",
  timestamp: "2019-03-14T12:06:03Z",
  amount: "100",
  currency: "USD",
  redirect_url: "https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1",
  invalid_transactions_for_amount: "alipay",
}

```

```

<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
  <consumer_id>123456</consumer_id>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <amount>100</amount>
  <currency>USD</currency>
  <redirect_url>https://wpf.emerchantpay.net/en/payment/c7e32c1e9d1</redirect_url>
  <invalid_transactions_for_amount>alipay</invalid_transactions_for_amount>
</wpf_payment>

```

Successful Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
consumer_id	string(10)	Consumer unique reference. See Consumers
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.
redirect_url	url	URL where user has to be redirected to complete payment process. Contains the locale in which the web payment form will be rendered by default. See WPF Internationalization (i18n)
timestamp	string	Time when the transaction was processed in ISO 8601 Combined date and time e.g. 2007-08-30T17:46:11Z
amount	integer	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
currency	string	Currency code in ISO 4217
invalid_transactions_for_amount	string*	list of comma separated transactions for which amount is not within the allowed limit *present only when at least for one transaction type an amount is invalid, check Currency and Amount Handling for details

Error Response

```

stdClass Object
(
    [transaction_type] => wpf_create
    [status] => error
    [mode] => live
    [transaction_id] => 43671
    [unique_id] => 44177a21403427eb96664a6d7e5d5d48
    [code] => 330
    [technical_message] => Unknown system error. Please contact support.
    [message] => Transaction failed, please contact support!
    [timestamp] => DateTime Object
        (
            [date] => 2019-03-14 12:06:03.000000
            [timezone_type] => 2
            [timezone] => Z
        )
    [amount] => 100
    [currency] => USD
)

```

```

<payment_response content=[<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
  <consumer_id content=[wpf_create]>
  <status content=[error]>
  <mode content=[live]>
  <transaction_id content=[43671]>
  <unique_id content=[44177a21403427eb96664a6d7e5d5d48]>
  <code content=[330]>
  <technical_message content=[Unknown system error. Please contact support.]>
  <message content=[Transaction failed, please contact support!]>
  <timestamp content=[2019-03-14T12:06:03Z]>
  <amount content=[100]>
  <currency content=[USD]>
]>

```

```
{
  transaction_type: "wpf_create",
  status: "error",
  mode: "live",
  transaction_id: "43671",
  unique_id: "44177a21403427eb96664a6d7e5d5d48",
  code: "330",
  technical_message: "Unknown system error. Please contact support.",
  message: "Transaction failed, please contact support!",
  timestamp: "2019-03-14T12:06:03Z",
  amount: "100",
  currency: "USD",
}
}
```

```
<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
  <transaction_type>wpf_create</transaction_type>
  <status>error</status>
  <mode>live</mode>
  <transaction_id>43671</transaction_id>
  <unique_id>44177a21403427eb96664a6d7e5d5d48</unique_id>
  <code>330</code>
  <technical_message>Unknown system error. Please contact support.</technical_message>
  <message>Transaction failed, please contact support!</message>
  <timestamp>2019-03-14T12:06:03Z</timestamp>
  <amount>100</amount>
  <currency>USD</currency>
</wpf_payment>
```

Error Response Parameters

Parameter	Type	Description
transaction_type	string	The transaction type
status	string	Status of the transaction, see states
mode	string	Mode of the transaction's terminal, can be "live" or "test"
transaction_id	string(255)	Unique transaction id defined by merchant
unique_id	string(32)	Unique id defined by gate (must later be used if capturing, voiding or refunding a transaction)
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

NOTIFICATION

WPF Notifications are sent once the WPF payment has reached a final state and are transmitted via HTTP POST (application/x-www-form-urlencoded) with the following parameters:

- Apart from the workflow described above, the Genesis system will also use the notification url endpoint to send notifications to the merchant if a WPF payment is chargebacked.

```
signature=c5219bd3d385e744966b2b48a5497b347e102849f10eacd25b062f823b
&payment_transaction_transaction_type=sale
&payment_transaction_terminal_token=e9fd7a957845450fb7ab9dccba98b6e1f6e1e3aa
&payment_transaction_unique_id=bad08183a9ec545daf0f24c48361aa0
&payment_transaction_amount=500
&wpf_transaction_id=mtid20104081447161135536962
&wpf_status=approved
&wpf_unique_id=26aa150ee68b1b2d6758a0e6c44fce4c
&consumer_id=123456
&token=ee946db8-d7db-4bb7-b608-b65b153e127d
&notification_type=wpf
&eci=05
&payment_transaction_avs_response_code=51
&payment_transaction_avs_response_text=Response+provided+by+issuer+processor%3B+Address+information+not+verified
```

Name	Type	Description
signature	string	the signature of the notification, should be used to verify the the notification was sent by Genesis
payment_transaction_transaction_type	string	transaction type for the transaction eg: sale3d
payment_transaction_terminal_token	string	the terminal token as used in the processing url
payment_transaction_unique_id	string	unique id generated by Genesis
payment_transaction_amount	string	Amount of the payment transaction. If the transaction is partially approved, this is the partially approved amount. CheckPartial Approvals for details
payment_transaction_partial_approval	string	If the transaction is partially approved, this is set to 'true'. CheckPartial Approvals for details

Name	Type	Description
wpf_transaction_id	string	merchant generated transaction id
wpf_status	string	status of the payment transaction
wpf_unique_id	string	unique id generated by Genesis, required for WPF payment reconciliation
consumer_id	string(10)	Consumer unique reference. See Consumers
token	string(36)	Plain-text token value. See Tokenize
notification_type	string	constant value "wpf"
eci	string	See Electronic Commerce Indicator as returned from the MPI for details
payment_transaction_avs_response_code	string	Generated by the card network on trying to match the billing address when performing the address verification. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.
payment_transaction_avs_response_text	string	Gives the human response text for the AVS response code above. Optional, returned if config is enabled and acquirer supports it. Check AVS Status Codes for details.

Status will be one of the following: approved, declined, error, timeout, pending, refunded, voided, chargebacked, chargeback reversed, and second chargebacked.

The signature is a mean of security to ensure that the gate is really the sender of the notification. It is generated by concatenating the unique id of the payment with your API password and generating a SHA-512 Hash (Hex) of the string:

```
SHA-512 Hash Hex of <wpf_unique_id><Your Merchant API password>
```

Notification signature examples

unique id	API password	signature
26aa150ee68b1b2d6758a0e6c44fce4c	50fd87e65eb415f42fb5af4c9cf497662e00b785	c5219b3d385e74496b2b48a549
3f760162ef57a829011e5e2379b3fa17	50fd87e65eb415f42fb5af4c9cf497662e00b785	14519d0db2f7f8f407efcc9b099

You must either use the signature to verify the notification's integrity or make a reconcile to check the final transaction status.

```
<?xml version="1.0" encoding="UTF-8"?>
<notification_echo>
  <wpf_unique_id>3f760162ef57a829011e5e2379b3fa17</wpf_unique_id>
</notification_echo>
```

When receiving the notification, you are required to render an XML page containing the transaction's unique id so that the gateway knows that you have accepted the notification. If the XML is not delivered, the notification is sent periodically until the XML is received.

RECONCILE

Reconcile can be used to retrieve data about a payment. This can be useful if you want to retrieve information about a payment whose status is timeout, which returned an error or has changed eg. has been chargebacked.

Reconcile requests are handled exactly like transaction requests via XML. To a large degree, the WPF Reconcile follows the notions of the standard processing Reconcile API.

```
<?xml version="1.0" encoding="UTF-8"?>
<wpf_reconcile>
  <unique_id>26aa150ee68b1b2d6758a0e6c44fce4c</unique_id>
</wpf_reconcile>
```

Parameter	Required	Format	Description
unique_id	required	string(32)	unique id as returned by the create request

i Please note that the response may include multiple payment transaction records, since a WPF payment is a container class for multiple payment transactions. Card brand and card number will be available in response only for card transaction types.

Example Reconcile Response XML for successful payment that is partially approved (check Partial Approvals for details):

```

<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
  <status>approved</status>
  <unique_id>26aa150ee68b1b2d6758a0e6c44fce4c</unique_id>
  <transaction_id>mtd201104081447161135536962</transaction_id>
  <consumer_id>123456</consumer_id>
  <timestamp>2011-04-08T14:46:27Z</timestamp>
  <amount>5000</amount>
  <currency>USD</currency>
  <card_brand>visa</card_brand>
  <card_number>420000...0000</card_number>
  <payment_transaction>
    <status>approved</status>
    <authorization_code>345678</authorization_code>
    <response_code>x00</response_code>
    <transaction_type>sale</transaction_type>
    <unique_id>bad08183a9ec545daf0f24c48361aa10</unique_id>
    <transaction_id>mtd201104081447161135536962</transaction_id>
    <terminal_token>e9fd7a957845450fb7ab9dccb498b6e1f6e1e3aa</terminal_token>
    <mode>test</mode>
    <timestamp>2011-04-08T14:46:40Z</timestamp>
    <descriptor>merchantpay.net/bogus +49123456789</descriptor>
    <amount>4990</amount>
    <partial_approval>true</partial_approval>
    <currency>USD</currency>
    <customer_email>john.doe@example.com</customer_email>
    <customer_phone>+11234567890</customer_phone>
    <technical_message>TESTMODE: No real money will be transferred!</technical_message>
    <message>TESTMODE: No real money will be transferred!</message>
    <billing_address>
      <first_name>John</first_name>
      <last_name>Doe</last_name>
      <address1>32, Doestreet</address1>
      <address2></address2>
      <zip_code>12345</zip_code>
      <city>New York</city>
      <state>NY</state>
      <country>US</country>
    </billing_address>
  </payment_transaction>
</wpf_payment>

```

Example Response XML for voided payment:

```

<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
  <status>voided</status>
  <unique_id>26aa150ee68b1b2d6758a0e6c44fce4c</unique_id>
  <transaction_id>mtd201104081447161135536962</transaction_id>
  <consumer_id>123456</consumer_id>
  <timestamp>2011-04-08T14:46:27Z</timestamp>
  <amount>5000</amount>
  <currency>USD</currency>
  <card_brand>visa</card_brand>
  <card_number>420000...0000</card_number>
  </payment_transaction>
  <status>oidel</status>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <transaction_type>sale</transaction_type>
  <unique_id>bad08183a9ec545daf0f24c48361aa10</unique_id>
  <transaction_id>mtd201104081447161135536962</transaction_id>
  <terminal_token>e9fd7a957845450fb7ab9dccba98b6e1f6e1e3aa</terminal_token>
  <mode>test</mode>
  <timestamp>2011-04-08T14:46:40Z</timestamp>
  <descriptor>merchantpay.net/bogus +49123456789</descriptor>
  <amount>5000</amount>
  <currency>USD</currency>
  <customer_email>john.doe@example.com</customer_email>
  <customer_phone>+11234567890</customer_phone>
  <billing_address>
    <first_name>John</first_name>
    <last_name>Doe</last_name>
    <address1>32, Doestreet</address1>
    <address2></address2>
    <zip_code>12345</zip_code>
    <city>New York</city>
    <state>NY</state>
    <country>US</country>
  </billing_address>
  </payment_transaction>
  </payment_transaction>
  <status>approved</status>
  <authorization_code>345678</authorization_code>
  <response_code>00</response_code>
  <transaction_type>void</transaction_type>
  <unique_id>bad08183a9ec545daf0f24c48361aa10</unique_id>
  <transaction_id>mtd201104081447161135536962</transaction_id>
  <terminal_token>e9fd7a957845450fb7ab9dccba98b6e1f6e1e3aa</terminal_token>
  <mode>test</mode>
  <timestamp>2011-04-08T14:46:40Z</timestamp>
  <descriptor>merchantpay.net/bogus +49123456789</descriptor>
  <amount>5000</amount>
  <currency>USD</currency>
  </payment_transaction>
</wpf_payment>

```

Example Error Response XML:

```

<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
  <status>error</status>
  <code>100</code>
  <technical_message>Unknown system error. Please contact support.</technical_message>
  <message>Transaction failed, please contact support!</message>
</wpf_payment>

```

ERRORS

ⓘ WPF returns the same error codes/XML as the regular Server-to-Server API methods (e.g. sale). See the Error Section for more details.

WPF transaction types

The web payment form supports the typical card-related transaction types such as authorizes, sales, and init recurring - with and without 3D (see below). If more than one card-based transaction type is passed, then if the cardholder decides to pay with a credit card, the first card-based transaction type with a valid configuration - terminals, MIDs, currencies, etc - is selected and used when cardholder decides to pay with a (credit) card.

In addition, the WPF API supports a host of alternative payment methods (APMs), bank transfer payments, wallets, and more. All of the alternative transaction types are offered to the cardholder for payment, so the cardholder can choose between credit cards and alternatives defined by the merchant. Only credit cards or only a single alternative method can also work, there is no need to always offer credit cards for example.

Merchant custom attributes for a number of the transaction types are required. The WPF API supports those merchant custom attributes - they are submitted as child elements to the transaction type they belong to (see WPF API example request above).

The web payment form has the concept of a default payment method. If a given transaction type has the 'default' attribute set to 'true', then this transaction type will be pre-selected as default when the cardholder is redirected to the web payment form. If more than one transaction type has the 'default' attribute, the first one with this attribute will be pre-selected. In the case there is only one transaction type requested (with or without the 'default'='true'), this transaction type is automatically set as default by design.

Note that for each transaction type requested by a merchant in the WPF API, a valid configuration should exist - valid terminal, currency, MID, web payment form enabled for the merchant, etc - otherwise a configuration error will be raised. If this happens, contact the IT support team to resolve/configure your desired transaction types correctly.

Example Request XML with custom attributes:

```

<?xml version="1.0" encoding="UTF-8"?>
<wpf_payment>
    <transaction_id>wev238f328nc</transaction_id>
    <usage>Order ID 500, Shoes</usage>
    <description>You are about to buy 3 shoes at www.shoes.com</description>
    <notification_url>https://example.com/notification</notification_url>
    <return_success_url>https://example.com/return_success</return_success_url>
    <return_failure_url>https://example.com/return_failure</return_failure_url>
    <return_cancel_url>https://example.com/return_cancel</return_cancel_url>
    <amount>5000</amount>
    <currency>USD</currency>
    <customer_email>john.doe@example.com</customer_email>
    <customer_phone>+11234567890</customer_phone>
    <card_holder>john doe</card_holder>
    <billing_address>
        <first_name>John</first_name>
        <last_name>Doe</last_name>
        <address1>23, Doestreet</address1>
        <zip_code>11923</zip_code>
        <city>New York City</city>
        <state>NY</state>
        <country>US</country>
    </billing_address>
    <transaction_types>
        <transaction_type name="sale">
            <bin>420000</bin>
            <tail>0000</tail>
            <expiration_date>2017-03</expiration_date>
        </transaction_type>
        <transaction_type name="sale3d" default="true">
            <tail>1111</tail>
            <expiration_date>2016-03</expiration_date>
        </transaction_type>
        <transaction_type name="cashu"/>
        <transaction_type name="ezeewallet">
            <source_wallet_id>john.doe@merchantpay.net</source_wallet_id>
        </transaction_type>
        <transaction_type name="paybyvoucher_yeepay">
            <product_name>Some Product Name</product_name>
            <product_category>Some Product Category</product_category>
            <card_type>virtual</card_type>
            <redeem_type>stored</redeem_type>
        </transaction_type>
        <transaction_type name="paybyvoucher_sale">
            <card_type>virtual</card_type>
            <redeem_type>stored</redeem_type>
        </transaction_type>
        <transaction_type name="citadel_payin">
            <merchant_customer_id>123456789</merchant_customer_id>
        </transaction_type>
    </transaction_types>
    <risk_params>
        <user_id>123456</user_id>
    </risk_params>
</wpf_payment>

```

Transaction Type	Custom Attribute	Required	Description
authorize			A standard authorization
	bin	no	Card's first 6 digits
	tail	no	Card's last 4 digits
	default	no	Configure as default or not
	expiration_date	no	Expiration month and year
authorize3d			A 3D-based authorization
	bin	no	Card's first 6 digits
	tail	no	Card's last 4 digits
	default	no	Configure as default or not
	expiration_date	no	Expiration month and year
sale			A standard sale
	bin	no	Card's first 6 digits
	tail	no	Card's last 4 digits
	default	no	Configure as default or not
	expiration_date	no	Expiration month and year
sale3d			A 3D-based sale

Transaction Type	Custom Attribute	Required	Description
	bin	no	Card's first 6 digits
	tail	no	Card's last 4 digits
	default	no	Configure as default or not
	expiration_date	no	Expiration month and year
init_recurring_sale			A standard init recurring
	bin	no	Card's first 6 digits
	tail	no	Card's last 4 digits
	default	no	Configure as default or not
	expiration_date	no	Expiration month and year
init_recurring_sale3d			A 3D-based init recurring
	bin	no	Card's first 6 digits
	tail	no	Card's last 4 digits
	default	no	Configure as default or not
	expiration_date	no	Expiration month and year
ezeewallet			Wallet-based payment
	source_wallet_id	no	Email address of consumer who owns the source wallet
	default	no	Configure as default or not
sofort			Bank transfer payment, popular in Germany
	default	no	Configure as default or not
cashu			Voucher-based payment
	default	no	Configure as default or not
paysafecard			Voucher-based payment
	default	no	Configure as default or not
ppro			Supports payments with EPS, TeleIngreso, SafetyPay, TrustPay, Przelewy24, iDEAL, QIWI, GiroPay, Mr. Cash and MyBank
	default	no	Configure as default or not
paybyvoucher_yeepay			Buy a voucher via online bank transfer (oBeP), popular in China
	product_name	yes	Apply to order product information in the process of payment, and the product description of purchase
	product_category	yes	Type of commodity, includes 3C digits, clothing and shoes, bag and accessories, books and DVDS, tuition, register exam tuition, member fee, participation fee, logistic service, airline tickets, hotel catering, etc
	card_type	yes	Card type for the voucher - can be 'virtual' or 'physical' only
	redeem_type	yes	Redeem type for the voucher - can be 'stored' or 'instant' only
	default	no	Configure as default or not
paybyvoucher_sale			Buy a voucher via Credit Card
	card_type	yes	Card type for the voucher - can be 'virtual' or 'physical' only
	redeem_type	yes	Redeem type for the voucher - can be 'stored' or 'instant' only
	bin	no	Card's first 6 digits
	tail	no	Card's last 4 digits
	default	no	Configure as default or not
	expiration_date	no	Expiration month and year
neteller			Wallet-based payment
	default	no	Configure as default or not
poli			Payment by bank account for customers with an Australian or New Zealand bank account.
	default	no	Configure as default or not

Transaction Type	Custom Attribute	Required	Description
p24			Payment by bank account for customers with a Polish bank account.
	default	no	Configure as default or not
citadel_payin			Online Banking ePayment method
	default	no	Configure as default or not
	merchant_customer_id	yes	Identifier provided by the merchant that uniquely identifies the customer in their system
idebit_payin			Online Banking ePayment method
	default	no	Configure as default or not
	customer_account_id	yes	Identifier provided by the merchant that uniquely identifies the consumer in their system
insta_debit_payin			Online Banking ePayment method
	default	no	Configure as default or not
	customer_account_id	yes	Identifier provided by the merchant that uniquely identifies the consumer in their system
paypal_express			Express payment by PayPal balance.
	default	no	Configure as default or not
abn_ideal			Bank transfer payment, popular in Netherlands.
webmoney			Bank transfer payment, popular in Russian Federation.
inpay			Instant bank payment.
sdd_sale			SEPA Direct Debit Sale
sdd_init_recurring_sale			SEPA Direct Debit init recurring
trustly_sale			Solution for Online Banking ePayments.
trustly_withdrawal			Allows you to pay with your online bank.
wechat			Online Banking ePayment method
	product_code	no	Product code
	product_num	no	Product number
	product_desc	no	Product description

WPF Internationalization (i18n)

The web payment form is internationalized (i18n) and supports the following locales and corresponding languages:

Locale	Language	Description
en	English	English locale and language settings (this is the default)
it	Italian	Italian locale and language settings
es	Spanish	Spanish locale and language settings
fr	French	French locale and language settings
de	German	German locale and language
ja	Japanese	Japanese locale and language
zh	Mandarin Chinese	Mandarin Chinese locale and language
ar	Arabic	Arabic locale and language
pt	Portuguese	Portuguese locale and language
tr	Turkish	Turkish locale and language
ru	Russian	Russian locale and language
hi	Hindu	Hindu locale and language
bg	Bulgarian	Bulgarian locale and language
id	Indonesian	Indonesian locale and language

Locale	Language	Description
ms	Malay	Malay locale and language
th	Thai	Thai locale and language

Note that the English locale is the default, and if you don't specify another locale in the WPF API, this is the locale and language that the web payment form will be translated into.

The customer has the option to change the language once he has been redirected to the WPF via the received `redirect_url`.

It is a good practice to submit the desired locale in the WPF API create call, so that a proper `redirect_url` is returned instead of manually parsing and generating a locale-specific `redirect_url`.

If a locale/language different than the current ones is needed or any translation errors/inconsistencies are spotted, feel free to contact the IT Support team atech-support@emerchantpay.net and contribute to the translation effort.

Authentication Services

Introduction

Authentication Services provide Strong Customer Authentication (SCA) which is a type of authentication relying on two or more independent elements.

SCA as defined by the European Central Bank (ECB) and in the context of the EU's Payment Services Directive (PSD2) is:

"a procedure based on the use of two or more of the following elements categorised as knowledge, ownership and inherence:

- something only the user knows, e.g. static password, code, personal identification number;
- something only the user possesses, e.g. token, smart card, mobile phone;
- something the user is, e.g. biometric characteristic, such as a fingerprint.

In addition, the elements selected must be mutually independent, i.e. the breach of one does not compromise the other(s).

At least one of the elements should be non-reusable and non-replicable (except for inherence), and not capable of being surreptitiously stolen via the Internet.

The strong authentication procedure should be designed in such a way as to protect the confidentiality of the authentication data."

Using multiple solutions from the same category would not constitute SCA.

SCA WITH 3DSecure

Only the newest variant of 3DSecure involving one-time passwords (OTP) constitutes a form of SCA.

3DSecure however might be a weak SCA solution for several reasons:

1. it relies on the cards being actively enrolled by the cardholder after issuing, i.e prior any transaction made with it and
2. it is not available on all card schemes.

ALTERNATIVE SERVICES

A number of services exist that provide SCA in a compliant way.

They rely on different solutions like generating payment "secrets", one-time passwords etc. Key advantage of such services is that they allow cards to be enrolled "on-the-fly", i.e. during a transaction rather than having to be pre-enrolled after issuing.

Such services could potentially work with any card and are thus card scheme agnostic.

ⓘ Authentication services are not available by default, they need to be enabled on your account. Please contact Tech Support for further assistance.

Genesis KYC Services

General Info

Genesis KYC Services gives us the ability to perform particular checks on the integrity of the consumer data. Based on the returned consumer score we can decide whether we want to reject/approve a given transaction or perform another action for this consumer.

Create Consumer Registration

Review all aspects of the customer's information, as it is received in the registration process, against local and external databases to increase accuracy and produce a risk score for that customer.

`POST /kyc_service/create_consumer`

```

curl https://username:password@gate.emerchantpay.net/kyc_service/create_consumer \
-H "Content-Type: text/json" \
-d '{
  "customer_information": {
    "first_name": "John",
    "last_name": "Doe",
    "customer_email": "jdoe@example.com",
    "address1": "Sample Address",
    "address2": "4th floor",
    "city": "MyCity",
    "zip_code": "32132",
    "country": "US",
    "province": "ProvinceName",
    "phone1": "0883113332",
    "phone2": "0883113334",
    "birth_date": "1987-03-03",
    "document_number": "f2345638972",
    "document_type": 3,
    "gender": "M"
  },
  "customer_unique_id": "21343253",
  "customer_registration_date": "2016-12-12",
  "customer_registration_ip_address": "255.255.255.255",
  "customer_username": "dim016",
  "customer_registration_device_id": "12343242",
  "third_party_device_id": "3432424",
  "profile_action_type": 1,
  "device_fingerprint_type": 1,
  "current_profile_status": 1,
  "bonus_code": 1922,
  "bonus_amount": 100,
  "merchant_website": "dai.com",
  "how_did_you_hear": "friend",
  "affiliate_id": 1922
}'

```

Request Parameters

Parameter	Required	Format	Description
session_id	optional	string	If this value is not provided the user email account should be complete and valid
customer_information	required	object	Customer information. See below for each of the nested required fields
customer_username	optional	string	Username of the customer on your system
customer_unique_id	required	string	Unique user identifier on your system
customer_registration_date	required	string	Date in which the customer was registered in the system OR the date in which the customer was created in the cashier Database yyyy-mm-dd
customer_registration_ip_address	required	string	IP address of customer used when the customer was registered in the system OR the current IP address
customer_registration_device_id	optional	string	Proprietary DeviceId technology, refer to the DeviceId Instruction Manual (provided on request)
third_party_device_id	optional	string	Third Party DeviceId
device_fingerprint	optional	string	Open Source DeviceId technologies (Interpreted as a String)
device_fingerprint_type	optional	enum	1 - Custom; 2 - Open Source; 3 - Open Source 2;
profile_action_type	optional	enum	1 - Registration; 2 - Profile Update;
profile_current_status	optional	enum	0 - Undefined; 1 - Review; 2 - Denied; 3 - Approved;
bonus_code	optional	string	Open text variable. Represents the code entered by the customer
bonus_submission_date	optional	string	
bonus_amount	optional	number	
merchant_website	optional	string	
industry_type	optional	string	1 - Finance; 2 - Gambling; 3 - Crypto; 4 - Travel; 5 - Retail; 6 - Risk Vendor; 7 - Adult; 8 - Remittance/Transfer; 9 - Other;
how_did_you_hear	optional	string	
affiliate_id	optional	string	
rule_context	optional	number	Number assigned to a given rule context. Please contact to get the available contexts

required* = conditionally required

Customer Information Fields

The fields of the customer information object.

Request Parameters

Parameter	Required	Format	Description
first_name	required	string	Customer first name
middle_name	optional	string	
last_name	required	string	Customer last name
customer_email	required	string	Must contain valid e-mail of customer
address1	required	string	Primary address
address2	optional	string	Secondary address
city	required	string	City
province	required	string	
zip_code	required	string	ZIP code
country	required	string	two-letter iso codes
phone1	optional	number	
phone2	optional	number	
birth_date	optional	string	Required for Visa only when MCC is a Financial Services one (e.g. MCC 6012)
document_type	optional	enum	0 - SSN; 1 - Passport Registry; 2 - Personal ID / National ID; 3 - Identity Card; 4 - Driver License; 8 - Travel Document; 12 - Residence Permit; 13 - Identity Certificate; 16 - Registro Federal de Contribuyentes; 17 - Credencial de Elector; 18 - CPF
document_number	optional	string	
gender	optional	enum	F - female; M - male

required* = conditionally required

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "details": [
    {
      "reference_id": "233",
      "risk_score": 98,
      "kyc_provider_recommendation": "Reject",
      "rules_triggered": [
        {
          "name": "Multi-Accounting : IP shared to Chargeback reason",
          "risk_score": "100.00",
          "display_to_merchant": 1
        }
      ],
      "scrubber_results": {
        "geo_check": "",
        "address_verification": "",
        "phone_verify": "",
        "idv_usa": "",
        "idv_global": "",
        "gav": "",
        "idv_br": "",
        "bav_usa": "",
        "bav_advanced": "",
        "cb_amls": "",
        "cb_bvs": "",
        "email_age": "",
        "compliance_watchlist": "",
        "ovation": "",
        "idv_advance": ""
      },
      "result_confidence_level": 91.5
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
details		
reference_id	string	KYC provider internal id

Parameter	Type	Description
risk_score	number	risk score low is better
kyc_provider_recommendation	string	KYC service provider recommendation
result_confidence_level	number	Confidence level in percentages
...	string	additional response data

Update Consumer Registration

Update the customer registration to be able to pass on the latest status required so we can continue improving the data models and provide the best scores and recommendations possible.

`POST /kyc_service/update_consumer`

```
curl https://username:password@gate.emerchantpay.net/kyc_service/update_consumer \
-H "Content-Type: text/json" \
-d '{
  "reference_id": "9999933344443",
  "profile_current_status": "21343253",
  "status_reason": "All good"
}'
```

Request Parameters

Parameter	Required	Format	Description
reference_id	required	number	Unique id returned by corresponding transaction
profile_current_status	required	enum	0 - Undefined; 1 - Review; 2 - Denied; 3 - Approved;
status_reason	optional	string	Required only if status is Reject / Decline / Chargeback / Refund / Return / Void

`required*` = conditionally required

Make sure that `reference_id` points to a preliminary created transaction (will describe transactions below).

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "details": [
    {
      "reference_id": "9999933344443"
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
details		
reference_id	string	KYC provider internal id

Create Transaction

Implement this to scrub a new transaction. We will take the information specific to that transaction and run various verification checks available, returning the recommendation, score, and third-party verification scrubbing results.

`POST /kyc_service/create_transaction`

```
curl https://username:password@gate.emerchantpay.net/kyc_service/create_transaction \
-H "Content-Type: text/json" \
-d '{
  "customer_information": {
    "first_name": "John",
    "last_name": "Doe",
    "customer_email": "jdoe@example.com",
    "address1": "Sample address",
    "city": "Paris",
    "zip_code": "666",
    "country": "FR",
    "province": "MyProvince"
  },
  "deposit_limits": {
    "payment_method": "CC"
  },
  "transaction_unique_id": "1332",
  "payment_details": {
    "bin": "411111",
    "last_digits": "1111"
  },
  "customer_ip_address": "255.255.255.255",
  "transaction_created_at": "2016-12-12 23:23:23",
  "currency": "USD",
  "amount": 99999
}'
```

```
curl https://username:password@gate.emerchantpay.net/kyc_service/create_transaction \
-H "Content-Type: text/json" \
-d '{
  "customer_information": {
    "first_name": "John",
    "last_name": "Doe",
    "customer_email": "jdoe@example.com",
    "address1": "Sample address",
    "city": "Paris",
    "zip_code": "666",
    "country": "FR",
    "province": "MyProvince"
  },
  "deposit_limits": {
    "payment_method": "EW"
  },
  "transaction_unique_id": "1332",
  "payment_details": {
    "ewallet_id": "411111"
  },
  "customer_ip_address": "255.255.255.255",
  "transaction_created_at": "2016-12-12 23:23:23",
  "currency": "USD",
  "amount": 99999
}'
```

```
curl https://username:password@gate.emerchantpay.net/kyc_service/create_transaction \
-H "Content-Type: text/json" \
-d '{
  "customer_information": {
    "first_name": "John",
    "last_name": "Doe",
    "customer_email": "jdoe@example.com",
    "address1": "Sample address",
    "city": "Paris",
    "zip_code": "666",
    "country": "FR",
    "province": "MyProvince"
  },
  "deposit_limits": {
    "payment_method": "CC"
  },
  "transaction_unique_id": "1332",
  "payment_details": {
    "bin": "411111",
    "tail": "1111"
  },
  "customer_ip_address": "255.255.255.255",
  "transaction_created_at": "2016-12-12 23:23:23",
  "currency": "USD",
  "amount": 99999
}'
```

```

curl https://username:password@gate.emerchantpay.net/kyc_service/create_transaction \
-H "Content-Type: text/json" \
-d '{
  "customer_information": {
    "first_name": "John",
    "last_name": "Doe",
    "customer_email": "jdoe@example.com",
    "address1": "Sample address",
    "city": "Paris",
    "zip_code": "666",
    "country": "FR",
    "province": "MyProvince"
  },
  "deposit_limits": {
    "payment_method": "EC"
  },
  "transaction_unique_id": "1332",
  "payment_details": {
    "bin": "411111",
    "tail": "4978784327847832784789"
  },
  "customer_ip_address": "255.255.255.255",
  "transaction_created_at": "2016-12-12 23:23:23",
  "currency": "USD",
  "amount": 99999
}'

```

Request Parameters

Parameter	Required	Format	Description
session_id	optional	string	If this value is not provided the user email account should be complete and valid
customer_username	optional	string	Username of the customer on your system
customer_unique_id	optional	string	Unique user identificator on your system
customer_status	optional	string	Customer loyalty level; for example: VIP; Bronze; Platinum; Gold; etc. This is an open text variable
customer_loyalty_level	optional	string	Customer loyalty level; for example: VIP; Bronze; Platinum; Gold; etc. This is an open text variable
customer_registration_date	optional	string	Date in which the customer was registered in the system OR the date in which the customer was created in the cashier Database yyyy-mm-dd
customer_registration_ip_address	optional	string	IP address of customer used when the customer was registered in the system OR the current IP address
customer_registration_device_id	optional	string	Proprietary Deviceld technology, refer to the Deviceld Instruction Manual (provided on request)
customer_information	required	object	Customer information. See below for each of the nested required fields
first_deposit_date	optional	string	Empty if first deposit yyyy-mm-dd
first_withdrawal_date	optional	string	Empty if 0 withdrawals yyyy-mm-dd
deposits_count	optional	number	
withdrawals_count	optional	number	
current_balance	optional	number	
deposit_limits	required	object	See below
transaction_unique_id	required	string	Transaction id
billing_information	optional	object	See below
shipping_information	optional	object	See below
payment_details	required	object	See below
amount	optional	number	Amount of transaction in minor currency unit, seeCurrency and Amount Handling for details
currency	optional	string	ISO 4217 Three digits
transaction_created_at	required	string	Represents the time of the transaction on the Merchant server. Format: yyyy-mmdd hh:mm:ss
transaction_status	optional	enum	Transaction status; it is recommended to send 0 on the initial call. Afterwards call Update Transaction endpoint to update the status. 0 - numberUndefined; 1 - number- Approved; 2 - number- Pre-Auth; 3 - number- Settled; 4 - number- Void; 5 - number- Rejected internally by Negative Database or other scrubber decided to reject the transaction; 6 - number- Declined the bank / gateway / processor rejected the transaction; 7 - number- Chargeback; 8 - number- Return; 9 - number- Pending; 10 - number- Pass Transaction validation; 11 - number- Failed Transaction validation; 12 - number- efund; 13 - number- Approved Review; 14 - number- Abandon This status is used when the user just leaves the transaction;
customer_ip_address	required	string	Customers IP address
customer_device_id	optional	string	Proprietary Deviceld technology; refer to the Deviceld Instruction Manual (provided on request)
third_party_device_id	optional	string	Third Party Deviceld

Parameter	Required	Format	Description
device_fingerprint	optional	string	Open Source DeviceId technologies (Interpreted as a String)
device_fingerprint_type	optional	enum	1 - Custom; 2 - Open Source; 3 - Open Source 2;
shopping_cart_items_count	optional	number	Represents the quantity of items in the shopping cart
local_time	optional	string	Represents the local time of the customer doing the transaction. Format: yyyy-mmdd hh:mm:ss
order_source	optional	enum	internet; mobile; inhouse
merchant_website	optional	string	Open text variable; it represents the website name or URL that submitted the transaction
industry_type	optional	enum	Definition of the industry type the transaction was performed on; 1-number - Finance; 2-number - Gambling; 3-number - Crypto; -number - Travel; 5-number - Retail; 6-number - Risk Vendor; 7-number - Adult; 8-number - Remittance/Transfer; 9-number - Other;
customer_password	optional	string	Open text variable; it represents the customers password in hashed format (using MD5) some companies share that information in order to look for patterns
rule_context	optional	number	Number assigned to a given rule context. Please contact to get the available contexts.
custom_variable	optional	string	Represents anything the merchant wants to store with this transaction

required* = conditionally required

Deposit Limits Fields

Request Parameters

Parameter	Required	Format	Description
payment_method	required	enum	CC; EC; EW - CreditCard; Echeck; EWallet
minimum	optional	number	Lowest valid amount for deposit in minor currency units; ex: 100 = \$1
daily_maximum	optional	number	In minor currency units
weekly_maximum	optional	string	In minor currency units
monthly_maximum	optional	string	In minor currency units

required* = conditionally required

Billing Information Fields

Request Parameters

Parameter	Required	Format	Description
first_name	optional	string	Customer first name
last_name	optional	string	Customer last name
customer_email	optional	string	Must contain valid e-mail of customer
address1	optional	string	Primary address
address2	optional	string	Secondary address
city	optional	string	City
province	optional	string	
zip_code	optional	string	ZIP code
country	optional	string	ISO 3166-1 Alpha-2. For example: USD
phone1	optional	number	Numbers only; no dash or any other separator. Please include area code if applicable. Country code is not required
birth_date	optional	string	yyyy-mm-dd
gender	optional	enum	M; F

required* = conditionally required

Shipping Information Fields

Request Parameters

Parameter	Required	Format	Description
first_name	optional	string	Customer first name
last_name	optional	string	Customer last name

Parameter	Required	Format	Description
customer_email	optional	string	Must contain valid e-mail of customer
address1	optional	string	Primary address
address2	optional	string	Secondary address
city	optional	string	City
province	optional	string	
zip_code	optional	string	ZIP code
country	optional	string	ISO 3166-1 Alpha-2. For example: USD
phone1	optional	number	Numbers only; no dash or any other separator. Please include area code if applicable. Country code is not required

required* = conditionally required

Payment Details Fields

Request Parameters

Parameter	Required	Format	Description
bin	optional	string	First 6 digits of the card number; Only required if Payment Method Type is Credit Card;
tail	optional	string	Last 4 digits of the card number; Only required if Payment Method Type is Credit Card;
cvv_present	optional	string	Indicator if the CVV was received or not; The expected values in this field are Yes or No;
hashed_pan	optional	string	Only required if Payment Method Type is Credit Card; It should be hashed using SHA256; the string to be hashed is Card Number and the MD5 hash of the Expiration Date; For example: if the card number is 1111-2222-3333-4444 with expiration date 01/22; The hash should be done on the string without spaces nor dash nor other special chars; The MD5 of the Expiration Date 0122 is f0f4b6598f2cee45644673998b4f44be; That said; the string to be hashed is 1111222233334444f0f4b6598f2cee45644673998b4f44be which generates the following result feed244b7d647b0db391e35910e0d42aa88f7633a4f4f4883b109abad1d6d7
routing	optional	string	Routing number; Only required if Payment Method Type is eCheck;
account	optional	string	Only numbers up to 30 digits; Only required if Payment Method Type is eCheck;
ewallet_id	optional	string	Most of the times its an email; Only required if Payment Method Type is eWallet;

required* = conditionally required

💡 Required attributes, depending on the Payment Method:

- For payment method CC
 - bin
 - tail
- For payment method CC OPTIONAL
 - cvv_present
 - hashed_pan
- For payment method EC
 - routing
 - account
- For payment method EW
 - ewallet_id

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "details": [
    {
      "reference_id": "481119",
      "kyc_provider_recommendation": "Approve",
      "risk_score": 0.39,
      "third_party": "",
      "processors": "",
      "reason": "",
      "result_confidence_level": 91.5,
      "rules_triggered": [
        {
          "name": "Address Verification : Global 25",
          "score": "0",
          "display_to_merchant": 1
        }
      ],
      "bin_information": {
        "bank_name": "BANCO NACIONAL DE COSTA RICA",
        "bank_location": "COSTA RICA",
        "card_type": "STANDARD",
        "card_level": "DEBIT",
        "iso_card_country": "CR",
        "card_brand_db": "MASTERCARD",
        "card_brand_script": "MASTERCARD"
      },
      "scrubber_results": {
        "geo_check": "",
        "address_verification": "",
        "phone_verify": "",
        "idv_usa": "",
        "idv_global": "",
        "gav": "",
        "idv_br": "",
        "bav_usa": "",
        "bav_advanced": "",
        "cb_am": "",
        "cb_bvs": "",
        "email_age": "",
        "compliance_watchlist": "",
        "ovation": "",
        "idv_advance": ""
      }
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
details		
reference_id	string	KYC provider internal id
kyc_provider_recommendation	string	KYC provider recommendation
risk_score	number	risk score low is better
result_confidence_level	number	KYC service level of decision confidence
...	*	KYC provider additional data

Update Transaction

Utilize this method to update a particular transaction status so we can continue improving the data models and provide the best scores and recommendations.

[POST /kyc_service/update_transaction](#)

```
curl https://username:password@gate.emerchantpay.net/kyc_service/update_transaction \
-H "Content-Type: text/json" \
-d '{
  "transaction_status": 1,
  "reference_id": "4454982",
  "reason": "a reason message",
  "transaction_unique_id": "1332",
  "cvv_check_result": "",
  "avs_check_result": "",
  "processor_identifier": ""
}'
```

```
curl https://username:password@gate.emerchantpay.net/kyc_service/update_transaction \
-H "Content-Type: text/json" \
-d '{
  "transaction_status": 2,
  "transaction_unique_id": "1332"
}'
```

Request Parameters

Parameter	Required	Format	Description
session_id	optional	string	If this value is not provided the user email account should be complete and valid
transaction_unique_id	required	string	Transaction id
reference_id	optional	number	Required only if status is Reject / Decline / Chargeback / Refund / Return / Void
transaction_status	optional	enum (number)	1-Approved; 2-Pre-Auth; 3-Settled; 4-Void; 5-Rejected internally by Negative Database or other scrubber decided to reject the transaction; 6-Declined the bank / gateway / processor rejected the transaction; 7-Chargeback; 8-Return; 9-Pending; 10-Pass Transaction validation; 11-Failed transaction validation; 12-Refund; 13-Approved Review; 14-Abandon This status is used when the user just leaves the transaction;
reason	optional	string	Required only if status is Reject / Decline / Chargeback / Refund / Return / Void
cvv_check_result	optional	string	Response from processor regarding CVV check
avs_check_result	optional	string	Result from processor regarding AVS check
processor_identifier	optional	string	Unique identifier of the processor attempted

`required*` = conditionally required

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "details": [
    {
      "reference_id": "481119"
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
details		
reference_id	string	KYC provider internal id

Identity Document Upload

Used to verify documents provided by the customer.

When called this action returns the following:

- An instant response with a reference id and additional keys by which the particular query could be addressed.
- Async responses with answers from the performed checks (OCR, manual, etc.). Usually, these responses arrive after 5-7 minutes. The notification url is agreed on environment basis.

Create a new transaction for the particular user before making a call of this kind.

`POST /kyc_service/upload_document`

```

curl https://username:password@gate.emerchantpay.net/kyc_service/upload_document \
-H "Content-Type: text/json" \
-d '{
  "transaction_unique_id": "1332",
  "doc": {
    "mime_type": "image/jpeg",
    "base64_content": "{base_64_endcoded_content}"
  }
}'

```

Request Parameters

Parameter	Required	Format	Description
customer_username	optional	string	Username of the customer on your system
customer_unique_id	optional	string	Unique user identifier on your system
transaction_unique_id	optional	string	Unique Transaction Id with info of the customer to be verified. Please note; if Transaction Id and Customer Registration Id are provided the system will use the Transaction Id. Please provide the Transaction Id or the Customer Registration Id; one of them must be provided
reference_id	optional	string	Unique Customer Registration Id with info of the customer to be verified
method	optional	enum (number)	1 - Manual; 2 - OCR; 3 - Both;
doc	required	object	see below
doc2; doc3; doc4	optional	object	additional document images

`required*` = conditionally required

Document Fields

Request Parameters

Parameter	Required	Format	Description
base64_content	required	string	
mime_type	required	string	

`required*` = conditionally required

```

{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "details": [
    {
      "kyc_source": "OCR",
      "reference_id": "382"
    },
    {
      "kyc_source": "Semi-manual",
      "reference_id": "129"
    }
  ],
  "doc": "51f7e411cd1202e040b21655738beb89",
  "doc2": "b0139d3fb1785c1e57ac5a6b054692eb",
  "doc3": "e0059153192876ce8ab36d8cd8ab1bca"
}

```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
details		
kyc_source	string	KYC service name triggered for verification
reference_id	string	id used for reference when verification result is received

Identity Document Download

Uploaded documents will be stored by legal provisions and they can be requested for review. Just post a JSON body with the identity document id of the given document and a response with the filename and the base64 encoded content of that file would be returned.

POST /kyc_service/download_document

```
curl https://username:password@gate.emerchantpay.net/kyc_service/download_document \
-H "Content-Type: text/json" \
-d '{
  "identity_document_id": "676a053b16781e43db7e75dcb1444ef8"
}'
```

Request Parameters

Parameter	Required	Format	Description
identity_document_id	required	string	document id

required* = conditionally required

```
[
  {
    "code": 0,
    "message": "Successful Response",
    "technical_message": "Successful Response",
    "details": [
      {
        "document": {
          "file_name": "430d595c22dbae26ef39ed91c3aabb49.jpg",
          "base64_content": "{base_64_encoded_content}"
        }
      }
    ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'

Consumer Phone verifications

Scrub detailed phone characteristics from phone type down to owner name and billing address and more. This method will return all the information we receive from various data sources.

POST /kyc_service/verify_phone

```
curl https://username:password@gate.emerchantpay.net/kyc_service/verify_phone \
-H "Content-Type: text/json" \
-d '{
  "trans_id": "1332",
  "phone": "123123123123"
}'
```

Request Parameters

Parameter	Required	Format	Description
trans_id	required	string	Transaction id
user_name	optional	string	Username of the customer on your system
user_number	optional	string	Unique user identifier on your system
phone	required	string	Numbers only; no dash or any other separator. Please include area code if applicable. Country code is not required

required* = conditionally required

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "payload": [
    {
      "reference_id": "2",
      "results": {
        "status": 201,
        "reference_id": "",
        "status_description": "",
        "phone_type": "",
        "phone_geo_city": "",
        "phone_geo_state": "",
        "phone_geo_zip": "",
        "phone_geo_county": "",
        "phone_geo_metro_code": "",
        "phone_geo_country": "",
        "phone_geo_time_zone": "",
        "phone_geo_coordinates_latitude": "",
        "phone_geo_coordinates_longitude": "",
        "phone_owner_first_name": "",
        "phone_owner_last_name": "",
        "phone_owner_street_address": "",
        "phone_owner_city": "",
        "phone_owner_state": "",
        "phone_owner_country": "",
        "phone_owner_zip": ""
      }
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
payload		
reference_id	string	id used for future reference
results	object	detailed data from KYC provider

Consumer Identity verifications

Verify the authenticity of your customers with their ID documentation and information provided with integrity and accuracy.

[POST /kyc_service/verify_identity](#)

```
curl https://username:password@gate.emerchantpay.net/kyc_service/verify_identity \
-H "Content-Type: text/json" \
-d '{
  "trans_id": "1332",
  "first_name": "John",
  "last_name": "Doe",
  "address": "MyAddress",
  "city": "Townsville",
  "postal_code": "666",
  "country": "FR"
}'
```

Request Parameters

Parameter	Required	Format	Description
trans_id	required	string	Transaction id
user_name	optional	string	Username of the customer on your system
user_number	optional	string	Unique user identificator on your system
first_name	required	string	Customer first name
middle_name	optional	string	
last_name	required	string	Customer last name

Parameter	Required	Format	Description
address	required	string	
generation	optional	string	
id_type	optional	enum(number)	0 - SSN; 1 - Passport Registry; 2 - Personal ID; 3 - Identity Card; 4 - Driver License; 8 - Travel Document; 12 - Residence Permit; 13 - Identity Certificate; 16 - Registro Federal de Contribuyentes; 17 - Credencial de Elector; 18 - CPF;
id_value	optional	string	
city	required	string	City
state	optional	string	State code in ISO 3166-2, required for USA and Canada
postal_code	required	string	
country	optional	string	ISO 3166-1 Alpha-2
dob	optional	string	yyyy-mm-dd
driver_license_number	optional	string	
driver_license_state	optional	string	
phone	optional	number	Numbers only; no dash or any other separator. Please include area code if applicable. Country code is not required

`required*` = conditionally required

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "payload": [
    {
      "reference_id": "18",
      "results": {
        "transaction_id": 15249304,
        "primary_result": "",
        "checkpoint_score": 294,
        "authentication_score": 73,
        "address_verification_result": "H",
        "address_type_result": "N",
        "address_high_risk_result": "N",
        "phone_verification_result": "NB",
        "phone_high_risk_result": "YP",
        "change_of_address_result": "N",
        "driver_license_result": "I",
        "social_security_number_result": "V",
        "date_of_birth_result": 5,
        "date_of_birth_day": "",
        "date_of_birth_month": "",
        "date_of_birth_year": "",
        "ssn_validation_state_issued": "KS",
        "ssn_validation_issue_start_range": 1997,
        "ssn_validation_issue_end_range": 1999,
        "ofac_validation_response": 1,
        "previous_addresses": [
          ],
        "questions": ""
      }
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
payload		
reference_id	string	id used for future reference
results	object	detailed data from KYC provider

Consumer Bank Account verifications

Confirm customers payment details down to bank location, name, account details and cross-reference against registrant intel.

POST /kyc_service/verify_bank_account

```
curl https://username:password@gate.emerchantpay.net/kyc_service/verify_bank_account \
-H "Content-Type: text/json" \
-d '{
  "customer_information": {
    "first_name": "John",
    "last_name": "Doe",
    "email": "jdoe@example.com",
    "address1": "Sample address",
    "city": "Paris",
    "postal_code": "666",
    "country": "FR",
    "province": "MyProvince"
  },
  "payment_method": {
    "routing": "216790235170695",
    "account": "3421"
  }
}'
```

Request Parameters

Parameter	Required	Format	Description
user_name	optional	string	Username of the customer on your system
user_number	optional	string	Unique user identifier on your system
customer_information	required	object	
payment_method	required	object	
user	optional	string	
pass	optional	string	

required* = conditionally required

Payment Method Fields

Request Parameters

Parameter	Required	Format	Description
routing	required	string	
account	required	string	Only numbers up to 30 digits

required* = conditionally required

```
[
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "payload": [
    {
      "internal_trans_id": "2",
      "rec": "Approve",
      "score": 0.43
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
payload		
internal_trans_id	string	id used for future reference
rec	string	KYC service provider recommendation
score	number	risk score low is better

Make call

This method is used to make a call or send an SMS to a given phone number. This method is used to complement the verification process. The system will make a call and dictates the verification code to be typed in the website. The following is a transcript of the voice message the system will use when en-US is used as language:

i Hello, thank you for using our phone verification system. Your code is [CODE]. Once again, your code is [CODE]. Goodbye!

The following is an example of the SMS text the system will use when en-US is used as language:

i Your code is [CODE]. Thank you.

POST /kyc_service/create_authentication

```
curl https://username:password@gate.emerchantpay.net/kyc_service/create_authentication \
-H "Content-Type: text/json" \
-d '{
  "customer_username": "896342",
  "customer_unique_id": 2,
  "transaction_unique_id": "387783428790324",
  "customer_phone_number": "+372489879342",
  "service_language": "bg",
  "security_code": "3423",
  "service_type": 1
}'
```

Request Parameters

Parameter	Required	Format	Description
customer_username	optional	string	Username of the customer on your system
customer_unique_id	optional	string	Unique user identificator on your system
transaction_unique_id	required	string	Transaction identification in the merchants system; If not provided the system won't be able to link with the transaction that is being verified
customer_phone_number	required	string	Phone number to call; It must be complete country code + phone number; No dashes; For example: 50622560000
service_language	required	string	a string value; See below
security_code	required	string	Numeric value - 4 digits only; It cannot start with 0; The boot is going to say this numeric value so the user can type it back on the website;
service_type	required	string	Numeric value to indicate if the system will send a text message or make a voice call; 1 for SMS; 2 for Voice call;

required* = conditionally required

Available languages for t_language

Language	Code
Arabic	a
Cantonese, Chinese/Hong Kong	zh-HK
Catalan	ca
Croatian	hr
Czech	cs
Danish	da
Dutch	nl
English, Australian	en-AU
English, UK	en-GB
English, US	en-US
Estonian	et
Filipino	fil
Finnish	fi
French	fr
French, Canadian	fr-CA

Language	Code
German	de
Greek	el
Hebrew	he
Hindi	hi
Hungarian	hu
Icelandic	is
Indonesian	id
Italian	it
Japanese	ja
Korean	ko
Latvian	lv
Lingala	ln
Lithuanian	lt
Mandarin	zh-CN
Norwegian	no
Polish	pl
Portuguese, Brazilian	pt-BR
Portuguese, European	pt
Romanian	ro
Russian	ru
Slovakian	sk
Spanish, European	es
Spanish, Latin American	es-419
Swedish	sv
Thai	th
Turkish	tr
Ukrainian	uk
Vietnamese	vi

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "details": [
    {
      "reference_id": "233"
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
details		
reference_id	string	id used for future reference

Update call

This method is used to update the call status with the latest info received from the main system. It also updates the transaction associated with this verification call.

POST /kyc_service/update_authentication

```
curl https://username:password@gate.emerchantpay.net/kyc_service/update_authentication \
-H "Content-Type: text/json" \
-d '{
  "reference_id": 1237834,
  "security_code_input": "4322",
  "verification_status": "4"
}'
```

Request Parameters

Parameter	Required	Format	Description
reference_id	required	string	Unique value to identify the call in back office.
security_code_input	required	string	Transaction identification in the merchants system; If not provided the system won't be able to link with the transaction that is being verified
verification_status	required	string	The first two values are defined by the system when the call is created; the ones accepted in this call are the status 3; 4 and 5 only 1-In Progress; 2-Failed; 3-Verification Failed; 4-Verification Successful; 5-Abandon;

required* = conditionally required

```
{
  "code": 0,
  "message": "Successful Response",
  "technical_message": "Successful Response",
  "details": [
    {
      "reference_id": "233"
    }
  ]
}
```

Successful Response Parameters

Parameter	Type	Description
code	number	genesis success code - 0
message	string	const 'Successful Response'
technical_message	string	const 'Successful Response'
details		
reference_id	string	id used for future reference

Error Response

```
{
  "code": 404,
  "message": "Passed attribute is invalid!",
  "technical_message": "The property '#/' did not contain a required property of 'customer_information'"
}
```

```
{
  "code": 803,
  "message": "KYC Services not configured!",
  "technical_message": "KYC Services not configured for Merchant!"
}
```

Error Response Parameters

Parameter	Type	Description
code	number	Genesis internal error code
message	string	Short explanation of occurred error
technical_message	string	More detailed explanation of occurred error

Kyc Service Notification

Since identity document verification is time consuming(can take up to 3-7 minutes) it is an asynchronous call. When verification is done a notification will be sent to configured Merchant notification url with all the details of the review along with the risk score. Note that multiple notifications can be expected so please always check the Score Complete parameter as if we have multiple DocumentId Verify providers, the score will be complemented with more info as we receive the data from the KYC sources. The count of expected notifications will be declared in initial IdentityDocumentUpload response.

KYC Notification Example

```
?kyc_source=OCR
&reference_id=1912
&score=10
&score_complete=0
&uid=5486354658
&error_message=
&analysis_ref_uid=148871
&controls_identifier=MODEL_VALIDITY
&controls_title_msg=OK
&controls_result_msg=OK
&controls_result=OK
&controls_control_identifier=MODEL_RECOGNIZED
&controls_control_title_msg=OK
&controls_control_result_msg=OK
&controls_control_result=OK
&document_classification_id_type=V
&document_detail_emit_country=USA
&document_detail_expiration_date_day=23
&document_detail_expiration_date_month=12
&document_detail_expiration_date_year=2004
&document_detail_document_number=555123ABC
&document_detail_extra_infos_data_key=PERSONAL_NUMBER
&document_detail_extra_infos_data_value=IFLND00AMS803085
&document_detail_extra_infos_title=Personal_Number
&holder_detail_last_name=TRAVELER
&holder_detail_first_name=HAPPYPERSON
&holder_detail_nationality=GBR
&holder_detail_gender=F
&holder_detail_birth_date_day=5
&holder_detail_birth_date_month=2
&holder_detail_birth_date_year=1965
&mrz_line1=VIUSATRAVELER_HAPPYPERSON
&mrz_line2=555123ABC6GBR6502056F0412236IFLND00AMS803085
&check_report_summary_check_identifier=SUMMARY_ID_COPY
&check_report_summary_check_title_msg=OK
&check_report_summary_check_result_msg=Original_Document
&check_report_summary_check_result=OK
&notification_type=kyc_service_execution
&signature=secure-signature
```

Notification Parameters Response Parameters

Parameter	Type	Description
kyc_source	string	name of the KYC source performed the validation
reference_id	string	Unique id for reference to document upload request
risk_score	number	Score product of validation rules
external_unique_id	string	Unique ID Reference from External Service Provider
analysis_reference_id	string	UniqueId Reference from Genesis
controls_identifier	string	List of all MAIN controls performed on the document
...	string	Additional information related to verification process
notification_type	string	constant value "kyc service response"
signature	string	the signature of the notification, should be used to verify the the notification was sent by Genesis

The signature is a security measure meant to ensure that the gateway is really the sender of the notification. It is generated by concatenating the reference id with your API password and generating a SHA-512 Hash (Hex) of the string:

SHA-512 Hash Hex of [reference_id][Your Merchant API password]

Notification signature examples

reference_id	API password	signature
1912	password1	ecc5f441366aef60627a7fd2ad31e8c0e6d61d7cc3922e00fcdf5cfbc2cc5ed67b9a3fa91a2c45ebd37c37acac6c543bed1f1146aea408c22741ffcd137fe75
1818	password2	e03a2cdda2d75b7522a1c0b14d078ef017b000aa419c872a1e6489b8dd287e6bc6573fece5cf0db9bd3e6711eb9a7cf65a29b7a13ba5bad1de13d16ba448283

When receiving the notification, you are required to render an XML page containing the transaction's reference id so that the gateway knows that you have accepted the notification. If the XML is not delivered, the notification is sent periodically as per the rules for notifications delivery.

```
<?xml version="1.0" encoding="UTF-8"?>
<notification_echo>
  <reference_id>1912</reference_id>
</notification_echo>
```

Consumers

Introduction

The Consumer entity brings Tokenization, Transactions and Web Payment Forms (WPF) together. It is a representation of a customer that can serve different purposes. A consumer is identified by providing both consumer ID and email. It is *explicitly* created via our Consumer API or *implicitly* by providing `customer_email` in either Transactions or WPF APIs. The main purpose of consumers is to group web payment forms and payment transactions. Using the merchant console, one can track consumers and find high-volume ones. The other role of consumers is to provide simplified, one-step tokenization of card holder details. For Processing API that means securely storing card data in exchange for a token, which can be used for future payments. For WPF, customers can choose either to use previously stored cards or remember a new payment method.

Consumer API

CREATE CONSUMER

Creates a consumer based on email address. Optionally, one can provide billing and shipping address. Addresses will be used, if none given, in Processing or WPF APIs.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/v1/create_consumer/ \
-H "Content-Type: text/xml" \
-d '
<create_consumer_request>
<email>consumer@email.com</email>
<billing_address>
  <first_name>Travis</first_name>
  <last_name>Pastrana</last_name>
  <address1>Muster Str. 12</address1>
  <zip_code>10178</zip_code>
  <city>Los Angeles</city>
  <state>CA</state>
  <country>US</country>
</billing_address>
<shipping_address>
  <first_name>Travis</first_name>
  <last_name>Pastrana</last_name>
  <address1>Muster Str. 12</address1>
  <zip_code>10001</zip_code>
  <city>Los Angeles</city>
  <state>CA</state>
  <country>US</country>
</shipping_address>
</create_consumer_request>'
```

Request Parameters

Parameter	Required	Format	Description
email	required	e-mail address	The consumer e-mail address must be unique. If another consumer exists with this e-mail address, the request will be rejected.
billing_address	optional		See Required vs Optional API params for details
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada

Parameter	Required	Format	Description
country	optional	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<create_consumer_response>
<consumer_id>123456</consumer_id>
<email>consumer@email.com</email>
<status>enabled</status>
</create_consumer_response>
```

Successful Response Parameters

Parameter	Type	Description
consumer_id	string(10)	Consumer unique reference
email	e-mail address	Consumer e-mail address
status	string	Status of the consumer

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<create_consumer_response>
<status>error</status>
<code>330</code>
<technical_message>Invalid email format!</technical_message>
<message>Something went wrong, please contact support!</message>
</create_consumer_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the consumer
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

UPDATE CONSUMER

Updates consumer email and addresses.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/v1/create_consumer/ \
-H "Content-Type: text/xml" \
-d '
<update_consumer_request>
<consumer_id>123456</consumer_id>
<email>consumer@email.com</email>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<shipping_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10001</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</shipping_address>
</update_consumer_request>'
```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	New e-mail address
billing_address	optional		See Required vs Optional API params for details
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166
shipping_address	optional		
first_name	optional	string(255)	Customer first name
last_name	optional	string(255)	Customer last name
address1	optional	string(255)	Primary address
address2	optional	string(255)	Secondary address
zip_code	optional	string	ZIP code
city	optional	string(255)	City
state	optional	string(2)	State code in ISO 3166-2, required for USA and Canada
country	optional	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<update_consumer_response>
<consumer_id>123456</consumer_id>
<email>consumer@email.com</email>
<status>enabled</status>
</update_consumer_response>
```

Successful Response Parameters

Parameter	Type	Description
consumer_id	string(10)	Consumer unique reference
email	e-mail address	Consumer e-mail address
status	string	Status of the consumer

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<update_consumer_response>
<status>error</status>
<code>702</code>
<technical_message>Consumer not found!</technical_message>
<message>Something went wrong, please contact support!</message>
</update_consumer_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the consumer
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

DISABLE CONSUMER

Disable consumer from usage until further action.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/v1/create_consumer/ \
-H "Content-Type: text/xml" \
-d '
<disable_consumer_request>
<consumer_id>123456</consumer_id>
<email>consumer@email.com</email>
</disable_consumer_request>'
```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<disable_consumer_response>
  <consumer_id>123456</consumer_id>
  <email>consumer@email.com</email>
  <status>disabled</status>
</disable_consumer_response>
```

Successful Response Parameters

Parameter	Type	Description
consumer_id	string(10)	Consumer unique reference
email	e-mail address	Consumer e-mail address
status	string	Status of the consumer

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<disable_consumer_response>
  <status>error</status>
  <code>702</code>
  <technical_message>Consumer not found!</technical_message>
  <message>Something went wrong, please contact support!</message>
</disable_consumer_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the consumer
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

ENABLE CONSUMER

Enable consumer that was disabled in the past.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/v1/create_consumer/ \
-H "Content-Type: text/xml" \
-d '
<enable_consumer_request>
  <consumer_id>123456</consumer_id>
  <email>consumer@email.com</email>
</enable_consumer_request>'
```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<enable_consumer_response>
  <consumer_id>123456</consumer_id>
  <email>consumer@mail.com</email>
  <status>enabled</status>
</enable_consumer_response>
```

Successful Response Parameters

Parameter	Type	Description
consumer_id	string(10)	Consumer unique reference
email	e-mail address	Consumer e-mail address
status	string	Status of the consumer

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<enable_consumer_response>
  <status>error</status>
  <code>702</code>
  <technical_message>Consumer not found!</technical_message>
  <message>Something went wrong, please contact support!</message>
</enable_consumer_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the consumer
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

GET CONSUMER CARDS

Get previously tokenized card details for a consumer.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://gate.emerchantpay.net/v1/create_consumer/ \
-H "Content-Type: text/xml" \
-d ' 
<get_consumer_cards_request>
  <consumer_id>123456</consumer_id>
  <email>consumer@email.com</email>
</get_consumer_cards_request>'

```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<get_consumer_cards_response>
  <total>1</total>
  <card>
    <card_number>409603...0106</card_number>
    <card_holder>Travis Pastrana</card_holder>
    <expiration_month>12</expiration_month>
    <expiration_year>2020</expiration_year>
    <card_brand>master</card_brand>
  </card>
</get_consumer_cards_response>

```

Successful Response Parameters

Parameter	Type	Description
total	string(255)	Number of non-expired consumer cards
card		
card_number	string(13..21)	Masked credit card number
card_holder	string(255)	Full name of customer as printed on credit card (first name and last name at least)
expiration_month	MM	Expiration month as printed on credit card
expiration_year	YYYY	Expiration year as printed on credit card
card_brand	string	Credit card brand

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<get_consumer_cards_response>
  <status>error</status>
  <code>702</code>
  <technical_message>Consumer not found!</technical_message>
  <message>Something went wrong, please contact support!</message>
</get_consumer_cards_response>

```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the consumer
code	integer	Error code according to Error code table

Parameter	Type	Description
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

Tokenization

Introduction

Tokenization is the process of replacing sensitive cardholder data with a surrogate value ("token"). The data to be tokenized must include at least the primary account number (PAN).

Tokenization greatly reduces the sensitive data that businesses need to store, thus improving security of credit card transactions and minimizing the costs related to PCI DSS compliance.

We issue reversible non-cryptographic tokens to merchants via our Tokenization API and take care to store safely the tokenized cardholder data. Merchants are able to use the issued tokens instead of the cardholder data when creating credit card transactions via our Processing API. PCI DSS compliant merchants have also the possibility to exchange the token for the original cardholder data via our Tokenization API ("detokenization").

Tokenization API

ACCEPTED CARDHOLDER PARAMETERS

All cardholder data parameters are accepted for tokenization - card number, card holder, expiration year, expiration month. Please note - CVV is not accepted.

CONSUMER REQUIRED

An enabled consumer is required in order to use this API. You have to create one or use existing, please checkConsumer API.

TOKENIZE

Tokenizes cardholder data and issues a corresponding token. Merchants should take care to save the plain-text token value in their system as once issued it is not possible to obtain it again. Attempting to tokenize the same cardholder data will issue a new token. The token can be used in the Processing API instead of the cardholder data.

i Please note, CVV can't be part of the cardholder data.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/v1/tokenize/ \
-H "Content-Type: text/xml" \
-d ' \
<tokenize_request>
<consumer_id>123456</consumer_id>
<email>consumer@email.com</email>
<token_type>uuid</token_type>
<card_data>
<card_number>4200000000000000</card_number>
<card_holder>John Doe</card_holder>
<expiration_month>05</expiration_month>
<expiration_year>2020</expiration_year>
</card_data>
</tokenize_request>'
```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address
token_type	required	uuid	Token type format
card_data	required		
card_number	required	string(13..21)	Complete cc number of customer
card_holder	optional	string(255)	Full name of customer as printed on credit card (first name and last name at least)

Parameter	Required	Format	Description
expiration_month	optional	MM	Expiration month as printed on credit card
expiration_year	optional	YYYY	Expiration year as printed on credit card

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<tokenize_response>
<status>active</status>
<token_id>34567</token_id>
<token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
<token_type>uuid</token_type>
<consumer_id>123456</consumer_id>
</tokenize_response>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the token
token_id	string(32)	Unique token id
token	string(36)	Plain-text token value
token_type	uuid	Token type format
consumer_id	string(10)	Consumer unique reference

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<tokenize_response>
<status>error</status>
<code>720</code>
<technical_message>Invalid token type!</technical_message>
<message>Something went wrong, please contact support!</message>
</tokenize_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the token
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

DETOKENIZE

Exchanges the token with the tokenized cardholder data

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/v1/detokenize/ \
-H "Content-Type: text/xml" \
-d '
<detokenize_request>
<consumer_id>123456</consumer_id>
<email>consumer@email.com</email>
<token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
<token_type>uuid</token_type>
</detokenize_request>'
```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address
token	required	string(36)	Plain-text token value
token_type	required	uuid	Token type format

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<detokenize_response>
<status></status>
<token_id>34567</token_id>
<token_type>uuid</token_type>
<card_data>
<card_number>4200000000000000</card_number>
<card_holder>John Doe</card_holder>
<expiration_month>05</expiration_month>
<expiration_year>2020</expiration_year>
</card_data>
</detokenize_response>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the token
token_id	string(32)	Unique token id
token	string(36)	Plain-text token value
token_type	uuid	Token type format
card_data		
card_number	string(13..21)	Complete cc number of customer
card_holder	string(255)	Full name of customer as printed on credit card (first name and last name at least)
expiration_month	MM	Expiration month as printed on credit card
expiration_year	YYYY	Expiration year as printed on credit card

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<detokenize_response>
  <status>error</status>
  <code>730</code>
  <technical_message>Invalid token!</technical_message>
  <message>Something went wrong, please contact support!</message>
</detokenize_response>

```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the token
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

UPDATE TOKEN

Updates the tokenized data corresponding to an existing valid token.

 Please note, PAN can't be updated

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://gate.emerchantpay.net/v1/update_token/ \
-H "Content-Type: text/xml" \
-d '
<update_token_request>
  <consumer_id>123456</consumer_id>
  <email>consumer@email.com</email>
  <token>ee946dbb-d7db-4bb7-b608-b65b153e127d</token>
  <token_type>uuid</token_type>
  <card_data>
    <card_number>4200000000000000</card_number>
    <card_holder>John Doe</card_holder>
    <expiration_month>05</expiration_month>
    <expiration_year>2020</expiration_year>
  </card_data>
</update_token_request>'

```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address
token	required	string(36)	Plain-text token value
token_type	required	uuid	Token type format
card_data	required		
card_number	required	string(13..21)	Complete cc number of customer
card_holder	optional	string(255)	Full name of customer as printed on credit card (first name and last name at least)
expiration_month	optional	MM	Expiration month as printed on credit card
expiration_year	optional	YYYY	Expiration year as printed on credit card

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<update_token_response>
<status>active</status>
<token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
<token_type>uuid</token_type>
</update_token_response>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the token
token	string(36)	Plain-text token value
token_type	uuid	Token type format

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<update_token_response>
<status>error</status>
<code>739</code>
<technical_message>Invalid token!</technical_message>
<message>'</message>
</update_token_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the token
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

VALIDATE TOKEN

Validates if a token is active, owned by a merchant, etc.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/v1/validate_token/ \
-H "Content-Type: text/xml" \
-d '
<validate_token_request>
<consumer_id>123456</consumer_id>
<email>consumer@email.com</email>
<token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
<token_type>uuid</token_type>
</validate_token_request>'
```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address

Parameter	Required	Format	Description
token	required	string(36)	Plain-text token value
token_type	required	uuid	Token type format

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<validate_token_response>
<status>active</status>
<token_id>34567</token_id>
<token_type>uuid</token_type>
</validate_token_response>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the token
token_id	string(32)	Unique token id
token_type	uuid	Token type format

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<validate_token_response>
<status>error</status>
<code>726</code>
<technical_message>Invalid token type!</technical_message>
<message>Something went wrong, please contact support!</message>
</validate_token_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the token
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

DELETE TOKEN

Deletes a token.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

curl https://gate.emerchantpay.net/v1/delete_token/ \
-H "Content-Type: text/xml" \
-d ' 
<delete_token_request>
  <consumer_id>123456</consumer_id>
  <email>consumer@email.com</email>
  <token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
  <token_type>uuid</token_type>
</delete_token_request>'
```

Request Parameters

Parameter	Required	Format	Description
consumer_id	required	string(10)	Consumer unique reference
email	required	e-mail address	Consumer e-mail address
token	required	string(36)	Plain-text token value
token_type	required	uuid	Token type format

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<delete_token_response>
  <status>active</status>
  <token_id>34567</token_id>
  <token_type>uuid</token_type>
</delete_token_response>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the token
token_id	string(32)	Unique token id
token_type	uuid	Token type format

Error Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```

<?xml version="1.0" encoding="UTF-8"?>
<delete_token_response>
  <status>error</status>
  <code>720</code>
  <technical_message>Invalid token type!</technical_message>
  <message>Something went wrong, please contact support!</message>
</delete_token_response>
```

Error Response Parameters

Parameter	Type	Description
status	string	Status of the token
code	integer	Error code according to Error code table
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).
message	string(255)	Human readable error message which can be displayed to users.

How to tokenize card holder data in Processing API

In order to tokenize card details you need to set the `remember_card` flag to "true".

CREATE A CONSUMER

Please provide `customer_email` in addition to card holder details and the `remember_card` flag. This will create a consumer and tokenize card holder details. `consumer_id` and `token` will be returned in the response and notification. `consumer_id` will be returned in the reconcile response.

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')
->setRememberCard('true');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");
        request.setRememberCard("true");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "expiration_month": "12",
    "expiration_year": 2020,
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "remember_card": "true"
})
.send()
.then(success)
.catch(failure);

```

```

curl https://gate.emerchantpay.net/process/TERMINAL_TOKEN/ \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<remember_card>true</remember_card>
</payment_transaction>'
```

USE EXISTING CONSUMER

Please provide `(consumer_id)` and `(customer_email)` in addition to card holder details and the `(remember_card)` flag. An existing consumer will be used, if identified. `(consumer_id)` and `(token)` will be returned in the response and notification. `(consumer_id)` will be returned in the reconcile response.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
    ->setTransactionId('43671')
    ->setUsage('40208 concert tickets')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setCardHolder('Travis Pastrana')
    ->setCardNumber('4200000000000000')
    ->setExpirationMonth('12')
    ->setExpirationYear('2020')
    ->setCvv('834')
    ->setCustomerEmail('travis@example.com')
    ->setCustomerPhone('+1987987987987')

// Billing Address
    ->setBillingFirstName('Travis')
    ->setBillingLastName('Pastrana')
    ->setBillingAddress1('Muster Str. 12')
    ->setBillingZipCode('10178')
    ->setBillingCity('Los Angeles')
    ->setBillingState('CA')
    ->setBillingCountry('US')
    ->setRememberCard('true')
    ->setConsumerId('123456');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");
        request.setRememberCard("true");
        request.setConsumerId("123456");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
  return console.log(reason);
};

var success = function(data) {
  return console.log(data);
};

transaction.sale(
{
  "transaction_id": "43671",
  "usage": "40208 concert tickets",
  "remote_ip": "245.253.2.12",
  "amount": "100",
  "currency": "USD",
  "card_holder": "Travis Pastrana",
  "card_number": "4200000000000000",
  "expiration_month": "12",
  "expiration_year": 2020,
  "cvv": "834",
  "customer_email": "travis@example.com",
  "customer_phone": "+1987987987987",
  "billing_address": {
    "first_name": "Travis",
    "last_name": "Pastrana",
    "address1": "Muster Str. 12",
    "zip_code": "10178",
    "city": "Los Angeles",
    "state": "CA",
    "country": "US"
  },
  "remember_card": true,
  "consumer_id": "123456"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://gate.emerchantpay.net/process/TERMINAL_TOKEN/ \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<remember_card>true</remember_card>
<consumer_id>123456</consumer_id>
</payment_transaction>

```

How to use tokens in Processing API

REQUESTS

MERCHANTS can substitute cardholder parameters with tokens in the request when creating credit card transactions via our Processing API. Please note: merchants may choose to tokenize all cardholder parameters or only a subset. In the latter case the remaining parameters would need to be provided in the request. An enabled consumer is required to use tokens in Processing API. Please provide `consumer_id` and `customer_email` along with the `token`.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setToken('e9946db8-d7db-4bb7-b608-b65b153e127d')
->setCvv('834')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')
->setConsumerId('123456');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setToken("e9946db8-d7db-4bb7-b608-b65b153e127d");
        request.setCvv("834");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");
        request.setConsumerId("123456");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "token": "ee946db8-d7db-4bb7-b608-b65b153e127d",
    "cvv": "834",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "consumer_id": "123456"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://gate.emerchantpay.net/process/TERMINAL_TOKEN/ \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
<cvv>834</cvv>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<consumer_id>123456</consumer_id>
</payment_transaction>'

```

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setToken('ee946db8-d7db-4bb7-b608-b65b153e127d')
->setCardHolder('Travis Pastrana')
->setCvv('834')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')
->setConsumerId('123456');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setToken("ee946db8-d7db-4bb7-b608-b65b153e127d");
        request.setCardHolder("Travis Pastrana");
        request.setCvv("834");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");
        request.setConsumerId("123456");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "token": "ee946db8-d7db-4bb7-b608-b65b153e127d",
    "card_holder": "Travis Pastrana",
    "cvv": "834",
    "expiration_month": "12",
    "expiration_year": 2020,
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "consumer_id": "123456"
},
).send()
.then(success)
.catch(failure);

```

```

curl https://gate.emerchantpay.net/process/TERMINAL_TOKEN/ \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>sale</transaction_type>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<token>ee946db8-d7db-4bb7-b608-b65b153e127d</token>
<card_holder>Travis Pastrana</card_holder>
<cvv>834</cvv>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<consumer_id>123456</consumer_id>
</payment_transaction>'
```

How to tokenize card holder data in WPF API

In order to offer saving a payment method for future use, set the `remember_card` flag to "true".

CREATE A CONSUMER

Please provide `customer_email` in addition to the `remember_card` flag. This will create a consumer and offer the user to save card holder details (tokenize).`consumer_id` will be returned in the response and reconcile response. `consumer_id` and `token` will be returned in the notification.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('WPF\Create');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setDescription('You are about to buy 3 shoes at www.shoes.com!')
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setReturnCancelUrl('http://www.example.com/cancel.html')
->setAmount('100')
->setCurrency('USD')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')
->setLifetime('60')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// Risk Params
->setRiskUserId('123456')

// Transaction Types
->addTransactionType('authorize')
->addTransactionType('sale')
->setRememberCard('true');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.wpf.WPFCREATERequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        WPFCREATERequest request = new WPFCREATERequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setDescription("You are about to buy 3 shoes at www.shoes.com!");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setReturnCancelUrl(new URL("http://www.example.com/cancel.html"));
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");
        request.setLifetime(60);

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // Risk Params
        request.setRiskUserId("123456");

        // Transaction Types
        request.addTransactionType("authorize").done();
        request.addTransactionType("sale").done();
        request.setRememberCard("true");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();
};

var failure = function(reason) {
  return console.log(reason);
};

var success = function(data) {
  return console.log(data);
};

transaction.wpf_create(
{
  "transaction_id": "43671",
  "usage": "40208 concert tickets",
  "description": "You are about to buy 3 shoes at www.shoes.com!",
  "notification_url": "https://www.example.com/notification",
  "return_success_url": "http://www.example.com/success",
  "return_failure_url": "http://www.example.com/failure",
  "return_cancel_url": "http://www.example.com/cancel.html",
  "amount": "100",
  "currency": "USD",
  "customer_email": "travis@example.com",
  "customer_phone": "+1987987987987",
  "lifetime": 60,
  "billing_address": {
    "first_name": "Travis",
    "last_name": "Pastrana",
    "address1": "Muster Str. 12",
    "zip_code": "10178",
    "city": "Los Angeles",
    "state": "CA",
    "country": "US"
  },
  "risk_params": {
    "user_id": "123456"
  },
  "transaction_types": [
    "authorize",
    "sale"
  ],
  "remember_card": "true"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://wpf.emerchantpay.net/wpf \
-H "Content-Type: text/xml" \
-d '
<wpf_payment>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<description>You are about to buy 3 shoes at www.shoes.com!</description>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<return_cancel_url>http://www.example.com/cancel.html</return_cancel_url>
<amount>100</amount>
<currency>USD</currency>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<lifetime>60</lifetime>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<risk_params>
<user_id>123456</user_id>
</risk_params>
<transaction_types>
<transaction_type name="authorize" />
<transaction_type name="sale" />
</transaction_types>
<remember_card>true</remember_card>
</wpf_payment>'

```

USE EXISTING CONSUMER

Please provide `consumer_id` and `customer_email` in addition to the `remember_card` flag. An existing consumer will be used, if identified, and offer the user to save card holder details (tokenize). `consumer_id` will be returned in the response and reconcile response. `consumer_id` and `token` will be returned in the notification.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('WPF\Create');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setDescription('You are about to buy 3 shoes at www.shoes.com!')
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setReturnCancelUrl('http://www.example.com/cancel.html')
->setAmount('100')
->setCurrency('USD')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')
->setLifetime('60')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// Risk Params
->setRiskUserId('123456')

// Transaction Types
->addTransactionType('authorize')
->addTransactionType('sale')
->setRememberCard('true')
->setConsumerId('123456');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.wpf.WPFCREATERequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        WPFCREATERequest request = new WPFCREATERequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setDescription("You are about to buy 3 shoes at www.shoes.com!");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setReturnCancelUrl(new URL("http://www.example.com/cancel.html"));
        request.setAmount(new BigDecimal("100"));
        request.setCurrent("USD");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");
        request.setLifetime(60);

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // Risk Params
        request.setRiskUserId("123456");

        // Transaction Types
        request.addTransactionType("authorize").done();
        request.addTransactionType("sale").done();
        request.setRememberCard("true");
        request.setConsumerId("123456");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();
};

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.wpf_create(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "description": "You are about to buy 3 shoes at www.shoes.com!",
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "return_cancel_url": "http://www.example.com/cancel.html",
    "amount": "100",
    "currency": "USD",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "lifetime": 60,
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "risk_params": {
        "user_id": "123456"
    },
    "transaction_types": [
        "authorize",
        "sale"
    ],
    "remember_card": "true",
    "consumer_id": "123456"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://wpf.emerchantpay.net/wpf \
-H "Content-Type: text/xml" \
-d '
<wpf_payment>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<description>You are about to buy 3 shoes at www.shoes.com!</description>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<return_cancel_url>http://www.example.com/cancel.html</return_cancel_url>
<amount>100</amount>
<currency>USD</currency>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<lifetime>60</lifetime>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
</risk_params>
<user_id>123456</user_id>
</risk_params>
<transaction_types>
<transaction_type name="authorize" />
<transaction_type name="sale" />
</transaction_types>
<remember_card>true</remember_card>
<consumer_id>123456</consumer_id>
</wpf_payment>

```

How to use tokens in WPF API

Please provide `(consumer_id)` and `(customer_email)`. An existing consumer will be used, if identified, and offer the user to select a previously stored card for payment.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('WPF\Create');
$request = $genesis->request();

$request
->setTransactionId('43671')
->setUsage('40208 concert tickets')
->setDescription('You are about to buy 3 shoes at www.shoes.com!')
->setNotificationUrl('https://www.example.com/notification')
->setReturnSuccessUrl('http://www.example.com/success')
->setReturnFailureUrl('http://www.example.com/failure')
->setReturnCancelUrl('http://www.example.com/cancel.html')
->setAmount('100')
->setCurrency('USD')
->setCustomerEmail('travis@example.com')
->setCustomerPhone('+1987987987987')
->setLifetime('60')

// Billing Address
->setBillingFirstName('Travis')
->setBillingLastName('Pastrana')
->setBillingAddress1('Muster Str. 12')
->setBillingZipCode('10178')
->setBillingCity('Los Angeles')
->setBillingState('CA')
->setBillingCountry('US')

// Risk Params
->setRiskUserId('123456')

// Transaction Types
->addTransactionType('authorize')
->addTransactionType('sale')
->setConsumerId('123456');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.wpf.WPFCREATERequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;
import java.net.MalformedURLException;
import java.net.URL;

public class GenesisExample {
    public static void main() throws MalformedURLException {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        WPFCREATERequest request = new WPFCREATERequest();

        request.setTransactionId("43671");
        request.setUsage("40208 concert tickets");
        request.setDescription("You are about to buy 3 shoes at www.shoes.com!");
        request.setNotificationUrl(new URL("https://www.example.com/notification"));
        request.setReturnSuccessUrl(new URL("http://www.example.com/success"));
        request.setReturnFailureUrl(new URL("http://www.example.com/failure"));
        request.setReturnCancelUrl(new URL("http://www.example.com/cancel.html"));
        request.setAmount(new BigDecimal(100));
        request.setCurrent("USD");
        request.setCustomerEmail("travis@example.com");
        request.setCustomerPhone("+1987987987987");
        request.setLifetime(60);

        // Billing Address
        request.setBillingFirstname("Travis");
        request.setBillingLastname("Pastrana");
        request.setBillingPrimaryAddress("Muster Str. 12");
        request.setBillingZipCode("10178");
        request.setBillingCity("Los Angeles");
        request.setBillingState("CA");
        request.setBillingCountry("US");

        // Risk Params
        request.setRiskUserId("123456");

        // Transaction Types
        request.addTransactionType("authorize").done();
        request.addTransactionType("sale").done();
        request.setConsumerId("123456");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();
};

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.wpf_create(
{
    "transaction_id": "43671",
    "usage": "40208 concert tickets",
    "description": "You are about to buy 3 shoes at www.shoes.com!",
    "notification_url": "https://www.example.com/notification",
    "return_success_url": "http://www.example.com/success",
    "return_failure_url": "http://www.example.com/failure",
    "return_cancel_url": "http://www.example.com/cancel.html",
    "amount": "100",
    "currency": "USD",
    "customer_email": "travis@example.com",
    "customer_phone": "+1987987987987",
    "lifetime": 60,
    "billing_address": {
        "first_name": "Travis",
        "last_name": "Pastrana",
        "address1": "Muster Str. 12",
        "zip_code": "10178",
        "city": "Los Angeles",
        "state": "CA",
        "country": "US"
    },
    "risk_params": {
        "user_id": "123456"
    },
    "transaction_types": [
        "authorize",
        "sale"
    ],
    "consumer_id": "123456"
}
).send()
.then(success)
.catch(failure);

```

```

curl https://wpf.emerchantpay.net/wpf \
-H "Content-Type: text/xml" \
-d '
<wpf_payment>
<transaction_id>43671</transaction_id>
<usage>40208 concert tickets</usage>
<description>You are about to buy 3 shoes at www.shoes.com!</description>
<notification_url>https://www.example.com/notification</notification_url>
<return_success_url>http://www.example.com/success</return_success_url>
<return_failure_url>http://www.example.com/failure</return_failure_url>
<return_cancel_url>http://www.example.com/cancel.html</return_cancel_url>
<amount>100</amount>
<currency>USD</currency>
<customer_email>travis@example.com</customer_email>
<customer_phone>+1987987987987</customer_phone>
<lifetime>60</lifetime>
<billing_address>
<first_name>Travis</first_name>
<last_name>Pastrana</last_name>
<address1>Muster Str. 12</address1>
<zip_code>10178</zip_code>
<city>Los Angeles</city>
<state>CA</state>
<country>US</country>
</billing_address>
<risk_params>
<user_id>123456</user_id>
</risk_params>
<transaction_types>
<transaction_type name="authorize" />
<transaction_type name="sale" />
</transaction_types>
<consumer_id>123456</consumer_id>
</wpf_payment>'

```

Supported transaction types

All transaction types accepting cardholder data are supported -Account Verification, Authorize, Authorize3D, Sale, Sale3D, InitRecurringSale, InitRecurringSale3D, Payout, Intersolve, Fashioncheque.

Klarna Services

Introduction

Klarna Services provides the ability for merchants to release remaining authorization, resend invoice, update order items or to update order address of a transaction.

i Klarna services requests are handled exactly like transaction requests via XML and authentication is required. Note that Klarna services can be done via transaction_id

Release Remaining Authorization API

The URL for Release Remaining Authorization API is:

Production:

https://gate.emerchantpay.net/klarna/release_remaining_authorization

Staging (for integration):

https://staging.gate.emerchantpay.net/klarna/release_remaining_authorization

i Release Remaining Authorization service is used for approved Klarna transaction with at least one approved partial Klarna capture transaction.
With this call the remaining authorization amount will be released and Klarna captures will be forbidden for the authorize transaction.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/klarna/release_remaining_authorization \
-H "Content-Type: text/xml" \
-d ' \
<release_remaining_authorization_request>
<transaction_id>a1qfi12e81eb23d0e00ffb85b1db7d152</transaction_id>
</release_remaining_authorization_request>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_id	required	string(255)	Unique transaction id defined by merchant

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<release_remaining_authorization_request>
<status>success</status>
<technical_message>Transaction operation successful!</technical_message>
</release_remaining_authorization_request>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).

Resend Invoice API

The URL for Resend Invoice API is:

Production:

https://gate.emerchantpay.net/klarna/resend_invoice

Staging (for integration):

https://staging.gate.emerchantpay.net/klarna/resend_invoice

Info Resend Invoice service is used only for approved not yet refunded Klarna capture transaction.

With this call Klarna will resend the invoice of the captured transaction.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/klarna/resend_invoice \
-H "Content-Type: text/xml" \
-d '
<resend_invoice_request>
<transaction_id>a1qf12e81eb23d0e0ff85b1db7d152</transaction_id>
</resend_invoice_request>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_id	required	string(255)	Unique transaction id defined by merchant

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<resend_invoice_request>
<status>success</status>
<technical_message>Transaction operation successful!</technical_message>
</resend_invoice_request>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).

Update Order Items API

The URL for Update Order Items API is:

Production:

https://gate.emerchantpay.net/klarna/update_order_items

Staging (for integration):

https://staging.gate.emerchantpay.net/klarna/update_order_items

Info Update Order Items service is used only for approved but not yet captured Klarna transaction.
With this call amount and associated items will be updated.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/klarna/update_order_items \
-H "Content-Type: text/xml" \
-d '
<update_order_items_request>
<transaction_id>a1qf12e81eb23d0e00ffb85b1db7d152</transaction_id>
<amount>10000</amount>
<items>
<item>
<type>physical</type>
<reference>19-402-BG1</reference>
<name>BatteryPowerPack</name>
<quantity>1</quantity>
<unit_price>5000</unit_price>
<tax_rate>0</tax_rate>
<total_amount>5000</total_amount>
<total_discount_amount>0</total_discount_amount>
<total_tax_amount>0</total_tax_amount>
</item>
</items>
</update_order_items_request>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_id	required	string(255)	Unique transaction id defined by merchant
amount	required	integer > 0	Amount of transaction in minor currency unit, see Currency and Amount Handling for details
items	required		List with items
item_type	required	string(255)	Order line type. Possible values: Supported item types
quantity	required	integer	Non-negative. The item quantity
unit_price	required	integer	Minor units. Includes tax, excludes discount(max value: 100000000)
total_amount	required	integer	Includes tax and discount. Must match (quantity unit price) - total discount amount divided by quantity (max value: 100000000)
reference	optional	string(255)	Article number, SKU or similar
name	optional	string(255)	Descriptive item name
tax_rate	optional	integer	Non-negative. In percent, two implicit decimals. I.e 2500 = 25.00 percent
total_discount_amount	optional	integer	Non-negative minor units. Includes tax
total_tax_amount	optional	integer	Must be within 1 of total amount - total_amount * 10000 / (10000 + tax rate). Negative when type is discount
image_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
product_url	optional	url	URL to an image that can be later embedded in communications between Klarna and the customer. (max 1024 characters)
quantity_unit	optional	string(8)	Unit used to describe the quantity, e.g. kg, pcs... If defined has to be 1-8 characters
product_identifiers	optional		List with product identifiers
brand	optional	string(255)	The product's brand name as generally recognized by consumers. If no brand is available for a product, do not supply any value
category_path	optional	string(255)	The product's category path as used in the merchant's webshop. Include the full and most detailed category and separate the segments with '>'
global_trade_item_number	optional	string(255)	The product's Global Trade Item Number (GTIN). Common types of GTIN are EAN, ISBN or UPC. Exclude dashes and spaces, where possible
manufacturer_part_number	optional	string(255)	The product's Manufacturer Part Number (MPN), which - together with the brand - uniquely identifies a product. Only submit MPNs assigned by a manufacturer and use the most specific MPN possible
merchant_data	optional		List with merchant data
marketplace_seller_info	optional	string(255)	Information for merchant marketplace

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<update_order_items_request>
  <status>success</status>
  <technical_message>Transaction operation successful!</technical_message>
</update_order_items_request>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).

Update Order Address API

The URL for Update Order Address API is:

Production:

https://gate.emerchantpay.net/klarna/update_order_address

Staging (for integration):

https://staging.gate.emerchantpay.net/klarna/update_order_address

Info Update Order Address service is used only for approved but not yet captured Klarna transaction.
With this call billing and shipping addresses will be updated.

Request

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
curl https://gate.emerchantpay.net/klarna/update_order_address \
-H "Content-Type: text/xml" \
-d '
<update_order_address_request>
  <transaction_id>1qf12e81eb23d0e00fffb85b1db7d152</transaction_id>
  <billing_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Berlin</city>
    <country>DE</country>
  </billing_address>
  <shipping_address>
    <first_name>Barney</first_name>
    <last_name>Rubble</last_name>
    <address1>14, Nerazdelni str</address1>
    <zip_code>1407</zip_code>
    <city>Berlin</city>
    <country>DE</country>
  </shipping_address>
</update_order_address_request>'
```

Request Parameters

Parameter	Required	Format	Description
transaction_id	required	string(255)	Unique transaction id defined by merchant

Parameter	Required	Format	Description
billing_address	required		See Required vs Optional API params for details
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166
shipping_address	required		
first_name	required*	string(255)	Customer first name
last_name	required*	string(255)	Customer last name
address1	required*	string(255)	Primary address
address2	required*	string(255)	Secondary address
zip_code	required*	string	ZIP code
city	required*	string(255)	City
state	required*	string(2)	State code in ISO 3166-2, required for USA and Canada
country	required	string(2)	Country code in ISO 3166

required* = conditionally required

Successful Response

This request is not implemented yet

This request is not implemented yet

This request is not implemented yet

```
<?xml version="1.0" encoding="UTF-8"?>
<update_order_address_request>
  <status>success</status>
  <technical_message>Transaction operation successful!</technical_message>
</update_order_address_request>
```

Successful Response Parameters

Parameter	Type	Description
status	string	Status of the transaction, see states
technical_message	string(255)	Technical error message (for internal use only, not to be displayed to users).

Errors

Error groups table

Code	Name	Description
(100..199)	Systems errors	Transaction could not be processed and was not passed to issuer.
(200..299)	Communication errors	Transaction could not be processed properly. Issuer could not be reached or returned invalid data. Errors 230 - 250 need to be reconciled as they might have been processed properly issuer-wise.
(300..399)	Input data errors	Transactions cannot be processed due to invalid incoming data in your request.

Code	Name	Description
(400..499)	Workflow errors	Workflow errors will occur if you trigger a transaction that is not possible at this time in the workflow, e.g. a refund on a declined transaction.
(500..599)	Processing errors	These errors occur when a transaction was declined by the issuer.
(600..699)	Risk errors	Risk errors occur when any of the risk management systems will not let the transaction pass through.
(700..799)	Tokenization errors	Tokenization related errors.
(800..899)	Genesis KYC Services errors	Genesis KYC Services errors
(900..999)	Issuer errors	Issuer errors occur when the issuer is unreachable or has other technical problems. If you experience this kind of errors, contact support.

Error codes tables

System Errors

Code	Name	Description
100	SystemError	A general system error occurred.
101	MaintenanceError	System is undergoing maintenance, request could not be handled.
110	AuthenticationError	Login failed. Check your API credentials.
120	ConfigurationError	Configuration error occurred, e.g. terminal not configured properly. Check terminal settings.

Communication Errors

Code	Name	Description
200	CommunicationError	Communication with issuer failed, please contact support.
210	ConnectionError	Connection to issuer could not be established, please contact support.
220	AccountError	Issuer account data invalid, please contact support.
230	TimeoutError	Issuer does not respond within given timeframe - please reconcile.
240	ResponseError	Issuer returned invalid response - please reconcile and contact support.
250	ParsingError	Issuer response could not be parsed - please reconcile and contact support.

Input Data Errors

Code	Name	Description
300	InputDataError	Invalid data were sent to the API.
310	InvalidTransactionTypeError	Invalid transaction type was passed to API. See transaction types.
320	InputDataMissingError	Required argument is missing. Check parameters.
330	InputDataFormatError	Argument passed in invalid format. Check parameters.
340	InputDataInvalidError	Argument passed in valid format but makes no sense (e.g. incorrect country code or currency). Check parameters.
350	InvalidXmlError	The input XML could not be parsed due to invalid code. Please check XML data.
360	InvalidContentTypeError	Missing or invalid content type: should be text/xml!

Workflow Errors

Code	Name	Description
400	WorkflowError	A transaction was triggered that is not possible at this time in the workflow, e.g. a refund on a declined transaction.
410	ReferenceNotFoundError	Reference transaction was not found.
420	ReferenceWorkflowError	Wrong Workflow specified.
430	ReferenceInvalidatedError	Reference transaction already invalidated!
440	ReferenceMismatchError	Data mismatch with reference, e.g. amount exceeds reference.

Code	Name	Description
450	DoubletTransactionError	Transaction doublet was detected, transaction was blocked. This happens if several transactions with same amount, card holder, cc number, cvv and expiry date are sent within 5 minutes.
460	TransactionNotFoundError	The referenced transaction could not be found.
470	ChargebackNotFoundError	Chargeback not found!
480	RetrievalRequestNotFoundError	Retrieval Request not found!
490	FraudReportNotFoundError	Fraud Report not found!

Processing Errors

Code	Name	Description
500	ProcessingError	Transaction declined by issuer
510	InvalidGiftCardError	DOCUMENTATION MISSING
510	InvalidCardError	Transaction declined, Credit card number is invalid.
520	ExpiredGiftCardError	DOCUMENTATION MISSING
520	ExpiredCardError	Transaction declined, expiration date not in the future or date invalid.
530	TransactionPendingError	Transaction pending.
540	CreditExceededError	Amount exceeds credit card limit.
550	IssuingError	The voucher could not be issued!

Risk Errors

Code	Name	Description
600	RiskError	Transaction declined by risk management
601	InterchangeRejectError	Interchange reject received for transaction!
609	BinCountryCheckError	Card bin does not match billing country
610	CardBlacklistError	Card is blacklisted
611	BinBlacklistError	BIN blacklisted.
612	CountryBlacklistError	Country blacklisted.
613	IpBlacklistError	IP address blacklisted.
614	BlacklistError	value from payment transaction or risk params is blacklisted.
615	CardWhitelistError	PAN Whitelist Filter blocked the transaction. This filter - like the above one - uses the PAN blacklist (BL) to perform CC number checks against the BL in the DB. This filter however will reject transactions from a CC with a number which is not whitelisted.
620	CardLimitExceededError	Card limit exceeded configured limits.
621	TerminalLimitExceededError	Terminal limits exceeded.
622	ContractLimitExceededError	MID limits exceeded.
623	CardVelocityExceededError	Velocity by unknown card exceeded!
624	CardTicketSizeExceededError	Ticketsize by unknown card exceeded!
625	UserLimitExceededError	User limit exceeded configured limits.
626	MultipleFailureDetectionError	Found user transaction declined by issuer. Try again later!
627	CSDetectionError	The CrossSellingFilter blocks duplicated transactions when an approved transaction has been found on another mid. That is, if the transaction has already been processed successfully on a different mid and within the specified time frame, context entity / scope and possibly within the issuer scope (or not), it will be rejected in order to prevent duplicates.
628	RecurringLimitExceededError	Amount/count by recurring subscription exceeded.
629	IrisFilterDeclinedError	Transaction declined by risk management.
630	IrisFilterOnHoldError	Transaction on hold, a manual review will be done
690	AvsError	Address Verification failed.
691	MaxMindRiskError	If a transaction is considered high risk by MaxMind minFraud service, a MaxMindRiskError is raised.
692	ThreatMetrixRiskError	Transaction declined by ThreatMetrix risk module.

Code	Name	Description
693	IpNotWhitelistedError	Transaction declined by risk management, IP is NOT whitelisted!
694	DomainBlacklistedError	Transaction declined by risk management, domain is blacklisted!
695	FraudError	Risk Error: Please contact the risk team!
696	IbanBlacklistError	Transaction declined by risk management, iban blacklisted!

Tokenization Errors

Code	Name	Description
701	ConsumerUniquenessError	Consumer with this consumer_id, email combination already exists!
702	InvalidConsumerError	Consumer not found!
703	DisabledConsumerError	Consumer is disabled!
700	TokenizationError	General tokenization error.
710	TokenizationNotEnabledError	Tokenization is not enabled for the merchant or the terminal! Contact support.
720	InvalidTokenTypeError	Unsupported token type!
730	InvalidTokenError	Invalid token!
740	DetokenizeForbiddenError	Detokenize action is forbidden!

KYC Errors

Code	Name	Description
800	KycServiceError	General KYC Service Error
801	DocumentMimeTypeUnsupportedError	Uploaded document MIME type is not supported by KYC provider
802	InvalidRequestAttributesError	Passed attributes are invalid!
803	KycServiceNotConfiguredError	KYC Services not configured for Merchant!
804	KycServiceProviderError	KYC Service provider Error!
805	KycServiceNotificationError	Notification already received
806	KycServiceUnacceptableMerchantStateError	Merchant state does not allow using KYC Service API!

Remote Errors

Code	Name	Description
900	RemoteError	Some error occurred on the issuer. Contact support.
910	RemoteSystemError	Some error occurred on the issuer
920	RemoteConfigurationError	Issuer configuration error
930	RemoteDataError	Some passed data caused an error on the issuer
940	RemoteWorkflowError	Remote workflow error
950	RemoteTimeoutError	Issuer has timed out with clearing network

i Description can be slightly different for error messages per acquirer, but the error classes will be as documented.

Client Integrations

There are client libraries and examples for a few programming languages to ease the merchant integration effort:

Language	Github	Description
PHP	Genesis PHP	PHP client library
Node.js	Genesis Node	Node.js client library

Language	Github	Description
.NET	Genesis .NET	.NET client library
Java	Genesis Java	Java client library
Ruby	coming soon	Ruby client library

Should you have any questions or suggestions regarding the client libraries and improvements, contact the IT Support team attech-support@emerchantpay.net.

You can also fork the repo(s) and send us pull requests directly at our [GitHub](#) account.

Shopping Carts

Genesis has a number of shopping cart plugins to ease the merchant integration effort:

Shopping cart	Github	More Info	Description
Magento 1.x CE	Magento CE	Magento Integration	Shopping cart plugin for Magento 1.x CE
Magento 2.x CE	Magento 2.x CE	Magento2 Integration	Shopping cart plugin for Magento 2.x CE
OpenCart	OpenCart	OpenCart Integration	Shopping cart plugin for OpenCart
osCommerce	osCommerce	osCommerce Integration	Shopping cart plugin for osCommerce
PrestaShop	PrestaShop	PrestaShop Integration	Shopping cart plugin for PrestaShop
Shopify	Internal integration	Shopify Integration	Shopping cart Integration for Shopify
WooCommerce	WooCommerce	WooCommerce Integration	Shopping cart plugin for WooCommerce
X-Cart	X-Cart	X-Cart Integration	Shopping cart plugin for X-Cart
Zen Cart	Zen Cart	Zen Cart Integration	Shopping cart plugin for Zen Cart

Should you have any questions or suggestions regarding the shopping cart plugins and improvements, contact the IT Support team attech-support@emerchantpay.net.

You can also fork the repo(s) and send us pull requests directly at our [GitHub](#) account.

Testing

For testing first login to the gateway admin and create a terminal.

The url for test admin is:

<https://staging.merchant.emerchantpay.net/>

The api base url for test processing is:

<https://staging.gate.emerchantpay.net/process/TOKEN>

The api base url for test single transaction reconciling is:

<https://staging.gate.emerchantpay.net/reconcile/TOKEN>

The api base url for test date range reconciling is:

https://staging.gate.emerchantpay.net/reconcile/by_date/TOKEN

For testing the gateway the following credit card numbers can be used:

card number	card brand	transaction result
4200000000000000	Visa	successful transaction
4111111111111111	Visa	transaction declined
555555555554444	Master Card	successful transaction
5105105105105100	Master Card	transaction declined

For 3DSecure testing the following credit card numbers can be used:

card number	card brand	transaction result
4711100000000000	Visa	3DSecure enrolled
4012001037461114	Visa	3DSecure enrolled failing authentication

card number	card brand	transaction result
4012001036853337	Visa	3DSecure unavailable - Card Not Participating
4012001037484447	Visa	Error in 3DSecure Network in first step of 3DS authentication process
4012001036273338	Visa	Error in 3DSecure Network in second (asynchronous) step of 3DS authentication process
5420923878724339	MasterCard	3DSecure enrolled
5185540810000019	MasterCard	3DSecure enrolled failing authentication
5111010030175156	MasterCard	3DSecure unavailable - Card Not Participating
5200828282828210	MasterCard	Error in 3DSecure Network in first step of 3DS authentication process
5204230080000017	MasterCard	Error in 3DSecure Network in second (asynchronous) step of 3DS authentication process

When redirected to the dummy authentication page you may enter any password you like.

i In test mode, successful transaction XML responses will include the following error message: "TESTMODE: No real money will be transferred!"

Status Page

statuspage.io is a popular service allowing to track server status, infrastructure notifications, and others.

Note that you can sign up foremerchantpay's status page.

It allows to sign up via email or SMS or both, and receive notifications for our payment services and any planned maintenance windows, upgrades, or similar in the future should the need arise.

Infrastructure and Uptime

Genesis is hosted in two data centers respectively in Berlin and Amsterdam, and features a state-of-the-art, active-active infrastructure setup. As such, it employs load balancing and failover on the DNS layer, and you should be using and requesting the API nodes and web apps only via their dedicated DNS names.

No hardcoding of IP addresses should be performed on the customers' systems, as this will prevent the customer to take advantage of the failover in case one of the data centers has issues or throughout maintenance windows and current processing happens through one data center only, however rare this might be. In addition, load balancing of the customers' volume is also impacted if IP addresses are hardcoded.

Finally, note that the DNS load balancing and failover layer has a TTL of 30 seconds, and will sense any issues returning the right IP addresses to use, for both API nodes and web apps alike, at all times.

As a highly available payment gateway platform, Genesis strives to achieve an uptime SLA of 99.99 percent on an yearly basis.

Penetration Testing Warning

It is important that merchants read and understand the activities that are explicitly prohibited when using the payment gateway services.

While merchants are encouraged to perform best practice security testing on their own websites and applications, merchants must ensure under all circumstances that scans exclude the payment gateway Web Payment Form (WPF), Processing API, and merchant console.

Action	prohibited?
Penetration testing of any gateway services	Prohibited
Load testing	Prohibited. During integration testing, ensure minimum number of requests
Exploiting common security vulnerabilities	Prohibited
Injecting malicious data	Prohibited
Bypassing validation and security checks	Prohibited
Subverting ACLs and user permissions	Prohibited
Port scanning and service discovery	Prohibited
Usage of ping/traceroute	Acceptable for short term debugging purposes

Note that merchants that do not abide by the above policy will be immediately blacklisted, resulting in terminating access to the WPF, Processing API, and merchant console.

AVS Status Codes

When sending a transaction for address verification or card verification, one of the following responses from the issuing bank will be received.

Code	Summary	VISA	MasterCard
A	Partial Match	Address matches, ZIP does not.	Address matches, ZIP does not.
B	Partial Match (International Transaction)	Street address match. Postal code not verified because of incompatible formats. (Acquirer sent both street address and postal code.)	Street addresses match. Postal code not verified due to incompatible formats. (Acquirer sent both street address and postal code.)
C	No Match (International Transaction)	Street address and postal code not verified because of incompatible formats. (Acquirer sent both street address and postal code.)	Street address and postal code not verified due to incompatible formats. (Acquirer sent both street address and postal code.)
D	Full Match (International Transaction)	Street addresses and postal code match.	Street addresses and postal codes match.
F	Full Match (UK only)	Street address and postal code match. Applies to U.K. only.	Street address and postal code match. Applies to U.K. only.
G	Not Supported (International Transaction)	Address information not verified for international transaction.	Address information not verified for international transaction.
I	No Match (International Transaction)	Address information not verified.	Address information not verified.
M	Full Match (International Transaction)	Street addresses and postal code match.	Street address and postal code match.
N	No Match	Neither address nor postal code matches.	Neither address nor postal code matches.
P	Partial Match (International Transaction)	Postal codes match. Street address not verified because of incompatible formats. (Acquirer sent both street address and postal code.)	Postal code match. Street address not verified because of incompatible formats. (Acquirer sent both street address and postal code.)
R	System Unavailable	Retry, system unable to process.	Retry, system unable to process.
S	Not Supported	AVS currently not supported.	AVS currently not supported.
U	System Unavailable	No data from issuer/Authorization System. Information not available.	No data from issuer/Authorization System. Information not available.
W	Partial Match (US only)	Not applicable. If present, replaced with "Z" by V.I.R Available for U.S. issuers only.	For U.S. addresses, nine-digit postal code matches, address does not; for address outside the U.S., postal code matches, address does not.
X	Full Match	Not applicable.	For U.S. addresses, nine-digit postal code and address matches; for addresses outside the U.S., postal code and address match.
Y	Full Match	For U.S. addresses, five-digit or nine-digit postal code and address matches.	For U.S. addresses, five-digit postal code and address matches.
Z	Partial Match	For U.S. addresses, five-digit or nine-digit postal code matches, address does not.	For U.S. addresses, five-digit postal code matches, address does not.

i AVS status codes are valid for cards issued from United States and United Kingdom. For other countries status message will be returned with error description.

Level 3 Travel Data

Level 3 travel data is supplied as optional data to the standard API request. If the supplied is valid travel data then the transaction will be processed as a travel transaction and will qualify for the travel Incentive rates. Otherwise the transaction will be processed normally as a regular transaction. Note that the travel data will be stored as part of the transaction in all cases.

Travel data is supported for Authorize, Authorize3D, Capture, Sale, Sale3D, InitRecurringSale, InitRecurringSale3D, RecurringSale.

The following travel types are supported Airline Itinerary Data (AID), Car Rental, Hotel Rental, Ancillary Charges, Misc Charges.

i Check the travel related transaction special cases.

Travel Types

AIRLINE ITINERARY DATA (AID)

Airline Ticket transaction With Airline Itinerary Data (AID)

MasterCard

Contract Merchant Category Code must be 3000-3350 or 4511

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request->set...('');
->setTravel('{"ticket":>{"ticket_number":>123456789012345, "passenger_name":>"Test Example", "customer_code":>1, "issuing_carrier":>"AAAA", "total_fare":>5000, "agency_name":>"Agency", "agency_code":>"AG001"}');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{"ticket":>{"ticket_number":>123456789012345, "passenger_name":>"Test Example", "customer_code":>1, "issuing_carrier":>"AAAA", "total_fare":>5000, "agency_name":>"Agency", "agency_code":>"AG001"}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_number": "123456789012345",
            "passenger_name": "Test Example",
            "customer_code": "1",
            "issuing_carrier": "AAAA",
            "total_fare": 5000,
            "agency_name": "Agency",
            "agency_code": "AG001"
        },
        "legs": [
            {
                "departure_date": "2018-02-05",
                "carrier_code": "12",
                "service_class": 1,
                "origin_city": "VAR",
                "destination_city": "FRA",
                "stopover_code": 0,
                "fare_basis_code": 1,
                "flight_number": "W6666",
                "departure_time": "11:37",
                "departure_time_segment": "A"
            }
        ]
    }
}).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<...></...>
<travel>
<ticket>
<ticket_number>123456789012345</ticket_number>
<passenger_name>Test Example</passenger_name>
<customer_code>1</customer_code>
<issuing_carrier>AAAA</issuing_carrier>
<total_fare>5000</total_fare>
<agency_name>Agency</agency_name>
<agency_code>AG001</agency_code>
</ticket>
<legs>
<leg>
<departure_date>2018-02-05</departure_date>
<carrier_code>12</carrier_code>
<service_class>1</service_class>
<origin_city>VAR</origin_city>
<destination_city>FRA</destination_city>
<stopover_code>0</stopover_code>
<fare_basis_code>1</fare_basis_code>
<flight_number>W6666</flight_number>
<departure_time>11:37</departure_time>
<departure_time_segment>A</departure_time_segment>
</leg>
</legs>
</travel>
</payment_transaction>'

```

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('')
->setTravel('{"ticket": {"ticket_number": "123456789012345", "passenger_name": "Test Example", "customer_code": 1, "issuing_carrier": "AAAA", "total_fare": 5000, "agency_name": "Agency", "agency_code": "AG001"}}

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel('{"ticket": {"ticket_number": "123456789012345", "passenger_name": "Test Example", "customer_code": 1, "issuing_carrier": "AAAA", "total_fare": 5000, "agency_name": "Agency", "agency_code": "AG001"}}

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```
var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_number": "123456789012345",
            "passenger_name": "Test Example",
            "customer_code": 1,
            "issuing_carrier": "AAAA",
            "total_fare": 5000,
            "agency_name": "Agency",
            "agency_code": "AG001"
        },
        "legs": [
            {
                "departure_date": "2018-02-05",
                "carrier_code": 12,
                "service_class": 1,
                "origin_city": "VAR",
                "destination_city": "FRA",
                "stopover_code": 0,
                "fare_basis_code": 1,
                "flight_number": "W6666",
                "departure_time": "11:37",
                "departure_time_segment": "A"
            },
            {
                "departure_date": "2018-02-05",
                "carrier_code": 12,
                "service_class": 1,
                "origin_city": "VAR",
                "destination_city": "BER",
                "stopover_code": 0,
                "fare_basis_code": 1,
                "flight_number": "W6666",
                "departure_time": "11:37",
                "departure_time_segment": "A"
            }
        ]
    }
},
).send()
.then(success)
.catch(failure);
```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ''
<payment_transaction>
<..><..>
<travel>
<ticket>
<ticket_number>123456789012345</ticket_number>
<passenger_name>Test Example</passenger_name>
<customer_code>1</customer_code>
<issuing_carrier>AAAA</issuing_carrier>
<total_fare>5000</total_fare>
<agency_name>Agency</agency_name>
<agency_code>AG001</agency_code>
</ticket>
<legs>
<leg>
<departure_date>2018-02-05</departure_date>
<carrier_code>12</carrier_code>
<service_class>1</service_class>
<origin_city>VAR</origin_city>
<destination_city>FRA</destination_city>
<stopover_code>0</stopover_code>
<fare_basis_code>1</fare_basis_code>
<flight_number>W6666</flight_number>
<departure_time>11:37</departure_time>
<departure_time_segment>A</departure_time_segment>
</leg>
<leg>
<departure_date>2018-02-05</departure_date>
<carrier_code>12</carrier_code>
<service_class>1</service_class>
<origin_city>VAR</origin_city>
<destination_city>BER</destination_city>
<stopover_code>0</stopover_code>
<fare_basis_code>1</fare_basis_code>
<flight_number>W6666</flight_number>
<departure_time>11:37</departure_time>
<departure_time_segment>A</departure_time_segment>
</leg>
</legs>
</travel>
</payment_transaction>

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
ticket	required		
ticket_number	required	String(15)	The number on the ticket.
passenger_name	required	String(29)	The name of the passenger. May be the cardholder name if the passenger name is unavailable. Must not be blank.
customer_code	required	String(17)	The customer code. Internal Reference.
issuing_carrier	optional	String(4)	Contains the standard abbreviation for the airline or railway carrier issuing the ticket.
total_fare	required	Fixnum	Total amount of the ticket and should equal the amount of the transaction.
agency_name	optional	String(30)	An entry should be supplied if a travel agency issued the ticket.
agency_code	optional	String(8)	An entry should be supplied if a travel agency issued the ticket.
legs	required	Max legs 10	
leg	required		
departure_date	required	String(10)	The departure date. Date can be in future.
carrier_code	required	String(2)	Contains the standard abbreviation for the airline or railway carrier issuing the ticket. This should not contain all spaces or zeros. Code indicating name of carrier.
service_class	required	String(1)	The service type. i.e. Coach, First Class. Required for reduced interchange.
origin_city	required	String(3)	The originating airport name's standard abbreviation. This should not contain all spaces or zeroes.
destination_city	required	String(3)	The destination airport or railway name's standard abbreviation.
stopover_code	required	String(1)	A code indicating whether there was a direct or a non-direct flight or route on the same ticket number. Allowed values: 0, 1
fare_basis_code	optional	String(6)	A code that carriers assign to a particular ticket type, such as business class or discounted/ non-re fundable.
flight_number	optional	String(5)	The number that the operating or marketing carrier assigned.
departure_time	optional	String(5)	The time of departure provided by the airline or railway, per trip leg.
departure_time_segment	optional	String(1)	Departure Time Segment. Allowed values: A, P

required* = conditionally required

Visa

Contract Merchant Category Code must be 3000-3350 or 4511

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
    ->set...('')
    ->setTravel(['ticket'=>['ticket_number'=>12345, "passenger_name"=>"Emil Example", "customer_code"=>1, "restricted_ticket_indicator"=>1, "agency_name"=>"Agency", "agency_code"=>"A6001"], "legs"=>[{"departure
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main()  {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{\"ticket\"=>{\"ticket_number\"=>12345, \"passenger_name\"=>\"Emil Example\", \"customer_code\"=>1, \"restricted_ticket_indicator\"=>1, \"agency_name\"=>\"Agency\", \"agency_code\"=>\"AG001\", \"legs\"=>[{"}

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_number": 12345,
            "passenger_name": "Emil Example",
            "customer_code": 1,
            "restricted_ticket_indicator": 1,
            "agency_name": "Agency",
            "agency_code": "AG001"
        },
        "legs": [
            {
                "departure_date": "2018-02-01",
                "carrier_code": 2,
                "service_class": 3,
                "origin_city": "SOF",
                "destination_city": "VAR",
                "stopover_code": 0,
                "fare_basis_code": 1,
                "flight_number": "W6666"
            }
        ]
    }
},
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ' 
<payment_transaction>
<...><...>
<travel>
<ticket>
<ticket_number>12345</ticket_number>
<passenger_name>Emil Example</passenger_name>
<customer_code>1</customer_code>
<restricted_ticket_indicator>1</restricted_ticket_indicator>
<agency_name>Agency</agency_name>
<agency_code>AG001</agency_code>
</ticket>
<legs>
<leg>
<departure_date>2018-02-01</departure_date>
<carrier_code>2</carrier_code>
<service_class>3</service_class>
<origin_city>SOF</origin_city>
<destination_city>VAR</destination_city>
<stopover_code>0</stopover_code>
<fare_basis_code>1</fare_basis_code>
<flight_number>W6666</flight_number>
</leg>
</legs>
</travel>
</payment_transaction>'

```

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('')
->setTravel(['ticket'=>"ticket_number"=>123456789012345, "passenger_name"=>"Test Example", "customer_code"=>1, "restricted_ticket_indicator"=>1, "agency_name"=>"Agency", "agency_code"=>"AG001"], "legs"=>[

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{\"ticket\":{\"ticket_number\"=>\"123456789012345\", \"passenger_name\"=>\"Test Example\", \"customer_code\"=>1, \"restricted_ticket_indicator\"=>1, \"agency_name\"=>\"Agency\", \"agency_code\"=>\"AG001\"}, \"traveler\"}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```
var genesis = require('genesis.js/lib/genesis.js')
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_number": "123456789012345",
            "passenger_name": "Test Example",
            "customer_code": 1,
            "restricted_ticket_indicator": 1,
            "agency_name": "Agency",
            "agency_code": "AG001"
        },
        "legs": [
            {
                "departure_date": "2018-02-01",
                "carrier_code": 2,
                "service_class": 3,
                "origin_city": "SOF",
                "destination_city": "VAR",
                "stopover_code": 0,
                "fare_basis_code": 1,
                "flight_number": "W6666"
            },
            {
                "departure_date": "2018-02-01",
                "carrier_code": 2,
                "service_class": 3,
                "origin_city": "VAR",
                "destination_city": "FRA",
                "stopover_code": 0,
                "fare_basis_code": 1,
                "flight_number": "W6366"
            }
        ]
    }
},
).send()
    .then(success)
    .catch(failure);
```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<..><..>
<travel>
<ticket>
<ticket_number>123456789012345</ticket_number>
<passenger_name>Test Example</passenger_name>
<customer_code>1</customer_code>
<restricted_ticket_indicator>1</restricted_ticket_indicator>
<agency_name>Agency</agency_name>
<agency_code>AG001</agency_code>
</ticket>
<legs>
<leg>
<departure_date>2018-02-01</departure_date>
<carrier_code>2</carrier_code>
<service_class>3</service_class>
<origin_city>SOF</origin_city>
<destination_city>VAR</destination_city>
<stopover_code>0</stopover_code>
<fare_basis_code>x1</fare_basis_code>
<flight_number>W6666</flight_number>
</leg>
<leg>
<departure_date>2018-02-01</departure_date>
<carrier_code>2</carrier_code>
<service_class>3</service_class>
<origin_city>VAR</origin_city>
<destination_city>FRA</destination_city>
<stopover_code>0</stopover_code>
<fare_basis_code>x1</fare_basis_code>
<flight_number>W6366</flight_number>
</leg>
</legs>
</travel>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
ticket	required		
ticket_number	required	String(15)	The number on the ticket.
passenger_name	required	String(29)	The name of the passenger. May be the cardholder name if the passenger name is unavailable. Must not be blank.
customer_code	required	String(17)	The customer code. Internal Reference.
restricted_ticket_indicator	optional	String(1)	Space or 0 = No restriction, 1 = Restriction; Allowed values: Empty String, 0, 1
agency_name	optional	String(30)	An entry should be supplied if a travel agency issued the ticket.
agency_code	optional	String(8)	An entry should be supplied if a travel agency issued the ticket.
legs	required		Max legs 10
leg	required		
departure_date	required	String(10)	The departure date. Date can be in future.
origin_city	required	String(3)	The originating airport name's standard abbreviation. This should not contain all spaces or zeroes.
carrier_code	required	String(2)	Contains the standard abbreviation for the airline or railway carrier issuing the ticket. This should not contain all spaces or zeros. Code indicating name of carrier.
service_class	required	String(1)	The service type. i.e. Coach, First Class. Required for reduced interchange.
stopover_code	required	String(1)	A code indicating whether there was a direct or a non-direct flight or route on the same ticket number. Allowed values: 0, 1
destination_city	required	String(3)	The destination airport or railway name's standard abbreviation.
fare_basis_code	optional	String(6)	A code that carriers assign to a particular ticket type, such as business class or discounted/ non-re fundable.
flight_number	optional	String(5)	The number that the operating or marketing carrier assigned.

required* = conditionally required

CAR RENTAL

MasterCard

Contact Merchant Category Code must be 3351-3500, 7512, 7513 or 7519

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('');
->setTravel('{"rentals"=>{"car_rental"=>{"purchase_identifier"=>12478, "class_id"=>3, "pickup_date"=>"2018-02-05", "renter_name"=>"Emil Example", "return_city"=>"Varna", "return_state"=>"VAR", "return_count"=>1, "customer_code"=>1}}');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{"rentals"=>{"car_rental"=>{"purchase_identifier"=>12478, "class_id"=>3, "pickup_date"=>"2018-02-05", "renter_name"=>"Emil Example", "return_city"=>"Varna", "return_state"=>"VAR", "return_count"=>1, "customer_code"=>1}}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "rentals": {
            "car_rental": {
                "purchase_identifier": 12478,
                "class_id": 3,
                "pickup_date": "2018-02-05",
                "renter_name": "Emil Example",
                "return_city": "Varna",
                "return_state": "VAR",
                "return_country": "BGR",
                "return_date": "2018-02-06",
                "renter_return_location_id": 12478,
                "customer_code": 1
            }
        }
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<..><..>
<travel>
<rentals>
<car_rental>
<purchase_identifier>12478</purchase_identifier>
<class_id>3</class_id>
<pickup_date>2018-02-05</pickup_date>
<renter_name>Emil Example</renter_name>
<return_city>Varna</return_city>
<return_state>VAR</return_state>
<return_country>BGR</return_country>
<return_date>2018-02-06</return_date>
<renter_return_location_id>12478</renter_return_location_id>
<customer_code>1</customer_code>
</car_rental>
</rentals>
</travel>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
rentals	required		
car_rental	required		
purchase_identifier	required	String(9)	Rental Agreement Number / Hotel Folio Number.
class_id	required	String(4)	The car rental classification. Allowed values: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 9999
pickup_date	required	String(10)	Car rental Pick-up date.
renter_name	required	String(20)	The Renter Name
return_city	required	String(18)	The Rental Return City
return_state	required	String(3)	The Rental Return State
return_country	required	String(3)	The Rental Return Country
return_date	required	String(10)	Car Rental return date
renter_return_location_id	required	String(10)	Expenses or Car Rental code, Address, phone number, etc. Identifying Rental Return Location.
customer_code	required	String(17)	The customer code. Internal Reference.

required* = conditionally required

Visa

Contract Merchant Category Code must be 3351-3500, 7512, 7513 or 7519

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('')
->setTravel('{"rentals": {"car_rental": {"purchase_identifier": "12478", "class_id": "3", "pickup_date": "2018-02-05", "renter_name": "Emil Example", "return_city": "Varna", "return_state": "VAR", "return_country": "BGR", "return_date": "2018-02-06", "renter_return_location_id": "12478", "customer_code": "1"} } } );
try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{rentals}=>{car_rental}=>{purchase_identifier}>12478, {class_id}>3, {pickup_date}>2018-02-05, {renter_name}>Emil Example, {return_city}>Varna, {return_state}>VAR, {retu

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "rentals": {
            "car_rental": {
                "purchase_identifier": 12478,
                "class_id": 3,
                "pickup_date": "2018-02-05",
                "renter_name": "Emil Example",
                "return_city": "Varna",
                "return_state": "VAR",
                "return_country": "BGR",
                "return_date": "2018-02-06",
                "renter_return_location_id": 12478,
                "customer_code": 1
            }
        }
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TOTAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<..><..>
<travel>
<rentals>
<car_rental>
<purchase_identifier>12478</purchase_identifier>
<class_id>3</class_id>
<pickup_date>2018-02-05</pickup_date>
<renter_name>Emil Example</renter_name>
<return_city>Varna</return_city>
<return_state>VAR</return_state>
<return_country>BGR</return_country>
<return_date>2018-02-06</return_date>
<renter_return_location_id>12478</renter_return_location_id>
<customer_code>1</customer_code>
</car_rental>
</rentals>
</travel>
</payment_transaction>
'

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
rentals	required		
car_rental	required		
purchase_identifier	optional	String(25)	Rental Agreement Number / Hotel Folio Number
pickup_date	optional	String(10)	Car rental Pick-up date.
extra_charges	optional	Array(6)	Additional charges added to customer bill after check-out. Each position can be used to indicate a type of charge; Allowed values: 1, 2, 3, 4, 5
no_show_indicator	optional	String(1)	No show indicator; Allowed values: 0, 1

required* = conditionally required

HOTEL RENTAL

MasterCard

Contract Merchant Category Code must be 3501-3999 or 7011

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('')
->setTravel('{"rentals":>{"hotel_rental":>{"purchase_identifier":>12478, "arrival_date":>3, "departure_date":>"2018-02-05", "customer_code":>1}}}'');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{"rentals":>{"hotel_rental":>{"purchase_identifier":>12478, "arrival_date":>3, "departure_date":>"2018-02-05", "customer_code":>1}}}'");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "rentals": {
            "hotel_rental": {
                "purchase_identifier": 12478,
                "arrival_date": 3,
                "departure_date": "2018-02-05",
                "customer_code": 1
            }
        }
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ''
<payment_transaction>
<..><..>
<travel>
<rentals>
<hotel_rental>
<purchase_identifier>12478</purchase_identifier>
<arrival_date>3</arrival_date>
<departure_date>2018-02-05</departure_date>
<customer_code>1</customer_code>
</hotel_rental>
</rentals>
</travel>
</payment_transaction>

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
rentals	required		
hotel_rental	required		
purchase_identifier	required	String(10)	Rental Agreement Number / Hotel Folio Number.
arrival_date	required	String(10)	Hotel check-in date.
departure_date	required	String(10)	The departure date. Date can be in future.
customer_code	required	String(17)	The customer code. Internal Reference.

required* = conditionally required

Visa

Contract Merchant Category Code must be 3501-3999 or 7011

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('');
->setTravel('{"rentals": {"hotel_rental": {"purchase_identifier": 2, "arrival_date": "2018-02-01", "extra_charges": 467, "no_show_indicator": 1}}}'));

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{\"rentals\": {\"hotel_rental\": {\"purchase_identifier\": 2, \"arrival_date\": \"2018-02-01\", \"extra_charges\": 467, \"no_show_indicator\": 1}}}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "rentals": {
            "hotel_rental": {
                "purchase_identifier": 2,
                "arrival_date": "2018-02-01",
                "extra_charges": 467,
                "no_show_indicator": 1
            }
        }
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<...><...>
<travel>
<rentals>
<hotel_rental>
<purchase_identifier>2</purchase_identifier>
<arrival_date>2018-02-01</arrival_date>
<extra_charges>467</extra_charges>
<no_show_indicator>1</no_show_indicator>
</hotel_rental>
</rentals>
</travel>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
rentals	required		
hotel_rental	required		
purchase_identifier	optional	String(25)	Rental Agreement Number / Hotel Folio Number

Parameter	Required	Format	Description
arrival_date	optional	String(10)	Car rental Pick-up date.
extra_charges	optional	Array(6)	Additional charges added to customer bill after check-out. Each position can be used to indicate a type of charge. Allowed values: 2, 3, 4, 5, 6, 7
no_show_indicator	optional	String(1)	No show indicator; Allowed values: 0, 1

required* = conditionally required

ANCILLARY CHARGES

Ancillary Charges

Charges/fees related to the ticket. These transactions are processed on a separate transaction, referenced to Airline transaction with AID.

MasterCard

Used to identify only Baggage Charges.

Contract Merchant Category Code must be 3000-3350 or 4511

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('')
->setTravel('{"ticket"=>{"ticket_reference_id"=>"8b7e3575e5605ea7e1895707a3e92837"}, "charges"=>{"charge"=>{"type"=>"BG"}}}');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{"ticket"=>{"ticket_reference_id"=>"8b7e3575e5605ea7e1895707a3e92837"}, "charges"=>{"charge"=>{"type"=>"BG"}}}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_reference_id": "8b7e3575e5605ea7e1895707a3e92837"
        },
        "charges": {
            "charge": {
                "type": "BG"
            }
        }
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<..><..>
<travel>
<ticket>
<ticket_reference_id>8b7e3575e5605ea7e1895707a3e92837</ticket_reference_id>
</ticket>
<charges>
<charge>
<type>BG</type>
</charge>
</charges>
</travel>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
ticket	required		
ticket_reference_id	required	String(32)	Unique id of the ticket transaction
charges	required		
charge	required		
type	required	String(2)	This field will contain the Service Category Code for the primary type of service that has been provided. Allowed values: BG

required* = conditionally required

Visa

Used to identify charges for a number of ancillary services such as ticket upgrades, baggage fee, food & beverage purchases which are not purchased as part of the original ticket. Also used for charges/fees related to partial airline ticket refunds or ticket cancellations.

Contract Merchant Category Code must be 3000-3350 or 4511

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('');
->setTravel('{"ticket":>{"ticket_reference_id":>"8b7e3575e5605ea7e1895707a3e92837", "ticket_document_number":>1111, "issued_with_ticket_number":>12321}, "charges":>{"charge":>{"type":>"BF", "sub_type":>"BG"}}

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{"ticket":>{"ticket_reference_id":>"8b7e3575e5605ea7e1895707a3e92837", "ticket_document_number":>1111, "issued_with_ticket_number":>12321}, "charges":>{"charge":>{"type":>"BF", "sub_type":>"BG"}}

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_reference_id": "8b7e3575e5605ea7e1895707a3e92837",
            "ticket_document_number": 1111,
            "issued_with_ticket_number": 12321
        },
        "charges": {
            "charge": {
                "type": "BF",
                "sub_type": "BG"
            }
        }
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<..><..>
<travel>
<ticket>
<ticket_reference_id>8b7e3575e5605ea7e1895707a3e92837</ticket_reference_id>
<ticket_document_number>1111</ticket_document_number>
<issued_with_ticket_number>12321</issued_with_ticket_number>
</ticket>
<charges>
<charge>
<type>BF</type>
<sub_type>BG</sub_type>
</charge>
</charges>
</travel>
</payment_transaction>'
```

Request Parameters

Parameter	Required	Format	Description
travel	required		
ticket	required		
ticket_reference_id	required	String(32)	Unique id of the ticket transaction
ticket_document_number	required	String(15)	This field will contain the form number assigned by the carrier for the transaction.
issued_with_ticket_number	required	String(15)	If this purchase has a connection or relationship to another purchase, such as baggage fee for a passenger transport ticket, this field must contain the document number for the other purchase.
charges	required		
charge	required		
type	required	String(2)	This field will contain the Service Category Code for the primary type of service that has been provided. Allowed values: BF, BG, CF, CG, CO, FF, GF, GT, IE, LG, MD, ML, OT, PA, PT, SA, SB, SF, ST, TS, UN, UP, WI
sub_type	required	String(2)	This field will contain the Service Category Code for the secondary type of service that has been provided Allowed values: BF, BG, CF, CG, CO, FF, GF, GT, IE, LG, MD, ML, OT, PA, PT, SA, SB, SF, ST, TS, UN, UP, WI

required* = conditionally required

MISCELLANEOUS CHARGES

Miscellaneous charges related to the travel, but not related to the ticket.

MasterCard

Contract Merchant Category Code must be 3000-3350 or 4511

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
->set...('')
->setTravel('{"ticket":>{"ticket_reference_id":>"8b7e3575e5605ea7e1895707a3e92837"}, "charges":>{"charge":>{"type":>"MISC"}}}'');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...("");
        request.setTravel("{ticket"=>{"ticket_reference_id"=>"8b7e3575e5605ea7e1895707a3e92837"}, "charges"=>{"charge"=>{"type"=>"MISC"}}}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_reference_id": "8b7e3575e5605ea7e1895707a3e92837"
        },
        "charges": {
            "charge": {
                "type": "MISC"
            }
        }
    }
}.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<..><..>
<travel>
<ticket>
<ticket_reference_id>8b7e3575e5605ea7e1895707a3e92837</ticket_reference_id>
</ticket>
<charges>
<charge>
<type>MISC</type>
</charge>
</charges>
</travel>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
ticket	required		
ticket_reference_id	required	String(32)	Unique id of the ticket transaction
charges	required		

Parameter	Required	Format	Description
charge	required		
type	required	String(4)	This field will contain the Service Category Code for the primary type of service that has been provided. Allowed values: MISC

required* = conditionally required

Visa

Contract Merchant Category Code must be 3000-3350 or 4511

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Sale');
$request = $genesis->request();

$request
    ->set...('');
    ->setTravel('{"ticket"=>{"ticket_reference_id"=>"8b7e3575e5605ea7e1895707a3e92837"}, "charges"=>{"charge"=>{"type"=>"MISC"}}}');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.SaleRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        SaleRequest request = new SaleRequest();

        request.set...('');
        request.setTravel("{"ticket"=>{"ticket_reference_id"=>"8b7e3575e5605ea7e1895707a3e92837"}, "charges"=>{"charge"=>{"type"=>"MISC"}}}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.sale(
{
    "...": null,
    "travel": {
        "ticket": {
            "ticket_reference_id": "8b7e3575e5605ea7e1895707a3e92837"
        },
        "charges": {
            "charge": {
                "type": "MISC"
            }
        }
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<..><..>
<travel>
<ticket>
<ticket_reference_id>8b7e3575e5605ea7e1895707a3e92837</ticket_reference_id>
</ticket>
<charges>
<charge>
<type>MISC</type>
</charge>
</charges>
</travel>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
travel	required		
ticket	required		
ticket_reference_id	required	String(32)	Unique id of the ticket transaction
charges	required		
charge	required		
type	required	String(4)	This field will contain the Service Category Code for the primary type of service that has been provided. Allowed values: MISC

`required* = conditionally required`

Special Cases

TRAVEL AUTHORIZE (3D) AND CAPTURE

The Capture travel data is always merged with the Authorize travel data and overrides the Authorization fields (where they are present in both transactions) before validating. This makes the required travel data for Authorizations optional. This logic is applied for all Travel Types. Because of this, there are 4 scenarios for submitting travel Authorization and Capture.

Travel Authorize (3D) and Travel Capture

In this scenario the Authorize and Capture transaction requests are submitted with valid travel data. The travel data that will be used for the transaction processing is the data submitted with the Capture.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Authorize');
$request = $genesis->request();

$request
->setTransactionId('1915c52b28ff29edb12bc617ac102a03')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setCvv('834')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setTravel('{ticket"=>{ticket_number"=>12345678123456, "passenger_name"=>"Passenger 01", "customer_code"=>123, "restricted_ticket_indicator"=>0, "agency_name"=>"Agency", "agency_code"=>"AG001"}, "legs"=>[]}')


try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.AuthorizeRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        AuthorizeRequest request = new AuthorizeRequest();

        request.setTransactionId("1915c52b28ff29edb12bc617ac102a03");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setCvv("834");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setTravel("{ticket"=>{ticket_number"=>12345678123456, "passenger_name"=>"Passenger 01", "customer_code"=>123, "restricted_ticket_indicator"=>0, "agency_name"=>"Agency", "agency_code"=>"AG001"}, "legs"=>[]}'}

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.authorize(
{
    "transaction_id": "1915c52b28ff29edb12bc617ac102a03",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "cvv": "834",
    "expiration_month": "12",
    "expiration_year": 2020,
    "travel": {
        "ticket": {
            "ticket_number": 12345678123456,
            "passenger_name": "Passenger 01",
            "customer_code": 123,
            "restricted_ticket_indicator": 0,
            "agency_name": "Agency",
            "agency_code": "AG001"
        },
        "legs": [
            {
                "departure_date": "2017-03-10",
                "carrier_code": "VX",
                "service_class": "J",
                "origin_city": "DUB",
                "destination_city": "ATL",
                "stopover_code": 1,
                "fare_basis_code": 0,
                "flight_number": ""
            }
        ]
    }
},
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
    <transaction_type>authorize</transaction_type>
    <transaction_id>1915c52b28ff29edb12bc617ac102a03</transaction_id>
    <remote_ip>245.253.2.12</remote_ip>
    <amount>100</amount>
    <currency>USD</currency>
    <card_holder>Travis Pastrana</card_holder>
    <card_number>4200000000000000</card_number>
    <cvv>834</cvv>
    <expiration_month>12</expiration_month>
    <expiration_year>2020</expiration_year>
    <travel>
        <ticket>
            <ticket_number>12345678123456</ticket_number>
            <passenger_name>Passenger 01</passenger_name>
            <customer_code>123</customer_code>
            <restricted_ticket_indicator>0</restricted_ticket_indicator>
            <agency_name>Agency</agency_name>
            <agency_code>AG001</agency_code>
        </ticket>
        <legs>
            <leg>
                <departure_date>2017-03-10</departure_date>
                <carrier_code>VX</carrier_code>
                <service_class>J</service_class>
                <origin_city>DUB</origin_city>
                <destination_city>ATL</destination_city>
                <stopover_code>1</stopover_code>
                <fare_basis_code>0</fare_basis_code>
                <flight_number></flight_number>
            </leg>
        </legs>
    </travel>
</payment_transaction>'

```

Request

```
<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Capture');
$request = $genesis->request();

$request
    ->setTransactionId('7fcc6097153beeecc1ddie71f643198d8')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setReferenceId('if2ee425e7c3159c60743098071771eb')
    ->setTravel(['ticket_number'=>"12345678123456", "passenger_name"=>"Passenger 01", "customer_code"=>"", "restricted_ticket_indicator"=>0, "agency_name"=>"New Agency", "agency_code"=>"AGN001"], "legs"=>[]);

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}
```

```
import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.CaptureRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        CaptureRequest request = new CaptureRequest();

        request.setTransactionId("7fcc6097153beec1ddie71f643198d8");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setReferenceId("1f2ee425e7c3159c60743098071771eb");
        request.setTravel("{\"ticket\": \"ticket_number=>12345678123456, passenger_name=>\"Passenger 01\", \"customer_code=>\", \"restricted_ticket_indicator=>0, \"agency_name=>\"New Agency\", \"agency_code=>\"AGN001\"}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}
```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.capture(
{
    "transaction_id": "7fcc6097153beeecciddie71f643198d8",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "reference_id": "1f2ee425e7c3159c60743098071771eb",
    "travel": {
        "ticket": {
            "ticket_number": 12345678123456,
            "passenger_name": "Passenger 01",
            "customer_code": "",
            "restricted_ticket_indicator": 0,
            "agency_name": "New Agency",
            "agency_code": "AGN001"
        },
        "legs": [
            {
                "departure_date": "2017-03-10",
                "carrier_code": "VX",
                "service_class": "J",
                "origin_city": "DUB",
                "destination_city": "ATL",
                "stopover_code": 1,
                "fare_basis_code": 0,
                "flight_number": ""
            }
        ]
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d ' \
<payment_transaction>
<transaction_type>capture</transaction_type>
<transaction_id>7fcc6097153beeecciddie71f643198d8</transaction_id>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<reference_id>1f2ee425e7c3159c60743098071771eb</reference_id>
<travel>
<ticket>
<ticket_number>12345678123456</ticket_number>
<passenger_name>Passenger 01</passenger_name>
<customer_code></customer_code>
<restricted_ticket_indicator>0</restricted_ticket_indicator>
<agency_name>New Agency</agency_name>
<agency_code>AGN001</agency_code>
</ticket>
<legs>
<leg>
<departure_date>2017-03-10</departure_date>
<carrier_code>VX</carrier_code>
<service_class>J</service_class>
<origin_city>DUB</origin_city>
<destination_city>ATL</destination_city>
<stopover_code>1</stopover_code>
<fare_basis_code>0</fare_basis_code>
<flight_number></flight_number>
</leg>
</legs>
</travel>
</payment_transaction>'

```

Non Travel Authorize (3D) and Travel Capture

In this scenario the Authorize request doesn't contain the travel data. Valid travel data is submitted in the Capture transaction request. The travel data that will be used for the transaction processing is the data submitted with the Capture.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Authorize');
$request = $genesis->request();

$request
->setTransactionId('1915c52b28ff29edb12bc617ac102a03')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setCvv('834')
->setExpirationMonth('12')
->setExpirationYear('2020');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.AuthorizeRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        AuthorizeRequest request = new AuthorizeRequest();

        request.setTransactionId("1915c52b28ff29edb12bc617ac102a03");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setCvv("834");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.authorize(
{
    "transaction_id": "1915c52b28ff29edb12bc617ac102a03",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "cvv": "834",
    "expiration_month": "12",
    "expiration_year": 2020
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>authorize</transaction_type>
  <transaction_id>1915c52b28ff29edb12bc617ac102a03</transaction_id>
  <remote_ip>245.253.2.12</remote_ip>
  <amount>100</amount>
  <currency>USD</currency>
  <card_holder>Travis Pastrana</card_holder>
  <card_number>4200000000000000</card_number>
  <cvv>834</cvv>
  <expiration_month>12</expiration_month>
  <expiration_year>2020</expiration_year>
</payment_transaction>

```

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Capture');
$request = $genesis->request();

$request
  ->setTransactionId('7fcc6097153beeecc1ddie71f643198d8')
  ->setRemoteIp('245.253.2.12')
  ->setAmount('100')
  ->setCurrency('USD')
  ->setReferenceId('1f2ee425e7c3159c60743098071771eb')
  ->setTravel('{"ticket":>{"ticket_number":>"12345678123456", "passenger_name":>"Passenger 01", "customer_code":>"", "restricted_ticket_indicator":>0, "agency_name":>"New Agency", "agency_code":>"AGN001"}, "legs":>[]}'}

try {
  $genesis->execute();
  $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
  $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.CaptureRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        CaptureRequest request = new CaptureRequest();

        request.setTransactionId("7fcc6097153beeecc1ddie71f643198d8");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setReferenceId("1f2ee425e7c3159c60743098071771eb");
        request.setTravel("{"ticket":>{"ticket_number":>"12345678123456", "passenger_name":>"Passenger 01", "customer_code":>"", "restricted_ticket_indicator":>0, "agency_name":>"New Agency", "agency_code":>"AGN001"}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.capture(
{
    "transaction_id": "7fcc6097153beeecciddie71f643198d8",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "reference_id": "1f2ee425e7c3159c60743098071771eb",
    "travel": {
        "ticket": {
            "ticket_number": 12345678123456,
            "passenger_name": "Passenger 01",
            "customer_code": "",
            "restricted_ticket_indicator": 0,
            "agency_name": "New Agency",
            "agency_code": "AGN001"
        },
        "legs": [
            {
                "departure_date": "2017-03-10",
                "carrier_code": "VX",
                "service_class": "J",
                "origin_city": "DUB",
                "destination_city": "ATL",
                "stopover_code": 1,
                "fare_basis_code": 0,
                "flight_number": ""
            }
        ]
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
    <transaction_type>capture</transaction_type>
    <transaction_id>7fcc6097153beeecciddie71f643198d8</transaction_id>
    <remote_ip>245.253.2.12</remote_ip>
    <amount>100</amount>
    <currency>USD</currency>
    <reference_id>1f2ee425e7c3159c60743098071771eb</reference_id>
    <travel>
        <ticket>
            <ticket_number>12345678123456</ticket_number>
            <passenger_name>Passenger 01</passenger_name>
            <customer_code></customer_code>
            <restricted_ticket_indicator>0</restricted_ticket_indicator>
            <agency_name>New Agency</agency_name>
            <agency_code>AGN001</agency_code>
        </ticket>
        <legs>
            <leg>
                <departure_date>2017-03-10</departure_date>
                <carrier_code>VX</carrier_code>
                <service_class>J</service_class>
                <origin_city>DUB</origin_city>
                <destination_city>ATL</destination_city>
                <stopover_code>1</stopover_code>
                <fare_basis_code>0</fare_basis_code>
                <flight_number></flight_number>
            </leg>
        </legs>
    </travel>
</payment_transaction>'

```

Travel Authorize (3D) and Non Travel Capture

In this scenario the Authorize request contains valid travel data. Travel data isn't submitted in the Capture transaction request. In this case the Capture transaction will inherit the travel data from the Authorize transaction. The travel data that will be used for the transaction processing is the data submitted with the Authorize.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Authorize');
$request = $genesis->request();

$request
->setTransactionId('1915c52b28ff29edb12bc617ac102a03')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setCardHolder('Travis Pastrana')
->setCardNumber('4200000000000000')
->setCvv('834')
->setExpirationMonth('12')
->setExpirationYear('2020')
->setTravel('{ticket"=>{ticket_number"=>12345678123456, "passenger_name"=>"Passenger 01", "customer_code"=>123, "restricted_ticket_indicator"=>0, "agency_name"=>"Agency", "agency_code"=>"AG001"}, "legs"=>[]}')


try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.AuthorizeRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main()  {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        AuthorizeRequest request = new AuthorizeRequest();

        request.setTransactionId("1915c52b28ff29edb12bc617ac102a03");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setCvv("834");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setTravel("{ticket"=>{ticket_number"=>12345678123456, "passenger_name"=>"Passenger 01", "customer_code"=>123, "restricted_ticket_indicator"=>0, "agency_name"=>"Agency", "agency_code"=>"AG001"}, "legs"=>[]}'}

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.authorize(
{
    "transaction_id": "1915c52b28ff29edb12bc617ac102a03",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "cvv": "834",
    "expiration_month": "12",
    "expiration_year": 2020,
    "travel": {
        "ticket": {
            "ticket_number": 12345678123456,
            "passenger_name": "Passenger 01",
            "customer_code": 123,
            "restricted_ticket_indicator": 0,
            "agency_name": "Agency",
            "agency_code": "AG001"
        },
        "legs": [
            {
                "departure_date": "2017-03-10",
                "carrier_code": "VX",
                "service_class": "J",
                "origin_city": "DUB",
                "destination_city": "ATL",
                "stopover_code": 1,
                "fare_basis_code": 0,
                "flight_number": ""
            }
        ]
    }
},
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
    <transaction_type>authorize</transaction_type>
    <transaction_id>1915c52b28ff29edb12bc617ac102a03</transaction_id>
    <remote_ip>245.253.2.12</remote_ip>
    <amount>100</amount>
    <currency>USD</currency>
    <card_holder>Travis Pastrana</card_holder>
    <card_number>4200000000000000</card_number>
    <cvv>834</cvv>
    <expiration_month>12</expiration_month>
    <expiration_year>2020</expiration_year>
    <travel>
        <ticket>
            <ticket_number>12345678123456</ticket_number>
            <passenger_name>Passenger 01</passenger_name>
            <customer_code>123</customer_code>
            <restricted_ticket_indicator>0</restricted_ticket_indicator>
            <agency_name>Agency</agency_name>
            <agency_code>AG001</agency_code>
        </ticket>
        <legs>
            <leg>
                <departure_date>2017-03-10</departure_date>
                <carrier_code>VX</carrier_code>
                <service_class>J</service_class>
                <origin_city>DUB</origin_city>
                <destination_city>ATL</destination_city>
                <stopover_code>1</stopover_code>
                <fare_basis_code>0</fare_basis_code>
                <flight_number></flight_number>
            </leg>
        </legs>
    </travel>
</payment_transaction>'

```

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Capture');
$request = $genesis->request();

$request
->setTransactionId('7fcc6097153beeciddie7if643198d8')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setReferenceId('1f2ee425e7c3159c60743098071771eb');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.CaptureRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        CaptureRequest request = new CaptureRequest();

        request.setTransactionId("7fcc6097153beeciddie7if643198d8");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setReferenceId("1f2ee425e7c3159c60743098071771eb");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.capture(
{
    "transaction_id": "7fcc6097153beeciddie7if643198d8",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "reference_id": "1f2ee425e7c3159c60743098071771eb"
})
.send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
  <transaction_type>capture</transaction_type>
  <transaction_id>7fcc6097153beec1ddie71f643198d8</transaction_id>
  <remote_ip>245.253.2.12</remote_ip>
  <amount>100</amount>
  <currency>USD</currency>
  <reference_id>1f2ee425e7c3159c60743098071771eb</reference_id>
</payment_transaction>'

```

Partial Travel Authorize (3D) and Partial Travel Capture

In this scenario the Authorize request contains only part of the travel data. The Capture transaction request contains also part of the travel data. The travel data from the Authorize will be merged with the Capture travel data. The Capture travel data will complete/override the travel fields in the Authorize. This merged data will be stored as Capture travel data. If the merged data is valid travel data then the transaction will be processed as travel using the travel data stored in the Capture. Otherwise the transaction will be processed as a regular Capture transaction.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Cards\Authorize');
$request = $genesis->request();

$request
    ->setTransactionId('1915c52b28ff29edb12bc617ac102a03')
    ->setRemoteIp('245.253.2.12')
    ->setAmount('100')
    ->setCurrency('USD')
    ->setCardHolder('Travis Pastrana')
    ->setCardNumber('4200000000000000')
    ->setCvv('834')
    ->setExpirationMonth('12')
    ->setExpirationYear('2020')
    ->setTravel('{"ticket":>{}, "legs":>[{"departure_date":>"2017-03-10", "carrier_code":>"VX", "service_class":>"J", "origin_city":>"DUB", "destination_city":>"ATL", "stopover_code":>1, "fare_basis_code":>0, "travel_type":>"3D"}]}')

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.card.AuthorizeRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        AuthorizeRequest request = new AuthorizeRequest();

        request.setTransactionId("1915c52b28ff29edb12bc617ac102a03");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setCardHolder("Travis Pastrana");
        request.setCardNumber("4200000000000000");
        request.setCvv("834");
        request.setExpirationMonth("12");
        request.setExpirationYear("2020");
        request.setTravel("{\"ticket\":>{}, \"legs\":>[{\\"departure_date\":>\"2017-03-10\", \"carrier_code\":>\"VX\", \"service_class\":>\"J\", \"origin_city\":>\"DUB\", \"destination_city\":>\"ATL\", \"stopover_code\":>1, \"fare_basis_code\":>0, \"travel_type\":>\"3D\"}]}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.authorize(
{
    "transaction_id": "1915c52b28ff29edb12bc617ac102a03",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "card_holder": "Travis Pastrana",
    "card_number": "4200000000000000",
    "cvv": "834",
    "expiration_month": "12",
    "expiration_year": 2020,
    "travel": {
        "ticket": {
        },
        "legs": [
            {
                "departure_date": "2017-03-10",
                "carrier_code": "VX",
                "service_class": "J",
                "origin_city": "DUB",
                "destination_city": "ATL",
                "stopover_code": 1,
                "fare_basis_code": 0,
                "flight_number": ""
            }
        ]
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TOKEN \ 
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>authorize</transaction_type>
<transaction_id>1915c52b28ff29edb12bc617ac102a03</transaction_id>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<card_holder>Travis Pastrana</card_holder>
<card_number>4200000000000000</card_number>
<cvv>834</cvv>
<expiration_month>12</expiration_month>
<expiration_year>2020</expiration_year>
<travel>
<ticket>
</ticket>
<legs>
<leg>
<departure_date>2017-03-10</departure_date>
<carrier_code>VX</carrier_code>
<service_class>J</service_class>
<origin_city>DUB</origin_city>
<destination_city>ATL</destination_city>
<stopover_code>1</stopover_code>
<fare_basis_code>0</fare_basis_code>
<flight_number></flight_number>
</leg>
</legs>
</travel>
</payment_transaction>
'

```

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Capture');
$request = $genesis->request();

$request
->setTransactionId('7fcc6097153beeciddie71f643198d8')
->setRemoteIp('245.253.2.12')
->setAmount('100')
->setCurrency('USD')
->setReferenceId('1f2ee425e7c3159c60743098071771eb')
->setTravel('{"ticket": {"ticket_number": "12345678123456", "passenger_name": "Passenger 01", "customer_code": "", "restricted_ticket_indicator": 0, "agency_name": "New Agency", "agency_code": "AGN001"}, "legs": [{"traveler": "Passenger 01", "traveler_type": "Passenger", "traveler_id": "1f2ee425e7c3159c60743098071771eb", "traveler_status": "P", "traveler_type_code": "P", "traveler_id_code": "1f2ee425e7c3159c60743098071771eb", "traveler_name": "Passenger 01", "traveler_code": "AGN001", "traveler_agency": "New Agency", "traveler_agency_code": "AGN001"}]}

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.CaptureRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;
import java.math.BigDecimal;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        CaptureRequest request = new CaptureRequest();

        request.setTransactionId("7fcc6097153beeciddie71f643198d8");
        request.setRemoteIp("245.253.2.12");
        request.setAmount(new BigDecimal(100));
        request.setCurrency("USD");
        request.setReferenceId("1f2ee425e7c3159c60743098071771eb");
        request.setTravel("{"ticket": {"ticket_number": "12345678123456", "passenger_name": "Passenger 01", "customer_code": "", "restricted_ticket_indicator": 0, "agency_name": "New Agency", "agency_code": "AGN001"}, "legs": [{"traveler": "Passenger 01", "traveler_type": "Passenger", "traveler_id": "1f2ee425e7c3159c60743098071771eb", "traveler_status": "P", "traveler_type_code": "P", "traveler_id_code": "1f2ee425e7c3159c60743098071771eb", "traveler_name": "Passenger 01", "traveler_code": "AGN001", "traveler_agency": "New Agency", "traveler_agency_code": "AGN001"}]}

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.capture(
{
    "transaction_id": "7fcc6097153beeciddie71f643198d8",
    "remote_ip": "245.253.2.12",
    "amount": "100",
    "currency": "USD",
    "reference_id": "1f2ee425e7c3159c60743098071771eb",
    "travel": {
        "ticket": {
            "ticket_number": 12345678123456,
            "passenger_name": "Passenger 01",
            "customer_code": "",
            "restricted_ticket_indicator": 0,
            "agency_name": "New Agency",
            "agency_code": "AGN001"
        },
        "legs": [
        ]
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<transaction_type>capture</transaction_type>
<transaction_id>7fcc6097153beeciddie71f643198d8</transaction_id>
<remote_ip>245.253.2.12</remote_ip>
<amount>100</amount>
<currency>USD</currency>
<reference_id>1f2ee425e7c3159c60743098071771eb</reference_id>
<travel>
<ticket>
<ticket_number>12345678123456</ticket_number>
<passenger_name>Passenger 01</passenger_name>
<customer_code></customer_code>
<restricted_ticket_indicator></restricted_ticket_indicator>
<agency_name>New Agency</agency_name>
<agency_code>AGN001</agency_code>
</ticket>
<legs>
</legs>
</travel>
</payment_transaction>
'
```

VISA REFUND

ⓘ The additional visa refund request parameters are applicable only when the reference transaction is Airline Itinerary Data (AID) or Ancillary Charges.

Request

```

<?php

// Load the pre-configured ini file...
\Genesis\Config::loadSettings('/path/to/config.ini');

$genesis = new Genesis('Financial\Refund');
$request = $genesis->request();

$request
->set...('')
->setTravel('{"ticket": {"credit_reason_indicator_1": "C", "credit_reason_indicator_2": "A", "ticket_change_indicator": "B"} }');

try {
    $genesis->execute();
    $response = $genesis->response()->getResponseObject();
} catch (\Exception $e) {
    $response = $e->getMessage();
}

```

```

import com.emerchantpay.gateway.GenesisClient;
import com.emerchantpay.gateway.api.TransactionResult;
import com.emerchantpay.gateway.api.constants.Endpoints;
import com.emerchantpay.gateway.api.constants.Environments;
import com.emerchantpay.gateway.api.requests.financial.RefundRequest;
import com.emerchantpay.gateway.model.Transaction;
import com.emerchantpay.gateway.util.Configuration;
import com.emerchantpay.gateway.util.Country;
import com.emerchantpay.gateway.util.Currency;

public class GenesisExample {
    public static void main() {

        // Create configuration
        Configuration configuration = new Configuration(Environments.STAGING, Endpoints.EMERCHANTPAY);

        configuration.setUsername("SET_YOUR_USERNAME");
        configuration.setPassword("SET_YOUR_PASSWORD");
        configuration.setToken("SET_YOUR_TOKEN");

        RefundRequest request = new RefundRequest();

        request.set...("");
        request.setTravel("{\"ticket\":{\"credit_reason_indicator_1\":\"C\", \"credit_reason_indicator_2\":\"A\", \"ticket_change_indicator\":\"B\"}}");

        GenesisClient client = new GenesisClient(configuration, request);
        client.execute();

        // Parse Payment result
        System.out.println(client.getResponse());
    }
}

```

```

var genesis = require('genesis.js/lib/genesis.js');
var transaction = new genesis.transaction();

var failure = function(reason) {
    return console.log(reason);
};

var success = function(data) {
    return console.log(data);
};

transaction.refund(
{
    "...": null,
    "travel": {
        "ticket": {
            "credit_reason_indicator_1": "C",
            "credit_reason_indicator_2": "A",
            "ticket_change_indicator": "B"
        }
    }
}
).send()
.then(success)
.catch(failure);

```

```

curl https://username:password@gate.emerchantpay.net/process/TERMINAL-TOKEN \
-H "Content-Type: text/xml" \
-d '
<payment_transaction>
<...><...>
<travel>
<ticket>
<credit_reason_indicator_1>C</credit_reason_indicator_1>
<credit_reason_indicator_2>A</credit_reason_indicator_2>
<ticket_change_indicator>B</ticket_change_indicator>
</ticket>
</travel>
</payment_transaction>'

```

Request Parameters

Parameter	Required	Format	Description
travel	optional		
ticket	optional		
credit_reason_indicator_1	optional	String(1)	This field indicates the reason for a credit to the cardholder. Allowed values: A, B, P, O
credit_reason_indicator_2	optional	String(1)	This field indicates the reason for a credit to the cardholder. Allowed values: A, B, P, O
ticket_change_indicator	optional	String(1)	This field will contain either a space or a code to indicate why a ticket was changed. Allowed values: C, N

required* = conditionally required

Allowed Values

CAR RENTAL CLASSES

Value	Description
1	Mini
2	Subcompact
3	Economy
4	Compact
5	Midsize
6	Intermediate
7	Standard
8	Full size
9	Luxury
10	Premium
11	Minivan
12	12 passenger van
13	Moving van
14	15 passenger van
15	Cargo van
16	12 foot truck
17	20 foot truck
18	24 foot truck
19	26 foot truck
20	Moped
21	Stretch limousine
22	Regular limousine
23	Unique limousine
24	Exotic limousine
25	Small/medium truck
26	Large truck
27	Small SUV
28	Medium SUV
29	Large SUV
30	Exotic SUV
9999	Miscellaneous

CHARGE TYPES

Value	Description
BF	Bundled Service
BG	Baggage Fee
CF	Change Fee
CG	Cargo
CO	Carbon Offset
FF	Frequent Flyer
GF	Gift Card
GT	Ground Transport

Value	Description
IE	In-flight Entertainment
LG	Lounge
MD	Medical
ML	Meal / Beverage
OT	Other
PA	Passenger Assist Fee
PT	Pets
SA	Seat Fees
SB	Standby
SF	Service Fee
ST	Store
TS	Travel Service
UN	Unaccompanied Travel
UP	Upgrades
WI	Wi-Fi
MISC	Miscellaneous Airline Charges

CAR RENTAL EXTRA CHARGES

Value	Description
1	Gas
2	Extra Mileage
3	Late Return
4	1 Way Ser Fee
5	Parking Violation

HOTEL RENTAL EXTRA CHARGES

Value	Description
2	Restaurant
3	Gift Shop
4	Mini Bar
5	Telephone
6	Laundry
7	Other

TICKET CHANGE INDICATORS

Value	Description
C	Change to existing Ticket
N	New ticket

CREDIT REASON INDICATORS

Value	Description
A	Passenger Transport Ancillary Cancellation
B	Travel Ticket and Passenger Transport
P	Partial Refund of Travel Ticket
O	Other