

WIFI CONFIGURATION USING NRF CONNECT MOBILE APP:

Download and Install the NRF connect app from the google play store


Open the app

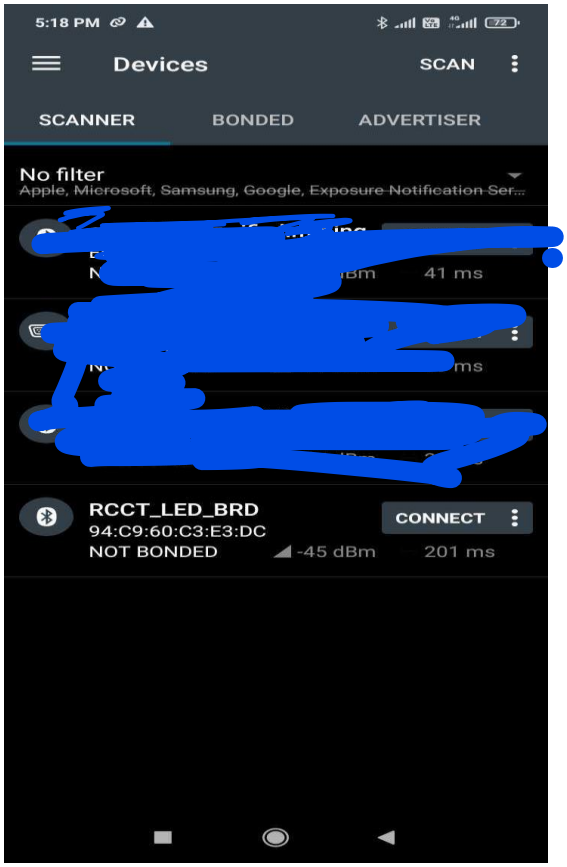


press the scan button and the RCCT_LED_BRD will show up in the scanners tab . connect to the RCCT_LED_BRD

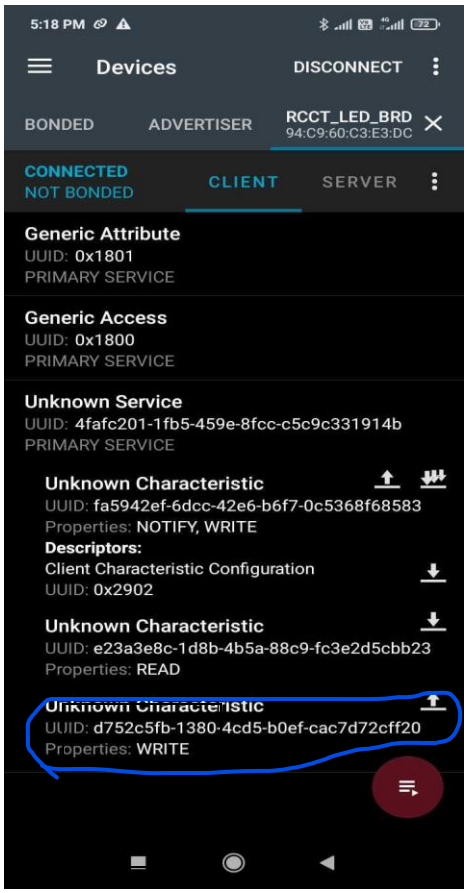

Click on the third characheteristic (write charachteristic)

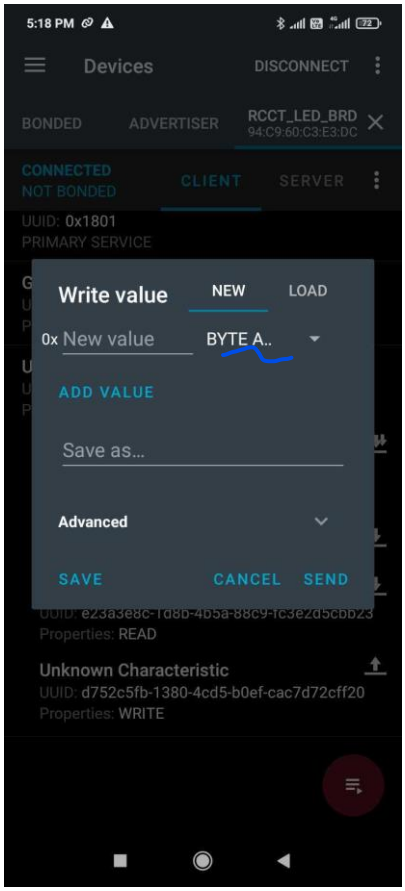


Change the type of value to text

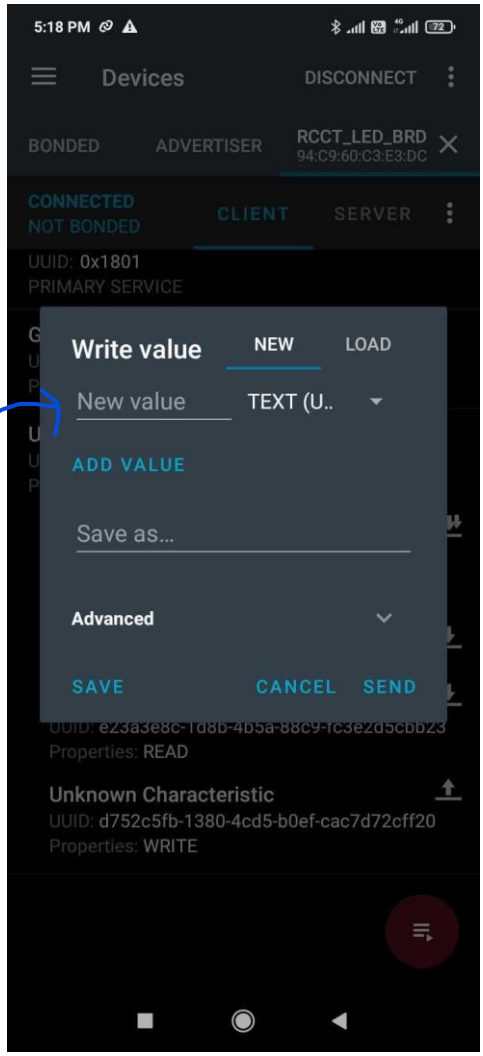


Now paste the wifi creds JSON which goes as:

{"ssid": "your_ssid", "password": "your_password"}

after entering and sending the JSON it will look something like this:

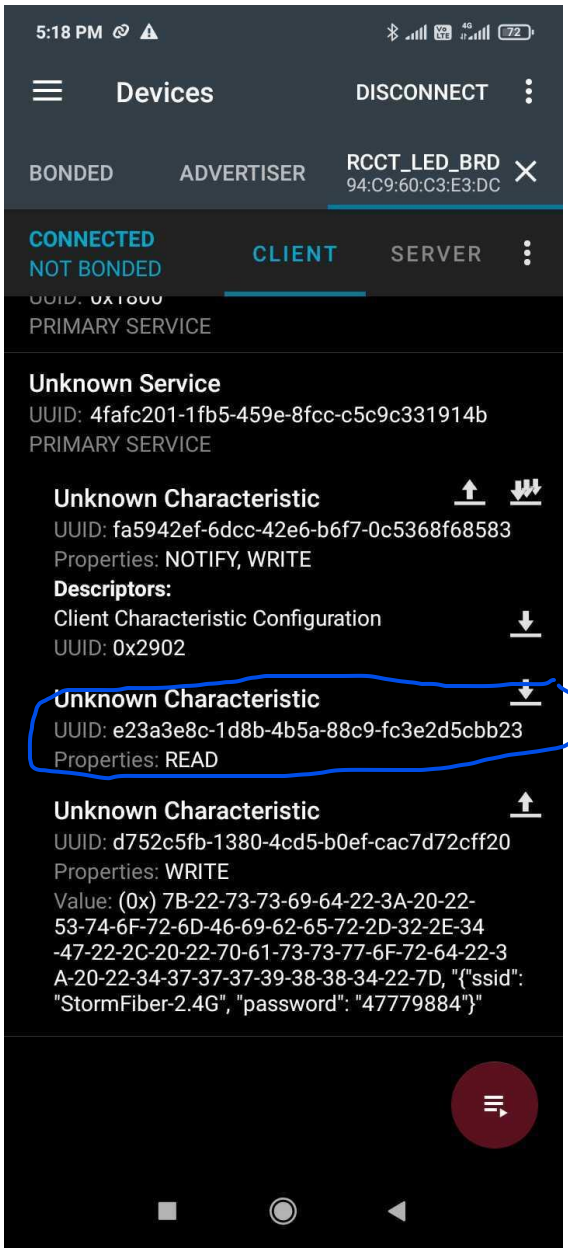

inorder to verify if the JSON is sent you can click on the read characteristic arrow and it will show the device connectivity status

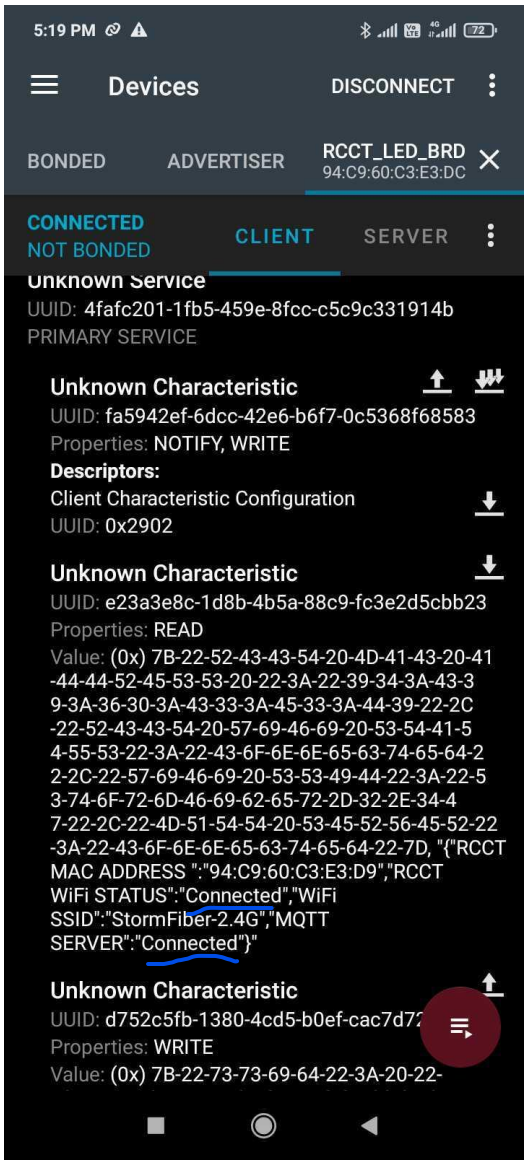
5:19 PM
Devices
DISCONNECT
BONDED
ADVERTISER
RCCT_LED_BRD
94:C9:60:C3:E3:DC
CONNECTED
NOT BONDED
CLIENT
SERVER
Unknown Service
UUID: 4fafc201-1fb5-459e-8fcc-c5c9c331914b
PRIMARY SERVICE
Unknown Characteristic
UUID: fa5942ef-6dcc-42e6-b6f7-0c5368f68583
Properties: NOTIFY, WRITE
Descriptors:
Client Characteristic Configuration
UUID: 0x2902
Unknown Characteristic
UUID: e23a3e8c-1d8b-4b5a-88c9-fc3e2d5cbb23
Properties: READ
Value: (0x) 7B-22-52-43-43-54-20-4D-41-43-20-41-44-44-52-45-53-53-20-22-3A-22-39-34-3A-43-39-3A-36-30-3A-43-33-3A-45-33-3A-44-39-22-2C-22-52-43-43-54-20-57-69-46-69-20-53-54-41-54-55-53-22-3A-22-43-6F-6E-6E-65-63-74-65-64-22-2C-22-57-69-46-69-20-53-53-49-44-22-3A-22-53-74-6F-72-6D-46-69-62-65-72-2D-32-2E-34-47-22-2C-22-4D-51-54-54-20-53-45-52-56-45-52-22-3A-22-43-6F-6E-6E-65-63-74-65-64-22-7D, "{"RCCT MAC ADDRESS ":"94:C9:60:C3:E3:D9","RCCT WiFi STATUS":"Connected","WiFi SSID":"StormFiber-2.4G","MQTT SERVER":"Connected"}"
Unknown Characteristic
UUID: d752c5fb-1380-4cd5-b0ef-cac7d72
Properties: WRITE
Value: (0x) 7B-22-73-73-69-64-22-3A-20-22-