

№11

2026-04-25

1

2

1







..



-
-
-
- 1032252356@rudn.ru

...



-
-
-
- 1032252356@rudn.ru
- <https://eagolovko.github.io/>



Emacs.


1

2

Emacs

(. 1).

```
eagolovko@eagolovko:~$ emacs &  
[1] 6873  
eagolovko@eagolovko:~$
```

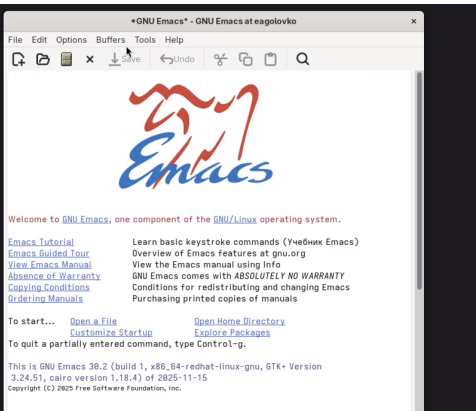

1: Emacs

lab07.sh,


(. 2).

```
U:%%- *GNU Emacs* All
```

```
Find file: ~/lab07.sh
```

2:

, : , , ,
(. 3).

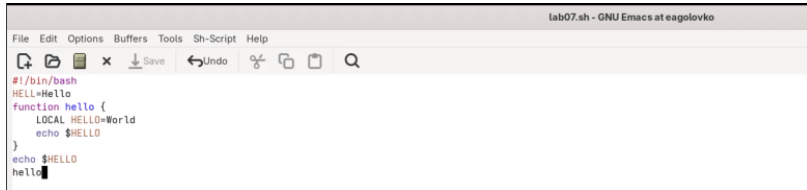

```
#!/bin/bash
HELL=Hello
function hello {
    LOCAL HELLO=World
    echo $HELLO
}
echo $HELLO
hello
```

3:

(. 4).

The screenshot shows the GNU Emacs editor interface. The title bar at the top reads "4 - GNU Emacs at eago1ovko". The menu bar includes "File", "Edit", "Options", "Buffers", "Tools", and "Help". The toolbar contains icons for undo, redo, save, and search. The main editing area is split into two vertical panes. The left pane shows a shell script with the following content:

```
#!/bin/bash
HELL=hello
function hello {
  LOCAL_HELLO=World
  echo $HELLO
}
echo $HELLO
hello
```

The right pane shows a C program with the following content:

```
#include <stdio.h>
int main() {
  printf("Hello, World!\n");
  return 0;
}
```

At the bottom of each pane, the status bar displays "U:++- 1 All L1 (Fundamental)" for the left pane and "U:++- 2 All L1 (Fundamental)" for the right pane.

4:

Emacs.