

№10

2026-04-17

1

2

3

1







..



-
-
-
- 1032252356@rudn.ru

...



-
-
-
- 1032252356@rudn.ru
- <https://eagolovko.github.io>



Linux.

vi,

.

1

vi

vi

2

(. 1).

```
eagolovko@eagolovko:~$ mkdir -p ~/work/os/lab06  
eagolovko@eagolovko:~$ cd ~/work/os/lab06  
eagolovko@eagolovko:~/work/os/lab06$
```

1:

vi (. 2).

```
eagolovko@eagolovko:~/work/os/lab06$ vi hello.sh
```

2: vi

1

(. 3).


The screenshot shows a terminal window with a vim editor. The terminal title bar reads "eagolovko@eagolovko:~/work/os/lab06 — vi hello.sh". The editor interface has a dark background. On the left, there is a vertical column of 20 tilde (~) characters, indicating 20 lines in the buffer. The main editing area is empty, with a cursor (a vertical bar) positioned at the end of the 20th line. At the bottom of the terminal, the status bar displays "hello.sh [New]".

i , (. 4).

```
eagolovko@eagolovko:/home/eagolovko/work/os/lab06 — vi hello.sh
~
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}
echo $HELLO
hello
```

4:

: wq (w - , q -), enter (. 5).

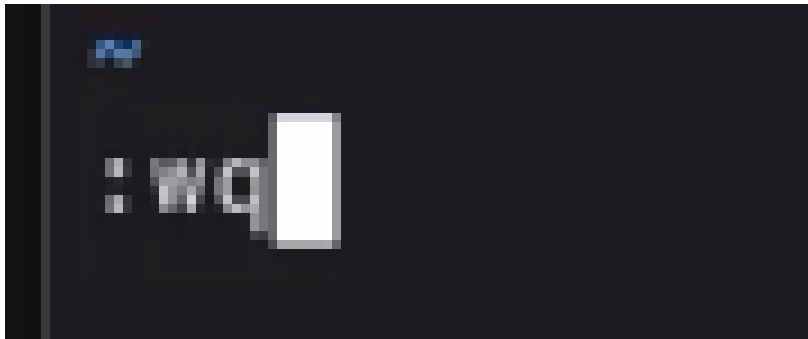

5:

(. 6).

```
eagolovko@eagolovko:~/work/os/lab06$ chmod +x hello.sh  
eagolovko@eagolovko:~/work/os/lab06$
```

6: chmod

hello.sh, ,
u (. 7).

dd,

```
eagolovko@eagolovko:/home/eagolovko/work/os/lab06 — vi hello.sh
~/work/os/lab06
#!/bin/bash
HELLO=Hello
function hello {
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
~
~
```

7:

(. 8).



8:

3

vi.