

Индивидуальный проект

Этап 2

Карпова Е.А.


15.03.2025

Российский университет дружбы народов, Москва, Россия

Объединённый институт ядерных исследований, Дубна, Россия

Информация

- Карпова Есения Алексеевна
- Студентка НКАбд-02-23
- ФФМиЕН
- Российский университет дружбы народов
- 1132236008@pfur.ru
- <https://github.com/eakarpova>

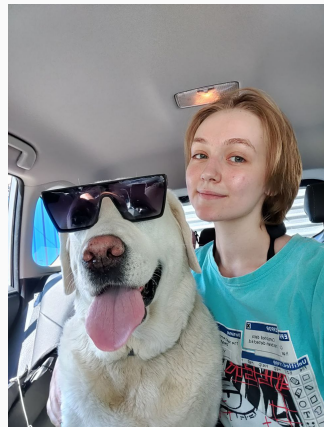

Установить DVWA на дистрибутив Kali Linux.

Выполнение индивидуального проекта


```
(kali@kali)-[~]  
$ cd /var/www/html
```

```
(kali@kali)-[/var/www/html]
$ sudo git clone https://github.com/ethicalhack3r/DVWA
Cloning into 'DVWA'...
remote: Enumerating objects: 5105, done.
remote: Counting objects: 100% (91/91), done.
remote: Compressing objects: 100% (24/24), done.
remote: Total 5105 (delta 79), reused 67 (delta 67), pack-reused 5014 (from 4)
Receiving objects: 100% (5105/5105), 2.45 MiB | 611.00 KiB/s, done.
Resolving deltas: 100% (2504/2504), done.
```

```
(kali㉿kali)-[/var/www/html]
└─$ ls
DVWA  index.html  index.nginx-debian.html

(kali㉿kali)-[/var/www/html]
└─$ sudo chmod -R 777 DVWA
```


Редактирование файл

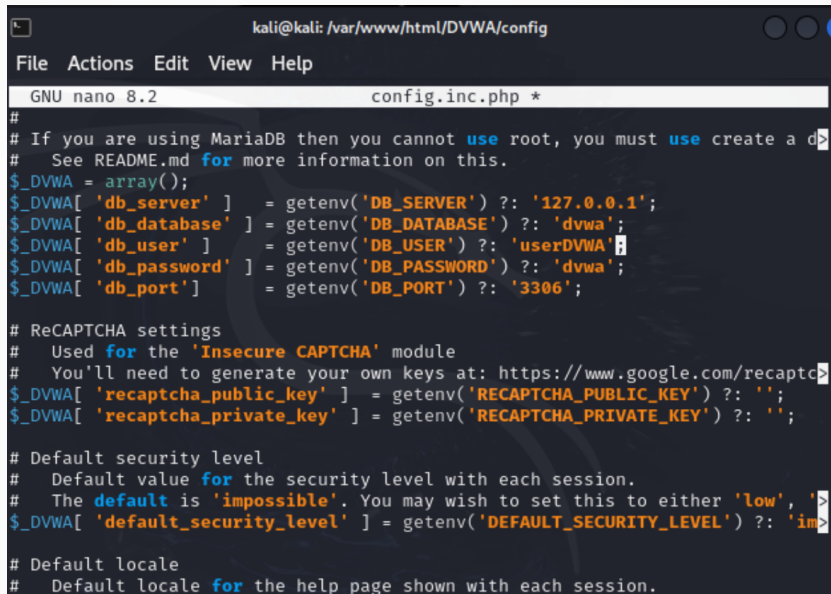

```
kali@kali: /var/www/html/DVWA/config
File Actions Edit View Help
GNU nano 8.2 config.inc.php *
#
# If you are using MariaDB then you cannot use root, you must use create a d>
# See README.md for more information on this.
$_DVWA = array();
$_DVWA[ 'db_server' ] = getenv( 'DB_SERVER' ) ?: '127.0.0.1';
$_DVWA[ 'db_database' ] = getenv( 'DB_DATABASE' ) ?: 'dvwa';
$_DVWA[ 'db_user' ] = getenv( 'DB_USER' ) ?: 'userDVWA';
$_DVWA[ 'db_password' ] = getenv( 'DB_PASSWORD' ) ?: 'dvwa';
$_DVWA[ 'db_port' ] = getenv( 'DB_PORT' ) ?: '3306';

# ReCAPTCHA settings
# Used for the 'Insecure CAPTCHA' module
# You'll need to generate your own keys at: https://www.google.com/recaptc>
$_DVWA[ 'recaptcha_public_key' ] = getenv( 'RECAPTCHA_PUBLIC_KEY' ) ?: '';
$_DVWA[ 'recaptcha_private_key' ] = getenv( 'RECAPTCHA_PRIVATE_KEY' ) ?: '';

# Default security level
# Default value for the security level with each session.
# The default is 'impossible'. You may wish to set this to either 'low', '>
$_DVWA[ 'default_security_level' ] = getenv( 'DEFAULT_SECURITY_LEVEL' ) ?: 'im>

# Default locale
# Default locale for the help page shown with each session.
```

```
(kali@kali)-[/var/www/html/DVWA/config]
$ sudo systemctl start mysql


(kali@kali)-[/var/www/html/DVWA/config]
$ systemctl status mysql
● mariadb.service - MariaDB 11.4.3 database server
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; disabled; pres>
   Active: active (running) since Sat 2025-03-15 05:19:13 EDT; 11s ago
 Invocation: 6e448550999a40f9ba3f89e6d0488310
    Docs: man:mariadb(8)
          https://mariadb.com/kb/en/library/systemd/
   Process: 21438 ExecStartPre=/usr/bin/install -m 755 -o mysql -g root -d >
   Process: 21445 ExecStartPre=/bin/sh -c systemctl unset-environment _WSRE>
   Process: 21458 ExecStartPre=/bin/sh -c [ ! -e /usr/bin/galera_recovery ]>
   Process: 21596 ExecStartPost=/bin/sh -c systemctl unset-environment _WSR>
   Process: 21598 ExecStartPost=/etc/mysql/debian-start (code=exited, statu>
 Main PID: 21542 (mariabdb)
    Status: "Taking your SQL requests now..."
   Tasks: 14 (limit: 14651)
  Memory: 215.9M (peak: 220.2M)
     CPU: 1.923s
   CGroup: /system.slice/mariadb.service
           └─21542 /usr/sbin/mariabdb
```

```
create user 'userDVWA'@'127.0.0.1' identified by "dvwa" at line 3
MariaDB [(none)]> create user 'userDVWA'@'127.0.0.1' identified by "dvwa";
Query OK, 0 rows affected (0.009 sec)

MariaDB [(none)]> grant all privileges on dvwa.* to 'userDVWA'@'127.0.0.1' id
entified by 'dvwa';
Query OK, 0 rows affected (0.003 sec)

MariaDB [(none)]> exit;
Bye
```

Редактирование файла

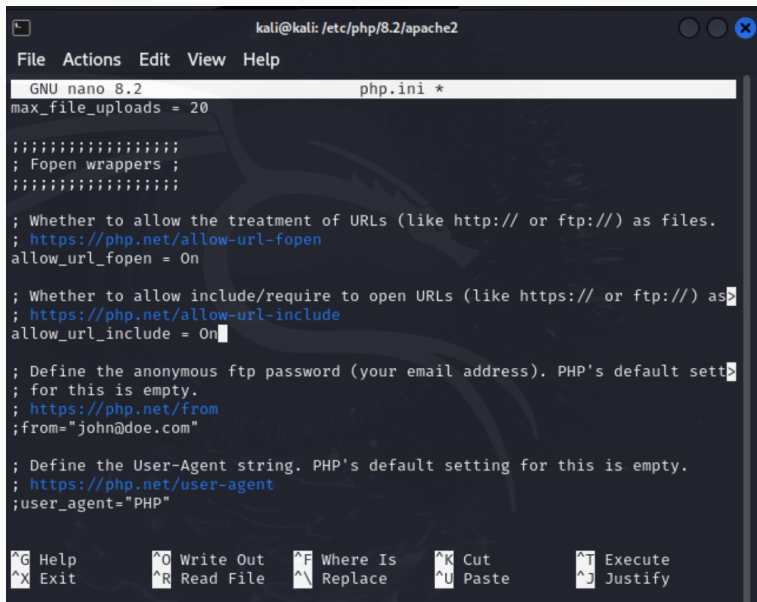

```
kali@kali: /etc/php/8.2/apache2
File Actions Edit View Help
GNU nano 8.2 php.ini *
max_file_uploads = 20

;;;;;;;;;;
; Fopen wrappers ;
;;;;;;;;;;

; Whether to allow the treatment of URLs (like http:// or ftp://) as files.
; https://php.net/allow-url-fopen
allow_url_fopen = On

; Whether to allow include/require to open URLs (like https:// or ftp://) as
; https://php.net/allow-url-include
allow_url_include = On

; Define the anonymous ftp password (your email address). PHP's default sett
; for this is empty.
; https://php.net/from
;from="john@doe.com"

; Define the User-Agent string. PHP's default setting for this is empty.
; https://php.net/user-agent
;user_agent="PHP"

^G Help      ^O Write Out  ^F Where Is   ^K Cut        ^T Execute
^X Exit      ^R Read File  ^\ Replace    ^_ Paste      ^J Justify
```

```
(kali㉿kali)-[/etc/php/8.2/apache2]
```

```
$ sudo systemctl start apache2
```

```
(kali㉿kali)-[/etc/php/8.2/apache2]
```

```
$ systemctl status start apache2
```

Unit start.service could not be found.

● apache2.service - The Apache HTTP Server

Loaded: loaded (/usr/lib/systemd/system/apache2.service; **disabled**; pres>

Active: **active (running)** since Sat 2025-03-15 05:36:17 EDT; 4s ago

Invocation: 0ddc53fde7b1407a8aafa513a6362947

Docs: <https://httpd.apache.org/docs/2.4/>

Process: 29929 ExecStart=/usr/sbin/apachectl start (code=exited, status=>

Main PID: 29953 (apache2)

Tasks: 6 (limit: 2219)

Memory: 19.9M (peak: 20.1M)

CPU: 100ms

CGroup: /system.slice/apache2.service

└─29953 /usr/sbin/apache2 -k start

└─29956 /usr/sbin/apache2 -k start


└─29957 /usr/sbin/apache2 -k start

└─29958 /usr/sbin/apache2 -k start

└─29959 /usr/sbin/apache2 -k start

└─29960 /usr/sbin/apache2 -k start

Mar 15 05:36:17 kali systemd[1]: Starting apache2.service - The Apache HTTP >

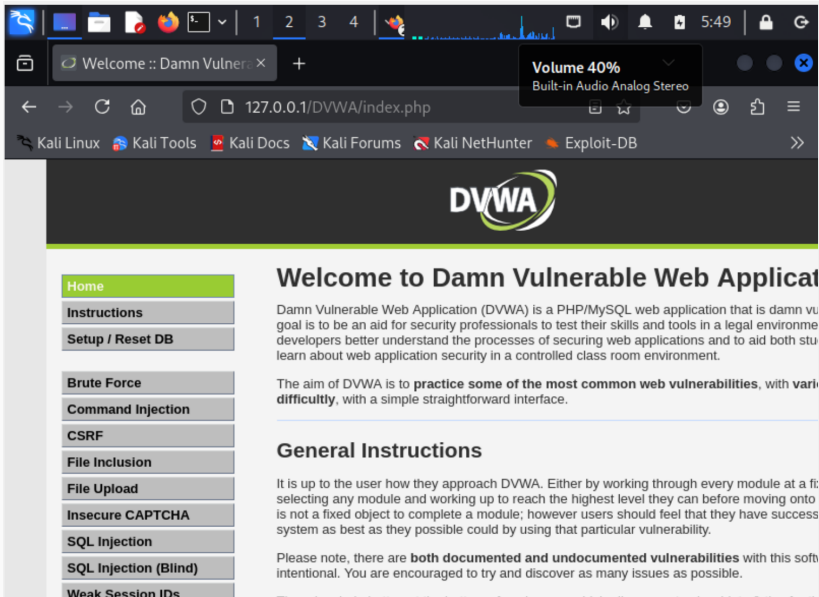

Volume 40%
Built-in Audio Analog Stereo

Welcome :: Damn Vulnerable Web Application

127.0.0.1/DVWA/index.php

Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB

DVWA

Home

Instructions

Setup / Reset DB

Brute Force

Command Injection

CSRF

File Inclusion

File Upload

Insecure CAPTCHA

SQL Injection

SQL Injection (Blind)

Weak Session IDs

Welcome to Damn Vulnerable Web Application

Damn Vulnerable Web Application (DVWA) is a PHP/MySQL web application that is damn vulnerable. Its main goal is to be an aid for security professionals to test their skills and tools in a legal environment, to help developers better understand the processes of securing web applications and to aid both students and researchers to learn about web application security in a controlled class room environment.

The aim of DVWA is to **practice some of the most common web vulnerabilities**, with varying degrees of **difficulty**, with a simple straightforward interface.

General Instructions

It is up to the user how they approach DVWA. Either by working through every module at a fixed pace, or by selecting any module and working up to reach the highest level they can before moving onto the next. The application is not a fixed object to complete a module; however users should feel that they have successfully completed a system as best as they possibly could by using that particular vulnerability.

Please note, there are **both documented and undocumented vulnerabilities** with this software. You are encouraged to try and discover as many issues as possible.

Результаты

В ходе лабораторной работы я установила DVWA на дистрибутив Kali Linux.