



# Multitenant Database 12c /18c

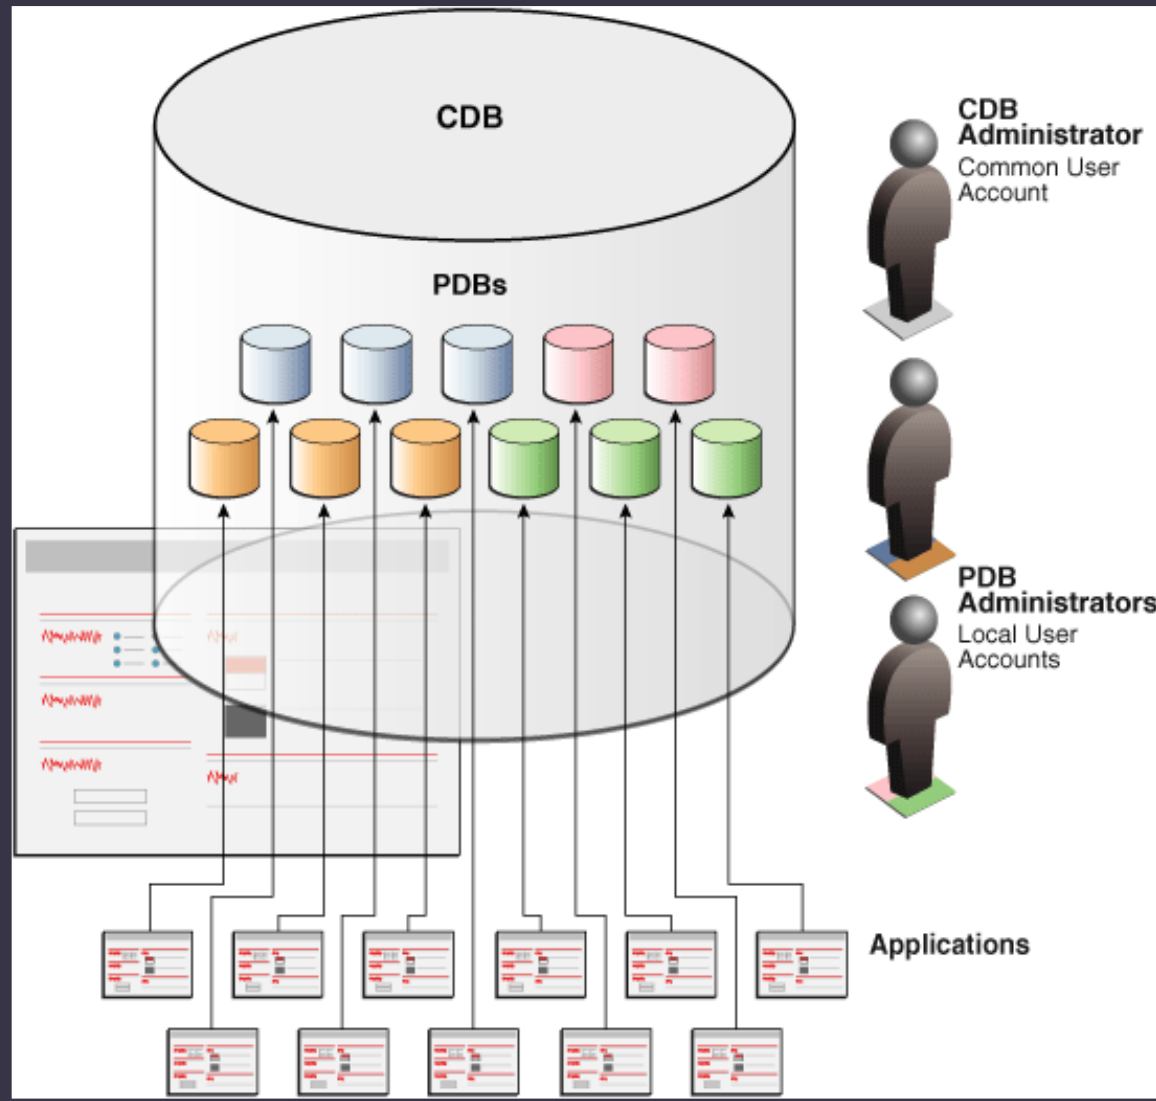


# Multitenant Database 12c /18c

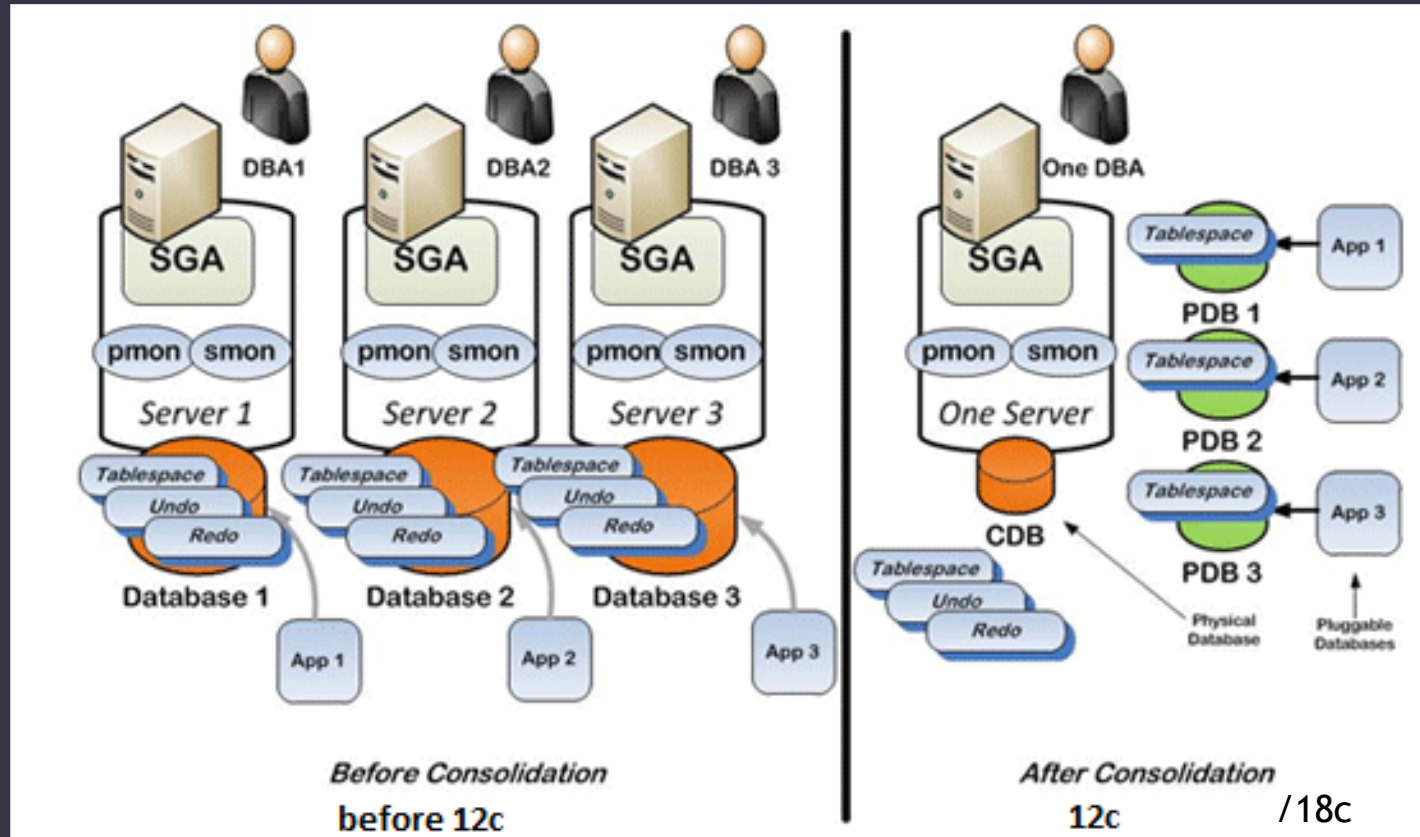

- ✓ Reduce cost
- ✓ Saving resources
- ✓ Easy maintenance
- ✓ Easy backup
- ✓ Easy cloning
- ✓ Separation of rules ( PDB Admin vs CDB Admin )

# Multitenant Database 12c /18c

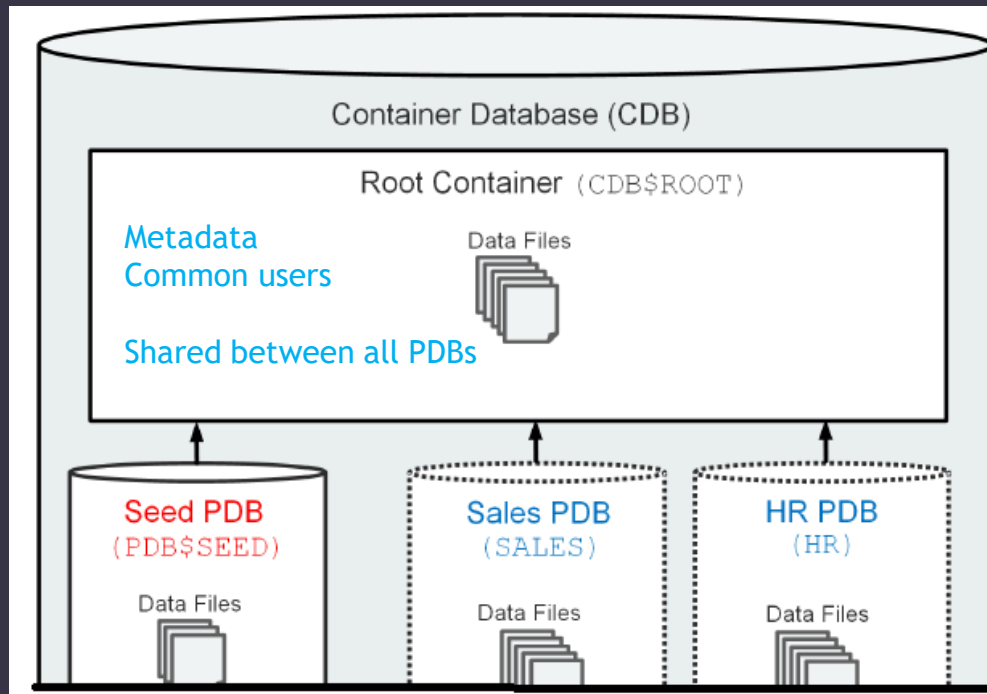

Every CDB has the following containers:

1. Exactly one CDB root container called **CDB\$ROOT**
2. Seed PDB called **PDB\$SEED** ( it is a template )
3. Zero or more user-created PDBs

**Note:** starting from 12c R2 , we have something called application container, but it is out of scope of this course.  
**Application Container is optional.**  
Application container seems to be a mini CDB, within CDB root.

# Thank You