

# Cucumber Report

Jun 9, 2024, 11:06:33 AM

Start : Jun 09, 11:06:22.348 AM

End : Jun 09, 11:06:30.816 AM

Duration : 8.468 s

Features


Scenarios

Steps

PASSED - 1  
FAILED - 0  
SKIPPED - 0

PASSED - 1  
FAILED - 0  
SKIPPED - 0

PASSED - 2  
FAILED - 0  
SKIPPED - 0

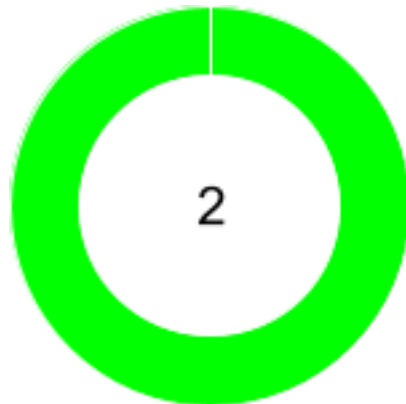

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Title of your feature</u>	8.468 s	1	1	0	0	2	2	0	0

<b>TAG</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>
@abc	1	1	0	0	1	1	0	0
@VerifyloginwithInvalidCredentials	1	1	0	0	1	1	0	0
@tag	1	1	0	0	1	1	0	0





#	Feature Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	1	1	0	0	8.468 s






#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	<u>running abc tag</u>	2	2	0	0	8.464 s

## Title of your feature

<b>PASSED</b>	<b>DURATION - 8.468 s</b>	Scenarios Total - 1 Pass - 1 Fail - 0 Skip - 0		Steps Total - 2 Pass - 2 Fail - 0 Skip - 0	
/ 11:06:22.348 AM // 11:06:30.816 AM /					

## running abc tag

<div>PASSED</div>	<div>DURATION - 8.464 s</div>		<div>Steps</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div>	
/ 11:06:22.352 AM // 11:06:30.816 AM /				
Title of your feature				
@abc @VerifyloginwithInvalidCredentials @tag				
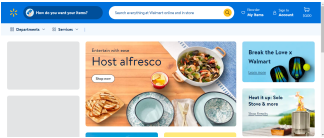
#	Step / Hook Details	Status	Duration
1	Given I want to write a step with precondition	PASSED	0.002 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.681 s
	image 		
2	And some other precondition	PASSED	0.001 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	1.485 s
	image 