

Cucumber Report

Jul 25, 2024, 4:03:05 PM

Start : Jul 25, 4:01:43.178 PM

End : Jul 25, 4:03:03.950 PM

Duration : 1 m 20.772 s

Features






PASSED - 0
FAILED - 3
SKIPPED - 0

Scenarios

PASSED - 1
FAILED - 8
SKIPPED - 0

Steps


PASSED - 11
FAILED - 2
SKIPPED - 29

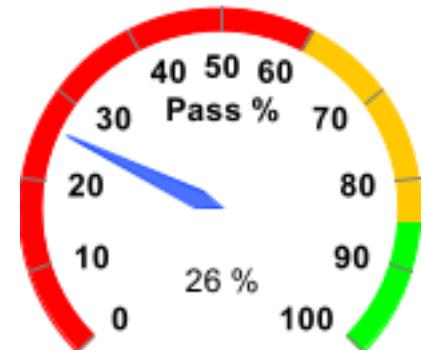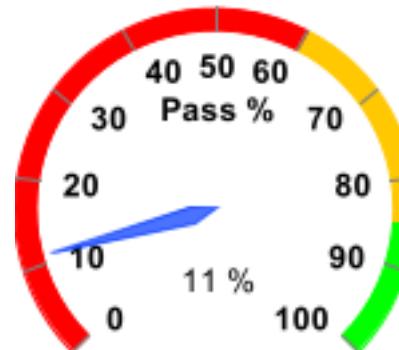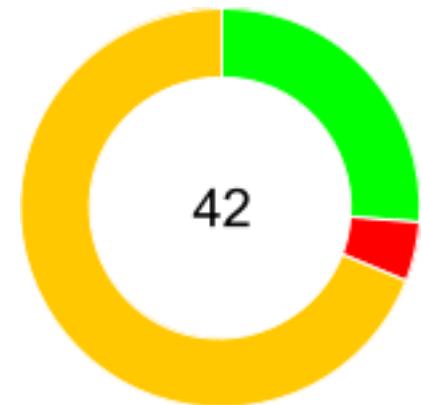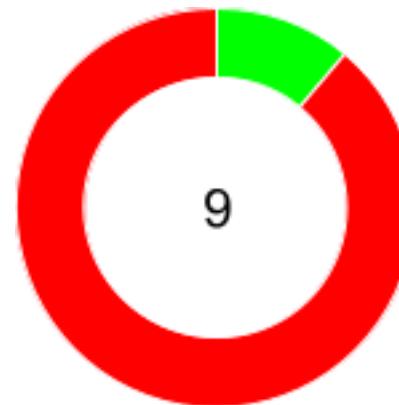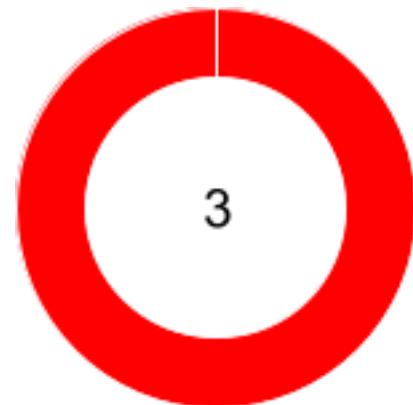


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Add to cart</u>	1 m 20.572 s	4	1	3	0	19	11	2	6
<u>checkout</u>	0.101 s	3	0	3	0	15	0	0	15
<u>View & Edit my Shopping Cart</u>	0.056 s	2	0	2	0	8	0	0	8

#	Feature Name	Scenario Name
1	<u>Add to cart</u>	<u>validate add to cart</u>
2		<u>red border</u>
3		<u>Add multiple products to cart</u>
4	<u>checkout</u>	<u>checkout as a guest</u>
5		<u>Check out as a registered customer</u>
6		<u>billing and delivery</u>
7	<u>View & Edit my Shopping Cart</u>	<u>Viewing my shopping cart</u>
8		<u>Changing the quantity of a product in the cart</u>

TAG	Name	Scenario				Feature			
		T	P	F	S	T	P	F	S
@confirmationmsg		1	1	0	0	1	0	1	0
@AddToCart		4	1	3	0	1	0	1	0
@validatecart		1	0	1	0	1	0	1	0
@borders		1	0	1	0	1	0	1	0
@multipleproduct		1	0	1	0	1	0	1	0
@checkout		3	0	3	0	1	0	1	0
@checkout1		1	0	1	0	1	0	1	0
@checkoutascustomer		1	0	1	0	1	0	1	0
@billing&delivery		1	0	1	0	1	0	1	0
@ViewEditMyShoppingCart		2	0	2	0	1	0	1	0

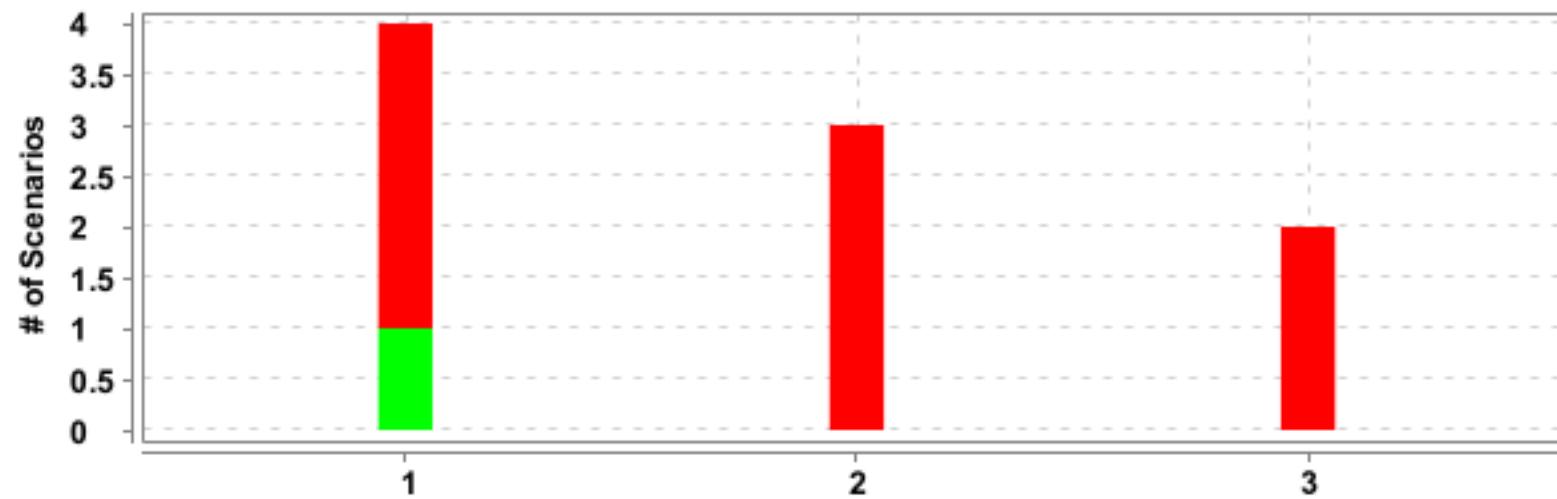


#	Feature Name	T	P	F	S	Duration
1	<u>Add to cart</u>	4	1	3	0	1 m 20.572 s
2	<u>checkout</u>	3	0	3	0	0.101 s
3	<u>View & Edit my Shopping Cart</u>	2	0	2	0	0.056 s

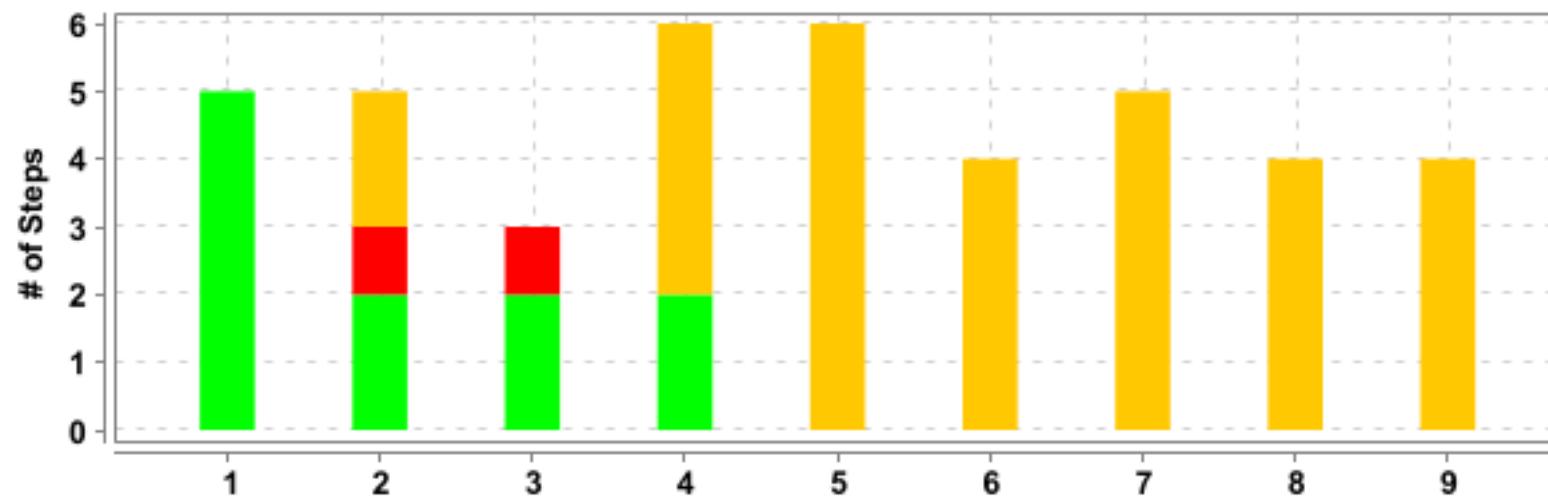



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Add to cart</u>	<u>verify the confirmation message after adding to cart</u>	5	5	0	0	32.980 s
2		<u>validate add to cart</u>	5	2	1	2	15.241 s
3		<u>red border</u>	3	2	1	0	17.541 s
4		<u>Add multiple products to cart</u>	6	2	0	4	14.670 s
5	<u>checkout</u>	<u>checkout as a guest</u>	6	0	0	6	0.034 s
6		<u>Check out as a registered customer</u>	4	0	0	4	0.027 s
7		<u>billing and delivery</u>	5	0	0	5	0.021 s
8	<u>View & Edit my Shopping Cart</u>	<u>Viewing my shopping cart</u>	4	0	0	4	0.027 s
9		<u>Changing the quantity of a product in the cart</u>	4	0	0	4	0.020 s


Add to cart

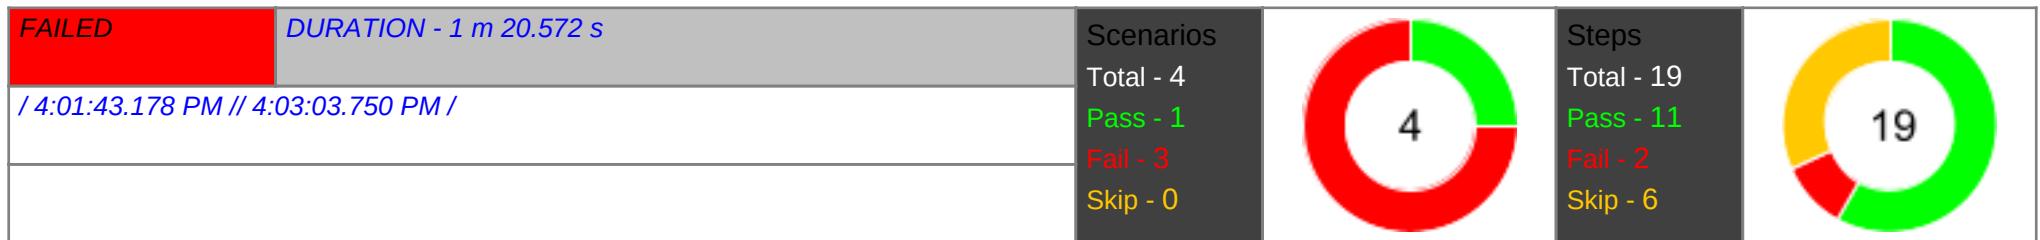


verify the confirmation message after adding to cart

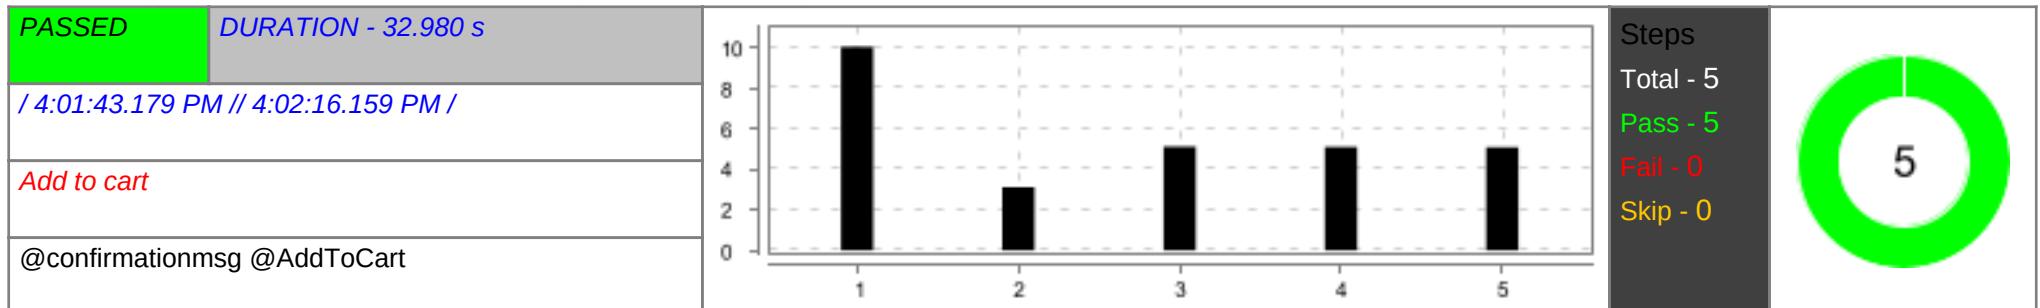



#	Step / Hook Details	Status	Duration
1	Given User navigates to Homepage AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	10.037 s
2	Then select a product to the cart from the product view page AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	3.112 s
3	When the user clicks on add to cart	PASSED	5.120 s

#	Step / Hook Details	Status	Duration
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	0.162 s
4	Then He should see a confirmation message that says: "Success: You have added [product name] to your shopping cart!"	PASSED	5.098 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	0.154 s
5	And the number of items in my cart should increase by one	PASSED	5.086 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	0.144 s


validate add to cart

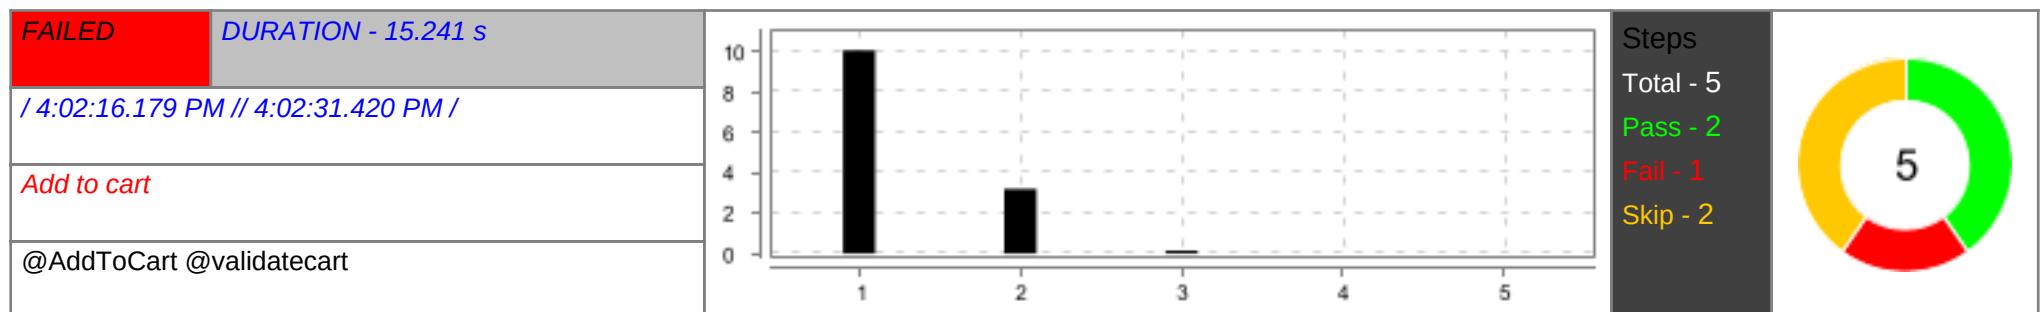

#	Step / Hook Details	Status	Duration
1	Given User navigates to Homepage	PASSED	10.050 s

#	Step / Hook Details	Status	Duration
	<p>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)</p> <p>image</p> 	PASSED	0.270 s
2	Then select a product to the cart from the product view page	PASSED	3.193 s
	<p>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)</p> <p>image</p> 	PASSED	0.238 s
3	<p>When validate the add to cart button should be enabled only if the product is in stock</p> <pre>java.lang.AssertionError: The 'Add to Cart' button should be disabled at org.junit.Assert.fail(Assert.java:88) at org.junit.Assert.assertTrue(Assert.java:41) at org.junit.Assert.assertFalse(Assert.java:64) at com.pdl.pages.KcAddToCartPage.validateCart(KcAddToCartPage.java:95) at Step_definitions.AddToCart_StepDef. validate_the_add_to_cart_button_should_be_enabled_only_if_the_product_is_in_stock(AddToCart_StepDef.java:74) at ?.validate the add to cart button should be enabled only if the product is in stock(file:///D:/eclipse%20internship%20workspace/EAL_QA_TeamA/src/test/resources/features/ManufacturerPortal/kcAddToCart.feature:17) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.142 s
	<p>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)</p> <p>image</p> 	PASSED	0.289 s
4	Then confirmation message should show the product name, image and price	SKIPPED	0.000 s
5	And Verify that available product is added to the cart	SKIPPED	0.002 s


red border

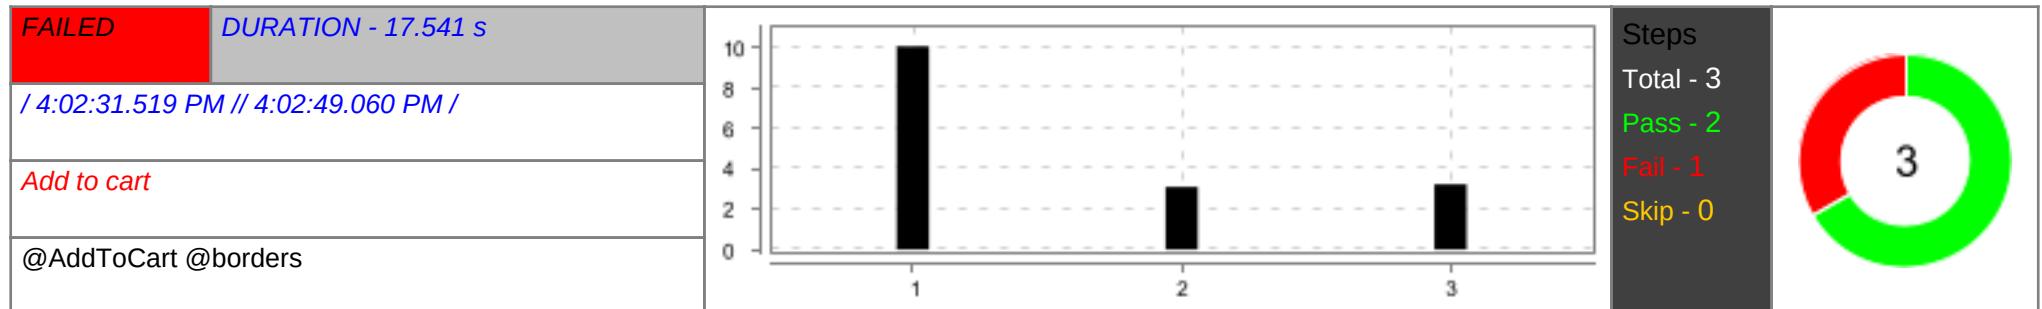

#	Step / Hook Details	Status	Duration
1	Given User navigates to Homepage AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	10.044 s
2	Then select a product to the cart from the product view page AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	3.098 s
3	When hover over on the add to cart button, A Red border should appear surrounding it org.junit.ComparisonFailure: The border color is not red expected:<rgb([255, 0, 0])> but was:<rgb([68, 68, 68])> at org.junit.Assert.assertEquals(Assert.java:115) at com.pdl.pages.KcAddToCartPage.redborders(KcAddToCartPage.java:147) at Step_definitions.AddToCart_StepDef.hover_over_on_the_add_to_cart_button_a_red_border_should_appear_surrounding_it(AddToCart_StepDef.java:99) at ?.hover over on the add to cart button, A Red border should appear surrounding it(file:///D:/eclipse%20internship%20workspace/EAL_QA_TeamA/src/test/resources/features/ManufacturerPortal/kcAddToCart.feature:24) * Not displayable characters are replaced by '?'.	FAILED	3.230 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image	PASSED	0.161 s

#	Step / Hook Details	Status	Duration
			


Add multiple products to cart

FAILED	DURATION - 14.670 s		Steps Total - 6 Pass - 2 Fail - 0 Skip - 4	
/ 4:02:49.080 PM // 4:03:03.750 PM /				
Add to cart				
@multipleproduct @AddToCart				


#	Step / Hook Details	Status	Duration
1	Given User navigates to Homepage	PASSED	10.037 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	0.325 s
2	Then select a product to the cart from the product view page	PASSED	3.320 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)	FAILED	0.015 s

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.takeScreenshot(Hooks.java:111)		
3	Then the product page should have an Add to Cart button	SKIPPED	0.000 s
4	When I click on the Add to Cart button for multiple products	SKIPPED	0.000 s
5	Then all the products should be added to my cart	SKIPPED	0.000 s
6	Then the cart icon should display the updated number of items	SKIPPED	0.000 s

checkout

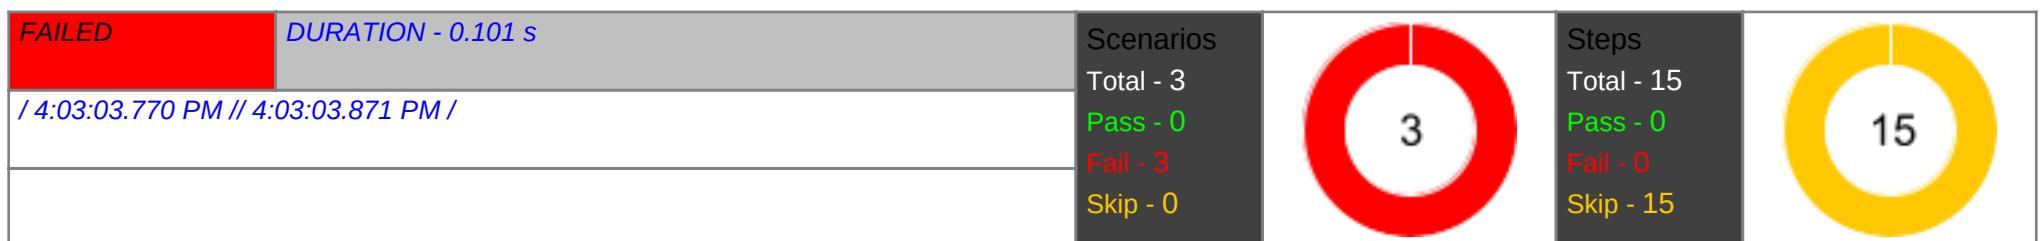

checkout as a guest

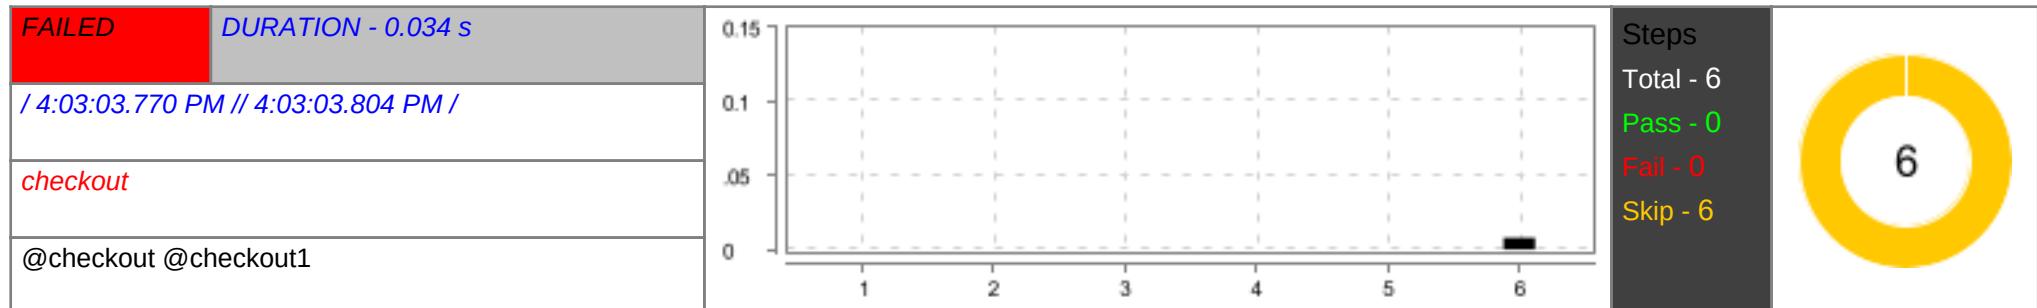

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</pre>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) </pre>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)		
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)	FAILED	0.011 s


#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) </pre>		

#	Step / Hook Details	Status	Duration
	<pre>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		
1	Given User navigates to homepage	SKIPPED	0.000 s
2	Then search a product, and click on add to cart	SKIPPED	0.000 s
3	Then navigate to shopping cart and click on it	SKIPPED	0.000 s
4	When click on checkout bouton.	SKIPPED	0.000 s
5	Then I should see an option to checkout as a guest	SKIPPED	0.000 s
6	Then I should be able to enter my billing details, delivery details, delivery method, payment method and confirm my order	SKIPPED	0.008 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.005 s
	<pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) </pre>		

#	Step / Hook Details	Status	Duration
	<pre>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		

Check out as a registered customer

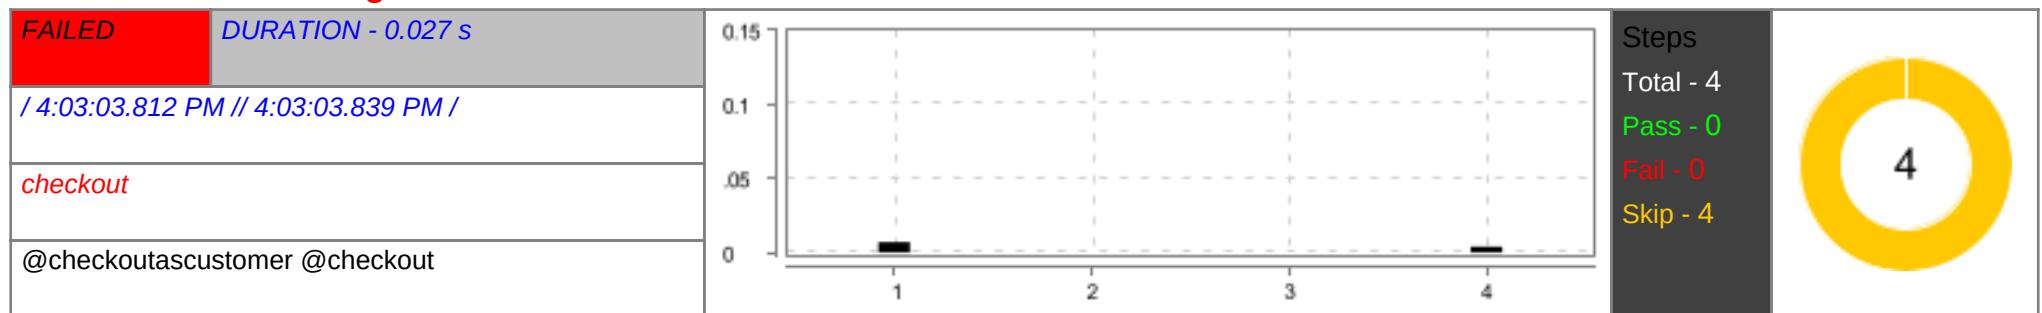

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: </pre>		

#	Step / Hook Details	Status	Duration
	<pre>normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCode.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</pre>	FAILED	0.000 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, </pre>		

#	Step / Hook Details	Status	Duration
	webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCode.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)		
1	Given I have some products in my shopping cart and I am logged in to my account	SKIPPED	0.007 s
2	When I click on the checkout button on the shopping cart page	SKIPPED	0.000 s
3	Then I should see an option to check out with my account	SKIPPED	0.000 s
4	And I should be able to use my saved billing and delivery details or enter new ones, choose a delivery method, a payment method and confirm my order	SKIPPED	0.004 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...},</pre>		

#	Step / Hook Details	Status	Duration
	<pre>fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		

billing and delivery

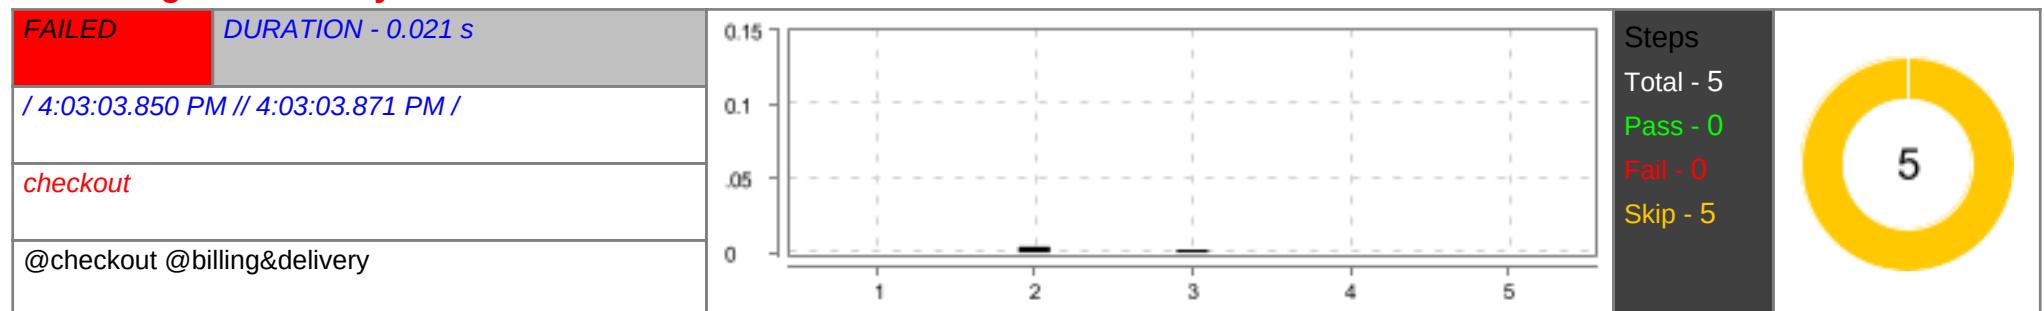

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)</p>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		

#	Step / Hook Details	Status	Duration
	<p>Caused by: java.lang.reflect.InvocationTargetException</p> <pre>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</pre>	FAILED	0.006 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43) </pre>		
1	Given the user is already in my account page	SKIPPED	0.000 s
2	When the user clicks on address book, he should see address book entries information	SKIPPED	0.004 s
3	Then The saved billing and delivery details should be pre-filled in the form and editable	SKIPPED	0.002 s
4	And The delivery method and payment method should have at least one option available	SKIPPED	0.000 s
5	And The order confirmation page should show the order number, order details, payment details and delivery details	SKIPPED	0.000 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.000 s
	<pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) </pre>		


#	Step / Hook Details	Status	Duration
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		

#	Step / Hook Details	Status	Duration
	<p>Caused by: java.lang.reflect.InvocationTargetException</p> <pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		

[View & Edit my Shopping Cart](#)

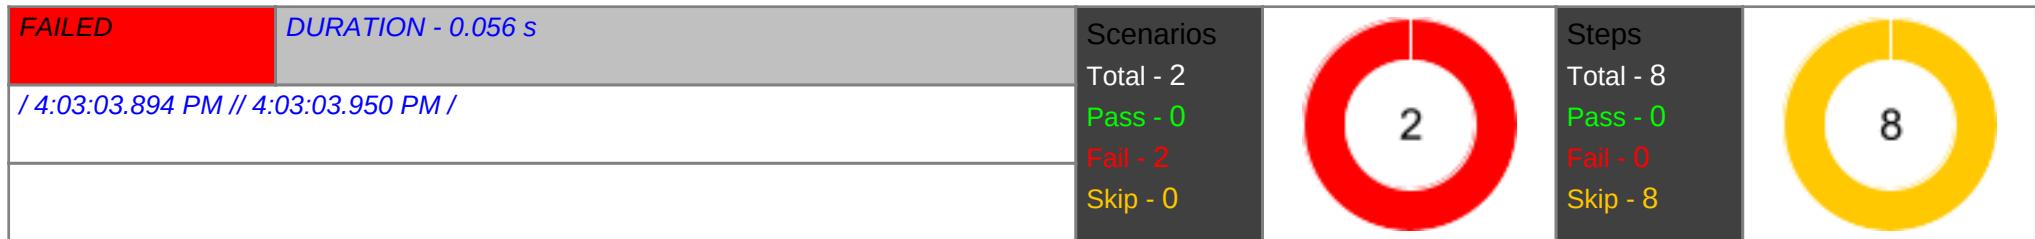

Viewing my shopping cart

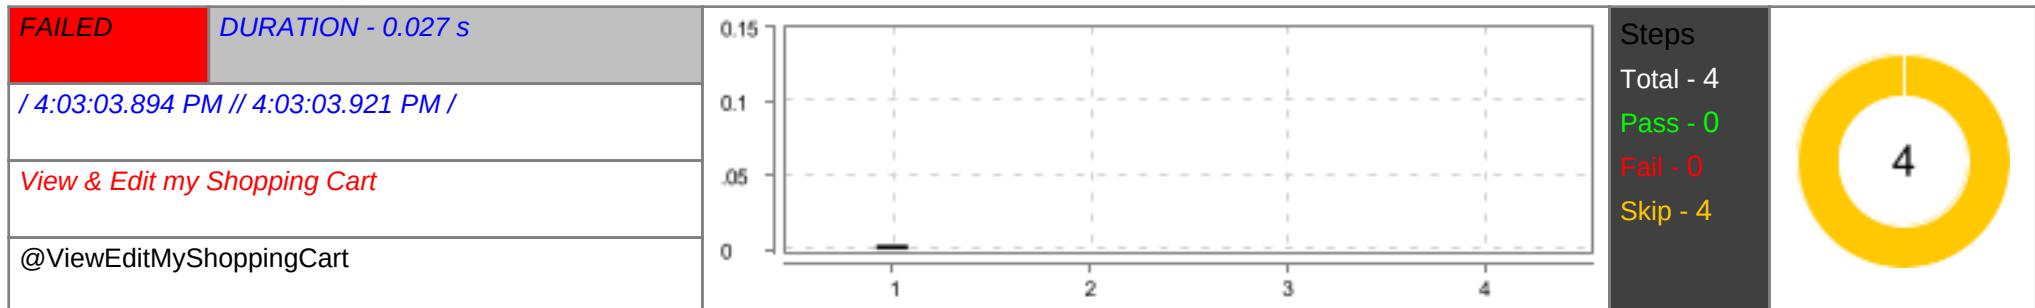

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</pre>	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43) </pre>		
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) </pre>	FAILED	0.007 s


#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCode.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)		
1	Given I have added some products to the cart	SKIPPED	0.003 s
2	When I click on the cart icon on the top right corner of the page	SKIPPED	0.000 s
3	Then I should see a summary of the products in the cart with their images, names, quantities, prices and totals	SKIPPED	0.000 s
4	And I should see the subtotal and total amount of my order	SKIPPED	0.000 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.003 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43) </pre>		

Changing the quantity of a product in the cart

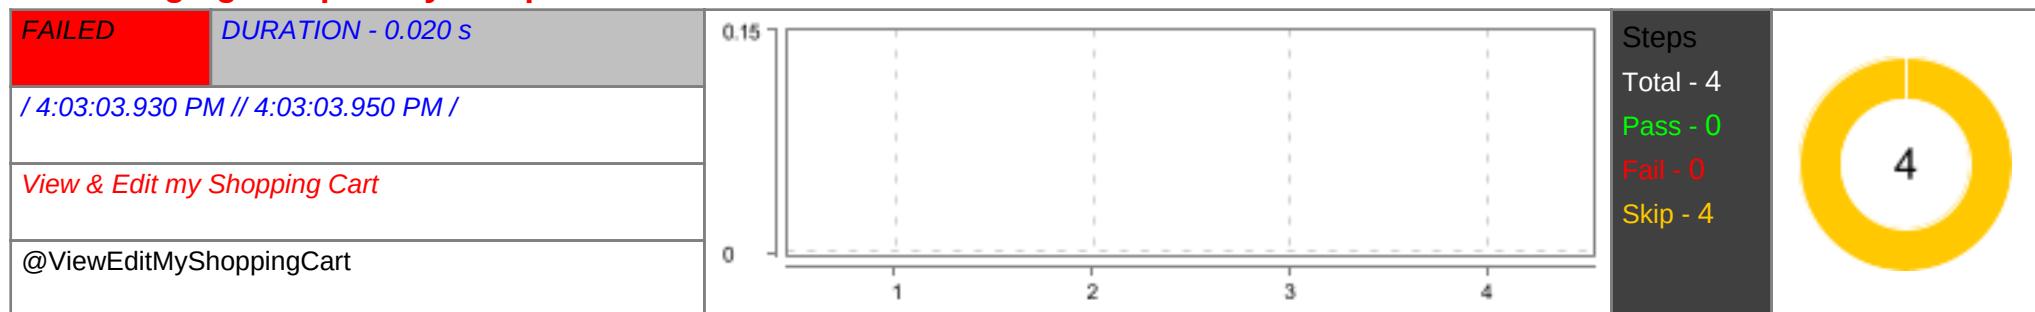

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) </pre>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor21.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) </pre>		

#	Step / Hook Details	Status	Duration
	<pre>... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor21.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: </pre>		

#	Step / Hook Details	Status	Duration
	<pre>126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		
1	Given I am on the shopping cart page	SKIPPED	0.000 s
2	When I change the quantity of a product and click on the refresh button	SKIPPED	0.000 s
3	Then I should see the updated quantity and price of the product	SKIPPED	0.000 s
4	And I should see the updated subtotal and total amount of my order	SKIPPED	0.000 s
	<p>AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90)</pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor21.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.185) Build info: version: '4.22.0', revision: 'c5f3146703' System info: os.name: </pre>		

#	Step / Hook Details	Status	Duration
	<pre>'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.9' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e134bda04b290b102e78fa9f6af583ba, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.185, chrome: {chromedriverVersion: 126.0.6478.182 (5b5d8292ddf..., userDataDir: C:\Users\kathi\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62695}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62695/devtoo..., se:cdpVersion: 126.0.6478.185, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e134bda04b290b102e78fa9f6af583ba at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:855) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:43)</pre>		