Cucumber Report

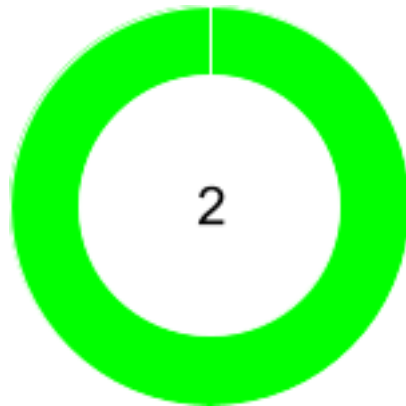| **Start : Jun 10, 7:19:04.068 AM**	**End : Jun 10, 7:19:14.636 AM**	**Duration : 10.568 s**
Features	Scenarios	Steps
PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 2 FAILED - 0 SKIPPED - 0

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Title of your feature	10.568 s	1	1	0	0	2	2	0	0

TAG	Scenario				Feature			
Name	**T**	**P**	**F**	**S**	**T**	**P**	**F**	**S**
@tag	1	1	0	0	1	1	0	0
@def	1	1	0	0	1	1	0	0

#	Feature Name	T	P	F	S	Duration
1	Title of your feature	1	1	0	0	10.568 s
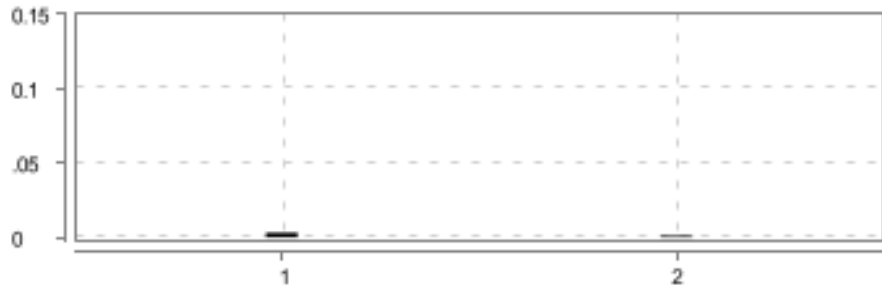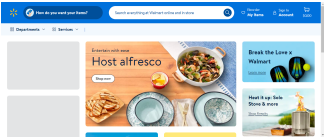
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Title of your feature	running DEF tag	2	2	0	0	10.563 s

Title of your feature

PASSED	DURATION - 10.568 s	Scenarios		Steps	
		Total - 1		Total - 2	
/ 7:19:04.068 AM // 7:19:14.636 AM /		Pass - 1		Pass - 2	
		Fail - 0	1	Fail - 0	2
		Skip - 0		Skip - 0	

running DEF tag

PASSED	DURATION - 10.563 s		Steps	
/ 7:19:04.073 AM // 7:19:14.636 AM /			Total - 2	
Title of your feature			Pass - 2	2
			Fail - 0	
@tag @def			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given I want to write a step with precondition 2	PASSED	0.003 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.736 s
	image		
2	And some other precondition 2	PASSED	0.001 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	2.463 s
	image		