# Workshop 02

1. Your project must be named <StudentCode>_ws1. E.g. CE123456_WS2
2. Create a database named `db_<StudentCode>_WS2`. E.g. `db_CE123456_WS2`
3. `In db_<StudentCode>_WS2 database:`
   Create a table named "***category***" that has a structure as below:

| | |
|---|---|
| **cat_id** | int, PK |
| **cat_name** | nvarchar(50) |
| **cat_description** | nvarchar(1000) |

Create another table named "***product***" that has a structure as below:

| | |
|---|---|
| **pro_id** | int, PK, auto-increment (IDENTITY(1,1)) |
| **pro_name** | varchar(50) |
| **pro_price** | bigint |
| **pro_quantity** | int |
| **pro_description** | nvarchar(500) |
| **cat_id** | int, FK |

Create another table named "***users***" that has a structure as below:

| | |
|---|---|
| **id** | int, PK |
| **username** | varchar(100), unique key |
| **password** | varchar(100) |
| **role** | int |

4. You must input 03 samples for category table and 05 samples for product table as below

| **Category** | | |
|---|---|---|
| 1 | Apple | |
| 2 | Samsung | |
| 3 | Xiaomi | |

| **Product** | | | | | |
|---|---|---|---|---|---|
| 1 | IPhone 15 | 22.000.000 | 20 | New | 1 |
| 2 | IPhone 14 | 17.000.000 | 10 | Like New | 1 |
| 3 | Samsung S24 | 22.000.000 | 15 | New | 2 |
| 4 | Redmi K30 5G | 5.500.000 | 30 | China | 3 |


| | | | | | |
|---|---|---|---|---|---|
| 5 | Redmi Note 14 | 13.000.000 | 12 | China | 3 |

| users | | | |
|---|---|---|---|
| **id** | **username** | **password** | **role** |
| 1 | admin | e10adc3949ba59abbe56e057f20f883e | 1 |
| 2 | guest | 900150983cd24fb0d6963f7d28e17f72 | 2 |

**URLs for functions in this workshop**:

| **Function** | **URL** |
|---|---|
| Login | http://localhost:8080/login |
| List of Product | http://localhost:8080/product |
| Add new a product | http://localhost:8080/product?view=create |
| Edit a product | http://localhost:8080/product?view=update&id=3 |
| Delete a product | http://localhost:8080/product?view=delete&id=3 |
| Logout | http://localhost:8080/logout |

5. Write a login page:

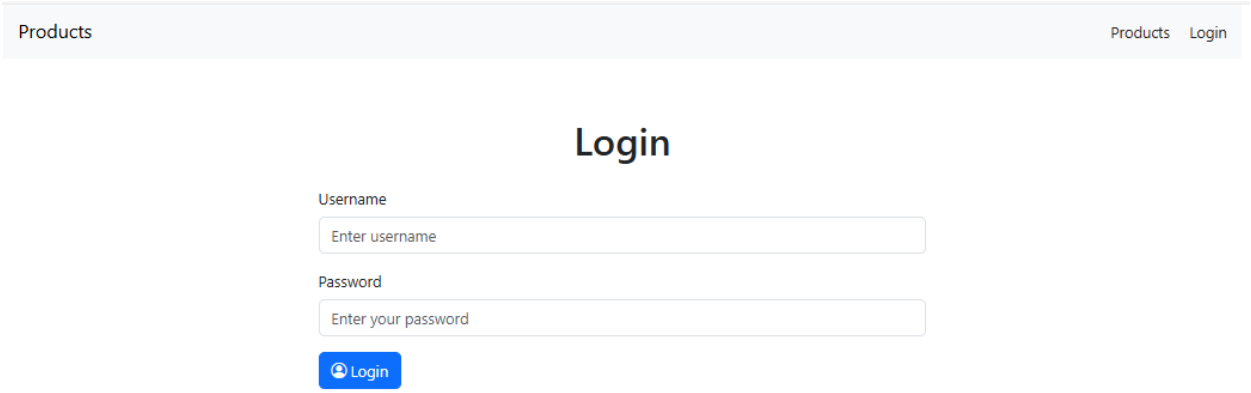


| **Element** | **Html tag** | **Attribute** | **Note** |
|---|---|---|---|
| Page title | h1 | | value=”Login” |
| Username input | input | #u_id | name=”username” |
| Password input | input | #u_pwd | name=”password” |
| Login button | input/button | #submit | |


a. Validate the inputted data in login form.

b. User must login to access other resources.

c. If login fails, show the error is "The user or password are wrong".


d. The website will be redirected to the "***product***" URL when the login is success successfully. Using cookie to save login information.


6. Create a page named "***product.jsp***" page to show all of products in database.

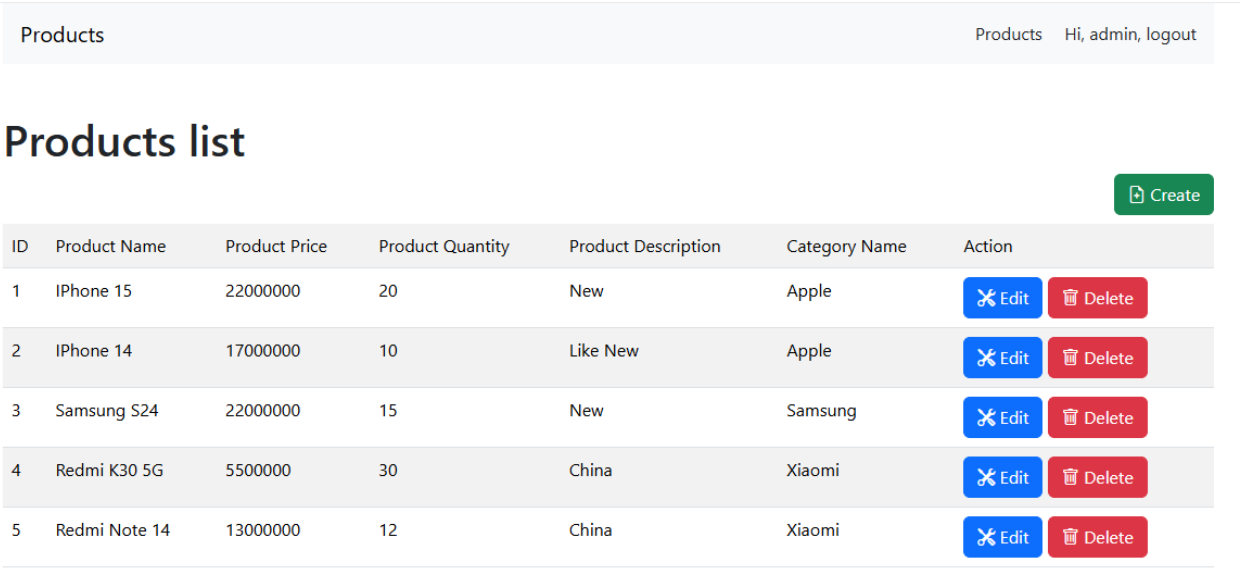


| Element | Html tag | Attribute | Note |
|---|---|---|---|
| Page title | h1 | | value = Products list |
| Add New button | a | .btn .btn-success | |
| Edit buttons | a | .btn .btn-primary | |
| Delete buttons | a | .btn .btn-danger | |

7. When the user clicks the "***Create***" button, they will be redirected to "***product?view=create"***.

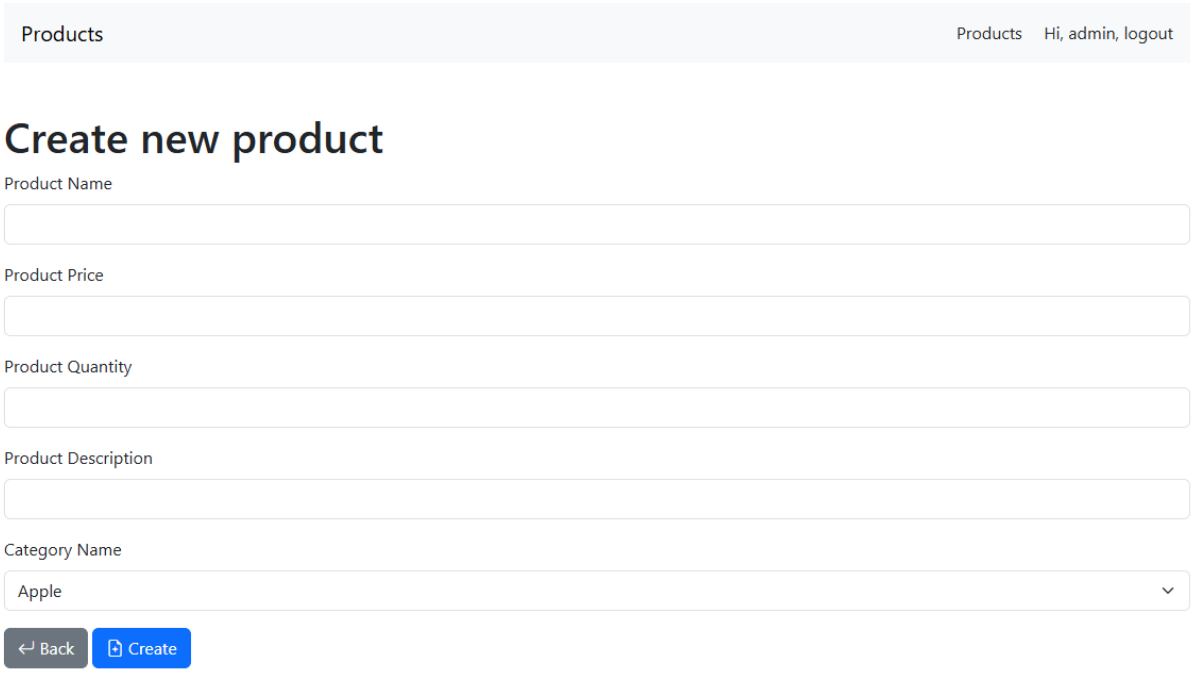



| Element | Html tag | Attribute | Note |
|---|---|---|---|
| Page title | h1 | | value = "Create new product" |
| Product Name input | input | #pName | |
| Product Price input | input | #pPrice | |
| Product Quantity input | input | #pQuantity | |
| Product Description input | input | #pDescription | |
| Category Name select | select | #cId |  |
| Back button | a/button | #back | Go back to "Product" |
| Create button | input/button | #submit | |




a. The user must input all information for the product to insert into database. You must validate the inputted data before submitting to db.

b. At the Category Name, you must show the names of categories for user to choose, but when the user clicks on the Create button, you must send the Category ID.
c. The website will be redirected to "p***roduct***" when a product is created successfully.

8. In the "***Product"*** page, when users click the edit button, they will be redirected to "***product?view=update"*** and all product info will be shown on the form.

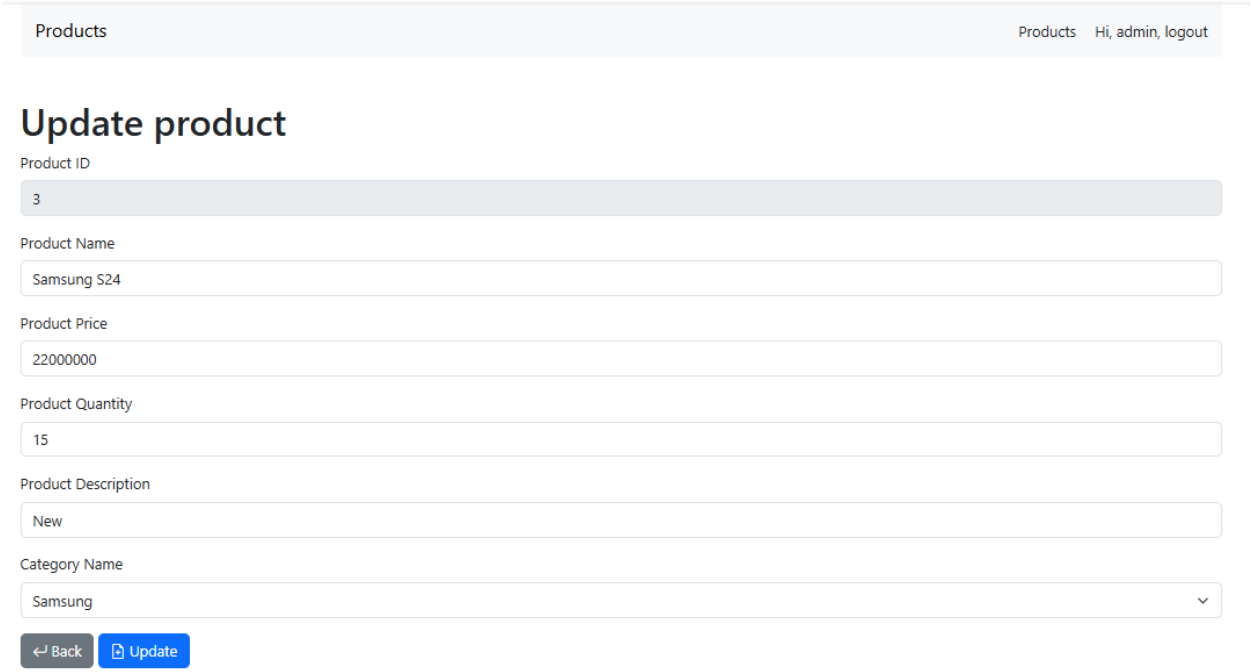



| Element | Html tag | Attribute | Note |
|---|---|---|---|
| Page title | h1 | | value = "Update product" |
| Product Id input | input | #pId | disable |
| Product Name input | input | #pName | |
| Product Price input | input | #pPrice | |
| Product Quantity input | input | #pQuantity | |
| Product Description input | input | #pDescription | |

| | | | |
|---|---|---|---|
| Category Name select | select | #cId |  |
| Back button | a/button | #back | Go back to "Product" |
| Create button | input/button | #submit | |

a. You must validate ID, If ID isn't found, redirect to "**product**" URL.
b. You must validate the inputted data before submitting to db.
c. The website will be redirected to "**product**" URL after updating in database.

9. In "***Product"*** page, when user click on delete button, they will be redirected to "p***roduct?view=delete"*** to confirm. When user click on delete button, the data of this product will be deleted in database.

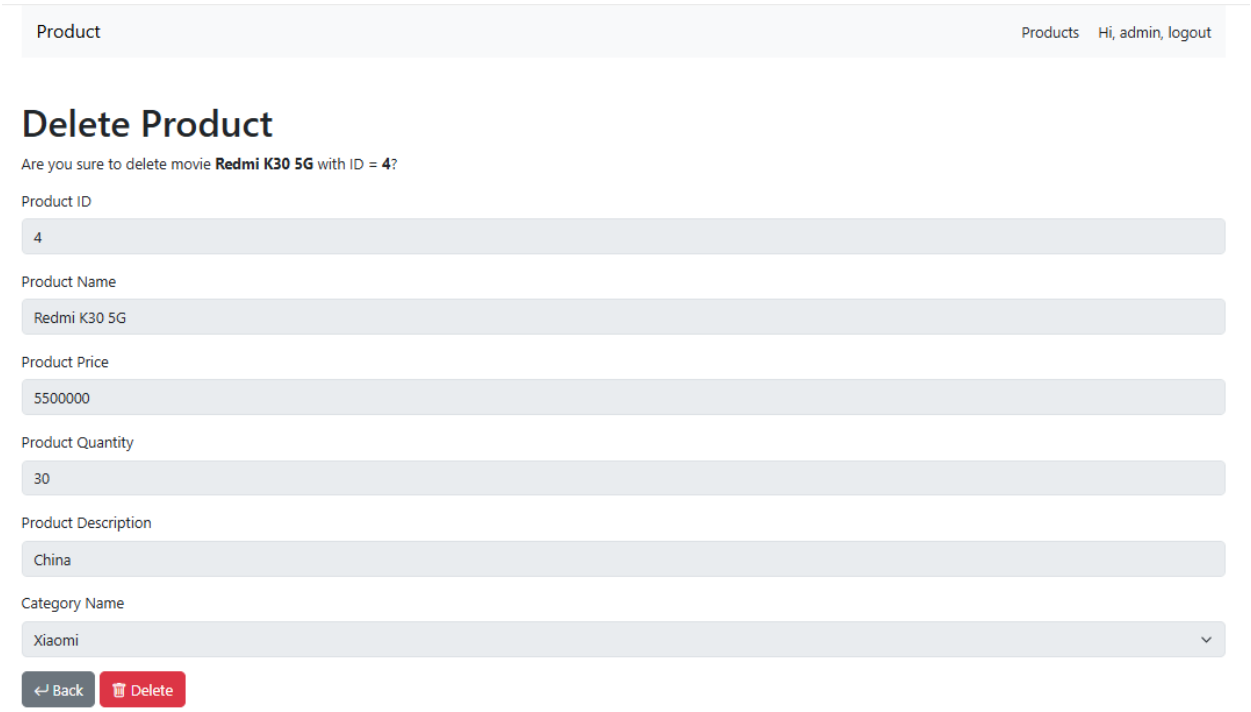


| Element | Html tag | Attribute | Note |
|---|---|---|---|
| Page title | h1 | | value = "Delete product" |
| Product name text | b | .p_name | |
| Product id text | b | .p_id | |
| Product Id input | input | #pId | disable |

| | | | |
|---|---|---|---|
| Product Name input | input | #pName | disable |
| Product Price input | input | #pPrice | disable |
| Product Quantity input | input | #pQuantity | disable |
| Product Description input | input | #pDescription | disable |
| Category Name select | select | #cId | disable |
| Back button | a/button | #back | Go back to “product” |
| Create button | input/button | #submit | |