
Useful notifications for Noop

Build one system that chooses the right message for the current situation.

540 cases	54 rule families	8 launch groups
Concrete user-visible possibilities.	Ten distinct cases per family.	A small first release with shared controls.

The product direction

Use the data Noop already stores. Select a message only when it helps a person act. Keep each group optional and make every tap open the right result.

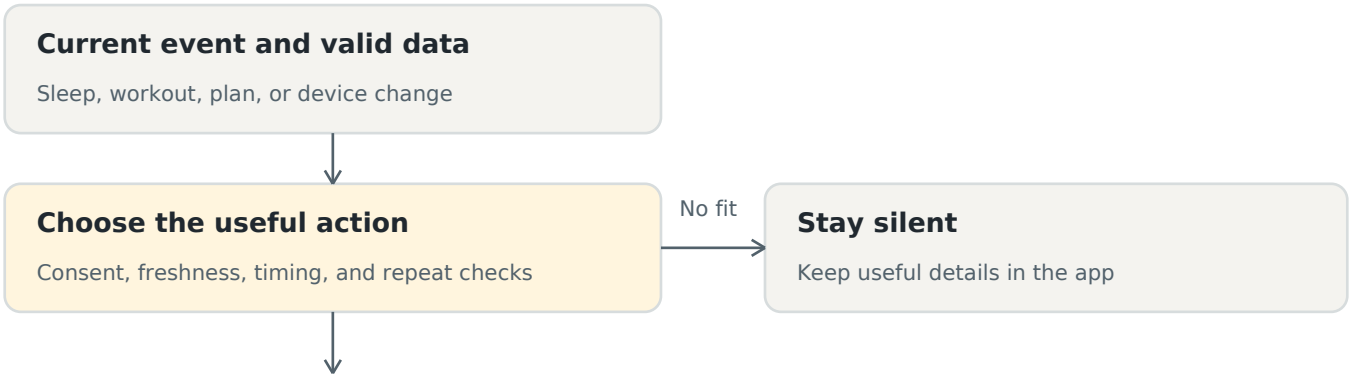

What is in the handoff

The ZIP contains the full JSON and CSV catalog, a product spec, exact code references, an implementation plan, and 96 separate failure cases. The workbook lets you filter all 540 cases.

The catalog includes local notifications, in-app cards, and digest items. Its rows are possible outcomes. They are not 540 alerts that run for every user.

Examples use fictional values. This task reviewed code and sources; it did not change or run the iOS app.

Start with useful moments

Offer these groups after the shared policy and data checks pass. New push groups remain off on existing installations until selected.

Group	Moment and action
Morning summary	A complete new night is ready. Review the day and any planned session.
Wind-down	The chosen sleep plan approaches. Open the current plan.
Workout plan	A saved workout is due. Open its routine without starting it automatically.
Workout summary	The session score has settled. Open the session result.
Strain target	Current strain reaches a valid target. Combine it with the workout summary when possible.
Charge before recording	Current battery evidence supports charging before sleep or a planned session.
Weekly review	A complete review period is ready. Open its useful changes.
Journal check-in	The selected check-in is due and incomplete. Open that entry.

Keep optional tools optional

Breathe and Hydrate stay off until selected. A missing water log should prompt a logging check only when the person requested it.

Later groups

Add reviewed habit patterns and coaching commitments after their data and consent exist. Aerobic and anaerobic load alerts need a defined split-load model first.

Code basis: current Training Load model. It uses one load series.

Fix coordination first

Your current iOS app has eight OS alert intents. The inspected upstream Apple code has thirteen. The main gaps concern shared timing, repeated alerts, and navigation.

Current finding	Change before expansion
Separate producers post directly	Use one coordinator to group messages and own submission.
Battery percentage and runtime can overlap	Choose one charge action for the same device episode.
The presenter always requests a banner and sound	Use quiet foreground updates when the person already sees the result.
No alert-specific tap handler in the fork presenter	Add typed day, workout, and device routes, including cold launch.
Wind-down can retain an older cached plan	Reconcile after plan changes, launch, and clock changes.
Health patterns can repeat after state resets	Persist raised, clear, and unknown episode states.

Coordinate existing work

Draft PR #62 repairs recovery inputs and history. New alerts that need those repairs must wait for reviewed code and current repaired results.

Draft PR #63 changes selected UI and routine Start. Recheck its status before changing settings or routes.

Inspected heads: your app **00eadc67**; Ryan BR upstream **8e4b0c16**.

Sources: fork presenter, battery rules, and the pinned paths in the evidence report.

What WHOOP confirms

Feature	Verified behavior
Daily health notices	Support names Recovery, Strain, and Sleep notification categories.
Contextual coaching	WHOOP describes push prompts based on shared goals and life context.
Stress summary	An evening notification has frequency and time controls.
Strain target	Band haptics are documented. The 4.0 behavior requires an active target session.
Wake alarm	Band vibrations use fixed time or a goal window with a latest wake time.
Health Monitor	The cited source describes in-app baseline flags. A phone-push channel is not specified.

What this means for Noop

Use personal context to select a useful moment. Distinguish phone notices from band vibrations and in-app cards. Define Noop thresholds from its own data and product policy.

The research does not establish WHOOP's full ranking policy, quiet hours, or exact battery and bedtime push rules. Immediate stress-spike pushes also remain unverified.

Sources

WHOOP AI guidance (April 30, 2026); app notification support; Stress Monitor; Strain Target; Haptic Alarm; Health Monitor.

WHOOP also has regulated rhythm notifications with specific eligibility. That feature is outside this wellness plan. WHOOP IHRN support.

Controls that protect value

Control	Proposed Noop rule
Proactive budget	At most 2 per local day, 10 per rolling 7 days, and 3 hours apart.
Chosen reminders	Keep selected times. Show the expected count before enablement.
Quiet period	21:00 to 08:00 local for new proactive advice. The person can change it.
Current evidence	Check the metric day, source, model, coverage, and event finality.
Private previews	Keep health values inside the app unless the person allows detailed previews.
Expiry	Skip stale candidates. Expiry limits submission, not OS presentation timing.
Active sessions	Suppress routine coaching during workouts, lifts, or sleep.

A practical day

A morning result can combine short sleep and a changed workout context into one plan review. After exercise, a completed-session summary can include a reached strain target. A selected evening reminder uses the current sleep plan.

iOS delivery has limits

Fresh advice depends on data and execution time. A submitted local request cannot recheck its rules when it fires, and the OS can delay presentation. Schedule generic future copy and show current status on tap. Empty HealthKit results cannot prove denied read access.

Sources: local scheduling, background timing, HealthKit privacy, and notification design guidance.

Give Codex a small first release

Step	Deliverable
1. Pure policy	Typed facts and decisions. Tests for stale data, missing values, source identity, and collisions.
2. Durable submission	A small ledger with shared event claims, known-failure retry, and conservative handling of uncertain outcomes.
3. Settings and routes	Clear controls, private previews, correct schedules, and cold-launch tap handling.
4. Launch groups	Migrate current producers and add the eight selected groups. Keep dependencies gated.
5. Qualification	Package and simulator tests, device checks where available, screenshots, and one draft PR.

Catalog coverage

The checked catalog contains **540 cases** across **54 families**. Its modes are 286 local-notification candidates, 200 in-app cases, and 54 digest items.

Every case includes a trigger, detailed copy, sample values, destination, timing, silence rules, and an acceptance case. Family records define data needs, dependencies, cooldowns, and source links.

Checks completed

Catalog structure, IDs, exact duplicate triggers, and example rendering were checked. The separate matrix contains 96 failure and platform cases for implementation.

Swift compilation, iPhone tests, and actual notification delivery were not run. Those checks belong to the implementation and device qualification steps.

Start with CODEX_PROMPT.md in the ZIP. The complete product spec and file-by-file plan sit beside the catalog.