



M360: API Documentation for Outbound SMS and Passthru

Version 3.3.4
18 November 2021

Table of Contents

Outbound SMS and Passthru

- I. Introduction
- II. Overview
- III. API Functions
- IV. Payload Level Requirement
- V. Status Codes
- VI. Message Codes
- VII. Broadcast API
- VIII. Payload for Outbound SMS and Passthru
- IX. DLR API (w/ parameters and DLR status codes) – for Outbound SMS
- X. MO Routing (for Passthru)
- XI. High Level Diagram of API Flow

Outbound SMS and Passthru

I. Introduction

This document contains all the needed information for M360's API integration. Each written functionality is limited on a per sprint development basis.

II. Overview

This document contains the list of M360's broadcast API specifications which sends a message to a particular mobile number on a real time basis. Any third-party entity/application who wishes to utilize the API must be authorized by M360 administrators.

III. API Functions

API	Description
Title	The name of your API call
URL	The URL structure (root url not permitted, use path)
Method	The HTTP request method (GET/POST)
Content-Type	General data type
Sample Payload	It describes the content of the request payload for a POST command. This can be either a mandatory, conditional, or optional field.
Sample Success Payload Response	Server data returns for a positive response to the request.
Sample Failed Payload Response	Server data returns for a negative response to the request.

IV. Payload Level Requirement

The broadcast API must be developed in accordance with the level requirement of payload.

Type	Description
Mandatory	A parameter which is required on the request

Conditional	A parameter which can either be a mandatory or optional on the request.
Optional	A parameter which can be supplied on the request or not.

V. Status Codes

Status Code	Name	Description
201 (for outbound SMS and passthru)	Created	Transaction has been successfully processed by the M360 Platform.
400 (for outbound SMS and passthru)	Bad Request	See "message" property on the JSON response. <i>See I-1.4 Message codes at bad request JSON.</i>
401 (for outbound SMS only)	Unauthorized	Account used is not authorized to use the broadcast API.
403 (for outbound SMS only)	Forbidden	The shortcode_mask provided is forbidden to broadcast due to Contact Policy.
404 (for outbound SMS and passthru)	Not Found	Credentials supplied (username and/or password) may be incorrect or non-existent.
410 (for outbound SMS only)	Gone	Allotted test credits for the account have been consumed.
503 (for outbound SMS only)	Service Unavailable	Service is deactivated.

VI. Message Codes

Message
The username field is required.
The password field is required.
The msisdn field is required.
The content field is required.
The msisdn must be a number.
The msisdn length must be between 10 and 13.
The content may not be greater than 1530 characters for outbound SMS.
The shortcode_mask is not provisioned on your account (for outbound SMS only).
The shortcode_mask is not provisioned (for outbound SMS only).

VII. Broadcast API

This command will be used to broadcast a message on a real time basis.

Sample Broadcast API:

Title	Send a broadcast message per msisdn
URL	https://api.m360.com.ph/v3/api/broadcast
Method	POST
Content-Type	application/json

Sample Payload	<pre>{ "username": "m360", "password": "password123", "msisdn": "639178919829", "content": "Hello, this is a sample broadcast.", "shortcode_mask": "M360", "rcvd_transid": "12334512312312", "is_intl": false, }</pre>
Sample Payload Success Response	<pre>{ "code": 201, "name": "Created", "transid": "M3600503CF798D16B462301455861296", "timestamp": "20210618103020", "msgcount": 1, "telco_id": 1 }</pre>
Sample Payload Failed Response	<pre>{ "code": 400, "name": "Bad Request", "message": "The username field is required." }</pre>

VIII. Payload for Outbound SMS

Payload Value	Type	Length	Level of Requirement	Description/Expected Values
username	string	255	Mandatory	Client's username on M360 Platform. <i>(Provided by M360)</i>
password	varchar	255	Mandatory	Client's password on M360 Platform. <i>(Provided by M360)</i>

msisdn	int	10-13	Mandatory	Must not contain spaces or other non-numeric characters. Prefix must be included for international MSISDN <i>Refer to page 8 for the list of supported formats.</i>
content	varchar	450	Mandatory	It must contain the actual message content in which the user wishes to send.
shortcode_mask	varchar	11	Mandatory	Client's provisioned source at M360 Platform. <i>(Approved by M360).</i>
rcvd_transid	varchar		Optional	Client's transaction id.
is_intl	boolean		Optional	Set to true if the mobile number is international else false .
udh	varchar		Optional	UDH (User Data Header) is used for concatenating split messages.
dcs	int		Optional	DCS (data coding scheme) is used to identify the type of char-encoding that shall be used for the message.

Local Mobile Number Format

+639272400575

639272400575

09272400575

9272400575

Response Value	Type	Length	Level of Requirement	Description/Expected Values
code	varchar	N	Mandatory	Status Code of the transaction <i>Refer to 'IV. Status Codes' table for the list of possible values.</i>
name	varchar	N	Mandatory	Status Code Name. <i>Refer to 'IV. Status Codes' table for the list of possible values.</i>
message	varchar		Optional	Error description. <i>Refer to 'V. Message Codes' table for the list of possible values.</i>
transid	int	32	Conditional	Generated Transaction Id.
timestamp	int	N	Conditional	Transaction timestamp in YMDHMS format.
msgcount	int	N	Conditional	Total number of message parts.
telco_id	int	1	Conditional	The telco id of mobile number (see below reference)

Telco	telco_id
<i>Globe</i>	1
<i>Smart</i>	2
<i>DITO</i>	4

IX. DLR Webhook (for Outbound SMS)

This command shall be used to inform the third party (user) that their transaction has been successfully processed by the Telco.

Sample DLR API

Title	DLR Webhook
Sample URL	https://client.domain.com/path/to/dlr/webhook/?transid=M3600503CF798D16B462301455861296&msisdn=9178919829&status_code=8&timestamp=20170101120000&rcvd_transid=1234551231&msgcount=1&telco_id=1 (client will need to define the actual endpoint and relay it to M360)
Method	GET

Parameters

Parameter Value	Type	Length	Level of Requirement	Description/Expected Values
transid	varchar	255	Mandatory	Transaction Id that was provided on the broadcast API response
msisdn	int	10	Mandatory	Mobile number used for the transaction
status_code	int	1	Mandatory	Contains the status code of the response
timestamp	date	N	Mandatory	Contains the timestamp in which the DLR Client API was called. Format is YMDHMS
rcvd_transid	varchar	N	Optional	Transaction Id of the client that was provided on the broadcast API request.


msgcount	int	N	Mandatory	Total number of message parts.
telco_id	int	1	Conditional	ID of Telco of the mobile number from the request.

DLR Status Codes

Status Code	Name	Description
8	Acknowledge / Successful	The transaction was successfully acknowledged by the Telco's SMSC. <i>Applicable to Globe and Non Globe Transactions</i>
1	Delivered	The transaction has been successfully delivered by the telco to the handset. Delivered status is optional and can be enabled upon request. <i>Applicable to Globe Transactions only.</i>
16	Rejected	Transaction was rejected by the concerned telco. <i>Applicable to Globe and Non Globe Transactions.</i>
2	Undelivered	The transaction was not delivered by the telco to the handset. Undelivered status is optional and can be enabled upon request. <i>Applicable to Globe Transactions only.</i>

				the MO Transaction was received. Format is YMDHMS
from	varchar	N	Mandatory	Access code used for the transaction.
msgcount	int	N	Mandatory	Total number of message parts.
telco_id	int	11	Conditional	The telco id of mobile number

XI. High Level Application flow for Outbound SMS

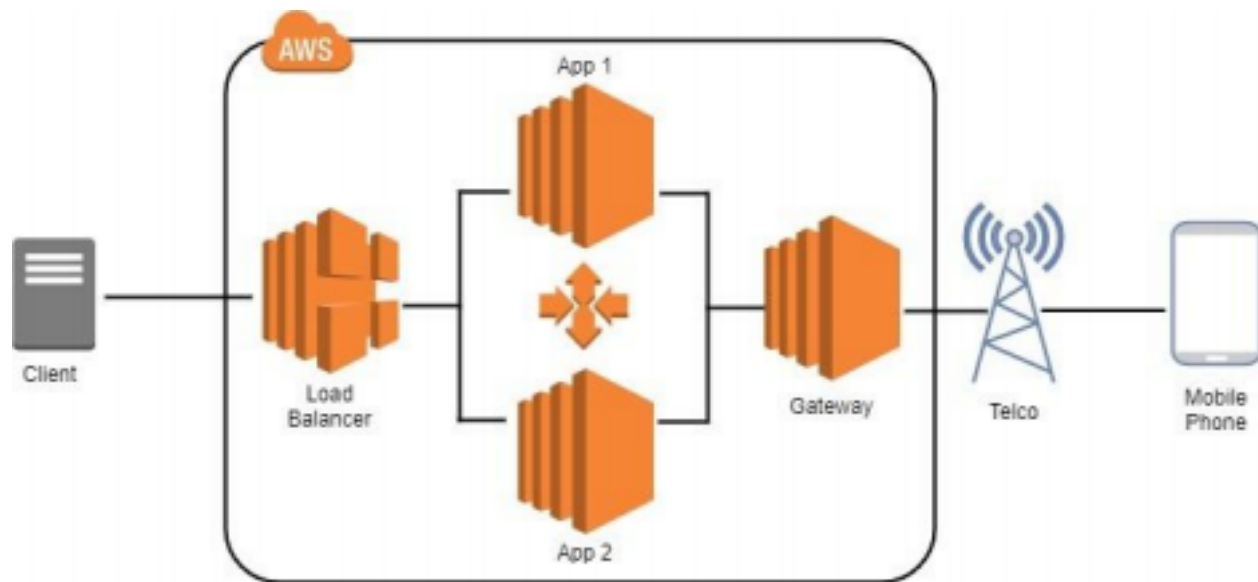

High Level Application Flow for Passthru

Application flow

