Let's look at another example:

Only the person who has the **private key** for an **address** can access the UTXOs stored in that address. For example, if Evelyn has a **private key** for **address** #1, she will see 0.5 ***bitcoin*** in her wallet. If Salo has a **private key** for **address** #2, he will see 2.3 ***bitcoin*** in his wallet.

When Evelyn sends 0.3 ***bitcoin*** to Salo, her wallet generates a new **private key** and address (#3). The original UTXO on **address** #1 gets spent and two new UTXOs are created: one for Salo's address with 0.3 ***bitcoin*** and one for Evelyn's new **address** with 0.2 ***bitcoin***. After this transaction is recorded in the ledger, Salo's wallet shows 2.6 ***bitcoin*** and Evelyn's wallet shows 0.2 ***bitcoin***.

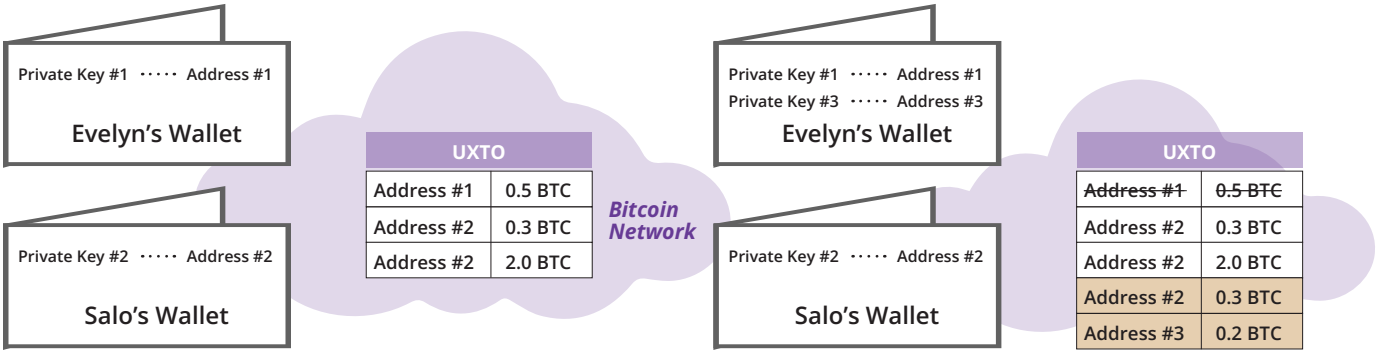

Below is an actual screenshot of a real transaction where there is only one input. However, in a more general case, the starting balance could be the sum of multiple UTXOs that a person has accumulated from previous transactions.

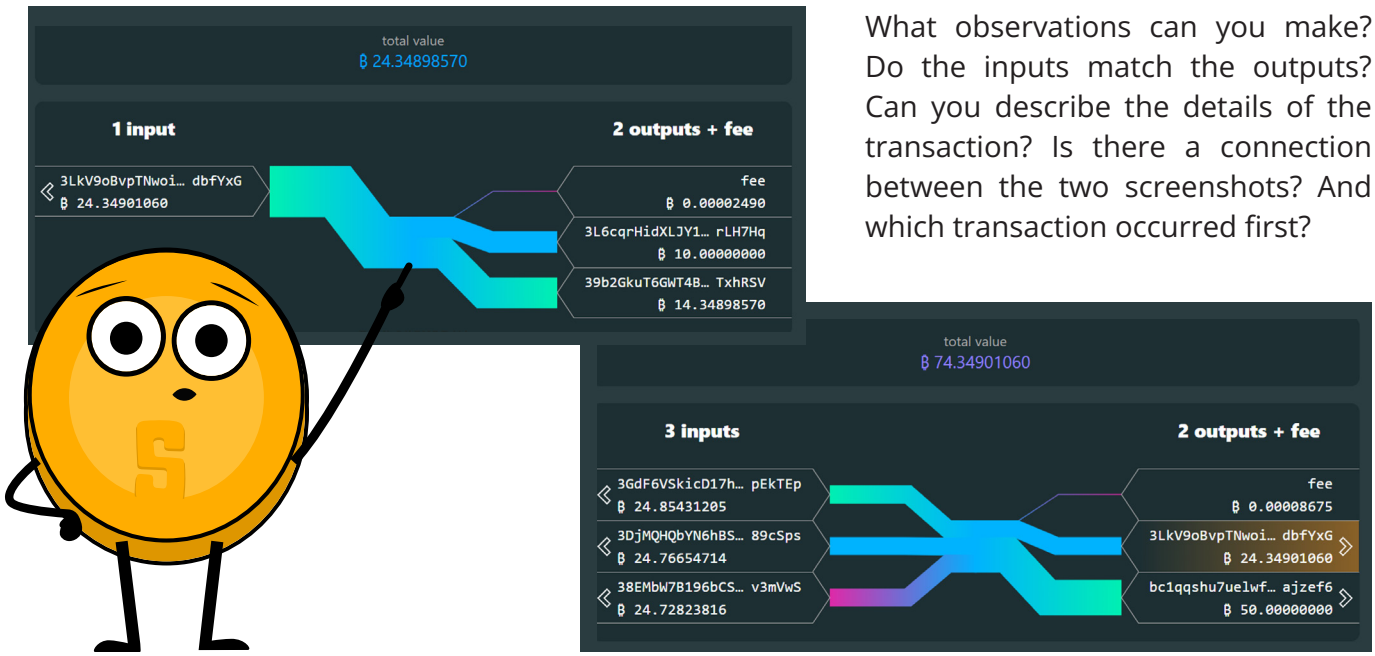

What observations can you make? Do the inputs match the outputs? Can you describe the details of the transaction? Is there a connection between the two screenshots? And which transaction occurred first?