Remember that hash functions are highly sensitive to any changes in the input, which means even a small change in the **input** will result in a completely different **output**. So, by using a different nonce value, miners can ensure that each block they mine has a **unique hash value**.

The nonce is just one of the components in the block ~~header, along with other important~~ information such as the timestamp and the previous block hash. Once all of the information in the block header has been hashed together, it creates the **candidate block hash**. The miner who finds the hash value that meets the target set by the network is the one who wins the race and gets to add the block to the blockchain.

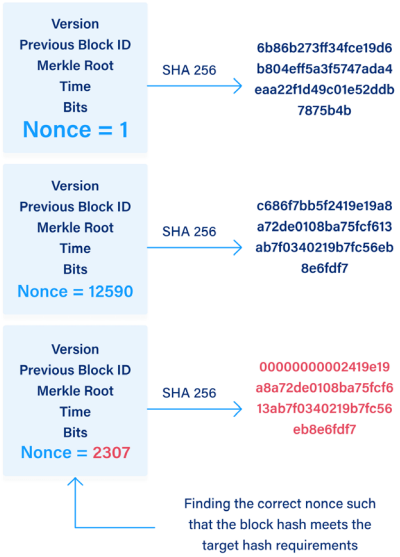
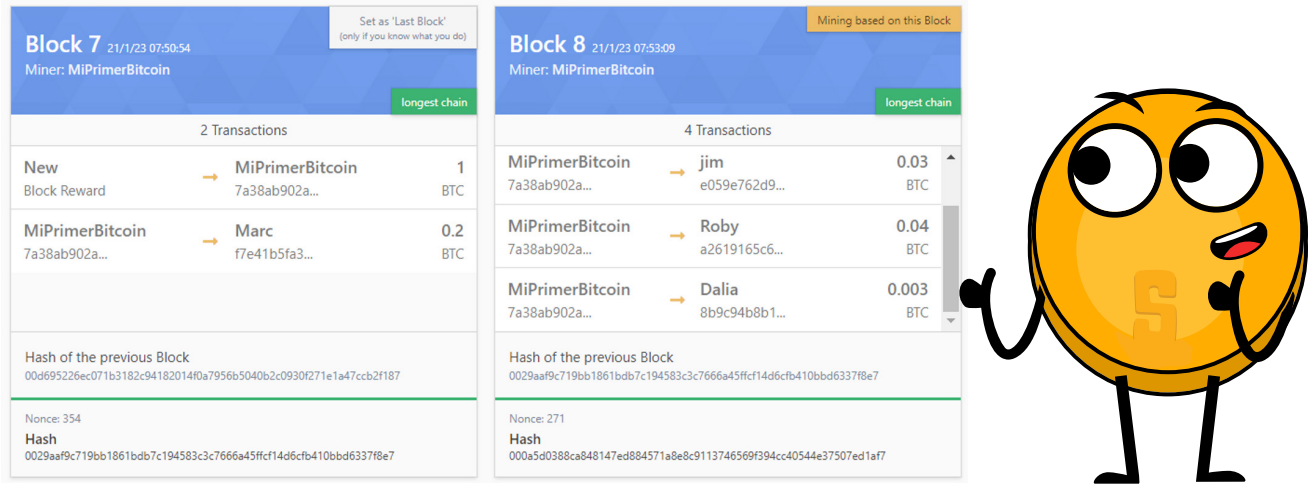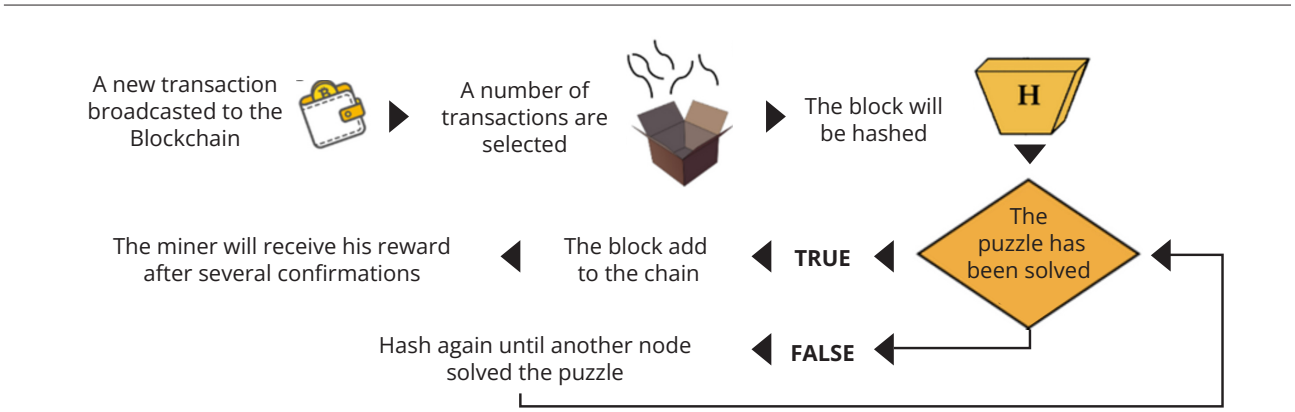
As we see below, for Block #7, **Mi Primer Bitcoin** was rewarded 1BTC for calculating the correct block hash required by the network at the time (21/1/23). In addition, MPB collected fees from the transactions included in the block. The **nonce** that finally produced the **winning hash** was 354.