

Lab 8

q1

```
1: bless@cis106: ~/lab8 ▾  
  
bless@cis106:~$ mkdir lab8  
bless@cis106:~$ cd lab8/  
bless@cis106:~/lab8$ echo "All files in my home directory" > file_report.txt  
bless@cis106:~/lab8$ ls -Am ~ >> file_report.txt  
bless@cis106:~/lab8$ cat file_report.txt  
All files in my home directory  
.ansi_codes.sh, assets, audio, .bash_aliases, .bash_history, .bash_logout,  
.bashrc, bash.save, .bastetrc, .cache, .cargo, cars-brands.csv,  
challenge_lab3.sh, challenge_lab3.sh.save, challenge_lab3.sh.save.1,  
challenge-Lab6, cis106, .config, Desktop, doc, docs, Documents, .dotnet,  
Downloads, Games, .gitconfig, .gnupg, hello.py, images, In classActivities,  
index.html, .irb_history, lab4files, lab6, lab8, .lessht, .local, music, Music,  
myenv, myscript.sh, myscript.sh.save, nano.9064.save, path, Pictures, .pki,  
practicels, practicels.tar.xz, .profile, program.py, Public, .python_history,  
.rustup, snap, .ssh, .sudo_as_admin_successful, Templates, .textFiles.sh,  
tfi.sh, txt, typescript, .vboxclient-clipboard-tty2-control.pid,  
.vboxclient-clipboard-tty2-service.pid,  
.vboxclient-draganddrop-tty2-control.pid,  
.vboxclient-hostversion-tty2-control.pid, .vboxclient-seamless-tty2-control.pid,  
.vboxclient-vmvga-session-tty2-control.pid,  
.vboxclient-vmvga-session-tty2-service.pid, .venv, .venvs, Videos, .viminfo,  
.vscode, website, website-lab5, .wget-hsts, wildcard_practice, wildcardpractice  
bless@cis106:~/lab8$
```

q2

```
1: bless@cis106: ~/lab8 ▾  
  
bless@cis106:~/lab8$ echo "Total number of files in my home directory" >> file_report.txt  
bless@cis106:~/lab8$ ls -lA ~ | grep "^-" | wc -l  
36  
bless@cis106:~/lab8$ ls -lA ~ | grep "^-" | wc -l >> file_report.txt  
bless@cis106:~/lab8$ echo "Total number of directories in my home directory" >> file_report.txt  
bless@cis106:~/lab8$ ls -lA ~ | grep "^d" | wc -l >> file_report.txt  
bless@cis106:~/lab8$ tail file_report.txt  
.vboxclient-clipboard-tty2-service.pid,  
.vboxclient-draganddrop-tty2-control.pid,  
.vboxclient-hostversion-tty2-control.pid, .vboxclient-seamless-tty2-control.pid,  
.vboxclient-vmvga-session-tty2-control.pid,  
.vboxclient-vmvga-session-tty2-service.pid, .venv, .venvs, Videos, .viminfo,  
.vscode, website, website-lab5, .wget-hsts, wildcard_practice, wildcardpractice  
Total number of files in my home directory  
36  
Total number of directories in my home directory  
42  
bless@cis106:~/lab8$
```

q3

```
colord /usr/sbin/nologin
gnome-initial-setup /bin/false
gdm /bin/false
nm-openvpn /usr/sbin/nologin
bless /bin/bash
_flatpak /usr/sbin/nologin
snapd-range-524288-root /usr/bin/false
snap_daemon /usr/bin/false
vboxadd /bin/false
bless@cis106:~/lab8$ awk -F":" '{print $1,$NF}' /etc/passwd
```

```
bless /bin/bash /home/bless
_flatpak /usr/sbin/nologin /nonexistent
snapd-range-524288-root /usr/bin/false /nonexistent
snap_daemon /usr/bin/false /nonexistent
vboxadd /bin/false /var/run/vboxadd
bless@cis106:~/lab8$ awk -F":" '{print $1,$NF,$6}' /etc/passwd
```

```
The user gnome-initial-setup logs in with: /bin/false and its home dir is: /run/gnome-initial-setup/
The user gdm logs in with: /bin/false and its home dir is: /var/lib/gdm3
The user nm-openvpn logs in with: /usr/sbin/nologin and its home dir is: /var/lib/openvpn/chroot
The user bless logs in with: /bin/bash and its home dir is: /home/bless
The user _flatpak logs in with: /usr/sbin/nologin and its home dir is: /nonexistent
The user snapd-range-524288-root logs in with: /usr/bin/false and its home dir is: /nonexistent
The user snap_daemon logs in with: /usr/bin/false and its home dir is: /nonexistent
The user vboxadd logs in with: /bin/false and its home dir is: /var/run/vboxadd
bless@cis106:~/lab8$ awk -F":" '{print "The user \"$1,\"logs in with: \"$NF,\"and its home dir is: \"$6}' /etc/passwd
```

```
bless = /bin/bash
_flatpak = /usr/sbin/nologin
snapd-range-524288-root = /usr/bin/false
snap_daemon = /usr/bin/false
vboxadd = /bin/false
bless@cis106:~/lab8$ awk -F":" '{print $1 = \"$NF}' /etc/passwd | grep "/bin/bash"
root = /bin/bash
bless = /bin/bash
bless@cis106:~/lab8$ awk -F":" '{print $1 = \"$NF}' /etc/passwd | grep "/bin/bash" >> report_users.txt
bless@cis106:~/lab8$
```

1: bless@cis106: ~/lab8 ~

```
The user kernoops logs in with: /usr/sbin/nologin and its home dir is: /
The user whoopsie logs in with: /bin/false and its home dir is: /nonexistent
The user dnsmasq logs in with: /usr/sbin/nologin and its home dir is: /var/lib/misc
The user avahi logs in with: /usr/sbin/nologin and its home dir is: /run/avahi-daemon
The user tcpdump logs in with: /usr/sbin/nologin and its home dir is: /nonexistent
The user sssd logs in with: /usr/sbin/nologin and its home dir is: /var/lib/sss
The user speech-dispatcher logs in with: /bin/false and its home dir is: /run/speech-dispatcher
The user cups-pk-helper logs in with: /usr/sbin/nologin and its home dir is: /nonexistent
The user fwupd-refresh logs in with: /usr/sbin/nologin and its home dir is: /var/lib/fwupd
The user saned logs in with: /usr/sbin/nologin and its home dir is: /var/lib/saned
The user geoclue logs in with: /usr/sbin/nologin and its home dir is: /var/lib/geoclue
The user cups-browsed logs in with: /usr/sbin/nologin and its home dir is: /nonexistent
The user hplip logs in with: /bin/false and its home dir is: /run/hplip
The user gnome-remote-desktop logs in with: /usr/sbin/nologin and its home dir is: /var/lib/gnome-remote-desktop
The user polkitd logs in with: /usr/sbin/nologin and its home dir is: /
The user rtkit logs in with: /usr/sbin/nologin and its home dir is: /proc
The user colord logs in with: /usr/sbin/nologin and its home dir is: /var/lib/colord
The user gnome-initial-setup logs in with: /bin/false and its home dir is: /run/gnome-initial-setup/
The user gdm logs in with: /bin/false and its home dir is: /var/lib/gdm3
The user nm-openvpn logs in with: /usr/sbin/nologin and its home dir is: /var/lib/openvpn/chroot
The user bless logs in with: /bin/bash and its home dir is: /home/bless
The user _flatpak logs in with: /usr/sbin/nologin and its home dir is: /nonexistent
The user snapd-range-524288-root logs in with: /usr/bin/false and its home dir is: /nonexistent
The user snap_daemon logs in with: /usr/bin/false and its home dir is: /nonexistent
The user vboxadd logs in with: /bin/false and its home dir is: /var/run/vboxadd
root = /bin/bash
bless = /bin/bash
bless@cis106:~/lab8$
```

```
1: bless@cis106: ~/lab8 ▾

bless@cis106:~/lab8$ grep -i "honda" ~/Documents/Csv/cars.csv > honda1.csv
bless@cis106:~/lab8$ head -1 ~/Documents/Csv/cars.csv > honda1.csv
bless@cis106:~/lab8$ cat honda1.csv
Car;MPG;Cylinders;Displacement;Horsepower;Weight;Acceleration;Model;Origin
bless@cis106:~/lab8$ grep -i "honda" ~/Documents/Csv/cars.csv >> honda1.csv
bless@cis106:~/lab8$ sed 's/;/,/g' honda1.csv
Car,MPG,Cylinders,Displacement,Horsepower,Weight,Acceleration,Model,Origin
Honda Civic,24.0,4,120.0,97.00,2489.,15.0,74,Japan
Honda Civic CVCC,33.0,4,91.00,53.00,1795.,17.5,75,Japan
Honda Civic,33.0,4,91.00,53.00,1795.,17.4,76,Japan
Honda Accord CVCC,31.5,4,98.00,68.00,2045.,18.5,77,Japan
Honda Civic CVCC,36.1,4,91.00,60.00,1800.,16.4,78,Japan
Honda Accord LX,29.5,4,98.00,68.00,2135.,16.6,78,Japan
Honda Civic 1500 gl,44.6,4,91.00,67.00,1850.,13.8,80,Japan
Honda Accord,32.4,4,107.0,72.00,2290.,17.0,80,Japan
Honda Civic 1300,35.1,4,81.00,60.00,1760.,16.1,81,Japan
Honda Prelude,33.7,4,107.0,75.00,2210.,14.4,81,Japan
Honda Accord,36.0,4,107.0,75.00,2205.,14.5,82,Japan
Honda Civic,38.0,4,91.00,67.00,1965.,15.0,82,Japan
Honda Civic (auto),32.0,4,91.00,67.00,1965.,15.7,82,Japan
bless@cis106:~/lab8$ sed 's/;/,/g' honda1.csv > honda2.csv
bless@cis106:~/lab8$
```

```
1: bless@cis106: ~/lab8 ▾

Honda Civic CVCC,4,60.00
Honda Accord LX,4,68.00
Honda Civic 1500 gl,4,67.00
Honda Accord,4,72.00
Honda Civic 1300,4,60.00
Honda Prelude,4,75.00
Honda Accord,4,75.00
Honda Civic,4,67.00
Honda Civic (auto),4,67.00
bless@cis106:~/lab8$ awk -F"," 'NR > 1 {print $1,"",$3,"",$5}' honda2.csv | sed 's/ , /,/g' | sed 's/Honda /Honda_/g'
Honda_Civic,4,97.00
Honda_Civic CVCC,4,53.00
Honda_Civic,4,53.00
Honda_Accord CVCC,4,68.00
Honda_Civic CVCC,4,60.00
Honda_Accord LX,4,68.00
Honda_Civic 1500 gl,4,67.00
Honda_Accord,4,72.00
Honda_Civic 1300,4,60.00
Honda_Prelude,4,75.00
Honda_Accord,4,75.00
Honda_Civic,4,67.00
Honda_Civic (auto),4,67.00
bless@cis106:~/lab8$ awk -F"," 'NR > 1 {print $1,"",$3,"",$5}' honda2.csv | sed 's/ , /,/g' | sed 's/Honda /Honda_/g' >> honda3.csv
bless@cis106:~/lab8$ batcat honda3.csv
```

	File: honda3.csv
1	model,cylinder,hp
2	Honda_Civic,4,97.00
3	Honda_Civic CVCC,4,53.00
4	Honda_Civic,4,53.00
5	Honda_Accord CVCC,4,68.00
6	Honda_Civic CVCC,4,60.00
7	Honda_Accord LX,4,68.00
8	Honda_Civic 1500 gl,4,67.00
9	Honda_Accord,4,72.00
10	Honda_Civic 1300,4,60.00
11	Honda_Prelude,4,75.00
12	Honda_Accord,4,75.00
13	Honda_Civic,4,67.00
14	Honda_Civic (auto),4,67.00


```
bless@cis106:~/lab8$
```

q5 (challenge q)

The image shows a terminal window with a dark background. The title bar at the top reads "Tilix: bless@cis106: ~/lab8/broken". The terminal prompt is "bless@cis106: ~/lab8/broken\$". The user has entered the command "python3 -m http.server 8080". The output of the command is a series of HTML tags for a Bootstrap navbar, including links to assets, fonts, and CSS, and a list of navigation items: Home, Resume, Projects, and Contact. The terminal window has a sidebar on the left with icons for file manager, applications, and search. The bottom of the window shows the terminal prompt "bless@cis106: ~/lab8/broken\$" and a cursor.

```
1/1 v + [ ] [ ]
bless@cis106: ~/lab8/broken$ python3 -m http.server 8080
<link rel="icon" type="image/x-icon" href="assets/favicon.ico" />
<link rel="preconnect" href="https://fonts.googleapis.com" />
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin />
<link href="https://fonts.googleapis.com/css2?family=Plus+Jakarta+Sans:wght@100;200;300;400;500;600;700;800;900&display=swap" rel="stylesheet" />
<link href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.1/font/bootstrap-icons.css" rel="stylesheet" />
<link href="css/styles.css" rel="stylesheet" />
<a class="navbar-brand" href="index.html"><span class="fw-bolder text-primary">Start Bootstrap</span></a>
<li class="nav-item"><a class="nav-link" href="index.html">Home</a></li>
<li class="nav-item"><a class="nav-link" href="resume.html">Resume</a></li>
<li class="nav-item"><a class="nav-link" href="projects.html">Projects</a></li>
<li class="nav-item"><a class="nav-link" href="contact.html">Contact</a></li>
<a class="btn btn-primary btn-lg px-5 py-3 me-sm-3 fs-6 fw-bolder" href="resume.html">Resume</a>
<a class="btn btn-outline-dark btn-lg px-5 py-3 fs-6 fw-bolder" href="projects.html">Projects</a>

<a class="text-gradient" href="#"><i class="bi bi-twitter"></i></a>
<a class="text-gradient" href="#"><i class="bi bi-linkedin"></i></a>
<a class="text-gradient" href="#"><i class="bi bi-github"></i></a>
<a class="small" href="#">Privacy</a>
<a class="small" href="#">Terms</a>
<a class="small" href="#">Contact</a>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/js/bootstrap.bundle.min.js"></script>
<script src="js/scripts.js"></script>
bless@cis106: ~/lab8/broken$
```

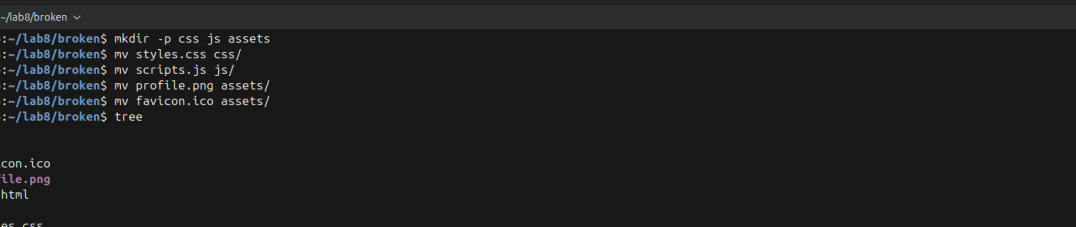

The screenshot shows a terminal window with the following content:

```
1: bless@cis106: ~/lab8/broken
bless@cis106:~/lab8/broken$ mkdir -p css js assets
bless@cis106:~/lab8/broken$ mv styles.css css/
bless@cis106:~/lab8/broken$ mv scripts.js js/
bless@cis106:~/lab8/broken$ mv profile.png assets/
bless@cis106:~/lab8/broken$ mv favicon.ico assets/
bless@cis106:~/lab8/broken$ tree
.
├── assets
│   ├── favicon.ico
│   └── profile.png
├── contact.html
├── css
│   └── styles.css
├── index.html
├── index.html.save
├── index.html.save.1
├── js
│   └── scripts.js
├── projects.html
└── resume.html

4 directories, 10 files
bless@cis106:~/lab8/broken$ firefox index.html
Gtk-Message: 17:57:45.259: Not loading module "atk-bridge": The functionality is provided by GTK natively. Please try to not load it.
bless@cis106:~/lab8/broken$
```

```
1: bless@cis106: ~/lab8/broken  v
bless@cis106:~/lab8/broken$ ls -l |grep "^-"
-rw-rw-r-- 1 bless bless  9275 Mar 25  2023 contact.html
-rw-rw-r-- 1 bless bless 27570 Mar 25  2023 index.html
-rw-rw-r-- 1 bless bless  6395 Mar 25  2023 projects.html
-rw-rw-r-- 1 bless bless 15143 Mar 25  2023 resume.html
bless@cis106:~/lab8/broken$
```

