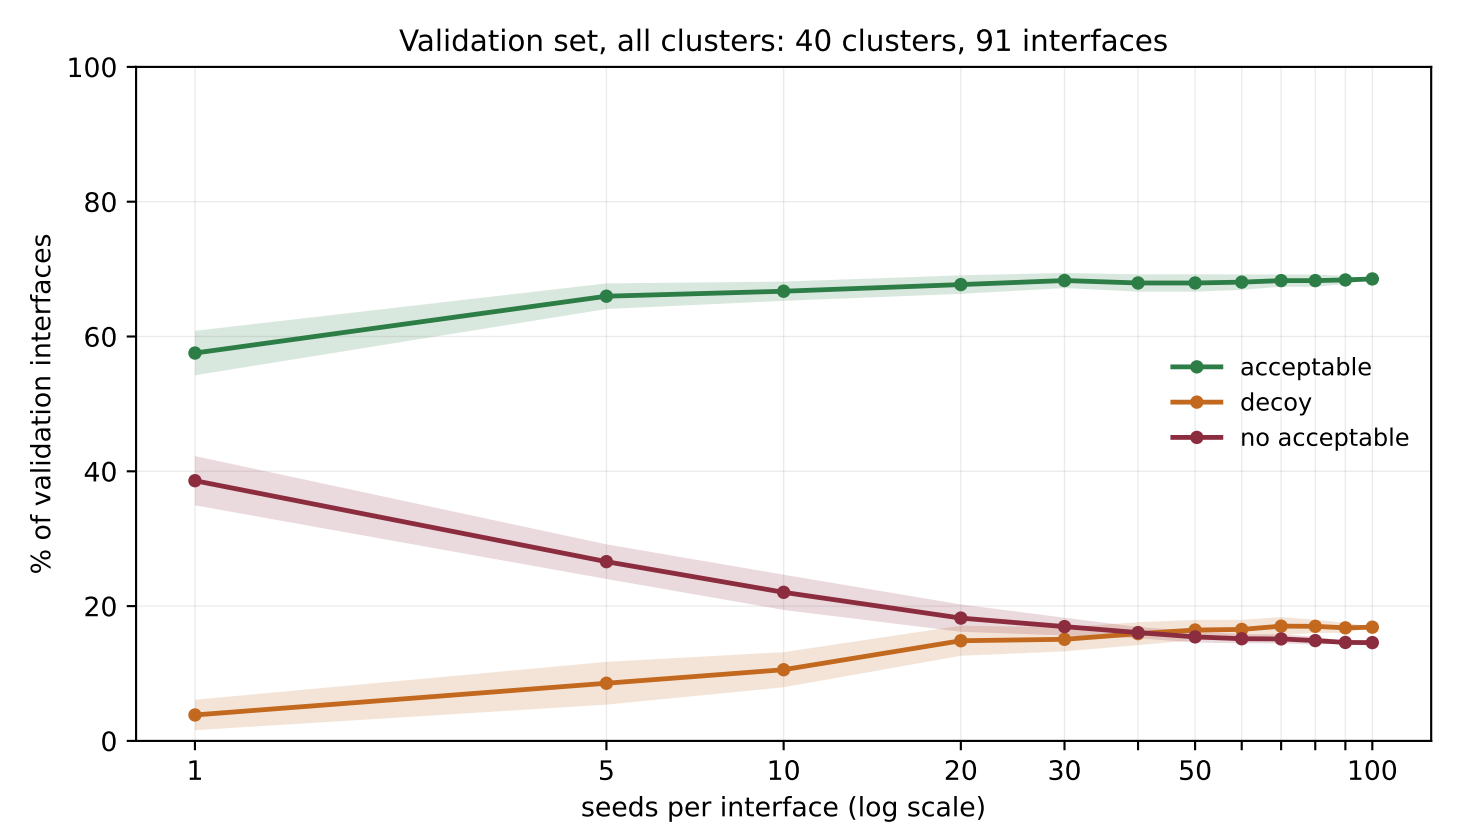

x: seeds drawn per interface. y: % of interfaces in each class, averaged within cluster then over clusters equally.
band = ±1 sd over draws. k=1 enumerates all 100 single-seed draws; k=100 has one possible draw; otherwise 50 draws without replacement.