Vital Details

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

This section specifically highlights the essential set of APIs required before calling any subsequent Global E-Invoicing Enriched APIs. To call any of the Global E-Invoicing APIs, an auth-token is required, which can be obtained using the Authentication API provided in Vital APIs.

An auth token retrieved from Global E-Invoicing must be sent along with subsequent API requests to Global E-Invoicing. This auth token will then be used to authorize your requests to our APIs.

Please take a note of below points:

> You should not request auth token for every API requestas it can be re-used across multiple API requests.

> An auth token will have a pre-defined lifetime, e.g. 6hours.

> Auth token api will have throttling for 24 hours window.

> Auth token must be stored securely.

> ClientID & ClientSecret must be stored securely.

Max number of auth-token api calls will be allowed 100 in staging & 50 in production per day. So, throttling will always be enabled on auth-token api. Any deviation in implementation will not be tolerated & no change in number of api calls will be extended.

This section also details out information on what should be the API URLs, which are the different RSA public keys required for encryption, how to call APIs with plain text request/response payload or encrypted request/response payload, whether SSL certificate import is required for handshake or not, and most importantly details on error codes and enums which are getting used in different requests and responses.

Pre-requisites

To authenticate, you are required to pass client-id & client-secret into Http Header. Based on these details, we will validate your identity and if all details are valid then you will get the auth-token in response of this api call. The client-id & client-secret will be provided to you by Global E-Invoicing.

Http Header Key	Sample Value
client-id	RyDIqxl36zDYFUJCH5t4EeVbxe4lS/acpCLEOJa2iqo=
client-secret	I5H0jzOy28U6vzydi3qMR35j5nwJDAjiVjbtzxrKVUt16Kf1FwdkARyY85xYxg==
content-type	application/json

Once authenticated, you are required to pass auth-token in all subsequent api calls as per below:

Http Header Key	Sample Value
auth-token	{{auth-token received from Authenticate API call response}}
content-type	application/json

RSA Public Key

While calling authenticate api, you are required to encrypt auth-key header value with RSA public key of Global E-Invoicing (if you want to enable api payload encryption mode). The RSA Public Key of Global E-Invoicing Enriched API is different for different environments. Here are the details:

RSA Public Key Details	
Staging	staging-cygnettaxglobaleinvoicing.pem
	staging-cygnettaxglobaleinvoicing.cer
Production	cygnettaxglobaleinvoicing.pem
	cygnettaxglobaleinvoicing.cer

SSL Handshake Certificates

Depending upon the programming language in which your program is written, you are required to import below certificate for SSL handshake & communication establishment. Here are the details:

Depending upon language in which your program is written, you are required to import below certificate for SSL handshake & communication establishment. Here are the details:

SSL Handshake Certificate Details	
Staging & Production	ssl-handshake-certificate.cer

API URL

Global E-Invoicing offers two environments for Enriched API. 1 Staging & 2 Production. You can start integration and testing with Staging and once everything is working fine and tested, move to Production environment.

Api URL Details	
Environment	URL
Staging	https://staging-bh-api-cygnettaxglobaleinvoicing.cygnet.one
Production	https://bh-api-cygnettaxglobaleinvoicing.cygnet.one

Request Timestamp

All date-time values provided in API request payloads for the stamp field, must be expressed in Coordinated Universal Time (UTC). Clients must ensure that local date-time values are converted to UTC before transmission. Failure to provide timestamps in UTC may result in validation errors, incorrect processing, or inconsistent results.

Correlation-ID

As part of the enhancement for tracking and correlating API requests and responses, please find below the finalized approach for the correlation-id header implementation

Header Key

The header key to be used: correlation-id

Details of Correlation-ID

The header key to be used: correlation-id

> Purpose

• The correlation-id will be passed as a unique key in the request header and returned in the corresponding

response header.

• This ensures proper tracking and mapping of requests to responses.

> Format

• Allowed Characters: Alphanumeric with hyphen (-) and underscore (_).

• Length: Maximum of 1000 characters.

> Usage

• Request: The correlation-id will be included in the request header when making the API call.

• Response: The API response must return the correlation-id in the response header unchanged.

System will work with both the approach without correlation-id and with correlation-id.

Key Points

The updated responses will include the correlation-Id when it is passed in the request header.

There are no changes to the Status API responses; they will remain as before.

Without correlation-id Header

Error Response


```
{
  "requestId": "85fb9372-fd8f-4e17-9842-019390ac2725",
  "errors": [
    {
      "code": "VAL0114",
      "message": "No records found.",
      "type": "Error"
    }
  ]
}
```


Validation Response


```
[
  {
    "propertyName": "MobileNumbers[0]",
    "errors": [
      {
        "code": "VAL0018",
        "message": "'MobileNumbers' must be 10 characters in length. You entered 3 characters.",
        "type": "Error"
      }
    ]
  }
]
```


With correlation-id Header

Error Response


```
{
  "requestId": "da634fea-c546-47ee-a854-019390acfb34",
  "correlationId": "XX112244552024FEBD",
  "errors": [
    {
      "code": "VAL0114",
```

```
      "message": "No records found.",
      "type": "Error"
    }
  ]
}
```

Validation Response

```
{
  "requestId": "b72f5415-1255-4fc4-b593-019390a5960c",
  "correlationId": "XX112244552024FEBD",
  "validationErrors": [
    {
      "propertyName": "MobileNumbers[0]",
      "errors": [
        {
          "code": "VAL0018",
          "message": "'MobileNumbers' must be 10 characters in length. You entered 3 characters.",
          "type": "Error"
        }
      ]
    }
  ]
}
```

HTTP Status Codes

Global E-Invoicing enriched api will return below types of HTTP status codes which requires to be handled at your end. Http status code 200, 202, 204 means success & for all rest of the HTTP status code, you are required to handle errors.

Content Type

Global E-Invoicing enriched api will accept content type as below

> application/json

> application/xml

Wherever we are accepting arrayof an object and if we provide only single object for that array, then we must need to pass additional attribute for that element in case of application/xml content type.

For Example:

Note: -This will be applicable to all properties accepting array.

Reference ID

Global E-Invoicing enriched POST apis are asynchronous in nature. This means that at first system will accept your request by returning referenceId & then you can PULL status based on referenceId or you can get data PUSH from our end if you have passed callback-url. This capability of system which is generic in nature leverages greater flexibility for clients to consume Global E-Invoicing apis.

The referenceId will be of max 64 characters.

Enriched API Result Size

The Enriched API Result Size Limit setting controls the maximum number of records that can be returned in a single response when calling Enriched APIs. This setting helps manage response payload size, improve API performance, and prevent excessive data retrieval in a single request.

By default, the maximum result size is set to 1000 records. If the total number of available records exceeds the configured limit, only records up to the configured limit will be returned in the response.

Note: If you require a higher result size limit than the configured value, please contact our support team for assistance. Any increase in the limit will be subject to system performance and configuration considerations.

Throttling

By default, none of the enriched api will have throttling in place except auth token api. Throttling rate is per 24 hours & will get reset on start of next day. If throttling limit is reached, you will receive below details.

> Error Code : AUTH0010

> Error Message : Api requests limit over. You can call {ThrottlingLimit} api in 24 hours.

> Http Status Code : 403

API Asynchronous Request Handling

Global E-Invoicing supports response callback mechanism in each api where there is a background processing & async in nature. This will provide facility to client to either establish response processing mechanism based on status api or callback mechanism. To get callback, you are required to pass callback-url header in request.

By default, none of Global E-Invoicing environment will do callback unless callback-url is whitelisted in Global E-Invoicing environment.

Global E-Invoicing will try for multiple attempts if it is unsuccessful in first attempt during posting callback.

We are marking each callback as success if we receive 200 or 202 or 204 status code.

The callback hit on the provided url will contain "request-id"(unique GUID to track the request) and "auth-token"(token passed during the original request) as header parameters.

Apart from above headers, we also support basic authentication for all callback api hits by passing Authorization headers, the mechanism is as follows

Response Payload (Yet Not Started status)

Attribute	Description
Request Type	Indicates the type of API request processed (refer requestType enum)
Reference ID	Unique ID to link the invoice with related documents or transactions
Status	Indicates the processing status of the request (YNS=Yet Not Started)

Sample JSON - Yet Not Started status response

```
{
  "requestType": "refer enum requestType",
  "referenceId": "string",
  "status": "YNS"
}
```

Response Payload (In Progress status)

Attribute	Description
Request Type	Indicates the type of API request processed (refer requestType enum)
Reference ID	Unique ID to link the invoice with related documents or transactions
Status	Represents the current processing status of the request (IP = In Progress)

Sample JSON - In Progress status response

```
{
  "requestType": "refer enum requestType",
  "referenceId": "string",
  "status": "IP"
}
```

Response Payload (Error status)

Attribute	Description
Request ID	Unique identifier generated for the specific API request
Request Type	Indicates the type of API request processed (refer requestType enum)
Reference ID	Unique ID to link the invoice with related documents or transactions
Status	Represents the current processing status of the request (ER = Error)
Errors Type	Type of issue encountered during processing (e.g., Error)
Errors Code	Error code identifying the specific issue (e.g., AUTH0001)
Errors Message	Detailed message describing the error encountered (e.g., Access Denied)

Sample JSON - Error status response

```
{
  "requestId": "4869534F-A956-4702-B412-017227D634D1",
  "requestType": "refer enum requestType",
  "referenceId": "string",
  "status": "ER",
  "errors": [
    {
      "type": "Error",
      "code": "AUTH0001",
      "message": "Access Denied"
    }
  ]
}
```

Callback Mechanism

The below-mentioned values will be sent as additional Http headers in the callback hit, which can then be validated at the client's end as a basic level of authentication. To enable this, you must provide custom headers details to Global E-Invoicing along with request email to enable it.

Http Header	Value
Authorization	Basic e.g. Basic dXNlcm5hbWU6cGFzc3dvcmQ=

Maintenance


If Global E-Invoicing services are going under scheduled maintenance, then you will receive http status code 503 & error message "The server is currently unable to handle the request due to a temporary overloading or maintenance of the server".

Enriched Api Rights

All enriched APIs of Global E-Invoicing are secured through role-based access control. Ensure that the user account consuming the APIs has been assigned the appropriate API permissions. You can create a role with the required API rights using roles module and assign it to the user account that will be used to access the APIs.

How to get password for authenticate api?

By default, none of the Global E-Invoicing user have enriched apiaccess. To enable enriched api access for any user, log in into Global E-Invoicing system & navigate to new portal using menu link. In new portal, under Manage Organizations => Users, you need to enable enriched api access against user with which you want to access enriched api. To enable enriched api access against user, click on "Set Enriched API Access" icon from user listing as shown below

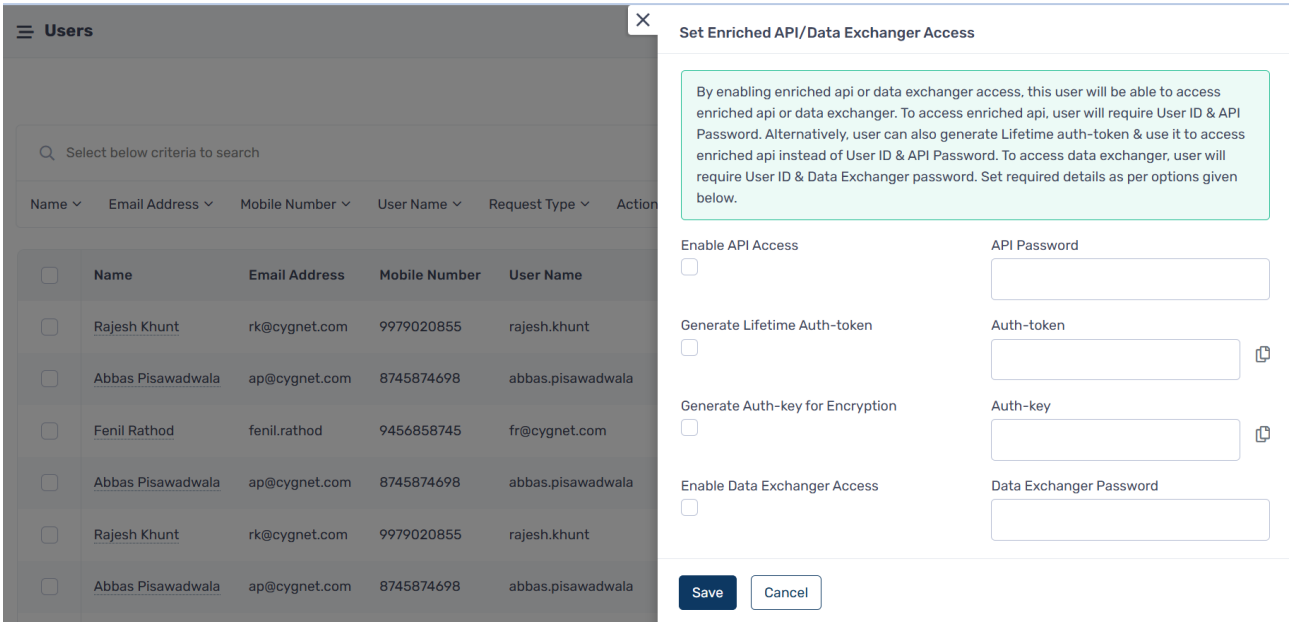

How to enable api payload encryption mode?

Many organizations have inbuilt policy which does not allow them to pass sensitive data without encryption even though communication is happening over HTTPS or VPN or MPLS. To mitigate such situation, Global E-Invoicing enriched api supports dual mode, with & without encrypted api payload.

STEP 1: Generate auth-key

To enable api payload encryption mode, you are required to generate auth-key. This is basically random AES-256 bit key.

Encrypt this key using RSA public key of Global E-Invoicing. Pass this encrypted value in http header of Authenticate API call along with client-id & client-secret. This will basically establish encryption decryption key between you and us. You are required to pass base64 value of encrypted auth-key.

Steps to generate & pass auth-key in headers

> Generate AES-256 Key. The result of this will be in the form of Byte [ ].

> Encrypt step 1 result via RSA public key of Global E-Invoicing. The result of this will be in the form of Byte [ ].

> Do base64 encoding of step 3 result.

Http Header Key	Sample Value
client-id	RyDIqxl36zDYFUJCH5t4EeVbxe4lS/acpCLEOJa2iqo=
client-secret	I5H0jzOy28U6vzydi3qMR35jJDAjiVjbtzcNBFYOPTz7rGleY5JxrKVUt16Kf1FwdkywARyY85xYxg==
auth-key	QAajWUcAn1MSXSAENkX2CCh/sxjssOdrol0M+gxX+VJsZd9+wXmJ3gI68PwYRO6WCwyxfLu2Kb7ZX67zlfob4Mg+aDsVYUUEPjT5b6l0PzdiNPcrQU0Jqmok1VpjRkNC0Buy5h6rM4VbOoxULrMBC66aEdwt81WoEKkWVBESVtbUcI1/9gSrPVnv8j69QQiEtaXFWj1U7Ve4AK0YbVFLmy9Wf1j8B22B6WNNjP94mNuzKrWAQabXrMKGZE8hSpDR0CKMC+JsnBN8jhXV3E4GVrpxyhehSIdQSr+353f9fNIzmov3f0AuKCMzdSl+KywvegdGz1Mf+4cQAV4R1FuUtw==
content-type	application/json

STEP 2: Encrypt password using auth-key

Along with above, you are required to pass encrypted password (using auth-key) in request payload of Authenticate api.

You are required to pass base64 value of encrypted password.

Steps to pass encrypted password in headers

> Convert password into Byte [ ] of UTF-8 format.

> Encrypt step 4 result via AES using auth-key generated in step 1. The result of this will be in the form of Byte [ ].

> Do base64 encoding of step 5 result.

Sample Request Body

```
{
  "forceRefresh": false,
  "username": "string",
  "password": "QAajWUcAn1MSXSAENkX2CCh/sxjss+VJsZd9+wXmJ3gI68PwYRO6WCwylfob4Mg+aDsVYUUEPj=="
}
```

NOTE: - Response of Authenticate api will always be in plain text but all further subsequent api call will support only encrypted request & response payload if api payload encryption mode is enabled via auth-key.

STEP 3: Encrypt request payload using auth-key

In case of request payload, you are required to pass base64 value of encrypted request payload under data attribute of JSON structure.

Steps to pass encrypted payload in request body

> Prepare request payload in JSON format

> Convert above step 7 result into Byte [ ] of UTF-8 format.

> Encrypt step 8 result via AES using auth-key generated in step 1. The result of this will be in the form of Byte [ ].

> Do base64 encoding of step 9 result.

Sample Encrypted Request Payload


```
{
  "data": "QAajWUcAn1MSXSAENkX2CCh/sxjssOdrol0M+gxX+VJsZd9+wXmJ3gI68PwYRO6WCwyxfLu2Kb7ZX6 7zlfob4M
           g+aDsVYUUEPjT5b6l0PzdiNPcrQU0Jqmok1VpjRkNC0Buy5h6rM4VbOoxULrMBC66aEdwt81WoEKkWVBESVtbUcI
           1/9gSrPVnv8j69QQiEtaXFWj1U7Ve4AK0YbVFLmy9Wf1j8B22B6WNNjP94mNuzKrWAQabXrMKGZE8hSpDR0CKMC+
           JsnBN8jhXV3E4GVrpxyhehSIdQSr+353f9fNIzmov3f0AuKCMzdSl+KywvegdGz1Mf+4cQAV4R1FuUtw=="
}
```


STEP 4: Decrypt response payload using auth-key

In case of response payload, you will receive encrypted response (encrypted by auth-key which you have passed during Authenticate api call) under data attribute as shown below.

Steps to decrypt response payload

> Fetch response payload (use data attribute value only).

> Do base64 decoding of step 11 result. The result of this will be in the form of Byte [ ].

> Decrypt step 12 result via AES using auth-key generated in step 1. The result of this will be in the form of Byte [ ] of UTF-8 format.

> Convert step 13 result into string via UTF-8.

Sample Encrypted Response Payload


```
{
  "data": "QAajWUcAn1MSXSAENkX2CCh/sxjssOdrol0M+gxX+VJsZd9+wXmJ3gI68PwYRO6WCwyxfLu2Kb7ZX6 7zlfob4M
           g+aDsVYUUEPjT5b6l0PzdiNPcrQU0Jqmok1VpjRkNC0Buy5h6rM4VbOoxULrMBC66aEdwt81WoEKkWVBESVtbUcI
           1/9gSrPVnv8j69QQiEtaXFWj1U7Ve4AK0YbVFLmy9Wf1j8B22B6WNNjP94mNuzKrWAQabXrMKGZE8hSpDR0CKMC+
           JsnBN8jhXV3E4GVrpxyhehSIdQSr+353f9fNIzmov3f0AuKCMzdSl+KywvegdGz1Mf+4cQAV4R1FuUtw=="
}
```


Error Codes

Error Codes apiis used to get all the error codes of enriched apis. This api will return an array of objects with error code and message properties. Using this error code details, you can map error code and its message based on individual api response.

NOTE: - If you receive GEN0006 or GEN0010, please retry transaction again

Request Headers	Value
auth-token	c57ed106fcaba73e7b2dcf4b7a9cfa10801e68a58dc26088584b80308f28c690
content-type	application/json

Request Response


```
[
  {
    "code": "AUTH0001",
    "message": "Access denied."
  },
  {
    "code": "GEN0001",
    "message": "An unknown error has occurred. Please try again after some time."
  },
  {
    "code": "GEN0002",
    "message": "Api version not found."
  },
  {
    "code": "GEN0003",
    "message": "Api category not found."
  },
  {
    "code": "GEN0004",
    "message": "An unknown error has occurred while calling provider api."
  }
]
```


Ping

Ping API is basically to check the health of the system. User can integrate this api to keep checking Global E-Invoicing health. This api will return http status code 204 with no content in response upon success if system is running.

Overview	Value
Url	/v0.1/ping
Type	GET

Request Headers	Value
content-type	application/json

Notes

> Global E-Invoicing Enriched APIs requires authentication. There are two modes of authentication: Lifetime token and API user & client id / secret.

> If you are opting for lifetime token-based authentication, then you do not need to call authentication api. You can generate the lifetime token from the Global E-Invoicing Portal and same can be used while calling the enriched APIs. This token never expires. However, you can manually reset / generate a new token whenever required from the portal. If required, you can also generate the encryption key along with the lifetime token to encrypt the request payload for all the API calls.

> An auth token retrieved from Global E-Invoicing must be sent along with subsequent API requests to Global E-Invoicing. This auth token will then be used to authorize your requests to our APIs.

• You should not request auth token for every API request as it can be re-used across multiple API requests.

• An auth token will have a pre-defined lifetime.

• Auth token api will have throttling for 24 hours window.

• Auth token must be stored securely.

• ClientID & ClientSecret must be stored securely.

> Max number of auth-token api calls will be allowed 100 in staging & 50 in production per day. So, throttling will always be enabled on auth-token api. Any deviation in implementation will not be tolerated & no change in number of api calls will be extended.

> In every API response if there is an error then we will send request-id in headers. Using this request-id, we will be able to troubleshoot the issue & making process easier at both ends.

Vital APIs

Authentication

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

To access the API, the application should first authenticate using the credentials. The credentials must be generated by the taxpayers to obtain an auth token. The same auth token is to be used to access subsequent APIs. Validity of the auth token will be 360 minutes (60 minutes on Sandbox for ease of testing). Any hits to this API within these 360 minutes will return the same token. There is no need to hit the API unless the token has expired. However, there is a provision to forcefully generate a new token within the last 10 minutes of expiry by calling this API with "ForceRefreshAccessToken" set to "True". On expiry, the same Authentication API must be invoked to issue a new auth token.

URL	Content-Type	Method
/enriched/v0.1/authenticate/token	application/json	POST

Request Header

Attribute	Description
client-id	Client ID will be provided by the service provider
client-secret	Client Secret will be provided by the service provider
content-type	application/json

Request Payload

Attribute	Description
ForceRefresh	Set to true if client needs to refresh the token 10 minutes before expiry
UserName	Username of authenticated user
Password	Password of authenticated user

Sample JSON – Request

```
{
  "forceRefresh": false,
  "username": "string",
  "password": "string"
}
```

Sample JSON – Response

Success


```
{
  "token": "string",
  "expiryTimeInMinutes": 0
}
```


Error


```
{
  "requestId": "861599b4-110f-43d8-9c2c-8acdbcdee958",
  "errors": [
    {
      "type": "Error",
      "code": "VALD0005",
      "message": "Incorrect Username or Password"
    }
  ]
}
```


Data Type & Length Validations

Field	Data Type	Data Length	Description
UserName	String	Min (5), Max (20)	Username should contain letters, digits, and special character from - , _ , . , @ , ‘
Password	String	Min (8), Max (16)	Minimum one lower, one upper, one special and one numeric
AppKey	String	44 characters	Any random 32 bytes array, generated by user. On converting to String using base 64 encoding will be 44 chars long.
ForceRefreshAccessToken	Boolean	True / False	

Entity APIs

Save Entity

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

This API is used to create / register their business as entities in Global E-Invoicing. Taxpayers must have entities created in Global E-Invoicing to access other modules. All the transactions are linked to the entities. It is asynchronous API. Hence, the API consumer should use the save entity status API to get the actual result of the request. Alternatively, you can use callback-url where Global E-Invoicing will pass the result on the callback url upon completion of the request.

URL	Method
/enriched/v0.1/entity/save	POST

Request Header

Attribute	Description
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json

Request Payload

Attributes	Description
entityType	Type of entity being created. Allowed values are Business, Entity, or ChildEntity.
parentEntityName	Name of the parent entity. Applicable when entityType is Entity or ChildEntity.
entityName	Legal name of the entity.
country	Country code of the entity as per Master.
entityTaxRegNo	Tax registration number of the entity as issued by the tax authority.
tin	Tax Identification Number (TIN) of the entity.
financialYearStartMonth	Month in which the financial year of the entity starts.
dataTransmissionPreference	Preferred channel(s) for data transmission such as TaxAuthority or Peppol.
documentType	Type of document configured for the entity, such as StandardInvoice or SimplifiedInvoice.
emailAddress	Official email address of the entity for communication.
mobileNumber	Official mobile contact number of the entity.
buildingNumber	Building or premises number of the entity address.
streetName	Street name of the entity address.
additionalStreetName	Additional street information for the entity address.

Attributes	Description
city	City where the entity is located.
postCode	Postal or ZIP code of the entity address.
additionalAddress	Additional address details such as landmark or area.
countrySubdivision	State or region code within the specified country.
contactFirstName	First name of the primary contact person for the entity.
contactLastName	Last name of the primary contact person for the entity.

Response Payload

Attributes	Description
Reference ID	Unique ID to link the invoice with related documents or transactions

Sample JSON – Request


```
{
  "data": [
    {
      "entityType": "Entity",
      "parentEntityName": "Bahrain Holding W.L.L.",
      "entityName": "Bahrain Trading W.L.L.",
      "country": "BH",
      "entityTaxRegNo": "200012345678902",
      "tin": "2100123456",
      "financialYearStartMonth": "JAN",
      "dataTransmissionPreference": "TaxAuthority",
      "documentType": "StandardInvoice",
      "emailAddress": "einvoice.manama@email.one",
      "mobileNumber": 97317001234,
      "buildingNumber": 1398,
      "streetName": "Al Fateh Highway",
      "additionalStreetName": "Block 338",
      "city": "Manama",
      "postCode": 338,
      "additionalAddress": "Tower 24, Office 1102",
      "countrySubdivision": "Capital Governorate",
      "contactFirstName": "Ahmed",
      "contactLastName": "Al Khalifa"
    }
  ]
}
```


Sample JSON – Response

Success


```
{
  "referenceId": "string"
}
```

Error


```
{
  "errors": [
    {
      "type": "Error",
      "code": "AUTH0001",
      "message": "Access Denied"
    }
  ]
}
```


Data Type & Length Validations

Request Body Attribute	Data Type	Length	Mandatory	Validations	Message
entityType	ENUM value from following: Business, Entity, ChildEntity	15	M	Mandatory field Must be one of the values from the master	Entity Type must not be empty. Please enter Entity Type. Entity Type does not exists in the system. Entity Type is invalid.
parentEntityName	String	300	C	Conditional field Maximum length validation	Parent Entity Name is mandatory for Child Entity. Parent Entity Name length must not exceed 300 characters.
entityName	String	160	M	Mandatory field Maximum length validation	Entity Name must not be empty. Please enter Entity Name. Entity Name length must not exceed 160 characters.
country	ENUM value from following AF, AX, AL, DZ, AS, AD, AO, AI, AQ, AG, AR, AM, AW, AU, AT, AZ, BS, BH, BD, BB, BY, BE, BZ, BJ, BM, BT, BO, BQ, BA, BW, BV, BR, IO, BN, BG, BF, BI, CV, KH, CM, CA, KY, CF, TD, CL, CN, CX, CC, CO, KM, CG, CD, CK, CR, CI, HR, CU, CW, CY, CZ, DK, DJ, DM, DO, EC, EG, SV, GQ, ER, EE, ET, FK, FO, FJ, FI, FR, GF, PF, TF, GA, GM, GE, DE, GH, GI, GR, GL, GD, GP, GU, GT, GG, GN, GW, GY, HT, HM, VA, HN, HK, HU, IS, IN, ID, IR, IQ, IE, IM, IT, JM, JP, JE, JO, KZ, KE, KI, KP, KR, KW, KG, LA, LV, LB, LS, LR, LY, LI, LT, LU, MO, MK, MG, MW, MY, MV, ML, MT, MH, MQ, MR, MU, YT, MX, FM, MD, MC, MN, ME, MS, MA,	2	CM	Mandatory when Entity Type is Entity or ChildEntity Must be one of the values from the master	Country must not be empty when Entity type is Entity or Child Entity. Country does not exists in the system. Country code is invalid.

Request Body Attribute	Data Type	Length	Mandatory	Validations	Message
	MZ, MM, NA, NR, NP, NL, NC, NZ, NI, NE, NG, NU, NF, MP, NO, OM, OT, PK, PW, PS, PA, PG, PY, PE, PH, PN, PL, PT, PR, QA, RE, RO, RU, RW, BL, SH, KN, LC, MF, PM, VC, WS, SM, ST, SA, SN, RS, SC, SL, SG, SX, SK, SI, SB, SO, ZA, GS, SS, ES, LK, SD, SR, SJ, SZ, SE, CH, SY, TW, TJ, TZ, TH, TL, TG, TK, TO, TT, TN, TR, TM, TC, TV, UG, UA, AE, GB, UM, US, UY, UZ, VU, VE, VN, VG, VI, WF, EH, YE, ZM, ZW				
entityTaxRegNo	String	15	C	Conditional field Maximum length validation	Entity Tax Registration Number is mandatory for Entity and Child Entity. Entity Tax Registration Number length must not exceed 15 characters.
entityTin	String	10	C	Mandatory if you are importing Entity and child entity. Non-mandatory if you are importing Business entity . Data type must be String TIN of a child entity should be same as TIN of its parent	Please enter TIN.TIN is Mandatory if Entity Type is 'Entity' or 'Child Entity' TIN must not exceed 10 characters. Invalid TIN. TIN of a child entity should be same as TIN of its parent entity.
financialYearStartMonth	ENUM value from following: JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DEC	3	C	Conditional field Must be one of the values from the master	Financial Year Start Month is mandatory for Business Entity. Financial Year Start Month does not exists in the system.
dataTransmissionPreference	ENUM value from following: TaxAuthority, Peppol	12	M	Mandatory field When Country = BH, DataTransmissionPreference should be Tax Authority.	DataTransmissionPreference must not be empty. Please enter DataTransmissionPreference value.
documentType	ENUM value from following: StandardInvoice, SimplifiedInvoice, Both	15	M	Mandatory field Must be one of the values from the master	Document Type must not be empty. Document Type does not exists in the system. Document Type is invalid.
emailAddress	String	320	M	Mandatory field Maximum length validation	Email Address must not be empty. Please enter Email Address. Email Address must not exceed 320 characters.
mobileNumber	Numeric	15	NM	Maximum length validation	Mobile Number must not exceed 15 characters.
buildingNumber	String	40	NM	Maximum length validation	Building Number must not exceed 40 characters.
streetName	String	60	C	Maximum length validation	Street Name must not exceed 60 characters.

Request Body Attribute	Data Type	Length	Mandatory	Validations	Message
additionalStreetName	String	200	C	Maximum length validation	Additional Street Name must not exceed 200 characters.
city	String	40	NM	Maximum length validation	City must not exceed 40 characters.
postCode	String	15	NM	Maximum length validation	Post Code must not exceed 15 characters.
additionalAddress	String	200	NM	Maximum length validation	Additional Address must not exceed 200 characters.
countrySubdivision	String	50	NM	Maximum length validation	Country Subdivision must not exceed 50 characters.
contactFirstName	String	200	NM	Maximum length validation	Contact First Name must not exceed 200 characters.
contactLastName	String	200	NM	Maximum length validation	Contact Last Name must not exceed 200 characters.

Save Entity Status

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

This API can be used to check the status of Save Entity using reference id received during Save Entity API call.

URL	Method
/reference/status?referenceId={referenceId}	GET

Request Header

Attribute	Description
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json

Request Payload

Attributes	Description
Reference ID	Unique ID to link the invoice with related documents or transactions

Sample JSON – Response

Error


```
{
  "requestType": "SaveEntities",
  "status": "PE",
  "version": "v0.1",
  "validationReport": [
    {
```

```
      "entityType": "Entity",
      "entityTaxRegNo": "200012345678902",
      "entityName": null,
      "tin": "2100123456",
      "propertyErrors": [
        {
          "propertyName": "EntityName",
          "errors": [
            {
              "code": "VAL0001",
              "message": "'EntityName' must not be empty.",
              "type": "Error"
            }
          ]
        }
      ]
    }
  ],
  "referenceId": "v7ROodxlCSuftB7bpYsiF+dh2RCgj5780ysLNk4lpEk="
}
```


Success


```
{
  "requestType": "SaveEntities",
  "status": "P",
  "dataReport": [
    {
      "entityType": "Entity",
      "entityTaxRegNo": "200012345678902",
      "entityName": "Bahrain Trading W.L.L.",
      "tin": "2100123456"
    }
  ],
  "referenceId": "v7ROodxlCSuftB7bpYsiF+dh2RCgj5780ysLNk4lpEk="
}
```


Onboard Entity (Tax Authority)

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

This API is used to create / register their business as entities in Global E-Invoicing. Taxpayers must have entities created in Global E-Invoicing to access other modules. All the transactions are linked to the entities. It is asynchronous API. Hence, the API consumer should use the save entity status API to get the actual result of the request.

URL	Method
/enriched/v0.1/entity/onboardTaxAuthority	POST

Request Header

Attributes	Description
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json

Request Payload

Attributes	Description
Country	Country of the entity issuing the e-Invoice
Entity Tax Registration Number	Tax registration number of the entity issuing the e-Invoice
Entity TIN	Tax Identification Number (TIN) of the entity issuing the e-Invoice
Entity Name	Legal name of the entity issuing the e-Invoice
Entity Type	Type of the entity issuing the e-Invoice
Otp	One-Time Password used to verify and authenticate the entity onboarding request
Onboard Level	Specifies the level (e.g. Entity, ChildEntity) at which the onboarding is being performed

Response Payload

Attributes	Description
Reference ID	Unique ID to link the invoice with related documents or transactions

Sample JSON – Request


```
{
  "data": [
    {
      "entityType": "Entity",
      "entityTaxRegNo": "200012345678902",
      "entityTin": "2100123456",
      "entityName": "Bahrain Trading",
      "country": "BH",
      "otp": "151515",
      "onboardLevel": "Entity"
    }
  ]
}
```


Sample JSON – Response

Error


```
{
  "errors": [
    {
      "type": "Error",
      "code": "AUTH0001",
      "message": "Access Denied"
    }
  ]
```

```
}
```

Success

```
{
  "referenceId": "string"
}
```

Data Type & Length Validations

Field	Data Type	Data Length	Mandatory	Validations	Message
entityType	ENUM value from following: Business,Entity,ChildEntity	11	M	Mandatory field Must be one of the values from the master	Entity Type must not be empty. Please enter Entity Type. Entity Type does not exists in the system. Entity Type is invalid.
entityTaxRegNo	String	30	C	Conditional field Maximum length validation	Entity Tax Registration Number is mandatory for Entity and Child Entity. Entity Tax Registration Number length must not exceed 30 characters.
entityTin	String	10	C	Mandatory if you are importing Entity and child entity. Non-mandatory if you are importing Business entity . Data type must be String TIN length should be 10 characters starting with '1' and ending with '03'. TIN of a child entity should be same as TIN of its parent	Please enter TIN.TIN is Mandatory if Entity Type is 'Entity' or 'Child Entity' Please enter TIN in valid format. TIN should always be alphanumeric with special characters allowed. Invalid TIN. It must be either 10 characters, starting with '1' and ending with '03'. Invalid TIN. TIN of a child entity should be same as TIN of its parent entity.
entityName	String	1000	M	Mandatory field Maximum	Entity Name must not be

Field	Data Type	Data Length	Mandatory	Validations	Message
				length validation	empty. Please enter Entity Name. Entity Name length must not exceed 1000 characters.
country	ENUM value from following AF, AX, AL, DZ, AS, AD, AO, AI, AQ, AG, AR, AM, AW, AU, AT, AZ, BS, BH, BD, BB, BY, BE, BZ, BJ, BM, BT, BO, BQ, BA, BW, BV, BR, IO, BN, BG, BF, BI, CV, KH, CM, CA, KY, CF, TD, CL, CN, CX, CC, CO, KM, CG, CD, CK, CR, CI, HR, CU, CW, CY, CZ, DK, DJ, DM, DO, EC, EG, SV, GQ, ER, EE, ET, FK, FO, FJ, FI, FR, GF, PF, TF, GA, GM, GE, DE, GH, GI, GR, GL, GD, GP, GU, GT, GG, GN, GW, GY, HT, HM, VA, HN, HK, HU, IS, IN, ID, IR, IQ, IE, IM, IT, JM, JP, JE, JO, KZ, KE, KI, KP, KR, KW, KG, LA, LV, LB, LS, LR, LY, LI, LT, LU, MO, MK, MG, MW, MY, MV, ML, MT, MH, MQ, MR, MU, YT, MX, FM, MD, MC, MN, ME, MS, MA, MZ, MM, NA, NR, NP, NL, NC, NZ, NI, NE, NG, NU, NF, MP, NO, OM, OT, PK, PW, PS, PA, PG, PY, PE, PH, PN, PL, PT, PR, QA, RE, RO, RU, RW, BL, SH, KN, LC, MF, PM, VC, WS, SM, ST, SA, SN, RS, SC, SL, SG, SX, SK, SI, SB, SO, ZA, GS, SS, ES, LK, SD, SR, SJ, SZ, SE, CH, SY, TW, TJ, TZ, TH, TL, TG, TK, TO, TT, TN, TR, TM, TC, TV, UG, UA, AE, GB, UM, US, UY, UZ, VU, VE, VN, VG, VI, WF, EH, YE, ZM, ZW	2	CM	Mandatory when Entity Type is Entity or ChildEntity Must be one of the values from the master	Country must not be empty when Entity type is Entity or Child Entity. Country does not exists in the system. Country code is invalid.
otp	String	6	M	Mandatory field Maximum length validation	Otp must not be empty. Please enter Otp. Otp length must not exceed 6 characters.
onboardLevel	ENUM value from following: Entity, ChildEntity	11	M	Mandatory field Must be one of the values from the master	Onboard Level must not be empty. Please enter Onboard Level. Onboard Level is invalid. Onboard Level should be Entity or ChildEntity

Onboard Entity (Tax Authority) Status

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

This API can be used to check the status of Onboard Entity using reference id received during Onboard Entity API call.

URL	Method
/reference/status?referenceId={referenceId}	POST

Request Payload

Attributes	Description
Reference ID	Unique ID to link the invoice with related documents or transactions

Sample JSON – Response

Error


```
{
  "requestType": "OnboardEntity",
  "status": "ER",
  "version": "v0.1",
  "errors": [
    {
      "code": "GEN0001",
      "message": "An unknown error has occurred. Please try again after some time.",
      "type": "Error"
    }
  ],
  "referenceId": "DYILj6J8lE/JbrTNSzlp4g=="
}
```


Success


```
{
  "requestType": "OnboardEntity",
  "status": "P",
  "version": "v0.1",
  "dataReport": [
    {
      "entityTaxRegNo": "200012345678902",
      "entityTin": "2100123456",
      "entityName": "Bahrain Trading",
      "taxAuthorityStatus": "Onboarded",
      "peppolPushStatus": "NotApplicable",
      "taxAuthorityErrors": null,
      "peppolErrors": null,
      "onboardDetails": null
    }
  ],
  "referenceId": "lb7IVHAg15HGJCYl4mlKyQ=="
}
```

Request Header

Attributes	Description
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json

Update Entity Status

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

This API can be used to update the status of any entity using its primary fields. For example, you can change entity status from Active to Inactive.

This API can be used to update the status of any entity using its primary fields. For example, you can change entity status from Active to Inactive.

URL	Content-Type	Method
/enriched/v0.1/entity/updatestatus	application/json	POST

Request Header

Attributes	Description
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json

Request Payload

Attributes	Description
Country	Country of the entity issuing the e-Invoice
Entity Tax Registration Number	Tax registration number of the entity issuing the e-Invoice
Entity TIN	Tax Identification Number (TIN) of the entity issuing the e-Invoice
Entity Name	Legal name of the entity issuing the e-Invoice
Entity Type	Type of the entity issuing the e-Invoice
Status	Current status of the entity

Sample JSON – Request

```
{
  "entityType": "Entity",
  "entityTaxRegNo": "200012345678902",
  "tin": "2100123456",
  "entityName": "Bahrain Trading W.L.L.",
  "country": "BH",
  "status": "DELETE"
}
```

Sample JSON – Response

Success response will have http status code as 204 & there will be no content.

Error

```
{
  "errors": [
    {
      "type": "Error",
      "code": "AUTH0001",
      "message": "Access Denied"
    }
  ]
}
```

Data Type & Length Validations

Field	Data Type	Data Length	Mandatory	Validations	Message
entityType	ENUM value from following: Business,Entity,ChildEntity	11	M	Mandatory field Must be one of the values from the master	Entity Type must not be empty. Please enter Entity Type. Entity Type does not exists in the system. Entity Type is invalid.
entityTaxRegNo	String	30	C	Conditional field Maximum length validation	Entity Tax Registration Number is mandatory for Entity and Child Entity. Entity Tax Registration Number length must not exceed 30 characters.
entityTin	String	10	C	Mandatory if you are importing Entity and child entity. Non-mandatory if you are importing Business entity . Data type must	Please enter TIN.TIN is Mandatory if Entity Type is 'Entity' or 'Child Entity' Please enter TIN in valid format. TIN should

Field	Data Type	Data Length	Mandatory	Validations	Message
				be String TIN length should be 10 characters starting with '1' and ending with '03'. TIN of a child entity should be same as TIN of its parent	always be alphanumeric with special characters allowed. Invalid TIN. It must be either 10 characters, starting with '1' and ending with '03'. Invalid TIN. TIN of a child entity should be same as TIN of its parent entity.
entityName	String	1000	M	Mandatory field Maximum length validation	Entity Name must not be empty. Please enter Entity Name. Entity Name length must not exceed 1000 characters.
country	ENUM value from following AF, AX, AL, DZ, AS, AD, AO, AI, AQ, AG, AR, AM, AW, AU, AT, AZ, BS, BH, BD, BB, BY, BE, BZ, BJ, BM, BT, BO, BQ, BA, BW, BV, BR, IO, BN, BG, BF, BI, CV, KH, CM, CA, KY, CF, TD, CL, CN, CX, CC, CO, KM, CG, CD, CK, CR, CI, HR, CU, CW, CY, CZ, DK, DJ, DM, DO, EC, EG, SV, GQ, ER, EE, ET, FK, FO, FJ, FI, FR, GF, PF, TF, GA, GM, GE, DE, GH, GI, GR, GL, GD, GP, GU, GT, GG, GN, GW, GY, HT, HM, VA, HN, HK, HU, IS, IN, ID, IR, IQ, IE, IM, IT, JM, JP, JE, JO, KZ, KE, KI, KP, KR, KW, KG, LA, LV, LB, LS, LR, LY, LI, LT, LU, MO, MK, MG, MW, MY, MV, ML, MT, MH, MQ, MR, MU, YT, MX, FM, MD, MC, MN, ME, MS, MA, MZ, MM, NA, NR, NP, NL, NC, NZ, NI, NE, NG, NU, NF, MP, NO, OM, OT, PK, PW, PS, PA, PG, PY, PE, PH, PN, PL, PT, PR, QA, RE, RO, RU, RW, BL, SH, KN, LC, MF, PM, VC, WS, SM, ST, SA, SN, RS, SC, SL, SG, SX, SK, SI, SB, SO, ZA, GS, SS, ES, LK, SD, SR, SJ, SZ, SE, CH, SY, TW, TJ, TZ, TH, TL, TG, TK, TO, TT, TN, TR, TM, TC, TV, UG, UA, AE, GB, UM, US, UY, UZ, VU, VE, VN, VG, VI, WF, EH, YE, ZM, ZW	2	CM	Mandatory when Entity Type is Entity or ChildEntity Must be one of the values from the master	Country must not be empty when Entity type is Entity or Child Entity. Country does not exists in the system. Country code is invalid.
status	ENUM value from following: Active, Inactive, Delete	15	M	Mandatory field Must be one of the values from the master	Status must not be empty. Please enter Status. Status does not exists in the system. Status is invalid.

Documents APIs

Save Documents

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

This API is used to save documents into the Global E-Invoicing portal. It works asynchronously and returns a reference ID to track the final status through the Save Documents Status API or Status Callback. Based on the provided attributes, the system validates the documents and can automatically trigger e-Invoice generation. The request payload must be structured as per the schema specified below.

URL	Method
/enriched/v0.1/document/save	POST

Request Header

Attributes	Description
callback-url	Endpoint URL provided by the client to receive real-time e-Invoice status updates from service provider
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json

Request Payload

Attributes	Description
Country	Country of the entity issuing the e-Invoice (refer country enum)
Entity Tax Registration Number	Tax registration number of the entity issuing the e-Invoice
Entity Name	Legal name of the entity issuing the e-Invoice
Entity TIN	Tax Identification Number (TIN) of the entity issuing the e-Invoice
Return Period	Return period for which the document is being reported
Purpose	Purpose of the document (refer purpose enum)
Auto Push Or Generate	Specifies if the document should be auto-pushed or generated automatically
Supply Type	Type of supply (refer supplyType enum)
Transaction Type	Nature of transaction (refer transactionType master)
Transaction Type Code	Code identifying the transaction type
Document Type	Type of document such as Invoice, Credit Note, etc.
Document UUID	Unique universal identifier for the document
Document Type Purpose	Purpose of the selected document type (refer documentTypePurpose enum)
Document Series Code	Series code used for document numbering

Attributes	Description
Document Number	Sequential number assigned to the document
Document Date	Date and time when the document was created (yyyy-MM-dd HH:mm:ss)
Document Notes	Additional notes or comments related to the document
Document Currency	Currency used in the document (refer DocumentCurrency master)
Exchange Rate	Exchange rate applied if foreign currency is used
Document Period Start Date	Start date of the document’s validity period (yyyy-MM-dd HH:mm:ss)
Document Period End Date	End date of the document’s validity period (yyyy-MM-dd HH:mm:ss)
Purchase Order Number	Reference number of the associated purchase order
Sales Order Number	Reference number of the associated sales order
Contract Document Reference	Contract document reference number
Note Reason	Reason for the note or remark on the document
Document Reference Details	Reference details associated with the document
Bill From Tax Registration Number	Supplier’s tax registration number
Bill From Legal Name	Supplier’s registered legal name
Bill From Trade Name	Supplier’s trade name or business name
Bill From Endpoint	Supplier’s electronic endpoint identifier for e-Invoicing
Bill From Shop Number	Supplier’s shop number
Bill From Street Name	Supplier’s street name
Bill From Additional Street Name	Additional street or building details
Bill From City	Supplier’s city name
Bill From Post Code	Supplier’s postal code or ZIP code
Bill From Additional Address	Additional address details for supplier
Bill From Country Subdivision	Supplier’s state or province
Bill From Country	Supplier’s country (refer Country enum)
Bill From Bank Assigned ID	Bank assigned identifier for supplier
Bill From Bank Assigned ID – Scheme	Scheme for bank identifier (refer Identifier Scheme master)
Bill From Bank Assigned ID – ID	Bank assigned identifier for supplier
Party Bill From Tax Registration Number	Supplier party’s tax registration number
Party Bill From Trade Name	Supplier party’s trade name or business name
Party Bill From Bank Assigned ID	Bank assigned identifier for supplier party
Party Bill From Bank Assigned ID – Scheme	Scheme for bank identifier (refer Identifier Scheme master)
Party Bill From Bank Assigned ID – ID	Bank assigned identifier for supplier party
Party Bill From Block Name	Supplier party’s block name
Party Bill From Building Name	Supplier party’s building name
Party Bill From Shop Number	Supplier party’s shop number
Party Bill From Street Name	Supplier party’s street name

Attributes	Description
Party Bill From City	Supplier party’s city name
Party Bill From Post Code	Supplier party’s postal code or ZIP code
Party Bill From Country Subdivision	Supplier party’s state or province
Party Bill From Country	Supplier party’s country (refer Country enum)
Bill To Tax Registration Number	Buyer’s tax registration number
Bill To Legal Name	Buyer’s registered legal name
Bill To Trade Name	Buyer’s trade or business name
Bill To Endpoint	Buyer’s electronic endpoint identifier for e-Invoicing
Bill To Identifier	Unique identifier for the buyer entity
Bill To Shop Number	Buyer’s shop number
Bill To Street Name	Buyer’s street name
Bill To Additional Street Name	Additional street or building details for buyer address
Bill To City	Buyer’s city name
Bill To Post Code	Buyer’s postal or ZIP code
Bill To Additional Address	Additional address details for the buyer
Bill To Country Subdivision	Buyer’s state or region
Bill To Country	Buyer’s country (refer Country enum)
Payment Due Date	Date by which payment is due (yyyy-MM-dd)
Payment Term Details	Payment terms associated with the document
Payment Details	Payment information associated with the document
Delivery Date	Date and time of delivery (yyyy-MM-dd HH:mm:ss)
Document Allowance Details	Allowance details applicable at document level
Document Charge Details	Charge details applicable at document level
Total Tax Amount In Accounting Currency	Total tax amount in accounting currency
Total Document Amount In Accounting Currency	Total document amount in accounting currency
Total Line Net Amount	Total net amount of all invoice lines
Total Document Allowance	Total allowance applied at document level
Total Document Charge	Total charge applied at document level
Invoice Total Amount Without Tax	Total invoice amount excluding tax
VAT Category Wise Total	VAT totals grouped by VAT category
Invoice Total Tax Amount	Total tax amount of the invoice
Total Document Amount	Total amount of the document including applicable tax
Prepaid Amount	Amount prepaid against the document
Rounding Amount	Rounding amount applied to the document
Payment Amount Due	Amount remaining to be paid
Custom1 to Custom10	User-defined custom fields for additional information

Attributes	Description
Items	Invoice line item details

Response Payload

Attributes	Description
Reference ID	Unique ID to link the invoice with related documents or transactions

Sample JSON – Request


```
{
  "data": [
    {
      "country": "BH",
      "entityTaxRegNo": "200012345678574",
      "entityName": "Bahrain Entity",
      "entityTin": "2000123456",
      "returnPeriod": "082026",
      "purpose": "EINV",
      "autoPushOrGenerate": "",
      "supplyType": "S",
      "transactionType": "NOR",
      "transactionTypeCode": "10000000",
      "documentType": "INV",
      "documentUuid": "61483f74-7773-426a-bda4-098c4ecb2626",
      "documentTypePurpose": "380",
      "documentSeriesCode": null,
      "documentNumber": "DOC-INV-04",
      "documentDate": "2026-08-26 10:10:15",
      "documentNotes": "Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Aenean commodo
            ligula eget dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis
            parturient montes, nascetur ridiculus mus. Donec quam felis, ultricies nec,
            pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim. Donec
            pede justo, fringilla vel, aliquet nec, vulputate eget, arcu. In enim
            justo, rhoncus ut, imperdiet a, venenatis vitae, justo. Nullam dictum felis
            eu p",
      "documentCurrency": "BHD",
      "exchangeRate": null,
      "documentPeriodStartDate": "2025-09-02 10:10:15",
      "documentPeriodEndDate": "2025-09-05 10:10:15",
      "purchaseOrderNumber": "PO-DOC-INV-1005",
      "salesOrderNumber": "SO-DOC-INV-1005",
      "contractDocumentReference": "Cont-DOC-INV-1005",
      "noteReason": "VD",
      "documentReferenceDetails": [
        {
          "referenceNumber": "Ref-DOC-INV-1005",
          "referenceUuid": " test Uuid",
          "referenceDate": "2025-09-02 10:10:15"
        }
      ],
      "billFromTaxRegNo": "100123776789103",
      "billFromLegalName": "UAE_NEW1",
      "billFromTradeName": "BH Trade Name",
      "billFromEndpoint": "0235:july18",
      "billFromShopNumber": "shop 1",
      "billFromStreetName": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commod
            o-ligula-eget-dolor-Aenean-massa-Cum-sociis-natoque-penatibus-et-magni
            s-dis-pa",
      "billFromAdditionalStreetName": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aen
            ean-commodo-ligula-eget-dolor-Aenean-massa-Cum-sociis-natoqu
```

```
      e-penatibus-et-magnis-dis-pa",
  "billFromCity": "Ahd",
  "billFromPostCode": "10001",
  "billFromAdditionalAddress": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean
      -commodo-ligula-eget-dolor-Aenean",
  "billFromCountrySubdivision": "FUJ",
  "billFromCountry": "BH",
  "billFromBankAssignedId": [
    {
      "scheme": "0235",
      "id": "1008193102"
    }
  ],
  "partyBillFromTaxRegNo": "100123456789103",
  "partyBillFromTradeName": "",
  "partyBillFromBankAssignedId": [
    {
      "scheme": "0235",
      "id": "1008193102"
    }
  ],
  "partyBillFromBlockName": "block 1",
  "partyBillFromBuildingName": "building 1",
  "partyBillFromShopNumber": "shop 2",
  "partyBillFromStreetName": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-c
      ommodo-ligula-eget-dolor-Aenean-massa-Cum-sociis-natoque-penatibu
      s-et-magnis-dis-pa",
  "partyBillFromCity": "Ahd",
  "partyBillFromPostCode": "10001",
  "partyBillFromCountrySubdiv": "FUJ",
  "partyBillFromCountry": "BH",
  "billToTaxRegNo": "100123456789103",
  "billToLegalName": "UAE_New",
  "billToTradeName": "trade 1",
  "billToEndpoint": "0235:18july",
  "billToIdentifier": "1111:Test",
  "billToShopNumber": "bill shop",
  "billToStreetName": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-
      ligula-eget-dolor-Aenean-massa-Cum-sociis-natoque-penatibus-et-magnis-di
      s-pa",
  "billToAdditionalStreetName": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenea
      n-commodo-ligula-eget-dolor-Aenean-massa-Cum-sociis-natoque-pe
      natibus-et-magnis-dis-pa",
  "billToCity": "bhv",
  "billToPostCode": "10001",
  "billToAdditionalAddress": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-c
      ommodo-ligula-eget-dolor-Aenean",
  "billToCountrySubdivision": "FUJ",
  "billToCountry": "BH",
  "paymentDueDate": "2025-10-26",
  "paymentTermDetails": [
    {
      "id": "jhasd7e",
      "note": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-e
        get-dolor-Aenean",
      "amount": "105",
      "dueDate": "2025-10-02"
    }
  ],
  "paymentDetails": [
    {
      "paymentMode": "1",
      "creditPaymentAccNumber": "c1",
      "creditPaymentAccNumberSch": "cn1",
```

```
      "creditPaymentAccHolderName": "acc1",
      "payeeFinancialInstitutionId": "ins1"
    }
  ],
  "deliveryDate": "2025-09-02 10:10:15",
  "documentAllowanceDetails": null,
  "documentChargeDetails": null,
  "totalTaxAmountInAccCurrency": "5",
  "totalDocAmountInAccCurrency": "105",
  "totalLineNetAmount": "105",
  "totalDocumentAllowance": null,
  "totalDocumentCharge": 109,
  "invoiceTotalAmountWithoutTax": "100",
  "vatCategoryWiseTotal": [
    {
      "vatCategoryTaxableAmount": "100",
      "vatCategoryTaxAmount": "5",
      "vatCategoryCode": "S",
      "vatCategoryRate": "5",
      "vatExemptionReason": "test reason"
    }
  ],
  "invoiceTotalTaxAmount": "5",
  "totalDocumentAmount": "105",
  "prepaidAmount": "5",
  "roundingAmount": "0",
  "paymentAmountDue": "100",
  "custom1": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom2": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom3": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom4": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom5": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom6": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom7": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom8": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom9": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-eg
      et-dolor-Aenean",
  "custom10": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-ligula-e
      get-dolor-Aenean",
  "items": [
    {
      "serialNumber": "1",
      "name": "Laptop",
      "description": "Laptop accessories",
      "isService": "N",
      "taxCategoryCode": "S",
      "taxExemptionReasonCode": null,
      "itemPrepaymentVatDetails": [
        {
          "prepaymentTaxableAmount": "1",
          "prepaymentTaxAmount": "2",
          "prepaymentCategoryCode": "3",
          "prepaymentRate": "4",
          "prepaymentExemptionReason": "5",
          "prepaymentExemptionText": "6"
        }
```

```
          ],
          "taxRate": "5",
          "taxAmountPerUnit": "2",
          "invoicedQuantity": "1",
          "invoicedQuantityUnitCode": "DD",
          "unitPrice": "110",
          "unitAllowanceAmount": "10",
          "netUnitPrice": "100",
          "itemPrepaymentDetails": [
            {
              "documentNumber": "p1",
              "documentUuid": "p2",
              "documentDate": "2026-08-07 00:00:00",
              "documentType": "0"
            }
          ],
          "allowanceDetails": null,
          "chargeDetails": null,
          "itemRoundingAmount": "34",
          "taxableAmount": "100",
          "taxAmount": "5",
          "taxAmountInAccCurrency": "5",
          "prepaidAmountDetails": [
            {
              "receivedDate": "2026-08-07 00:00:00"
            }
          ],
          "buyerIdentification": "",
          "sellerIdentification": "",
          "standardIdentification": "",
          "notes": "Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Aenean commodo
            ligula eget dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis
            parturient montes, nascetur ridiculus mus. Donec quam felis, ultricies nec,
            pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim. Donec pede
            justo, fringilla vel, aliquet nec, vulputate eget, arcu. In enim justo, rhoncus
            ut, imperdiet a, venenatis vitae, justo. Nullam dictum felis eu p",
          "customItem1": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem2": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem3": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem4": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem5": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem6": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem7": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem8": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem9": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-l
            igula-eget-dolor-Aenean",
          "customItem10": "Lorem-ipsum-dolor-sit-amet-consectetuer-adipiscing-elit-Aenean-commodo-
            ligula-eget-dolor-Aenean"
        }
      ]
    }
  ]
}
```

Sample JSON – Response

Success


```
{
  "referenceId": "string"
}
```


Save Document Status

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

URL	Method
/enriched/v0.1/reference/status?referenceId={referenceId}	GET

Request Header

Attribute	Description
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json

Response Payload (For Processed with Errors status)

Attributes	Description
Request Type	Type of API request being processed (e.g., SaveDocuments)
Reference ID	Unique reference identifier for the request
Status	Current status of the request (e.g., P = Pending)
Version	Version of the API being used
Data Report Country	Country associated with the data record
Data Report Entity Tax Registration Number	Tax registration number of the entity in data report
Data Report Entity Name	Name of the entity in data report
Data Report Document Number	Invoice or document number in data report
Data Report Document Date	Date of document issuance in data report
Data Report Document Type	Type of document (refer documentType enum)
Data Report Supply Type	Type of supply (refer supplyType enum)
Data Report Bill From Tax Registration Number	Supplier’s tax registration number
Data Report Bill From Legal Name	Supplier’s legal name

Attributes	Description
Data Report Bill To Tax Registration Number	Buyer’s tax registration number
Data Report Bill To Legal Name	Buyer’s legal name
Data Report Return Period	Return or filing period associated with the document
Data Report Custom1 to Custom10	Custom fields for additional information in data report
Data Report eInv Generated Date	Date and time when the e-invoice was generated
Data Report eInv Push Status	Current processing status of the e-invoice via tax authority. Possible values include 1 - YetNotGenerated, 2 - InProgress, 4 - Generated, 5 - Failed, 6 - Cancelled, 8 - Received, 9 - Rejected, 10 - Accepted, 11 - ConsolidatedPrepared, 12 - NotApplicable, 13 - Revoked, or 14 - PendingConfirmation.
Data Report eInv Errors Type	Type of error returned (e.g., Error)
Data Report eInv Errors Code	Error code from e-invoice validation or submission
Data Report eInv Errors Message	Detailed message describing the e-invoice error

Response Payload (For Processed status)

Attributes	Description
Request Type	Type of API request being processed (e.g., SaveDocuments)
Reference ID	Unique reference identifier for the request
Status	Current status of the request (e.g., P = Pending)
Version	Version of the API being used
Data Report Country	Country associated with the data record
Data Report Entity Tax Registration Number	Tax registration number of the entity in data report
Data Report Entity Name	Name of the entity in data report
Data Report Document Number	Invoice or document number in data report
Data Report Document Date	Date of document issuance in data report
Data Report Document Type	Type of document (refer documentType enum)
Data Report Supply Type	Type of supply (refer supplyType enum)
Data Report Bill From Tax Registration Number	Supplier’s tax registration number
Data Report Bill From Legal Name	Supplier’s legal name
Data Report Bill To Tax Registration Number	Buyer’s tax registration number
Data Report Bill To Legal Name	Buyer’s legal name
Data Report Return Period	Return or filing period associated with the document
Data Report Custom1 to Custom10	Custom fields for additional information in data report

Attributes	Description
Data Report eInv Generated Date	Date and time when the e-invoice was generated
Data Report eInv Push Status	Current processing status of the e-invoice via tax authority. Possible values include 1 - YetNotGenerated, 2 - InProgress, 4 - Generated, 5 - Failed, 6 - Cancelled, 8 - Received, 9 - Rejected, 10 - Accepted, 11 - ConsolidatedPrepared, 12 - NotApplicable, 13 - Revoked, or 14 - PendingConfirmation.
Data Report eInv Errors Type	Type of error returned (e.g., Error)
Data Report eInv Errors Code	Error code from e-invoice validation or submission
Data Report eInv Errors Message	Detailed message describing the e-invoice error

Sample JSON – For Processed with Errors Status


```
{
  "requestType": "SaveDocuments",
  "referenceId": "string",
  "status": "PE",
  "version": "v0.1",
  "validationReport": [
    {
      "country": "string",
      "entityTaxRegNo": "alphanumeric",
      "entityName": "string",
      "documentNumber": "numeric",
      "documentDate": "datetime",
      "documentType": "refer enum documentType",
      "supplyType": "refer enum supplyType",
      "documentUuid": "019c4bf0-5f64-414f-beb6-863bdb8a6974",
      "billFromTaxRegNo": "alphanumeric",
      "billFromLegalName": "string",
      "billToTaxRegNo": "alphanumeric",
      "billToLegalName": "string",
      "returnPeriod": "numeric",
      "custom1": "string",
      "custom2": "string",
      "custom3": "string",
      "custom4": "string",
      "custom5": "string",
      "custom6": "string",
      "custom7": "string",
      "custom8": "string",
      "custom9": "string",
      "custom10": "string",
      "propertyErrors": [
        {
          "propertyName": "DocumentNumber",
          "errors": [
            {
              "type": "Error",
              "code": "VAL0001",
              "message": "Document Number must not be empty"
            }
          ]
        }
      ]
    }
  ]
}
```

Sample JSON – For Processed Status


```
{
  "requestType": "SaveDocuments",
  "status": "P",
  "version": "v0.1",
  "dataReport": [
    {
      "country": "BH",
      "entityTaxRegNo": "200012345678902",
      "entityTin": "2100123456",
      "entityName": "Bahrain Trading W.L.L.",
      "documentNumber": "DOC-INV-04",
      "documentDate": "2026-05-11 00:02:58",
      "documentType": "INV",
      "supplyType": "S",
      "documentUuid": "61483f74-7773-426a-bda4-098c4ecb2626",
      "billFromTaxRegNo": "200012345678902",
      "billFromLegalName": "BH S1",
      "billToTaxRegNo": "200712878177803",
      "billToLegalName": "BH_Receiver",
      "returnPeriod": "52026",
      "custom1": null,
      "custom2": null,
      "custom3": null,
      "custom4": null,
      "custom5": null,
      "custom6": null,
      "custom7": null,
      "custom8": null,
      "custom9": null,
      "custom10": null,
      "eInv": {
        "generatedDate": "2026-05-20 15:38:37",
        "pushStatus": "Generated",
        "errors": null
      }
    }
  ],
  "referenceId": "mOzNb66pNgOSuY785npV3A=="
}
```

Callback APIs

Status Callback

Version	Published On	Expires On	Status
v0.1	2026-09-08	-	Active

Overview

URL	Content-Type	Method
{Asynchronous API URL}	application/json	POST

Request Header

Attributes	Description
callback-url	Endpoint URL provided by the client to receive real-time e-Invoice status updates.
auth-token	Valid Auth Token generated using Authentication API
content-type	application/json