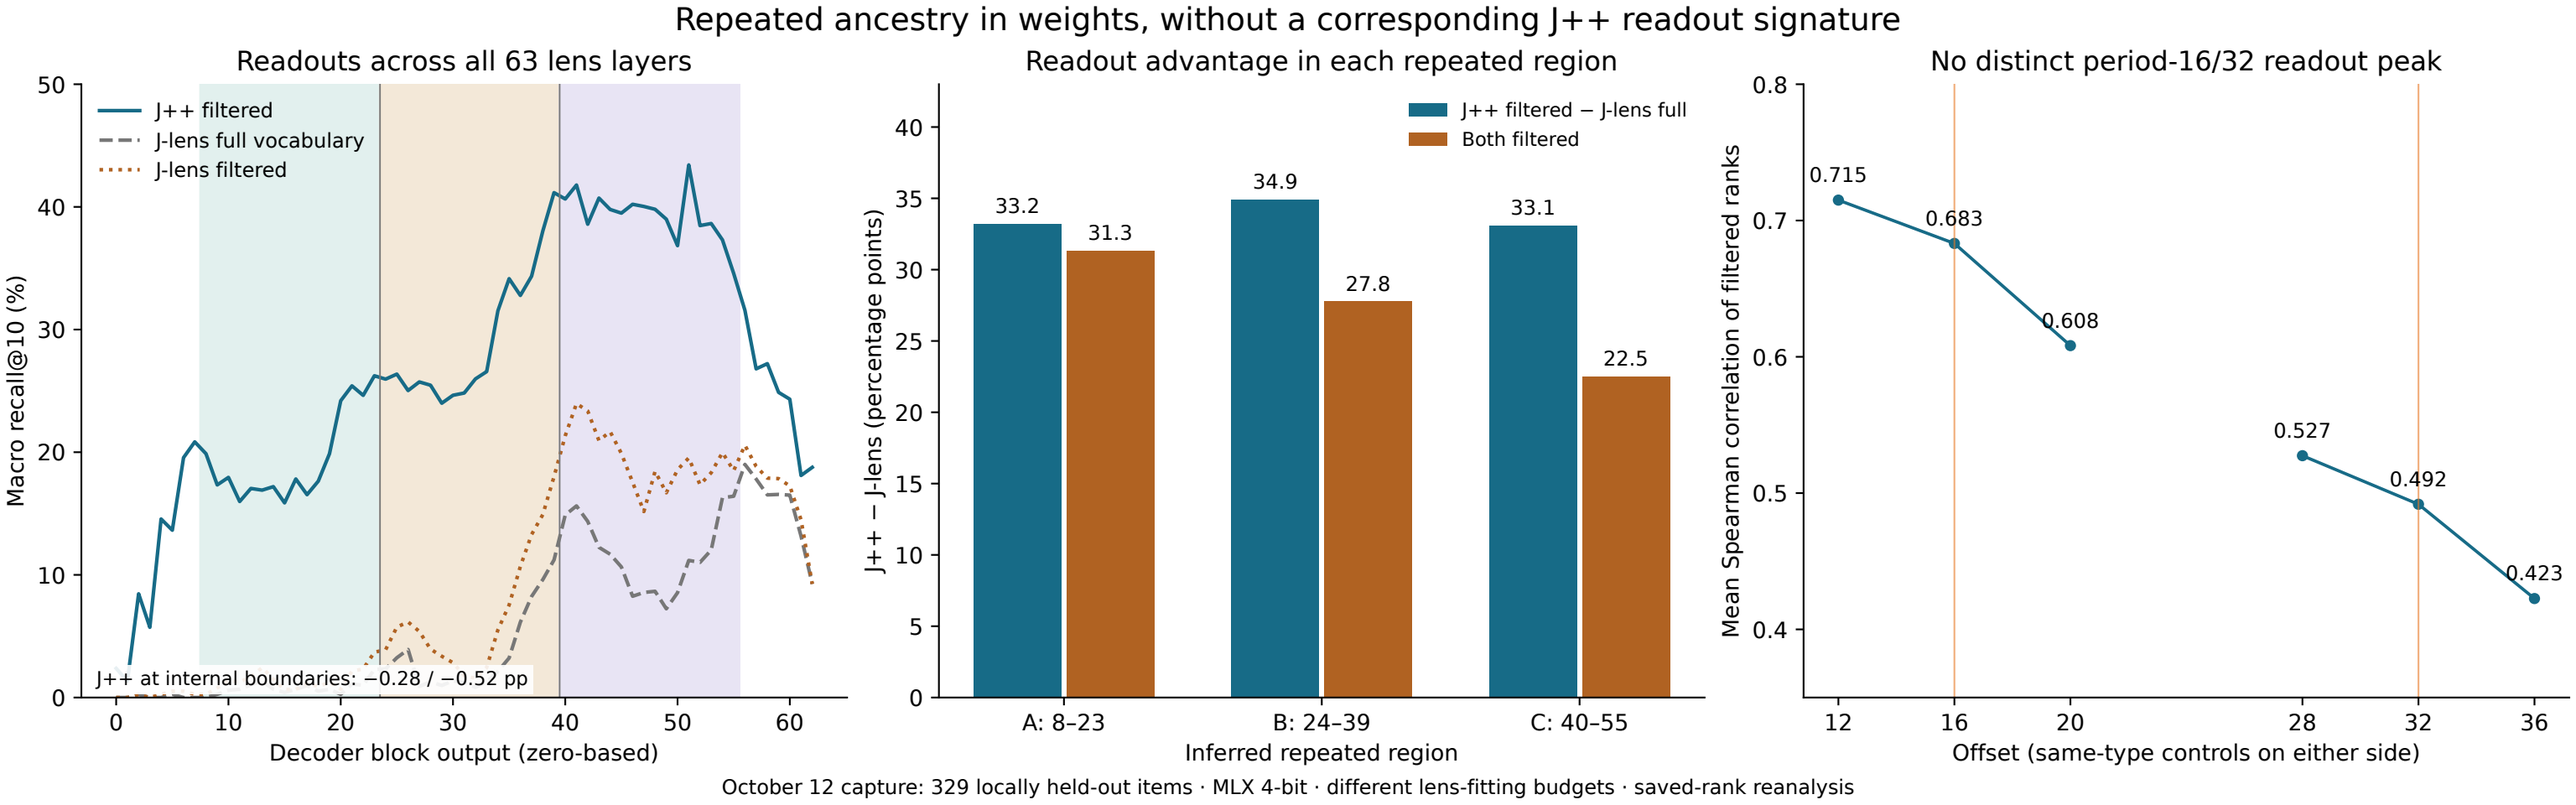
Repeated ancestry in weights, without a corresponding J++ readout signature
Readouts across all 63 lens layers
J++ filtered
J-lens full vocabulary
J-lens filtered
J++ at internal boundaries: −0.28 / −0.52 pp
Macro recall@10 (%)
Decoder block output (zero-based)
Readout advantage in each repeated region
J++ filtered − J-lens full
Both filtered
33.2
31.3
34.9
27.8
33.1
22.5
J++ − J-lens (percentage points)
A: 8–23
B: 24–39
C: 40–55
Inferred repeated region
No distinct period-16/32 readout peak
0.715
0.683
0.608
0.527
0.492
0.423
Mean Spearman correlation of filtered ranks
Offset (same-type controls on either side)
October 12 capture: 329 locally held-out items · MLX 4-bit · different lens-fitting budgets · saved-rank reanalysis