STA_445_Assignment 7

Ezra Guilfoyle

Load your packages here:

Problem 1:

The `infmort` data set from the package `faraway` gives the infant mortality rate for a variety of countries. The information is relatively out of date, but will be fun to graph. Visualize the data using by creating scatter plots of mortality vs income while faceting using `region` and setting color by `oil` export status. Utilize a $\log_{10}$ transformation for both `mortality` and `income` axes. This can be done either by doing the transformation inside the `aes()` command or by utilizing the `scale_x_log10()` or `scale_y_log10()` layers. The critical difference is if the scales are on the original vs log transformed scale. Experiment with both and see which you prefer.

a. The `rownames()` of the table gives the country names and you should create a new column that contains the country names. *`rownames`

```
infmort <- data.frame(infmort)
infmort <- infmort %>% mutate('Country' = rownames(infmort))
```

b. Create scatter plots with the `log10()` transformation inside the `aes()`command.

```
ggplot(infmort, aes(x = log10(income),y = log10(mortality)))+
  geom_point()+
  facet_wrap(~region)+
  aes(color = oil)+
  labs(
    x = "Income",
    y = "Mortality"
  )
```

```
## Warning: Removed 4 rows containing missing values or values outside the scale range
## (`geom_point()`).
```

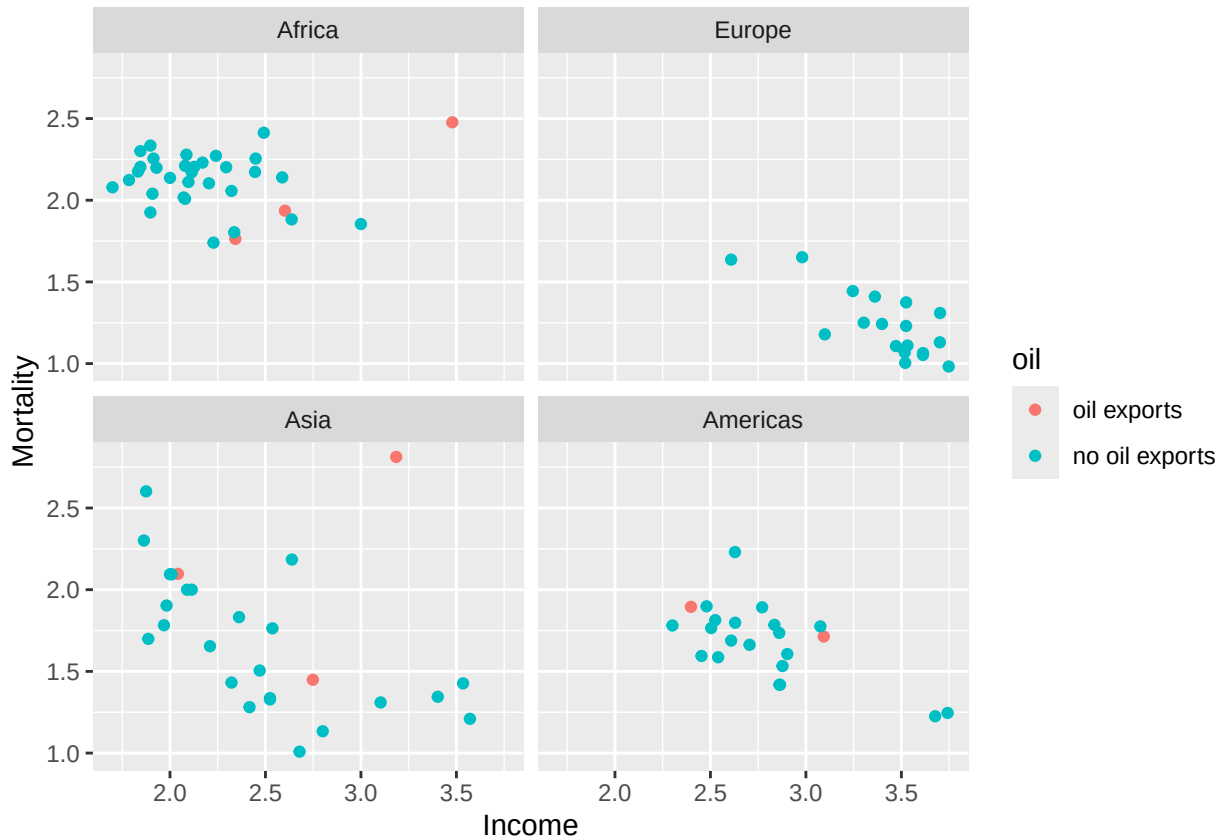

c. Create the scatter plots using the `scale_x_log10()` and `scale_y_log10()`.Set the major and minor breaks to be useful and aesthetically pleasing.Comment on which version you find easier to read.

```
P1 <- ggplot(infmort, aes(x = income,y = mortality))+
  geom_point()+
  facet_wrap(~region)+
  aes(color = oil)
P2 <- P1 + scale_x_log10(
  breaks = c(100, 300, 1000, 3000),
  minor_breaks = c(50,175,500,1500)
)
P3 <- P2 + scale_y_log10(
  breaks = c(5,10,30,100,300)
)
P3
```

```
## Warning: Removed 4 rows containing missing values or values outside the scale range
## (`geom_point()`).
```

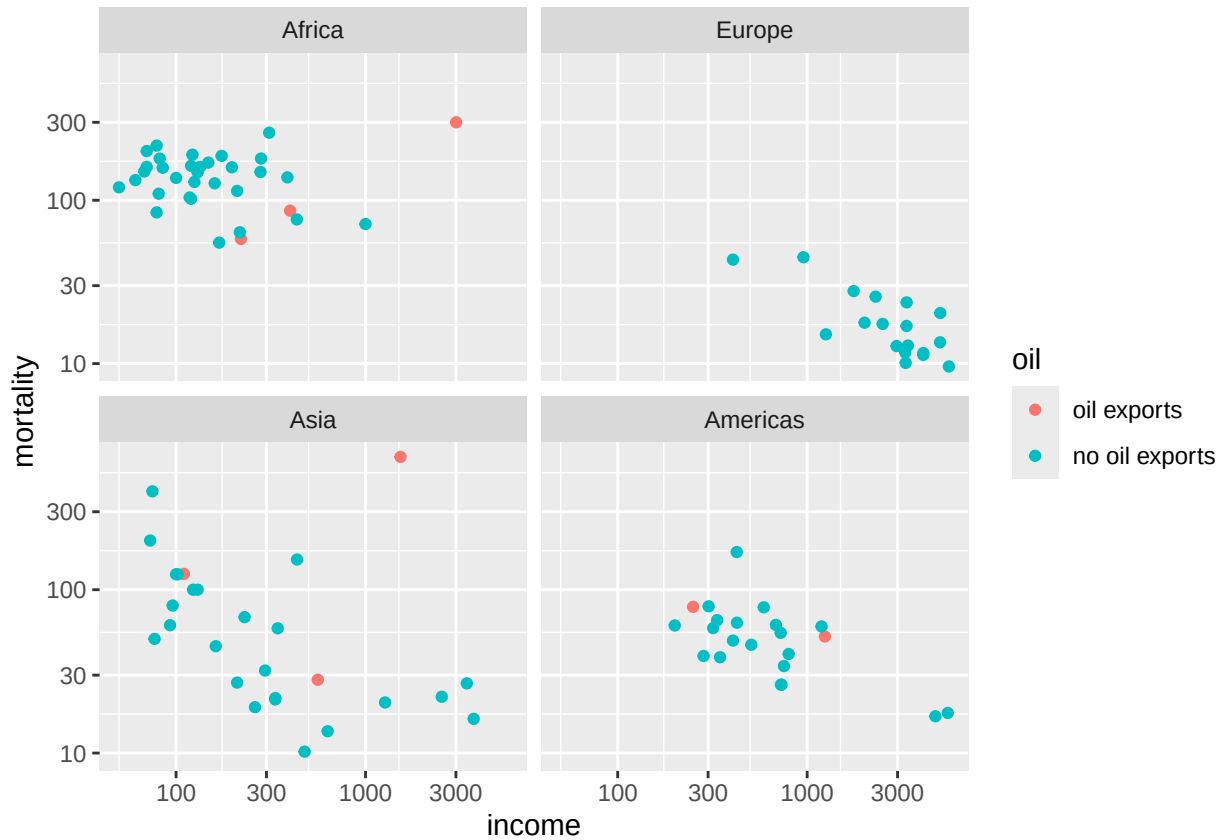

I think the readability of both methods is about the same but I like the customizability of the scale_x_log10 and scale_y_log10 functions.

d. The package `ggrepel` contains functions `geom_text_repel()` and `geom_label_repel()` that mimic the basic `geom_text()` and `geom_label()`functions in `ggplot2`, but work to make sure the labels don't overlap. Select 10-15 countries to label and do so using the `geom_text_repel()` function.

```
teninfmort <-slice_sample(infmort, n = 10)
teninfmort
```

```
##                        region income mortality            oil
## India                    Asia     93      60.6 no oil exports
## Turkey                   Asia    435     153.0 no oil exports
## Southern_Yemen           Asia     96      80.0 no oil exports
## Singapore                Asia   1268      20.4 no oil exports
## Austria                Europe   3350      23.7 no oil exports
## Chile                Americas    590      78.0 no oil exports
## Australia                Asia   3426      26.7 no oil exports
## South_Africa           Africa   1000      71.5 no oil exports
## Sri_Lanka                Asia    162      45.1 no oil exports
## Sierra_Leone           Africa    148     170.0 no oil exports
##                                Country
## India                India
## Turkey               Turkey
## Southern_Yemen       Southern_Yemen
## Singapore            Singapore
```

```
## Austria              Austria
## Chile                Chile
## Australia            Australia
## South_Africa         South_Africa
## Sri_Lanka            Sri_Lanka
## Sierra_Leone         Sierra_Leone
```

```
P3 + geom_text_repel(data = teninfmort, aes(label = Country))
```

```
## Warning: Removed 4 rows containing missing values or values outside the scale range
## (`geom_point()`).
```

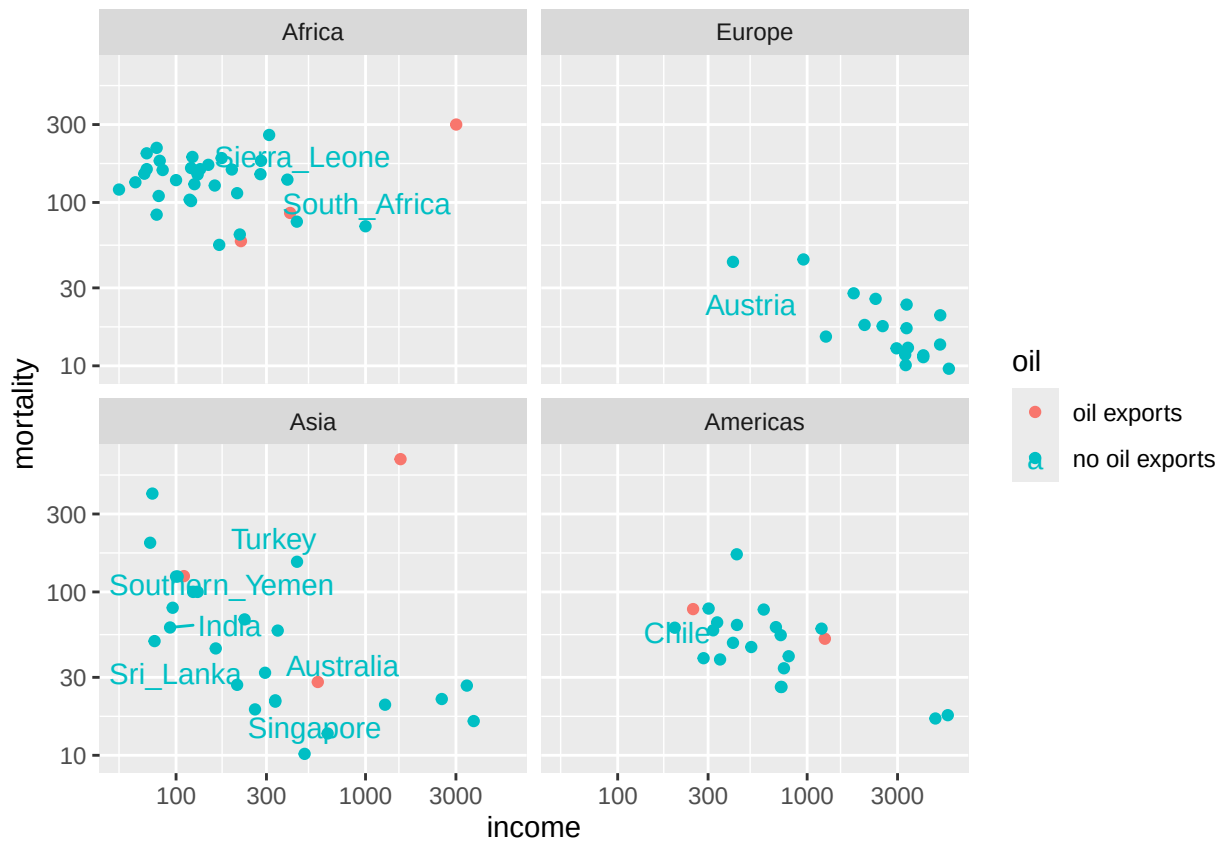

Problem 2

Using the `datasets::trees` data, complete the following:

a. Create a regression model for $y =$ `Volume` as a function of $x =$ `Height`.

```
Regression <- lm( Volume~Height, data = trees)
Regression
```

```
##
## Call:
```

```
## lm(formula = Volume ~ Height, data = trees)
##
## Coefficients:
## (Intercept)       Height
##     -87.124        1.543
```

b. Using the str(your model's name) command, to get a list of all the information stored in the linear model object. Use $ to extract the slope and intercept of the regression line (the coefficients).

```r
info<-str(Regression)
```

```
## List of 12
##  $ coefficients : Named num [1:2] -87.12 1.54
##   ..- attr(*, "names")= chr [1:2] "(Intercept)" "Height"
##  $ residuals    : Named num [1:31] -10.6109 -2.8941 0.0926 -7.5976 -19.0877 ...
##   ..- attr(*, "names")= chr [1:31] "1" "2" "3" "4" ...
##  $ effects      : Named num [1:31] -167.98 53.86 2.05 -5.89 -17.64 ...
##   ..- attr(*, "names")= chr [1:31] "(Intercept)" "Height" "" "" ...
##  $ rank         : int 2
##  $ fitted.values: Named num [1:31] 20.9 13.2 10.1 24 37.9 ...
##   ..- attr(*, "names")= chr [1:31] "1" "2" "3" "4" ...
##  $ assign       : int [1:2] 0 1
##  $ qr           :List of 5
##   ..$ qr   : num [1:31, 1:2] -5.57 0.18 0.18 0.18 0.18 ...
##   .. ..- attr(*, "dimnames")=List of 2
##   .. .. ..$ : chr [1:31] "1" "2" "3" "4" ...
##   .. .. ..$ : chr [1:2] "(Intercept)" "Height"
##   .. ..- attr(*, "assign")= int [1:2] 0 1
##   ..$ qraux: num [1:2] 1.18 1.29
##   ..$ pivot: int [1:2] 1 2
##   ..$ tol  : num 1e-07
##   ..$ rank : int 2
##   ..- attr(*, "class")= chr "qr"
##  $ df.residual  : int 29
##  $ xlevels      : Named list()
##  $ call         : language lm(formula = Volume ~ Height, data = trees)
##  $ terms        :Classes 'terms', 'formula'  language Volume ~ Height
##   .. ..- attr(*, "variables")= language list(Volume, Height)
##   .. ..- attr(*, "factors")= int [1:2, 1] 0 1
##   .. .. ..- attr(*, "dimnames")=List of 2
##   .. .. .. ..$ : chr [1:2] "Volume" "Height"
##   .. .. .. ..$ : chr "Height"
##   .. ..- attr(*, "term.labels")= chr "Height"
##   .. ..- attr(*, "order")= int 1
##   .. ..- attr(*, "intercept")= int 1
##   .. ..- attr(*, "response")= int 1
##   .. ..- attr(*, ".Environment")=<environment: R_GlobalEnv>
##   .. ..- attr(*, "predvars")= language list(Volume, Height)
##   .. ..- attr(*, "dataClasses")= Named chr [1:2] "numeric" "numeric"
##   .. .. ..- attr(*, "names")= chr [1:2] "Volume" "Height"
##  $ model        :'data.frame':   31 obs. of  2 variables:
##   ..$ Volume: num [1:31] 10.3 10.3 10.2 16.4 18.8 19.7 15.6 18.2 22.6 19.9 ...
##   ..$ Height: num [1:31] 70 65 63 72 81 83 66 75 80 75 ...
```

```
##   ..- attr(*, "terms")=Classes 'terms', 'formula'  language Volume ~ Height
##   .. .. ..- attr(*, "variables")= language list(Volume, Height)
##   .. .. ..- attr(*, "factors")= int [1:2, 1] 0 1
##   .. .. .. ..- attr(*, "dimnames")=List of 2
##   .. .. .. .. ..$ : chr [1:2] "Volume" "Height"
##   .. .. .. .. ..$ : chr "Height"
##   .. .. ..- attr(*, "term.labels")= chr "Height"
##   .. .. ..- attr(*, "order")= int 1
##   .. .. ..- attr(*, "intercept")= int 1
##   .. .. ..- attr(*, "response")= int 1
##   .. .. ..- attr(*, ".Environment")=<environment: R_GlobalEnv>
##   .. .. ..- attr(*, "predvars")= language list(Volume, Height)
##   .. .. ..- attr(*, "dataClasses")= Named chr [1:2] "numeric" "numeric"
##   .. .. .. ..- attr(*, "names")= chr [1:2] "Volume" "Height"
##  - attr(*, "class")= chr "lm"
```

```r
str(info)
```

```
##  NULL
```

```r
Regression$coefficients
```

```
## (Intercept)      Height
##   -87.12361     1.54335
```

```r
intercept <- Regression$coefficients["(Intercept)"]
slope <- Regression$coefficients["Height"]
```

c. Using `ggplot2`, create a scatter plot of Volume vs Height.

```r
VvH <- ggplot(trees, aes(x = Volume, y = Height)) +
  geom_point()
VvH
```

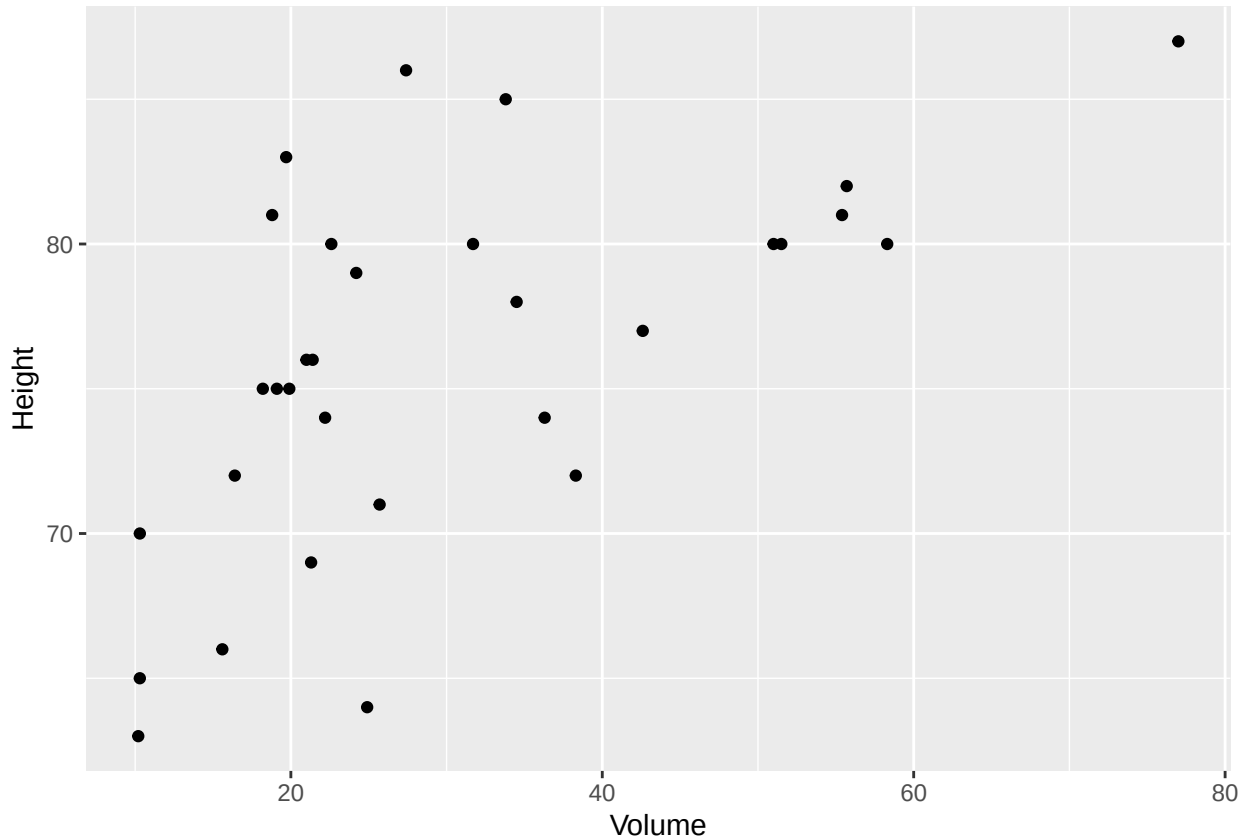

d. Create a nice white filled rectangle to add text information to using by adding the following annotation layer.

annotate('rect', xmin=65, xmax=75, ymin=60, ymax=74, fill='white', color='black')

```
VvH <- VvH + annotate('rect', xmin=65, xmax=75, ymin=60, ymax=74, fill='white', color='black')
```

e. Add some annotation text to write the equation of the line $\hat{y}_i = -87.12 + 1.54x_i$ in the text area.

```
VvH <- VvH + annotate('text', x = 70, y = 67,
              label = TeX("$\\hat{y}_i = -87.12 + 1.54x_i$", output = "character"), parse = TRUE)
```

f. Add annotation to add $R^2 = 0.358$

```
VvH <- VvH + annotate('text',x = 70, y = 65,
                 label = TeX("$R^2 = 0.358$", output = "character"),parse = TRUE)
```

g. Add the regression line in red. The most convenient layer function to use is `geom_abline()`.

```
ggplot(trees, aes(x = Volume, y = Height)) +
  geom_point() +
  geom_abline(color = "red")+
```

```
annotate('rect', xmin=65, xmax=75, ymin=60, ymax=74, fill='white', color='black') +
annotate('text', x = 70, y = 67,
            label = TeX("$\\hat{y}_i = -87.12 + 1.54x_i$", output = "character"), parse = TRUE)+
annotate('text',x = 70, y = 65,
               label = TeX("$R^2 = 0.358$", output = "character"),parse = TRUE)
```

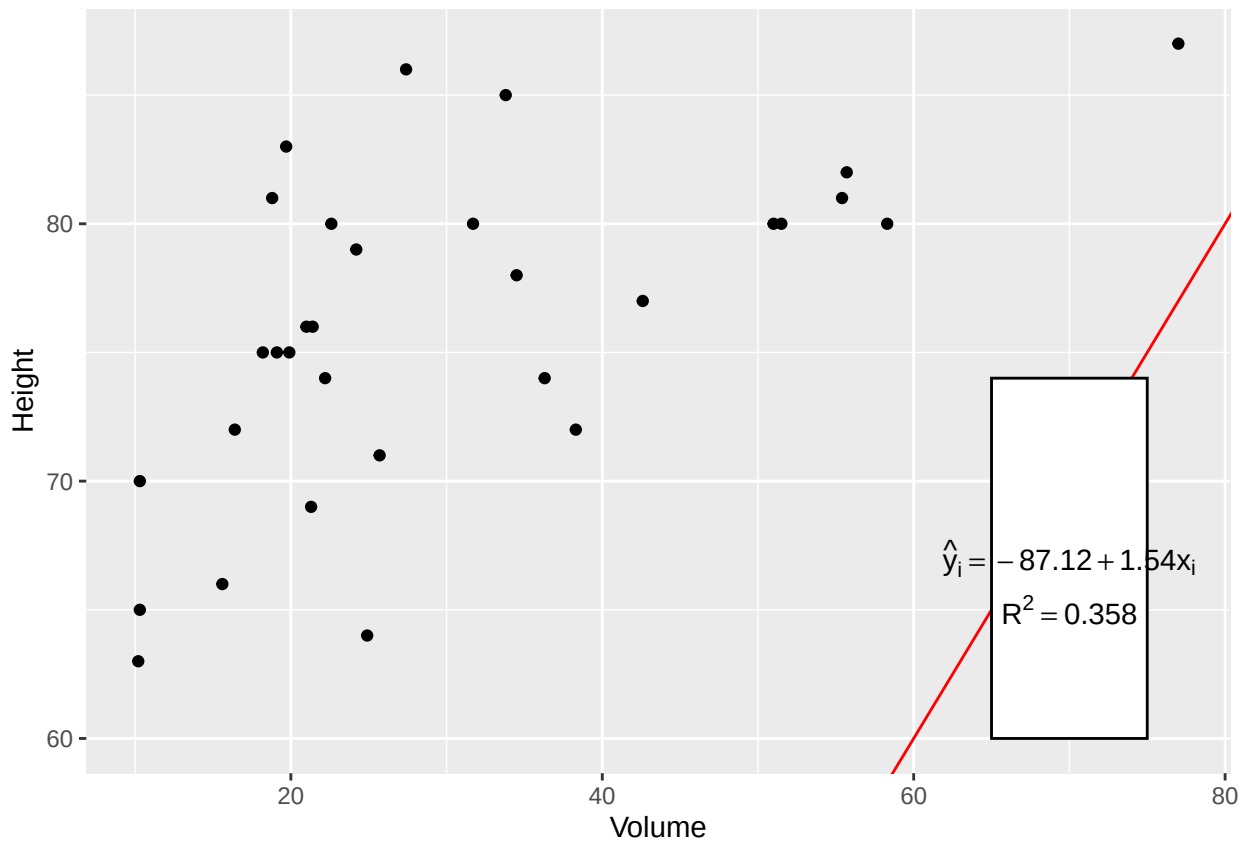

Problem 3

In `datasets::Titanic` table summarizes the survival of passengers aboard the ocean liner *Titanic*. It includes information about passenger class, sex, and age (adult or child). Create a bar graph showing the number of individuals that survived based on the passenger `Class`, `Sex`, and `Age` variable information. You'll need to use faceting and/or color to get all four variables on the same graph. Make sure that differences in survival among different classes of children are perceivable. *Unfortunately, the data is stored as a* `table`*and to expand it to a data frame, the following code can be used.*

```
‘‘‘ r
Titanic <- Titanic %>% as.data.frame()
‘‘‘
```

a. Make this graph using the default theme. *If you use color to denote survivorship, modify the color scheme so that a cold color denotes death.*

```r
default <- ggplot(Titanic, aes(x = Class, y = Freq, fill = Survived) ) +
  geom_bar(stat = "identity", position = "dodge") +
  facet_grid(Age~Sex) +
  scale_fill_manual(values = c("No" = "steelblue","Yes" = "salmon"))
default
```

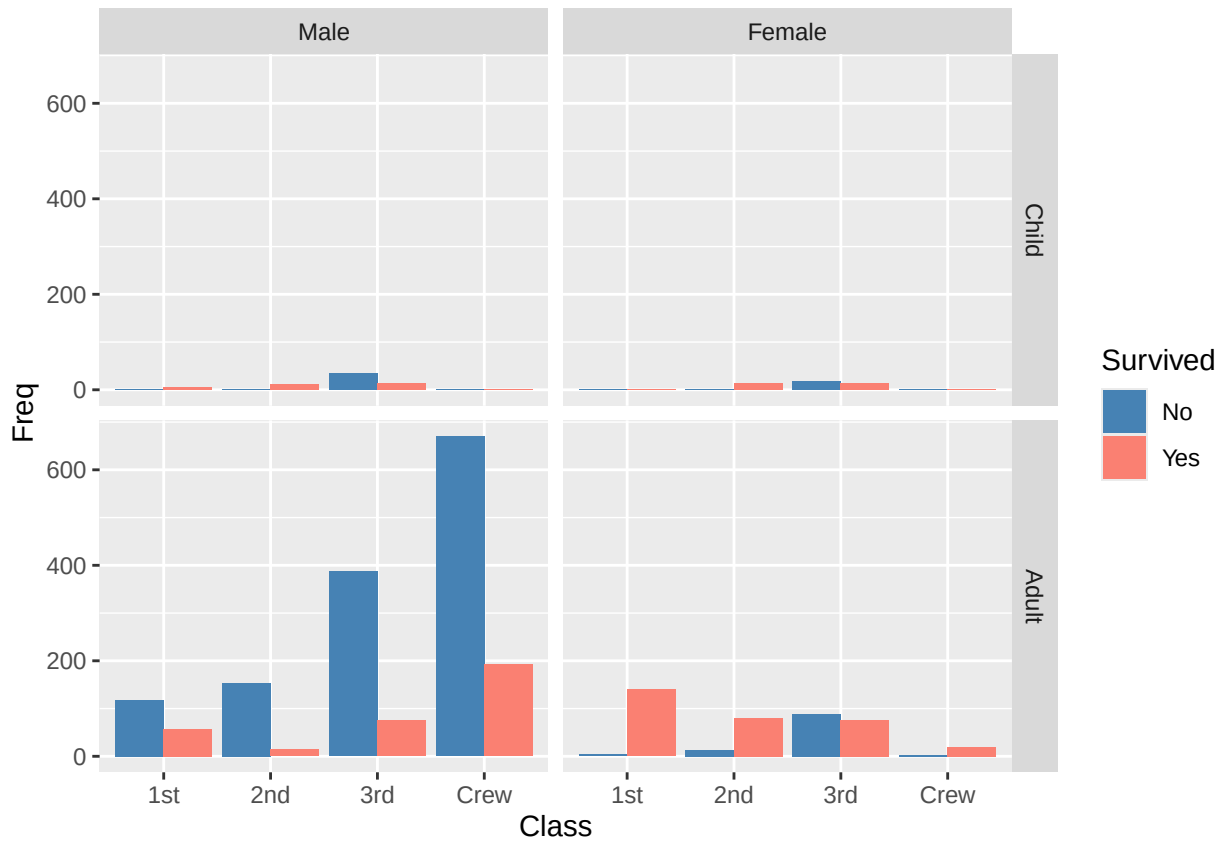

b. Make this graph using the `theme_bw()` theme.

```r
bw <- default + theme_bw()
bw
```

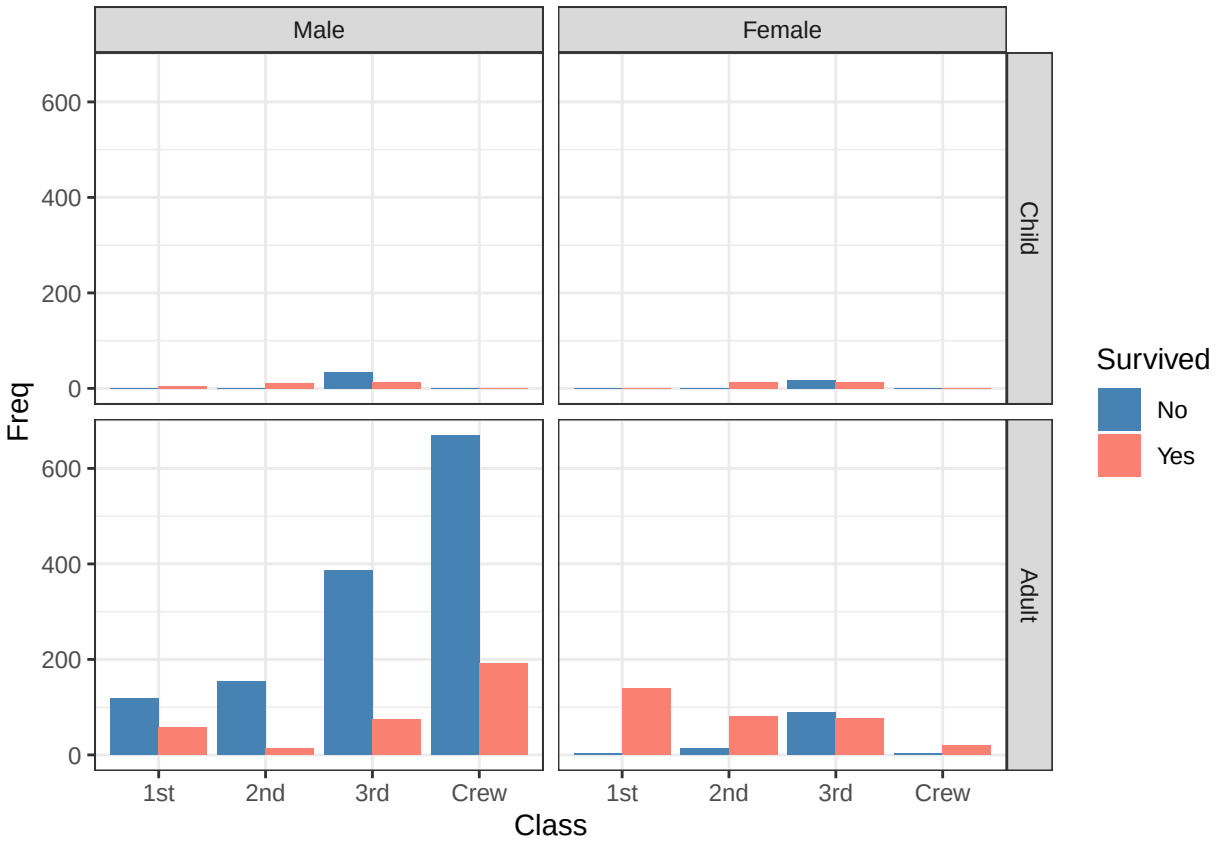

c. Make this graph using the `cowplot::theme_minimal_hgrid()` theme.

```
default + theme_minimal_hgrid()
```

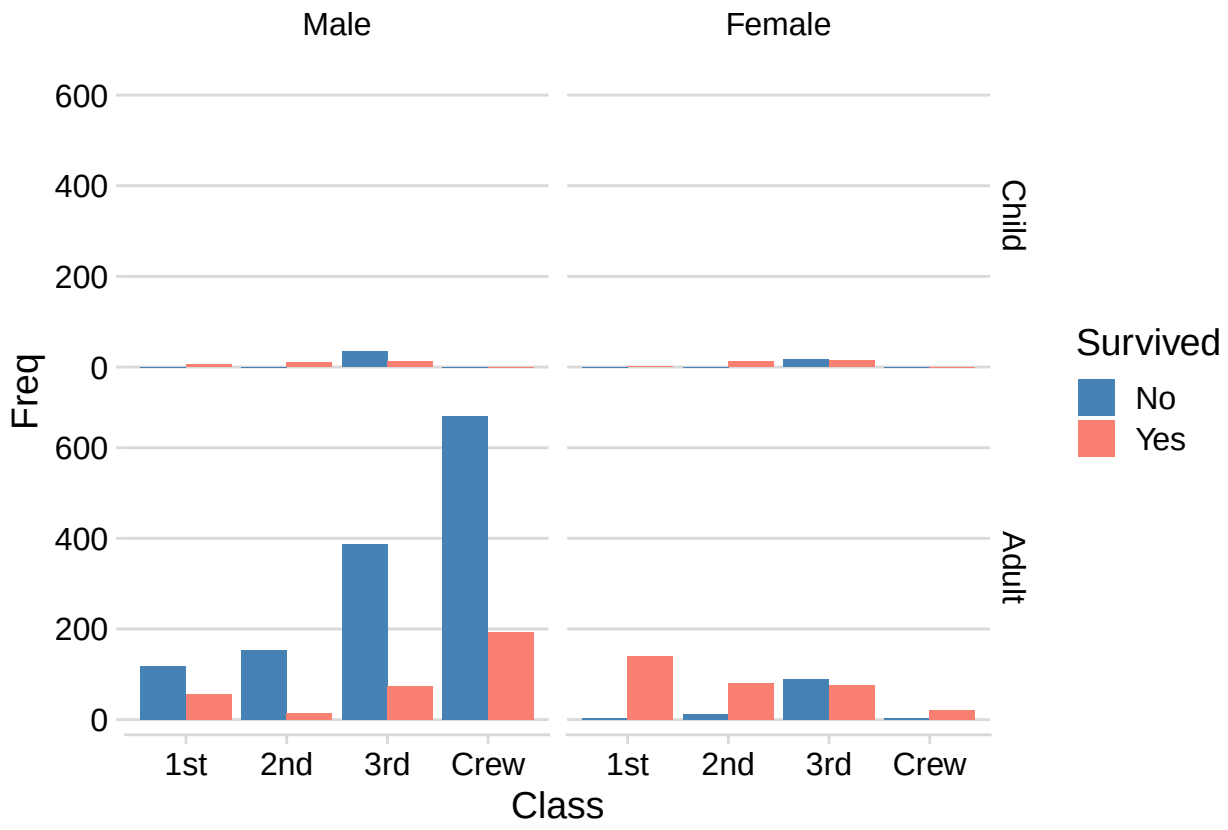

d. Why would it be beneficial to drop the vertical grid lines?

There are less distracting things on the graph and it makes it so the reader focuses on the bars.