5 Unique HTML Elements



in Mohsin Bashir

<q>><q>> tag

The <q> tag defines a short quotation.

<q>> Hi 👋, my name is Mohsin consider to follow </q>

Result

"Hi 👋, my name is Mohsin consider to follow"

<\$></\$> tag

The <s> HTML element renders text with a strikethrough, or a line through it. Use the <s> element to represent things that are no longer relevant or no longer accurate.

Result R

Old Price 400 New Price 50

<mark></mark> tag

The <mark> HTML element represents text which is marked or highlighted for reference or notation purposes due to the marked passage's relevance in the enclosing context.

Hi you should have to<mark>Follow me</mark> for more amazing content Thanks

Result

Hi you should have to Follow me for more amazing content Thanks

<ruby></ruby> tag

The <ruby> HTML element represents small annotations that are rendered above, below, or next to base text, usually used for showing the pronunciation of East Asian characters.


Result R



<details></details> tag

The <details> HTML element creates a disclosure widget in which information is visible only when the widget is toggled into an "open" state. A summary or label must be provided using the <summary> element.

<details>
<summary>Details</summary>
Something small enough to escape casual notice.
</details>

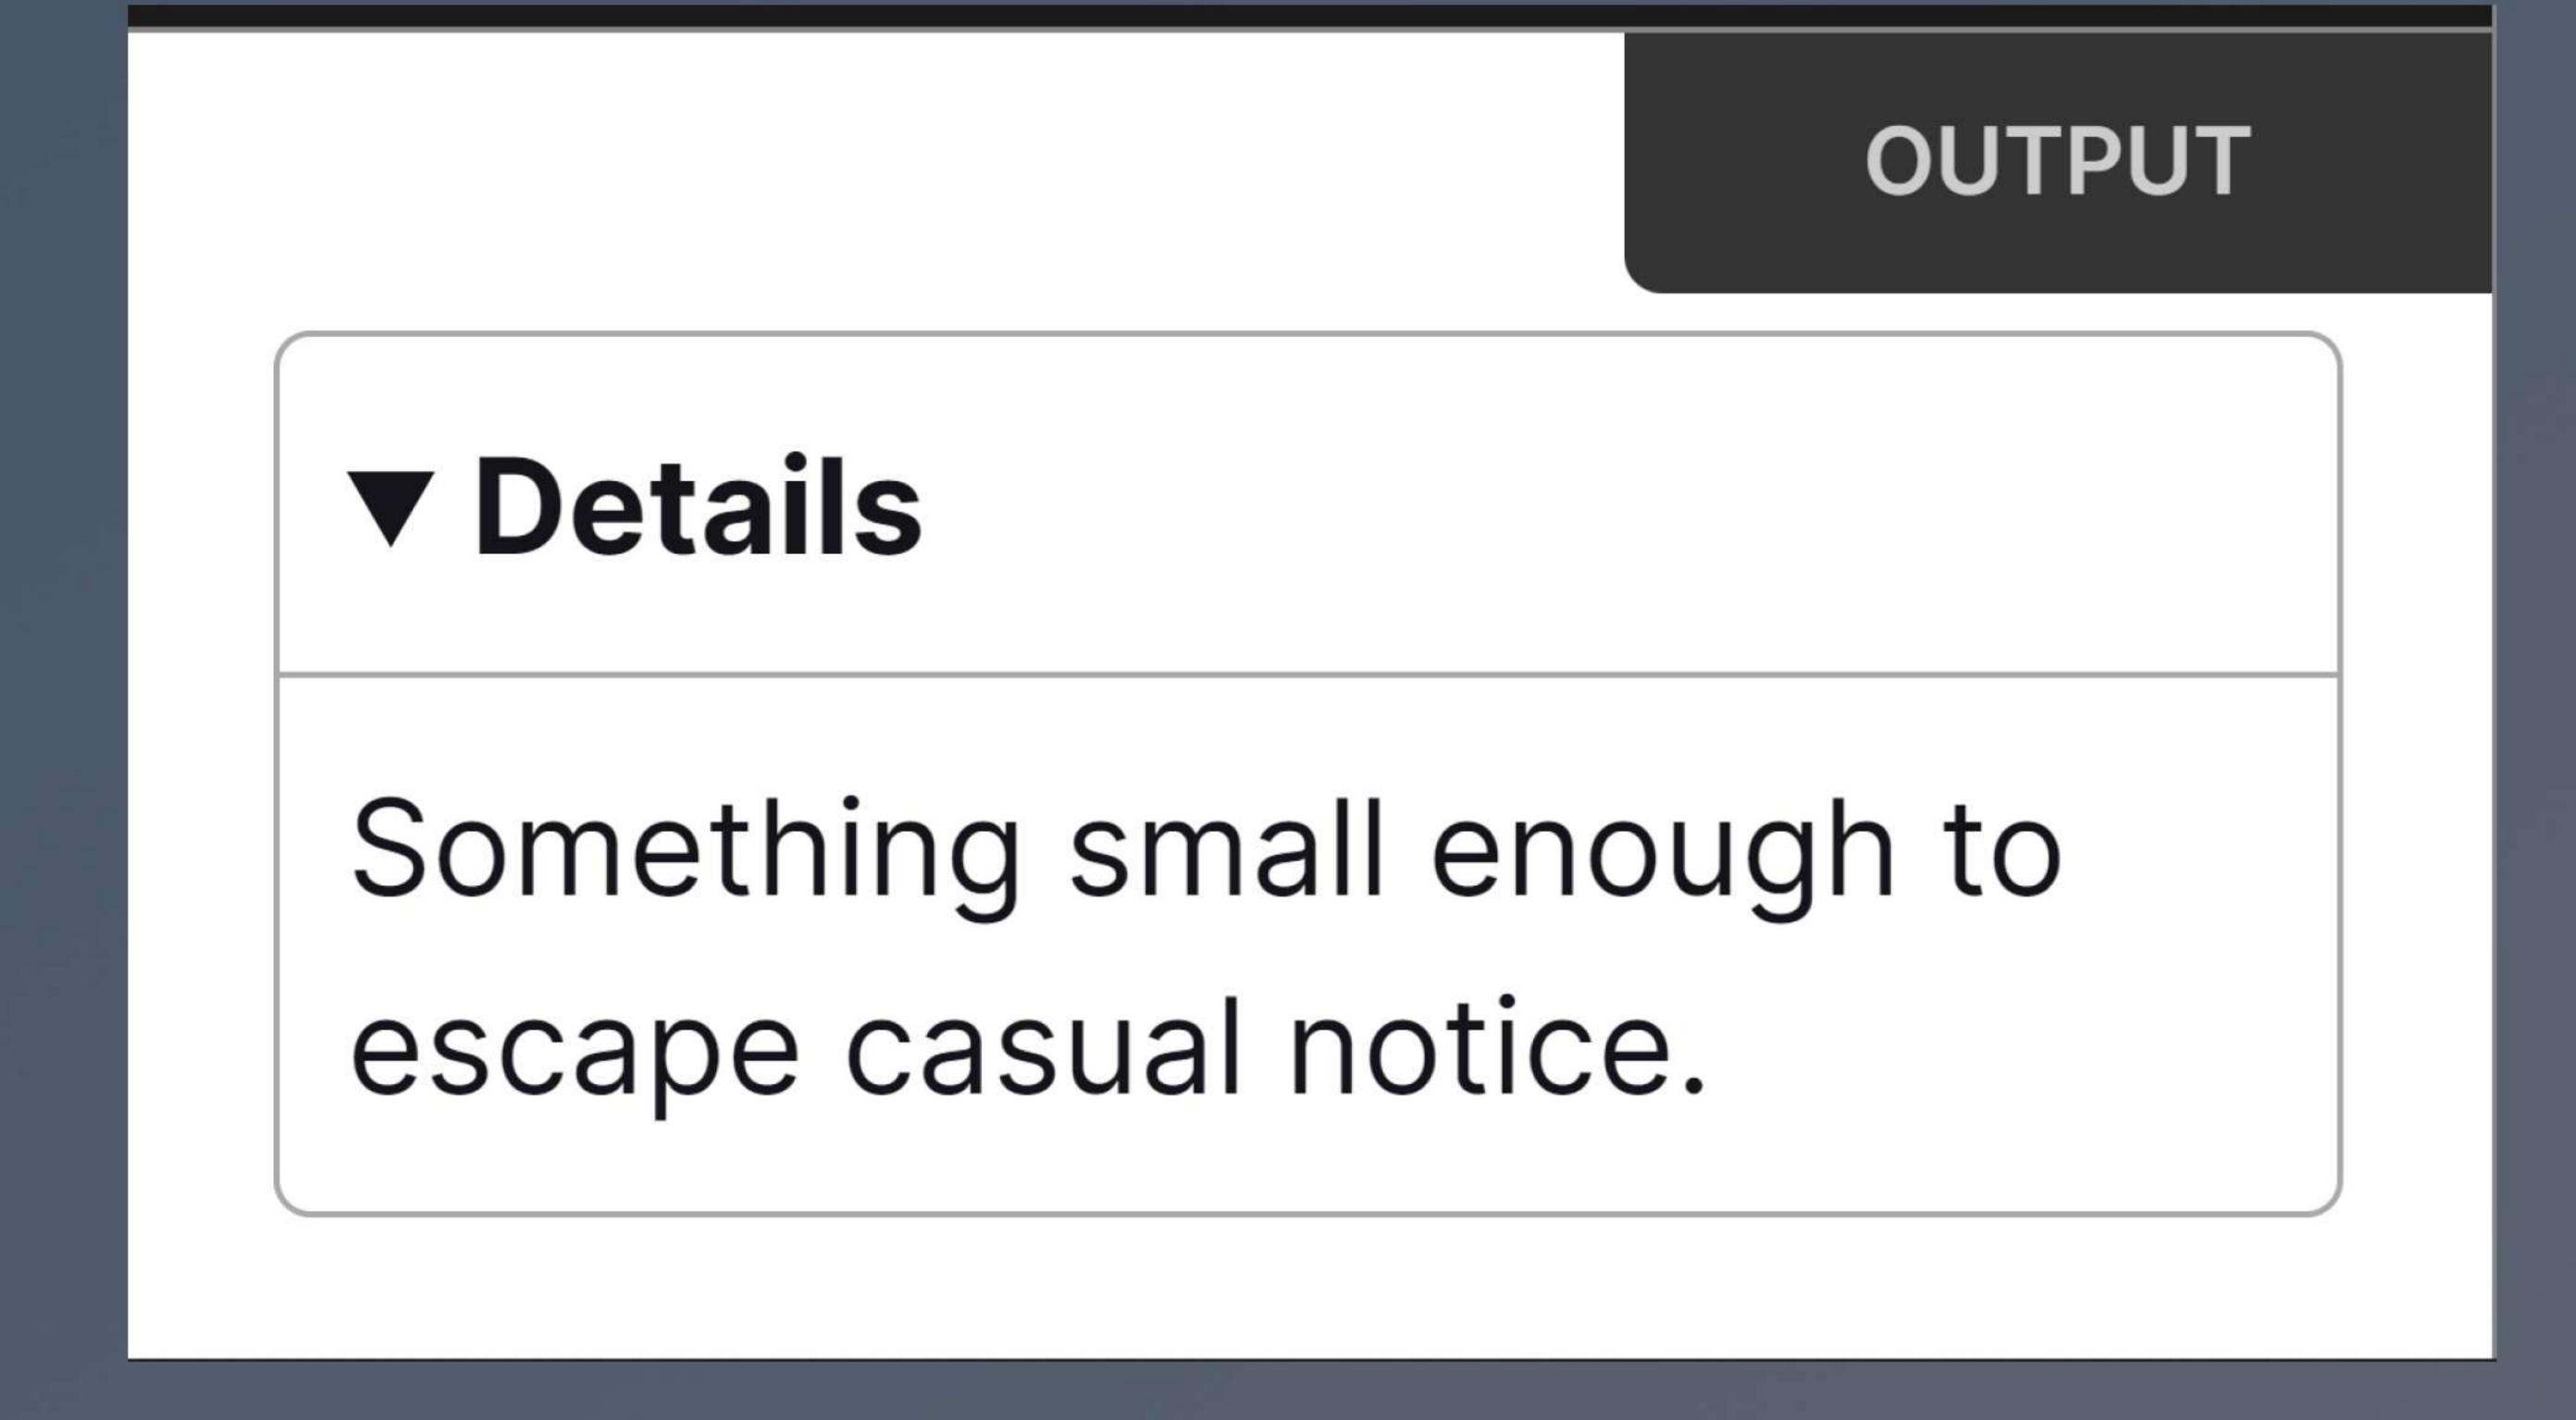



Hi I'm Mohsin
Follow me for More
amazing Content
Thank you

in Mohsin Bashir

