5 Unique HTML Elements

@Mohsin_bashir10

Mohsin Bashir

<q></q> tag

The <q> tag defines a short quotation.

```
<q> Hi 👋, my name is Mohsin consider to follow </q>
```

Result ⤵️

“Hi 👋, my name is Mohsin consider to follow”

<S></S> tag

The <s> HTML element renders text with a strikethrough, or a line through it. Use the <s> element to represent things that are no longer relevant or no longer accurate.

```
<p>Old Price<s>100</s></p>
<p>New price 50</p>
```

Result ⤵️

Old Price ~~100~~

New Price 50

<mark></mark> tag

The <mark> HTML element represents text which is marked or highlighted for reference or notation purposes due to the marked passage's relevance in the enclosing context.

```
<p>Hi you should have to<mark>Follow me</mark> for more amazing content Thanks</p>
```

Result ⤵️

Hi you should have to Follow me for more amazing content Thanks

4

<ruby></ruby> tag

The <ruby> HTML element represents small annotations that are rendered above, below, or next to base text, usually used for showing the pronunciation of East Asian characters.

```
<ruby> 明日 <rp>(</rp><rt>Ashita</rt><rp>)</rp>
</ruby>
```

Result ⤵️

<details></details> tag

The <details> HTML element creates a disclosure widget in which information is visible only when the widget is toggled into an "open" state. A summary or label must be provided using the <summary> element.

```
<details>
  <summary>Details</summary>
  Something small enough to escape casual notice.
</details>
```

OUTPUT

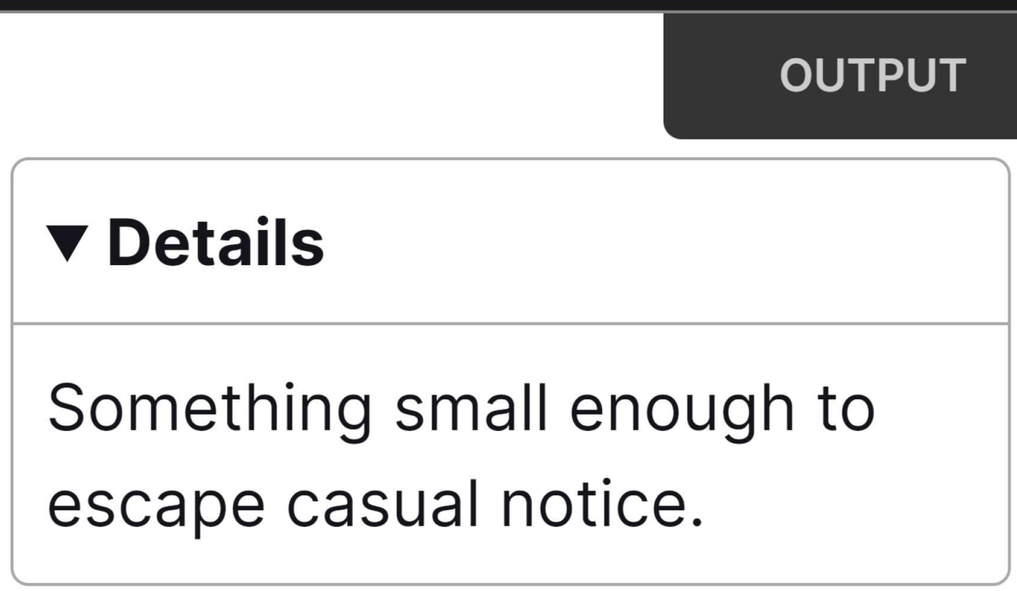

Hi👋 I’m Mohsin

Follow me for More
amazing Content
Thank you 🙏

Mohsin Bashir

@Mohsin_Bashir10