


# Monitor Sensor interfaces to Service and Monitoring Framework

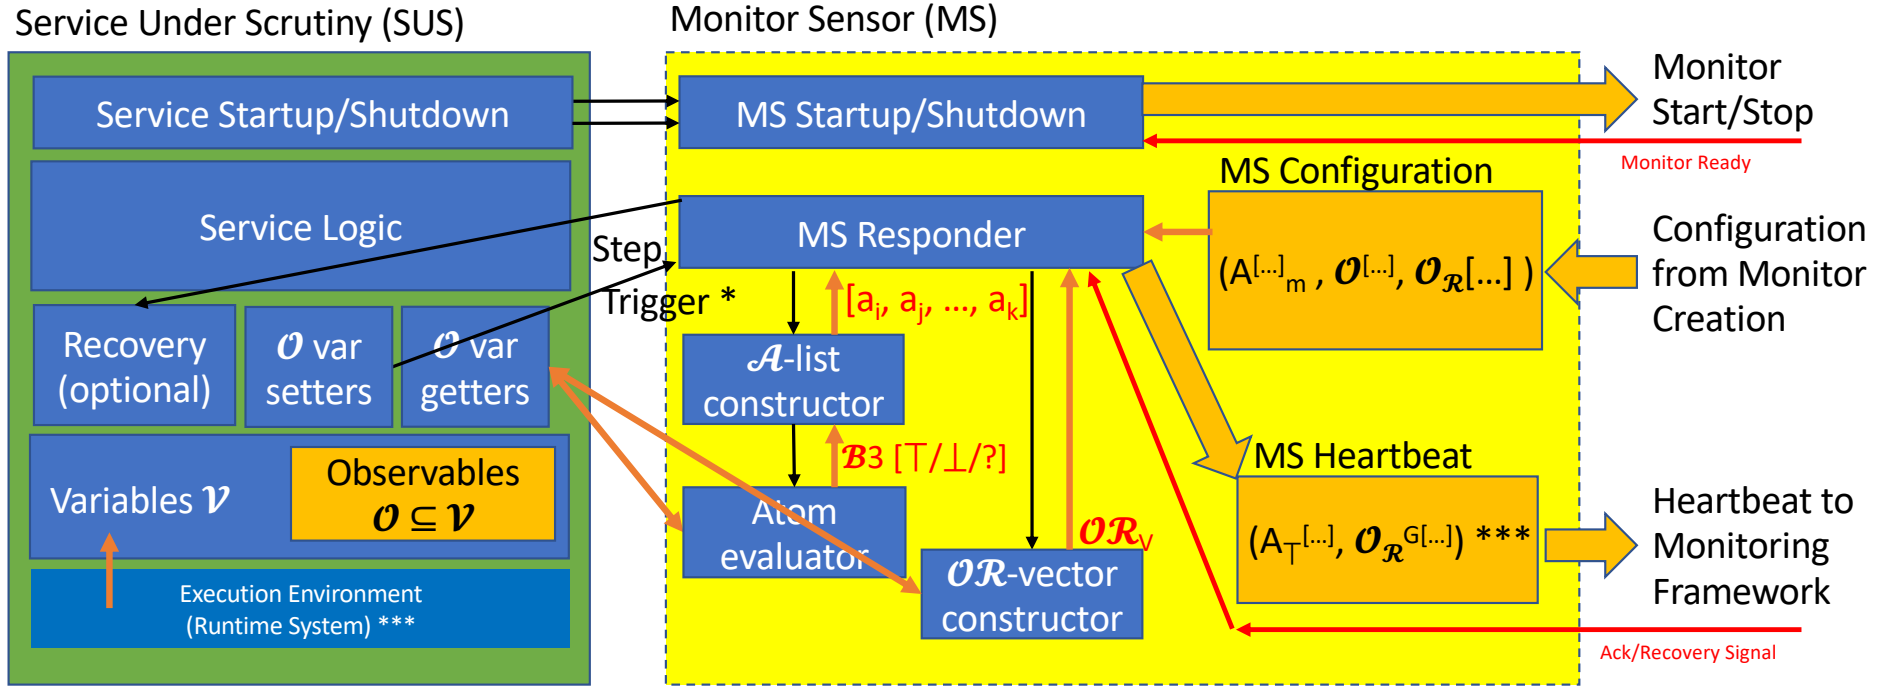

\* There may be other trigger sources from Service Logic or Runtime System (such as timers)

\*\* Runtime System can set reserved variables including observable variables

\*\*\* Instead of a list  $[\mathcal{OR}_1=c_1, \mathcal{OR}_2=c_2, \dots]$ ,  $\mathcal{O}_{\mathcal{R}}$  values could be returned as a fixed size positional vector of values  $\mathcal{O}_{\mathcal{R}}^G(\dots)$