



Service Under Scrutiny (SUS)

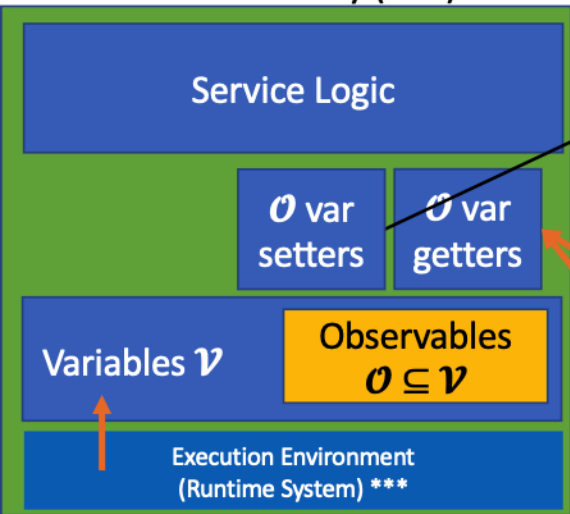

Monitor Sensor

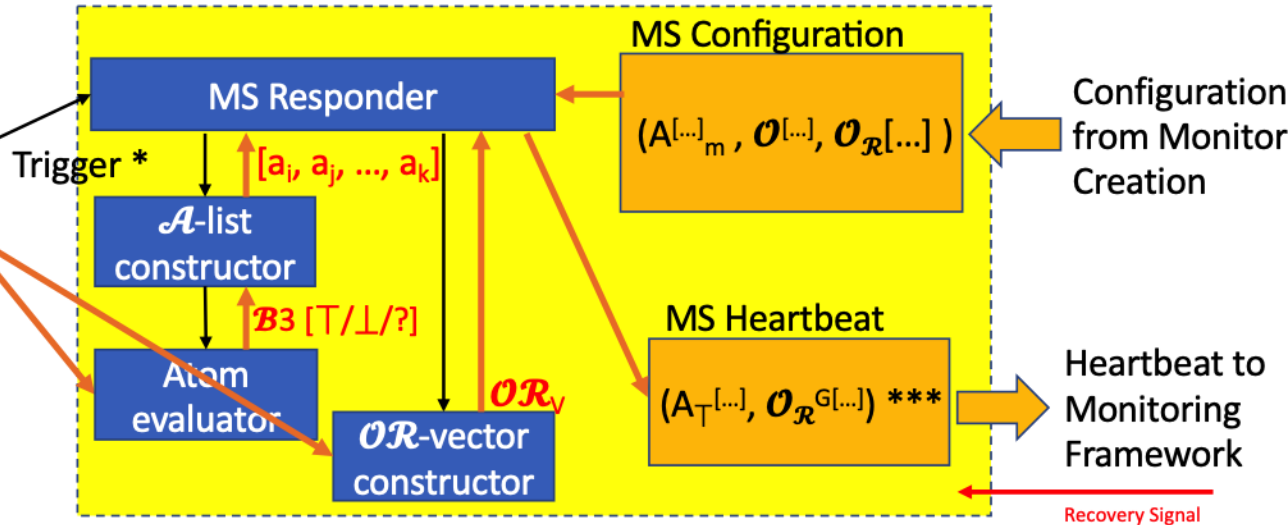

* There may be other trigger sources from Service Logic or Runtime System (such as timers)

** Runtime System can set reserved variables including observable variables

*** Instead of a list $[OR_1=c_1, OR_2=c_2, \dots]$, $\mathcal{O}_{\mathcal{R}}$ values could be returned as a fixed size positional vector of values $\mathcal{O}_{\mathcal{R}}^G(\dots)$