


Fundamentos da plataforma NodeJS

Criação de aplicativos NodeJS

Instalação do NodeJS - LTS

Endereço: <https://nodejs.org>

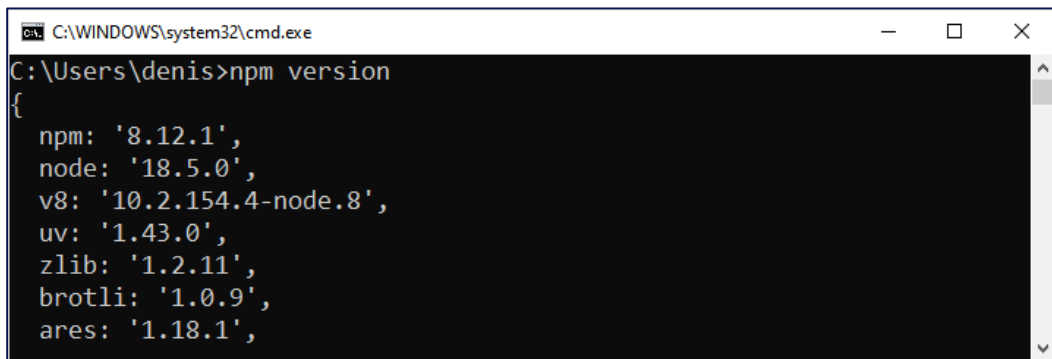


```
C:\WINDOWS\system32\cmd.exe
C:\Users\denis>npm version
{
  npm: '8.12.1',
  node: '18.5.0',
  v8: '10.2.154.4-node.8',
  uv: '1.43.0',
  zlib: '1.2.11',
  brotli: '1.0.9',
  ares: '1.18.1',
```

Teste: **npm version**

- Instalação do Visual Studio Code - VSCode
- Endereço:
<https://code.visualstudio.com/download>
- Realce de sintaxe
- Complementação de código
- Ferramentas de Depuração
- Terminal interno

- Comando: **npm init**

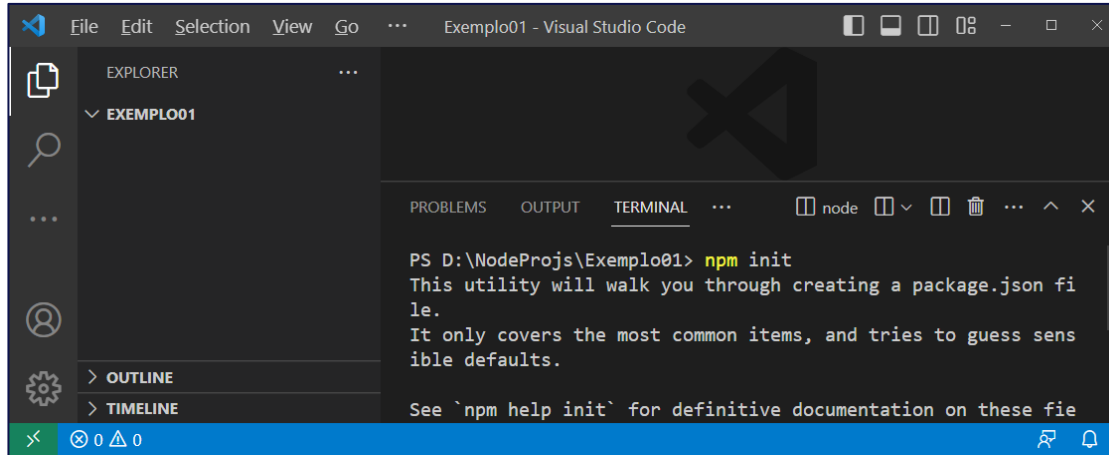

The screenshot shows the Visual Studio Code interface with a terminal window open. The terminal displays the output of the 'npm init' command executed in a PowerShell prompt. The output indicates that a package.json file has been created with sensible defaults.


```

PS D:\NodeProjs\Exemplo01> npm init
This utility will walk you through creating a package.json file.
It only covers the most common items, and tries to guess sensible defaults.

See `npm help init` for definitive documentation on these fields
  
```

- Arquivo criado: **package.json**

- Criação do arquivo index.js
- Conteúdo: `console.log("Alo Mundo");`

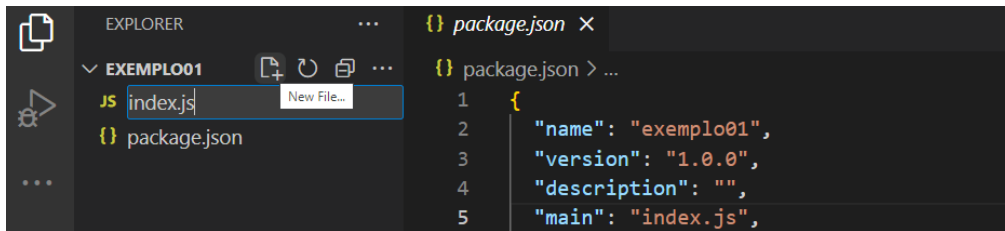

- Comando: **node index.js**

