


# GetPedOccupiedVehicleSeat

This function gets the seat that a specific ped is sitting in in a vehicle.

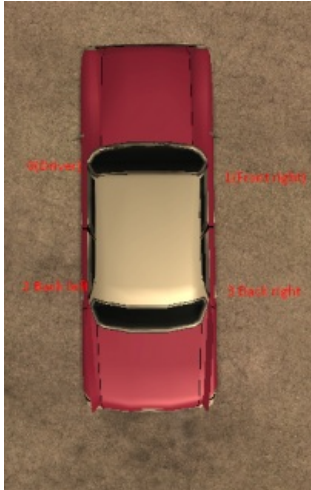

Vehicle seat ids

## Syntax

```
int getPedOccupiedVehicleSeat ( ped thePed )
```

**OOP Syntax** Help! I don't understand this!

**Note:** *Prior to 1.5, the variable was `.occupiedVehicleSeat`*

**Method:** *`ped:getOccupiedVehicleSeat(...)`*

**Variable:** *`.vehicleSeat`*

## Required Arguments

- **thePed:** The ped whose vehicle seat you're looking up.

## Returns

- Returns an integer containing the number of the seat that the ped is currently in:
  - **0:** Front-left
  - **1:** Front-right
  - **2:** Rear-left
  - **3:** Rear-right

Returns *false* if the ped is on foot, or the ped doesn't exist.