


## Graphical Abstract

### Showcasing All Available Features

Alan E. Lujan, Christopher D. Carroll, Matthew N. White

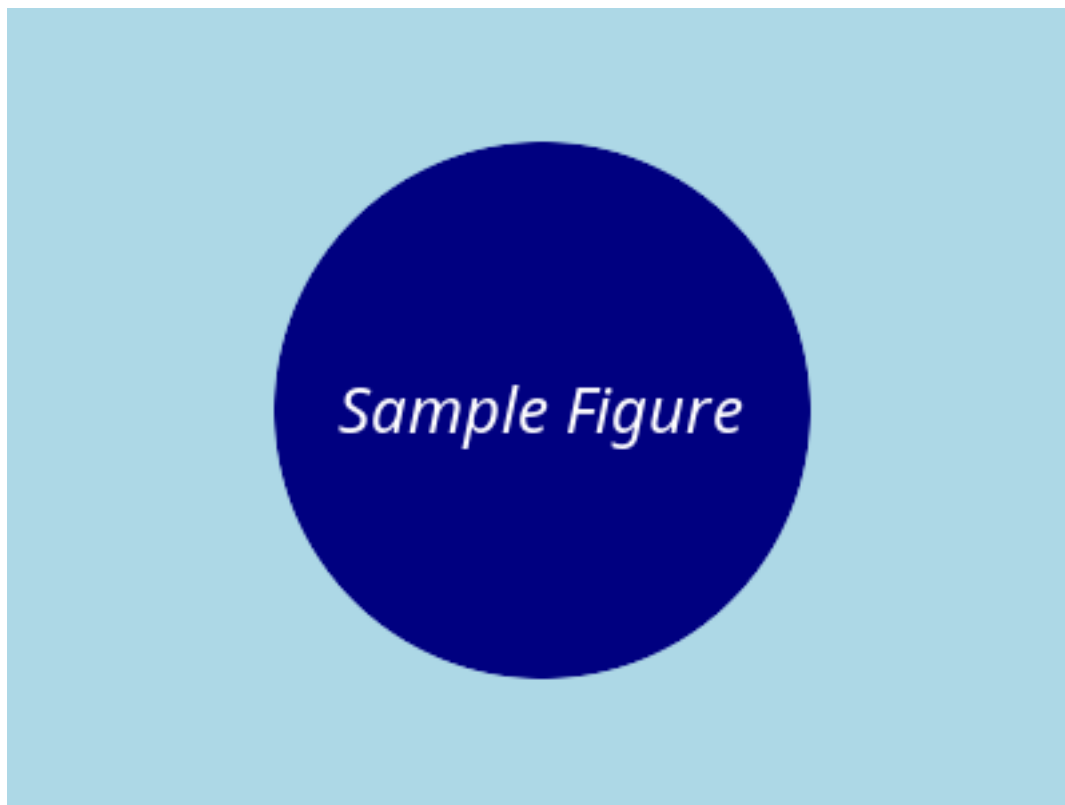

## Highlights

### **Showcasing All Available Features**

Alan E. Lujan, Christopher D. Carroll, Matthew N. White

- MyST Markdown enables reproducible scientific writing
- Seamless export to multiple journal formats
- Rich mathematical and scientific notation support

# A Comprehensive Guide to MyST Markdown with Elsevier CAS Templates

Showcasing All Available Features

Alan E. Lujan<sup>a,b,\*</sup>, Christopher D. Carroll<sup>c,b</sup> and Matthew N. White<sup>b</sup>

<sup>a</sup>Johns Hopkins University, Washington, DC, USA

<sup>b</sup>Econ-ARK,

<sup>c</sup>Johns Hopkins University, Baltimore, MD, USA

## ARTICLE INFO

Keywords:

MyST Markdown

Elsevier

LaTeX

CAS Template

Scientific Publishing

Reproducible Research

## ABSTRACT

This article demonstrates MyST Markdown integration with Elsevier's CAS templates, showcasing typography, math, cross-references, admonitions, proofs, tables, figures, and code blocks.

## 1. Introduction

This document demonstrates the full integration of MyST Markdown (Cockett, Purvis and others, 2023) with Elsevier's CAS templates. MyST provides a powerful authoring experience while maintaining compatibility with traditional LaTeX journal requirements (Lamport, 2004).

### 1.1. Background

Scientific publishing has traditionally relied on LaTeX for high-quality typesetting (Smith and Johnson, 2020). However, the learning curve and complexity of LaTeX can be a barrier for many researchers. MyST Markdown bridges this gap by providing:


1. A familiar Markdown syntax based on CommonMark (Gruber, 2004)
2. Rich scientific features (equations, citations, cross-references)
3. Export to multiple formats including PDF via LaTeX

Reproducible research workflows have become increasingly important, with tools like Jupyter Notebooks (Kluyver, Ragan-Kelley and others, 2016) enabling literate programming approaches.

#### Note

**About this document:** This article serves as both a comprehensive guide and a test file for the Elsevier CAS MyST template. Every feature demonstrated here should render correctly in both the web preview and PDF exports.

\*Corresponding author

 alujan@jhu.edu (A.E. Lujan); ccarroll@jhu.edu (C.D. Carroll)

 <https://alanlujan91.github.io> (A.E. Lujan);

<https://econ.jhu.edu/people/ccarroll> (C.D. Carroll)

ORCID(s): 0000-0002-5289-7054 (A.E. Lujan); 0000-0003-3732-9312 (C.D. Carroll)

We know what we are, but know not what we may be.

**Figure 1:** \*

William Shakespeare, Hamlet

The important thing is not to stop questioning. Curiosity has its own reason for existing.

In the middle of difficulty lies opportunity.

**Figure 2:** \*

Albert Einstein

## 2. Typography Features

This section demonstrates MyST Markdown typography features and how they render in the PDF output.

### 2.1. Inline Formatting

Standard inline formatting includes **bold text**, *italic text*, and inline code. You can also use ~~strikethrough text~~ and underlined text for special emphasis.

For chemical formulas, use subscripts: H<sub>2</sub>O, CO<sub>2</sub>, C<sub>6</sub>H<sub>12</sub>O<sub>6</sub>. For ordinals and exponents, use superscripts: the 4<sup>th</sup> of July, 1<sup>st</sup> place,  $x^2 + y^2 = r^2$ .

### 2.2. Line Breaks

The world's shortest poem demonstrates line breaks:

Fleas

Adam

Had 'em.

—Strickland Gillilan

### 2.3. Quotations

Block quotes are useful for highlighting important passages:

## 2.4. Definition Lists

MyST supports definition lists for glossaries or term explanations:

**MyST** Markedly Structured Text, a markdown flavor for scientific writing

**LaTeX** A document preparation system for high-quality typesetting

**jtex** A Jinja-based templating system for LaTeX documents

**CAS** Content Acquisition System, Elsevier's journal template system

## 2.5. Footnotes

MyST supports footnotes<sup>1</sup> which are automatically numbered and placed at the end of the document. You can have multiple footnotes<sup>2</sup> throughout your text.

## 2.6. Task Lists

Task lists can track progress (rendered as bullet points in LaTeX):

- Create template structure
- Add typography examples
- Add math demonstrations
- Add proof environments
- Submit to journal
- Celebrate publication!

## 3. Mathematical Content

The templates support full LaTeX math with custom macros defined in frontmatter.

### 3.1. Inline Mathematics

Inline math like  $E = mc^2$  or  $\mathbb{E}[X] = \mu$  works seamlessly. Using our custom macros: for  $x \in \mathbb{R}$ , we have  $\text{Var}(X) = \mathbb{E}[X^2] - (\mathbb{E}[X])^2$ .

### 3.2. Display Equations

The quadratic formula:

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a} \quad (1)$$

Maxwell's equations in differential form:

$$\begin{aligned} \nabla \cdot \mathbf{E} &= \frac{\rho}{\epsilon_0} \\ \nabla \cdot \mathbf{B} &= 0 \\ \nabla \times \mathbf{E} &= -\frac{\partial \mathbf{B}}{\partial t} \\ \nabla \times \mathbf{B} &= \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t} \end{aligned} \quad (2)$$

The Bellman equation for dynamic programming:

$$V(s) = \max_a \left\{ R(s, a) + \gamma \sum_{s'} P(s'|s, a) V(s') \right\} \quad (3)$$

Equations can be cross-referenced: see (1) for the quadratic formula and (2) for Maxwell's equations.

## 4. Proofs and Theorems

MyST supports formal mathematical environments using proof directives. These are essential for mathematical and theoretical papers.

### 4.1. Definitions

**Definition 4.1** (Convergent Sequence). *A sequence  $(a_n)$  in  $\mathbb{R}$  is said to be convergent if there exists a number  $L \in \mathbb{R}$  such that for every  $\epsilon > 0$ , there exists  $N \in \mathbb{N}$  such that for all  $n > N$ :*

$$|a_n - L| < \epsilon \quad (4)$$

We write  $\lim_{n \rightarrow \infty} a_n = L$ .

**Definition 4.2** (Continuous Function). *A function  $f : \mathbb{R} \rightarrow \mathbb{R}$  is continuous at a point  $c$  if for every  $\epsilon > 0$ , there exists  $\delta > 0$  such that:*

$$|x - c| < \delta \implies |f(x) - f(c)| < \epsilon \quad (5)$$

### 4.2. Theorems

**Theorem 4.1** (Squeeze Theorem). *Let  $(a_n)$ ,  $(b_n)$ , and  $(c_n)$  be sequences such that  $a_n \leq b_n \leq c_n$  for all  $n \geq N_0$ . If*

$$\lim_{n \rightarrow \infty} a_n = \lim_{n \rightarrow \infty} c_n = L \quad (6)$$

*then  $\lim_{n \rightarrow \infty} b_n = L$ .*

**Theorem 4.2** (Fundamental Theorem of Calculus). *Let  $f$  be continuous on  $[a, b]$  and let  $F$  be defined by  $F(x) = \int_a^x f(t) dt$ . Then:*

1.  $F$  is continuous on  $[a, b]$
2.  $F$  is differentiable on  $(a, b)$  and  $F'(x) = f(x)$
3.  $\int_a^b f(x) dx = F(b) - F(a)$

<sup>1</sup>This is a footnote demonstrating the feature. Footnotes can contain **formatted text** and even code.

<sup>2</sup>Another footnote with additional information. Footnotes are essential for academic writing.

### 4.3. Proofs

*Proof. Proof of Theorem 4.1.* Let  $\varepsilon > 0$  be given. Since  $a_n \rightarrow L$  and  $c_n \rightarrow L$ , there exist  $N_1, N_2 \in \mathbb{N}$  such that:

- $|a_n - L| < \varepsilon$  for all  $n > N_1$
- $|c_n - L| < \varepsilon$  for all  $n > N_2$

Let  $N = \max\{N_0, N_1, N_2\}$ . For  $n > N$ , we have:

$$L - \varepsilon < a_n \leq b_n \leq c_n < L + \varepsilon \quad (7)$$

Thus  $|b_n - L| < \varepsilon$ , completing the proof.  $\square$

### 4.4. Lemmas and Corollaries

**Lemma 4.3** (Triangle Inequality). *For all  $x, y \in \mathbb{R}$ , we have  $|x + y| \leq |x| + |y|$ .*

**Corollary 4.3.1.** *If  $(b_n)$  is squeezed between two sequences converging to zero, then  $b_n \rightarrow 0$ .*

### 4.5. Remarks and Examples

**Remark 4.1.** *The proof directives (Definition 4.1, Theorem 4.1) are automatically numbered and can be cross-referenced throughout the document.*

**Example 4.1** (Convergent Sequence). *The sequence  $a_n = \frac{1}{n}$  converges to 0. For any  $\varepsilon > 0$ , choose  $N > \frac{1}{\varepsilon}$ . Then for  $n > N$ :*

$$\left| \frac{1}{n} - 0 \right| = \frac{1}{n} < \frac{1}{N} < \varepsilon \quad (8)$$

## 5. Admonitions

Admonitions (callouts) are useful for highlighting important information. MyST supports many types:

#### Note

This is a note admonition. Use it to highlight supplementary information that readers should be aware of.

#### Warning

This is a warning. Use it to alert readers about potential pitfalls or important caveats in your methodology.

#### Tip

Tips can provide helpful suggestions for readers applying your methods.

#### Important

Important information that readers must not miss should go in this type of admonition.

**Table 1**

Comparison of numerical methods

Method	Accuracy	Speed	Memory
Baseline	85.2%	Fast	Low
Proposed	<b>92.1%</b>	Medium	Medium
Ensemble	94.3%	Slow	High
Oracle	98.5%	N/A	N/A

#### Hint

Hints can be hidden in dropdowns! Click to reveal.

This hint contains the secret formula:  $e^{i\pi} + 1 = 0$

#### Caution

Caution: Proceed carefully when implementing this algorithm with large datasets.

#### Attention

Attention: New methodology introduced in this section differs from previous work.

#### Danger

**Danger:** Do not run this code in production without proper testing!

#### Error

Error: This approach will fail if the input matrix is singular.

#### See Also

For more information on MyST Markdown features, visit the [MyST documentation](#).

## 6. Code Blocks

Code blocks with syntax highlighting are supported:

As shown in Program 3, code can be captioned, numbered, and cross-referenced.

Multiple languages are supported:

## 7. Tables

### 7.1. Markdown Tables

MyST tables convert cleanly to LaTeX:

Results are summarized in Table 1.

### 7.2. List Tables

List tables provide an alternative syntax useful for complex content:

**Table 2**  
Dataset characteristics

Dataset	Training Samples	Test Samples	Features	Classes
MNIST	60,000	10,000	784	10
CIFAR-10	50,000	10,000	3,072	10
ImageNet	1,281,167	50,000	150,528	1,000

**Table 3**  
Experimental results

Model	Accuracy	Precision	Recall	F1-Score
Logistic Regression	0.82	0.81	0.83	0.82
Random Forest	0.89	0.88	0.90	0.89
Neural Network	0.94	0.93	0.95	0.94
Transformer	0.97	0.96	0.97	0.97

**Table 4**  
Comprehensive table showcasing CAS template features

Category		Measurements		
Type	Description (details)	Status	Value	Count
Group A	Item 1	Yes	12.34	100
	Item 2	Yes	5.67	250
	Item 3	–	89.01	50
Group B	Item 4	Yes	23.45	175
	Item 5	–	6.78	320

Features: booktabs rules, multirow row spanning, makecell line breaks, dcolumn decimal alignment, array column formatting.

### 7.3. CSV Tables

### 7.4. Raw LaTeX Tables

For complex tables requiring advanced features, use raw LaTeX blocks. The CAS templates include booktabs, multirow, makecell, array, and dcolumn packages:

## 8. Figures and Images

As shown in Figure 5, the template properly handles figure placement and captions.

## 9. Cross-References Summary

This document demonstrates various cross-reference capabilities:

- **Equations:** (1), (2), (3)
- **Figures:** Figure 5
- **Tables:** Table 1, Table 2, Table 3

- **Code:** Program 3, Program 4
- **Theorems:** Theorem 4.1, Theorem 4.2
- **Definitions:** Definition 4.1, Definition 4.2
- **Lemmas:** Lemma 4.3
- **Corollaries:** Corollary 4.3.1
- **Examples:** Example 4.1
- **Sections:** Introduction, Typography

## 10. Discussion

This approach enables researchers to write in MyST Markdown while producing publication-ready documents that meet Elsevier's submission requirements.

### 10.1. Advantages

1. **Reproducibility:** Source files are plain text and version-controllable
2. **Flexibility:** Single source exports to HTML, PDF, and other formats
3. **Modern tooling:** Integration with Jupyter, VS Code, and other tools
4. **Rich features:** Full LaTeX math, cross-references, and citations

### 10.2. Limitations

#### Warning

Some MyST features render only in HTML output. For PDF, consider using LaTeX-compatible alternatives.

## 11. Conclusion

The Elsevier CAS MyST template provides a modern workflow for scientific writing while maintaining compatibility with traditional journal submission systems. This document has demonstrated:

- Typography: formatting, footnotes, definition lists
- Mathematics: inline, display, custom macros
- Formal environments: definitions, theorems, proofs, examples
- All admonition types
- Multiple table formats
- Code blocks with syntax highlighting
- Figures with cross-referencing
- Citations and bibliography

For questions or contributions, please visit the template repository.

**Table 5**  
Supplementary parameters

Parameter	Value	Unit
Alpha	0.05	-
Beta	1.23	m/s
Gamma	456	kg

## Appendix

### A. Supplementary Methods

This appendix provides additional methodological details that support the main text.

#### A.1. Data Processing

The data was processed using standard procedures as described in the literature.

### B. Additional Tables

#### CRediT authorship contribution statement

**Alan E. Lujan:** Conceptualization, Methodology, Software, Writing – original draft. **Christopher D. Carroll:** Supervision, Writing – review editing. **Matthew N. White:** Methodology, Software.

## References

- Cockett, R., Purvis, S., others, 2023. Myst Markdown: Technical Communication for the Modern Era. *Journal of Open Source Software* 8, 1–10. doi:10.21105/joss.05000.
- Gruber, J., 2004. Markdown. <https://daringfireball.net/projects/markdown/>. URL: <https://daringfireball.net/projects/markdown/>. accessed: 2024-01-01.
- Kluyver, T., Ragan-Kelley, B., others, 2016. Jupyter Notebooks: A Publishing Format for Reproducible Computational Workflows, in: *Positioning and Power in Academic Publishing*, IOS Press. pp. 87–90.
- Lamport, L., 2004. *LaTeX: A Document Preparation System*. 2nd ed., Addison-Wesley, Boston.
- Smith, J., Johnson, M., 2020. Modern Scientific Publishing Workflows. *Scientometrics* 125, 2145–2160. doi:10.1007/s11192-020-03456-7.

```
import numpy as np
from typing import Tuple


def quadratic_formula(a: float, b: float, c: float) -> Tuple[float, float]:
    """Solve ax^2 + bx + c = 0 using the quadratic formula."""
    discriminant = b**2 - 4*a*c
    if discriminant < 0:
        raise ValueError("No real solutions")
    x1 = (-b + np.sqrt(discriminant)) / (2*a)
    x2 = (-b - np.sqrt(discriminant)) / (2*a)
    return x1, x2

# Example usage
roots = quadratic_formula(1, -5, 6)
print(f"Roots: {roots}") # Output: (3.0, 2.0)
```

**Figure 3:** Example Python implementation of the quadratic formula

```
function quadratic_formula(a, b, c)
    discriminant = b^2 - 4*a*c
    x1 = (-b + sqrt(discriminant)) / (2*a)
    x2 = (-b - sqrt(discriminant)) / (2*a)
    return x1, x2
end
```

**Figure 4:** Julia implementation

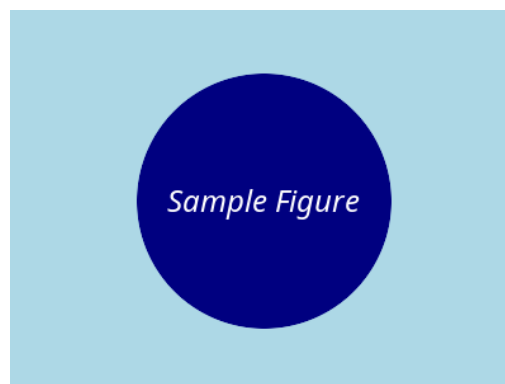

**Figure 5:** A sample figure demonstrating image support in the template. This figure shows a placeholder image that would typically contain research results or visualizations. Figures are automatically numbered and can be cross-referenced.