


## Lesson 30: Understand Time Complexity

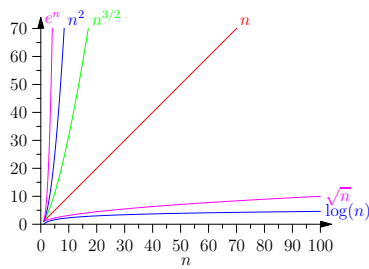

Theta, Big-O, little-o, Big-Omega, little-omega

AICE1005

Algorithms and Analysis

1

### Recap

- We have seen many algorithms taking times of order 1,  $\log(n)$ ,  $n$ ,  $n \log(n)$ ,  $n^2$ , etc.
- Sometimes these are worst time, average time or best time results.
- We have lots of different notations, e.g.  $O(1)$ ,  $\Theta(\log(n))$ ,  $\Omega(n^2)$ , etc.
- What does it all mean?

AICE1005

Algorithms and Analysis

3

### Defining $\Theta(g(n))$

- A function  $f(n) \in \Theta(g(n))$  if

$$\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} = c \quad 0 < c < \infty$$

- E.g.

$$\lim_{n \rightarrow \infty} \frac{4n^2 + 2n + 3}{n^2} = 4$$

$$\lim_{n \rightarrow \infty} \frac{5n \log(n) + 3n + 2}{n \log(n)} = 5$$

AICE1005

Algorithms and Analysis

5

### Ordering Complexity Classes

- We can define the relation  $\Theta(f(n)) < \Theta(g(n))$  if

$$\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} = 0$$

- Informally if algorithm  $A$  has time complexity  $\Theta(f(n))$  and algorithm  $B$  has time complexity  $\Theta(g(n))$  then if  $\Theta(f(n)) < \Theta(g(n))$  algorithm  $A$  is faster for sufficiently large  $n$ .
- The relation defines a **complete ordering**.

AICE1005


Algorithms and Analysis

7

## 1. Time Complexity Classes

- Theta— $\Theta$
- Big O
- Little o
- Big Omega— $\Omega$
- Little omega— $\omega$

## 2. Computing Time Complexity



AICE1005

Algorithms and Analysis

2

### Complexity Class Sets

- The correct way to think about complexity classes is in terms of sets.
- Suppose we have an algorithm which takes an input of size  $n$  and computes an output in  $f(n)$  operations.
- E.g.  $f(n) = 4n^2 + 2n + 3$
- We can partition all run times into sets by considering only the leading order term and ignoring the constant term.
- We denote these sets by  $\Theta(g(n))$ 
  - ★  $4n^2 + 2n + 3 \in \Theta(n^2)$
  - ★  $5n \log(n) + 3n + 2 \in \Theta(n \log(n))$

AICE1005

Algorithms and Analysis

4

### Ignoring the Constant

- Does an algorithm that uses  $4n^2$  operations run faster than one that uses  $7n^2$  operations?
- Answer depends on the operations which might depend on the programming language or the machine architecture.
- However asymptotically (i.e. for sufficiently large  $n$ ) an order  $n \log(n)$  algorithm will always run faster than an order  $n^2$  algorithm even when they are run on different machines.
- The constant is important in practice (if there are two algorithms  $A$  and  $B$  that are both  $n \log(n)$ , but algorithm  $A$  runs twice as fast as algorithm  $B$ , which one should you use?).
- Nevertheless, ignoring the constant is often essential to make analysis of algorithms doable.

AICE1005

Algorithms and Analysis


6

### The Complexity Line

- We can order all complexity classes. E.g.

$$\Theta(1) < \Theta(\log(n)) < \Theta(\sqrt{n}) < \Theta(n) < \Theta(n^2)$$

- We can depict this as a complexity line

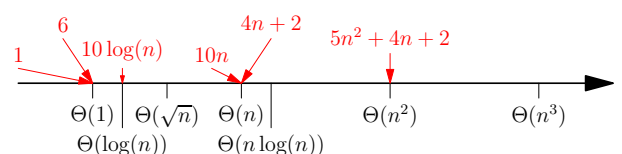

- The line is dense (i.e. there are an uncountable infinity of complexity classes).

AICE1005

Algorithms and Analysis

8

- The run time of many algorithms depends on the input
- In this case we can define different time complexities
  - ★ Worst case time complexity (the longest time an algorithm will take)
  - ★ Average complexity (the expected time averaged over all possible inputs)
  - ★ Best case time complexity (the shortest time an algorithm will take)—usually not very interesting
- Every algorithm will have a  $\Theta$  complexity class for the worst, average and best time complexity


AICE1005

Algorithms and Analysis

9

## Big-O

- Big-O is an upper bound on the time complexity
- If an algorithm is  $O(g(n))$  then its time complexity is no more than  $\Theta(g(n))$

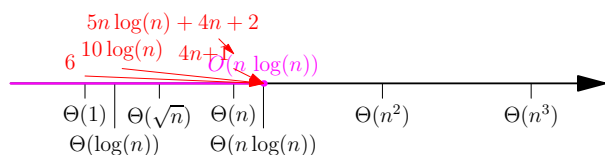

- I.e.  $\Theta(f(n)) \leq \Theta(g(n))$  implies  $f(n) \in O(g(n))$


AICE1005

Algorithms and Analysis

11

## Little-o

- Sometimes we want to say that the time complexity for an algorithm  $\Theta(f(n))$  is **strictly less** than a known time complexity  $\Theta(g(n))$



- I.e.  $\Theta(f(n)) < \Theta(g(n))$  implies  $f(n) \in o(g(n))$

AICE1005

Algorithms and Analysis

13

## Lower Bounding Time Complexity

- Returning to the program
 

```
// define stuff
for(int i=0; i<n; i++) {
    // do something
    if (/* some condition */) {
        for (int j=0; j<n; j++) {
            // do other stuff
        }
    }
}
// clean up
```
- We might not know how frequently the `if` statement is true, but we know in all cases the first `for` loop iterates over  $n$
- Thus we know this algorithm is in  $\Omega(n)$ —we assume the best, but the best may never happen

AICE1005

Algorithms and Analysis

15

- Algorithms are often rather complicated and knowing the exact time complexity (for either worst, average or best cases) might not be known
- In reality it will have some run time (e.g.  $f(n) = 3n^2 \log(n) + 2n^2 - n + 3$ ) and will belong to a  $\Theta$  time complexity set (e.g.  $\Theta(n^2 \log(n))$ ) but we might not be able to calculate it
- However, we can usually bound the run times of algorithms

AICE1005

Algorithms and Analysis

10

## Upper Bounding Time Complexity

- Consider a program
 

```
// define stuff
for(int i=0; i<n; i++) {
    // do something
    if (/* some condition */) {
        for (int j=0; j<n; j++) {
            // do other stuff
        }
    }
}
// clean up
```
- If the `if` statements is never true this is a  $\Theta(n)$  algorithm if it is always true it is a  $\Theta(n^2)$  algorithm
- If we don't know then we can at least say that the run time is in  $O(n^2)$ —we assume the worst, but the worst may never happen


AICE1005

Algorithms and Analysis

12

Lower Bounds— $\Omega$ 

- It is often easy to obtain a lower bound on an algorithm
- I.e.  $\Theta(f(n)) \geq \Theta(g(n))$  implies  $f(n) \in \Omega(g(n))$

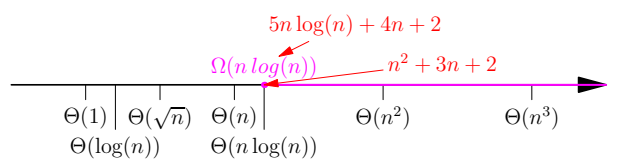

AICE1005

Algorithms and Analysis

14

Little Omega— $\omega$ 

- It is sometimes useful to talk about a strict lower bound
- I.e.  $\Theta(f(n)) > \Theta(g(n))$  implies  $f(n) \in \omega(g(n))$


AICE1005

Algorithms and Analysis

16

## Bounding Run Time Complexity

- When we are given an algorithm to analyse we want to compute  $\Theta(n)$
- This may be difficult, however, it is often easy to find bounds

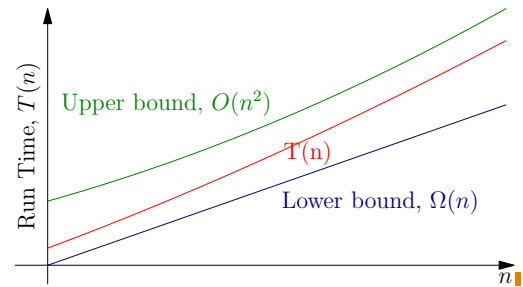

$$\omega(n \log(n))$$

AIICE1005

Algorithms and Analysis

17

## Proving Asymptotic Time Complexity

- If we know an algorithm is
  - $T(n) \in O(f(n))$
  - $T(n) \in \Omega(f(n))$
- Then  $T(n) \in \Theta(f(n))$
- This is a common proof strategy

AIICE1005

Algorithms and Analysis

19

## Exponential Time Complexity

- When we talk about exponential time complexity we usually mean that

$$\log(T(n)) \in \Theta(n)$$

- This is true if
  - $T(n) = 2^n$   $\log(T(n)) = n \log(2)$
  - $T(n) = 6.1 e^{0.003n}$   $\log(T(n)) = 0.03n + \log(6.1)$
  - $T(n) = n 10^n$   $\log(T(n)) = n \log(10) + \log(n)$
- Note that none of these are in complexity class  $\Theta(e^n)$

AIICE1005

Algorithms and Analysis

21

## Counting For Loops

- How long does the following code take?

```
for(int i=0; i<n; i++) {
    // prepare stuff
}
for(int i=0; i<n; i++) {
    // do something
    for (int j=0; j<n; j++) {
        // do other stuff
    }
}
```

- The first `for` loop takes  $\Theta(n)$  operations the second double `for` loop takes  $\Theta(n^2)$
- Answer  $\Theta(n^2)$

AIICE1005

Algorithms and Analysis

23

## Meaning of Time Complexity

- Insertion sort has time complexity  $\Theta(n^2)$
- Because it consists of two `for` loops
- It takes 2 seconds to sort 100 000 items
- How long does it take to sort 1 000 000 items?
- $n$  increases by 10, time complexity increases by  $10^2 = 100$
- Time taken is approximately 200 seconds or around 3.5 minutes

AIICE1005


Algorithms and Analysis

18

## Outline

### 1. Time Complexity Classes

- Theta— $\Theta$
- Big O
- Little o
- Big Omega— $\Omega$
- Little omega— $\omega$



### 2. Computing Time Complexity

AIICE1005

Algorithms and Analysis

22

## Recursion

- Determining time complexity is harder when we use recursion
- Consider Euclid's algorithm for determining the greatest common divisor

```
public static
long gcd(long m, long n)
{
    while (n!=0) {
        long rem = m%n;
        m = n;
        n = rem;
    }
    return m;
}

public static
long gcd(long m, long n)
{
    if (n==0)
        return m;
    else
        return gcd(n, m%n);
}
```

- This doesn't even look like a recursion

AIICE1005

Algorithms and Analysis

24

## Example of gcd

- Example of Euclid's algorithm  $\text{gcd}(1989, 1590)$  ■
- Sequence of remainders is 399, 393, 6, 3, 0 ■
- The greatest common divisor is 3 ■
- How long does it take compute  $\text{gcd}(n, m)$  with  $n > m$  ■
- This is subtle as could depend in a complex way on the pair  $n$  and  $m$  ■

AIICE1005

Algorithms and Analysis

25

## Solving Recursions

- To show that  $T(n) \in O(\log(n))$  we observe
  - ★ Note that  $T(1) = 1$  ■
$$T(n) < T(2^{-1}n) + 2 < T(2^{-2}n) + 4 < \dots < T(2^{-t}n) + 2t$$
  - ★ Choose  $t = \lceil \log_2(n) \rceil$
  - ★ then  $2^{-t}n = 2^{-\lceil \log_2(n) \rceil}n \leq 2^{-\log_2(n)}n = \frac{n}{n} = 1$  ■
  - ★ Thus  $T(2^{-t}n) < T(1) = 1$  ■
  - ★  $T(n) < 1 + 2t = 1 + 2\lceil \log_2(n) \rceil \in O(\log(n))$  ■- A huge calculation shows the the average number of iterations is about  $(12 \log(2) \log(n)) / \pi^2 + 1.47$  ■

AIICE1005

Algorithms and Analysis

27

## Time Complexity

- Program involves two nested loops of size  $O(n)$  ■
- Then we need to calculate  $\text{gcd}(i, j)$  at each iteration ■
- Time complexity is  $n \times n \times \log(n) = n^2 \log(n)$  ■
- How could we provide empirical support for this calculation? ■

AIICE1005

Algorithms and Analysis

29

## Conclusions

- You should understand the difference between  $\Theta$ ,  $O$ ,  $o$ ,  $\Omega$  and  $\omega$  ■
- You need to be able to compute time complexity by loop counting ■
- To compute time complexity for recursive functions you need to be able to obtain recurrence equations ■
- You should be able to solve simple recurrence equations and sum up simple series ■
- You should be able to prove more complicated results using proof by induction ■
- Thank you for attending the course ■

AIICE1005

Algorithms and Analysis

31

## Recursive Formulae

- An observation which makes the analysis relatively simple is that the remainder is reduced by at least 2 after two iterations ■
- To prove
  - ★ Using the recursion (assuming  $m, n < 0$ )
$$\text{gcd}(m, n) = \text{gcd}(n, \text{rem}(m, n)) = \text{gcd}(\text{rem}(m, n), \text{rem}(n, \text{rem}(m, n)))$$
  - ★ The proof follows by showing that  $\text{rem}(n, \text{rem}(m, n)) < n/2$  ■
- Thus  $T(n) < T(n/2) + 2$  ■

AIICE1005

Algorithms and Analysis

26

## Probability of Relative Primes

- Consider the following program to compute the probability of relative primes for all numbers up to  $n$ 

```
public static double probRelPrime(n)
{
    int rel=0, tot=0;
    for(int i=1; i<=n; i++)
        for(int j=i+1; j<=n; j++) {
            tot++;
            if (gcd(i, j)==1)
                rel++;
        }
    return (double) rel / tot;
}
```
- What is the time complexity? ■


AIICE1005

Algorithms and Analysis

28

## Testing Hypothesis

- We can test our hypothesis by scaling the run time by the complexity

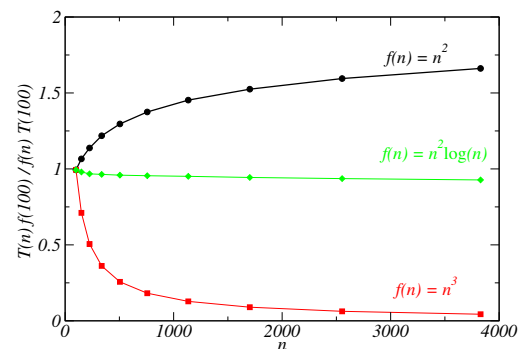

AIICE1005

Algorithms and Analysis

30