

Working with Block Elements and Objects :-

Every HTML element has a default display value depending on what type of element it is.

The two display values are: block and inline.

1) Block Elements

A block-level element always starts on a new line and takes up the full width available (stretches out to the left and right as far as it can).

The `<div>` element is often used as a container for other HTML elements.

The `<div>` element has no required attributes, but `style`, `class` and `id` are common.

When used together with CSS, the `<div>` element can be used to style blocks of content

The `<div>` element is a block-level element.

```
<!DOCTYPE html>
<html>
<body>
<div style="border: 1px solid black">Hello World</div>
<p>This is sample text.</p>
</div>
</body>
</html>
```

2) Inline Elements

An inline element does not start on a new line and only takes up as much width as necessary.

This is an inline `<span>` element inside a paragraph.

The `<span>` element is often used as a container for some text.

The `<span>` element has no required attributes, but `style`, `class` and `id` are common.

```
<!DOCTYPE html>
<html>
<body>
<p>This is an inline span <span style="border: 1px solid black; background-
color: pink;">Hello World</span> element inside a paragraph.</p>
</body>
</html>
```

- **CSS Advanced –**

Dimensions (CSS Height and Width)

The `height` and `width` properties are used to set the height and width of an element.

The height and width properties do not include padding, borders, or margins. It sets the height/width of the area inside the padding, border, and margin of the element.

All CSS Dimension Properties

Property	Description
<u><code>height</code></u>	Sets the height of an element
<u><code>max-height</code></u>	Sets the maximum height of an element
<u><code>max-width</code></u>	Sets the maximum width of an element
<u><code>min-height</code></u>	Sets the minimum height of an element
<u><code>min-width</code></u>	Sets the minimum width of an element
<u><code>width</code></u>	Sets the width of an element

E.g

```
<!DOCTYPE html>
<html>
<head>
<style>
div {
  height: 100px;
  width: 500px;
  background-color: blue;
  max-width: 500px;
  min-width: 300px;
  max-height: 400px;
  min-height: 400px;
}
</style>
</head>
<body>
<h2>Set the height and width of an element</h2>
<p>This div element has a height of 100px and a width of 500px:</p>
<div></div>
</body>
</html>
```

What is Pseudo-class?

A pseudo-class is used to define a special state of an element.

For example, it can be used to:

- Style an element when a user mouse over it
- Style visited and unvisited links differently
- Style an element when it gets focus

Syntax

The syntax of pseudo-classes:

```
selector:pseudo-class {  
  property:value;  
}
```

example of Pseudo-class

Links can be displayed in different ways:

```
<style>  
/* unvisited link */  
a:link {  
  color: red;  
}  
/* visited link */  
a:visited {  
  color: green;  
}  
/* mouse over link */  
a:hover {  
  color: hotpink;  
}  
/* selected link */  
a:active {  
  color: blue;  
}</style>  
<body>  
<a href="abc.html">Click</a>  
</body>
```

Navigation Bar:-

Having easy-to-use navigation is important for any web site.


With CSS you can transform boring HTML menus into good-looking navigation bars.

A navigation bar needs standard HTML as a base.

In our examples we will build the navigation bar from a standard HTML list.

A navigation bar is basically a list of links, so using the and elements makes perfect sense:

1)Vertical

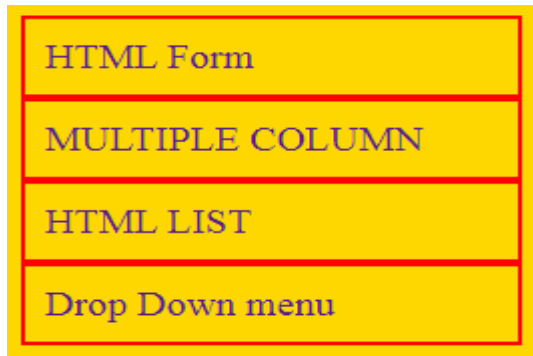

2)Horizontal



Example-

1)Simple navigation bar

```
<style>
ul{border:2px solid red;padding:20px;background-color:gold;}
ul a{font-size:20px;text-decoration:none;}
li {color:blue;display:inline;padding:10px;border:2px solid red;}
li:hover{background-color:green;color:white}
</style>
<body>
<ul class="start" >
<li><a href="comuter.html">COMPUTER</a></li>
<li><a href="Maths.html">Maths</li></a></li>
<li><a href="Electronics.html">Electronics</li>
<li><a href="English.html">English</li>
</ul>
</body>
```

2)drop down navigation bar

```
<style>
*{margin:0px;padding:0px;}
#drop ul{list-style:none;}
#drop ul li{background-color:cyan;width:150px;border:1px solid white;
height:50px;text-align:center;float:left;font-size:20px;
position:relative;line-height:40px;}
#drop ul li a{display:block;color:white; text-decoration:none;}
#drop ul li:hover{background-color:pink;}
#drop ul ul{display:none;position:absolute;}
#drop ul li:hover >ul{display:block;}
#drop ul ul ul{margin:150px;top:-150px;}
```

</style>

```
<body>
<div id="drop">
<ul>
<li><a href="">home</a></li>
<li><a href="">HTML</a>
<ul>
<li><a href="">text</a></li>
<li><a href="">Link</a>
<ul>
<li><a href="">Internal</a></li>
<li><a href="">External</a></li>
</ul>
<li><a href="">help</a></li>
<li><a href="">Link</a></li>
</ul></li>
</ul>
</div>
</body>
```

o/p :-

home	HTML	
	text	
	Link	Internal
	help	External

CSS Attribute Selectors

The [attribute] selector is used to select elements with a specified attribute.

The following example selects all <a> elements with a target attribute:

```
<!DOCTYPE html>
<html>
<head>
<style>
input[type="text"] {
  width: 150px;
  display: block;
  margin-bottom: 10px;
  background-color: yellow;
}
```

```

input[type="button"] {
  width: 120px;
  margin-left: 35px;
  display: block;
}
</style>
</head>
<body>
<form name="input" action="" method="get">
  Firstname:<input type="text" name="Name" size="20">
  Lastname:<input type="text" name="Name" size="20">
  <input type="button" value="Example Button">
</form>
</body>
</html>

```

Image sprites:-

An image sprite is a collection of images put into a single image.

A web page with many images can take a long time to load and generates multiple server requests.

Using image sprites will reduce the number of server requests and save bandwidth.

We want to use the sprite image ("sprite.png") to create a navigation list.

We will use an HTML list, because it can be a link and also supports a background image:

E.g.

```

<style>
.back{background:url(sprite.png) 0px 0px;width:60px;height:50px;display:inline-block;}
.next{background:url(sprite.png)-90px 0px;width:60px;height:50px;display:inline-block;}
</style>
<body>
  <a href="abc.html"><span class="back"></span></a>
  <a href="xyz.html"><span class="next"></span></a>
</body>

```

CSS COLORS :-

Colors are specified using predefined color names, or RGB, HEX, HSL, RGBA, HSLA values.

1) CSS Color Names:-

In CSS, a color can be specified by using a color name :-

Ex. red, blue, orange, tomato, gray etc.

2) RGB Value

In CSS, a color can be specified as an RGB value, using this formula:

`rgb(red, green, blue)`

Each parameter (red, green, and blue) defines the intensity of the color between 0 and 255.

For example, `rgb(255, 0, 0)` is displayed as red, because red is set to its highest value (255) and the others are set to 0.

To display black, set all color parameters to 0, like this: `rgb(0, 0, 0)`.

To display white, set all color parameters to 255, like this: `rgb(255, 255, 255)`.

Experiment by mixing the RGB values below:

Ex. `rgb(255,99,71)`

3) CSS HEX Color

In CSS, a color can be specified using a hexadecimal value in the form:

`#rrggbb`

Where rr (red), gg (green) and bb (blue) are hexadecimal values between 00 and ff (same as decimal 0-255).


For example, `#ff0000` is displayed as red, because red is set to its highest value (ff) and the others are set to the lowest value (00).

Experiment by mixing the HEX values below:

`#ff6347`

Creating page layout and site designing :-

There are number of different layout designs to choose from.

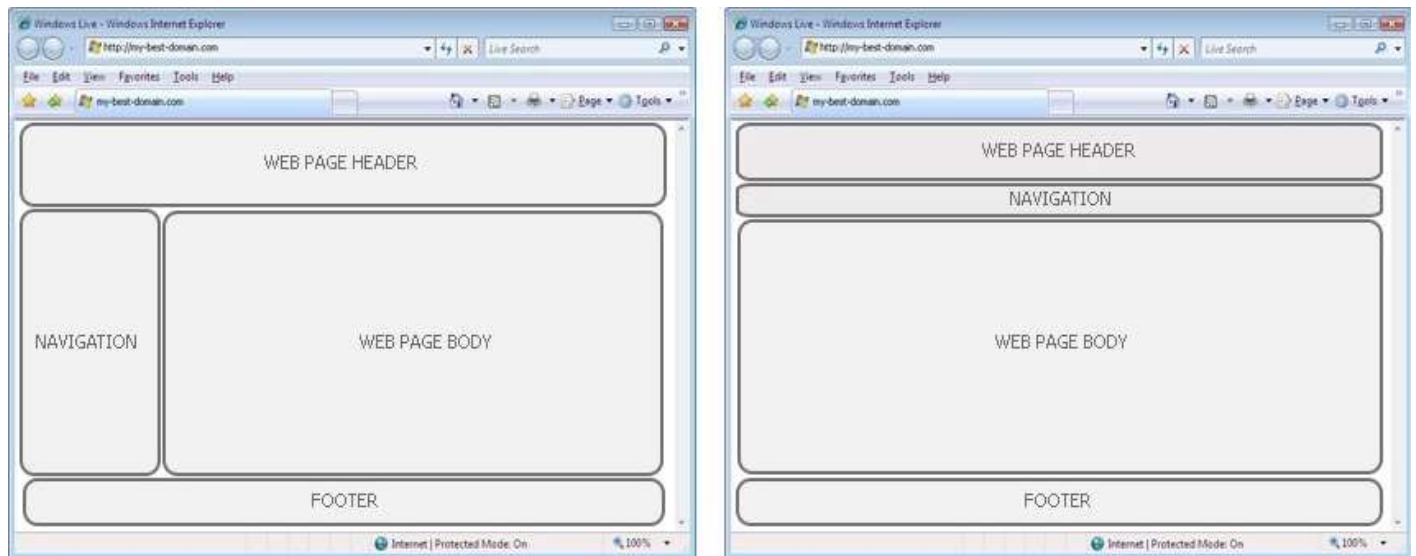

Header

A header is usually located at the top of the website . Defines a header for a document or a section.

Navigation Bar

A navigation bar contains a list of links to help visitors navigating through your website. Defines a container for navigation links.

Web page body

In web page body User can view main contents of web page.

Footer

The footer is placed at the bottom of your page. It often contains information like copyright and contact info:

e.g.

Create webpage layout file :-

1) Main.html

```
<frameset rows="20%,70%,10%">
<frame src="header.html">
<frameset cols="20%,80%">
<frame src="navigation.html">
<frame src="" name="f3">
</frameset>
<frame src="footer.html">
</frameset>
```


2) Create header.html file :-

```
<body style="font-size:80px;text-align:center;background-color:pink;color:green;font-weight:bold;">
<marquee>Welcome to HTML </marquee>
</body>
```

3) Create navigation.html file:-

```
<style>
ul{border:2px solid red;padding:20px;background-color:gold;width:250px}
ul a{font-size:20px;text-decoration:none;}
li{color:blue;display:block;padding:10px;border:2px solid red;}
li:hover{background-color:green;color:white}
body{background-color:pink}
</style>
<body>
<ul class="start" >
<li><a href="form.html" target="f3">HTML Form</a></li>
<li><a href="Multi.html" target="f3">MULTIPLE COLUMN</li></a></li>
<li><a href="liststyle.html" target="f3">HTML LIST</li>
<li><a href="dropdown.html" target="f3">Drop Down menu</li>
</ul>
</body>
```

4) Create any four HTML files such as(form.html,Multi.html,liststyle.html,dropdown.html)

5) Create footer.html file

```
<body style="font-size:50px;text-align:center;background-color:pink">
follow @ Copy right act
</body>
```