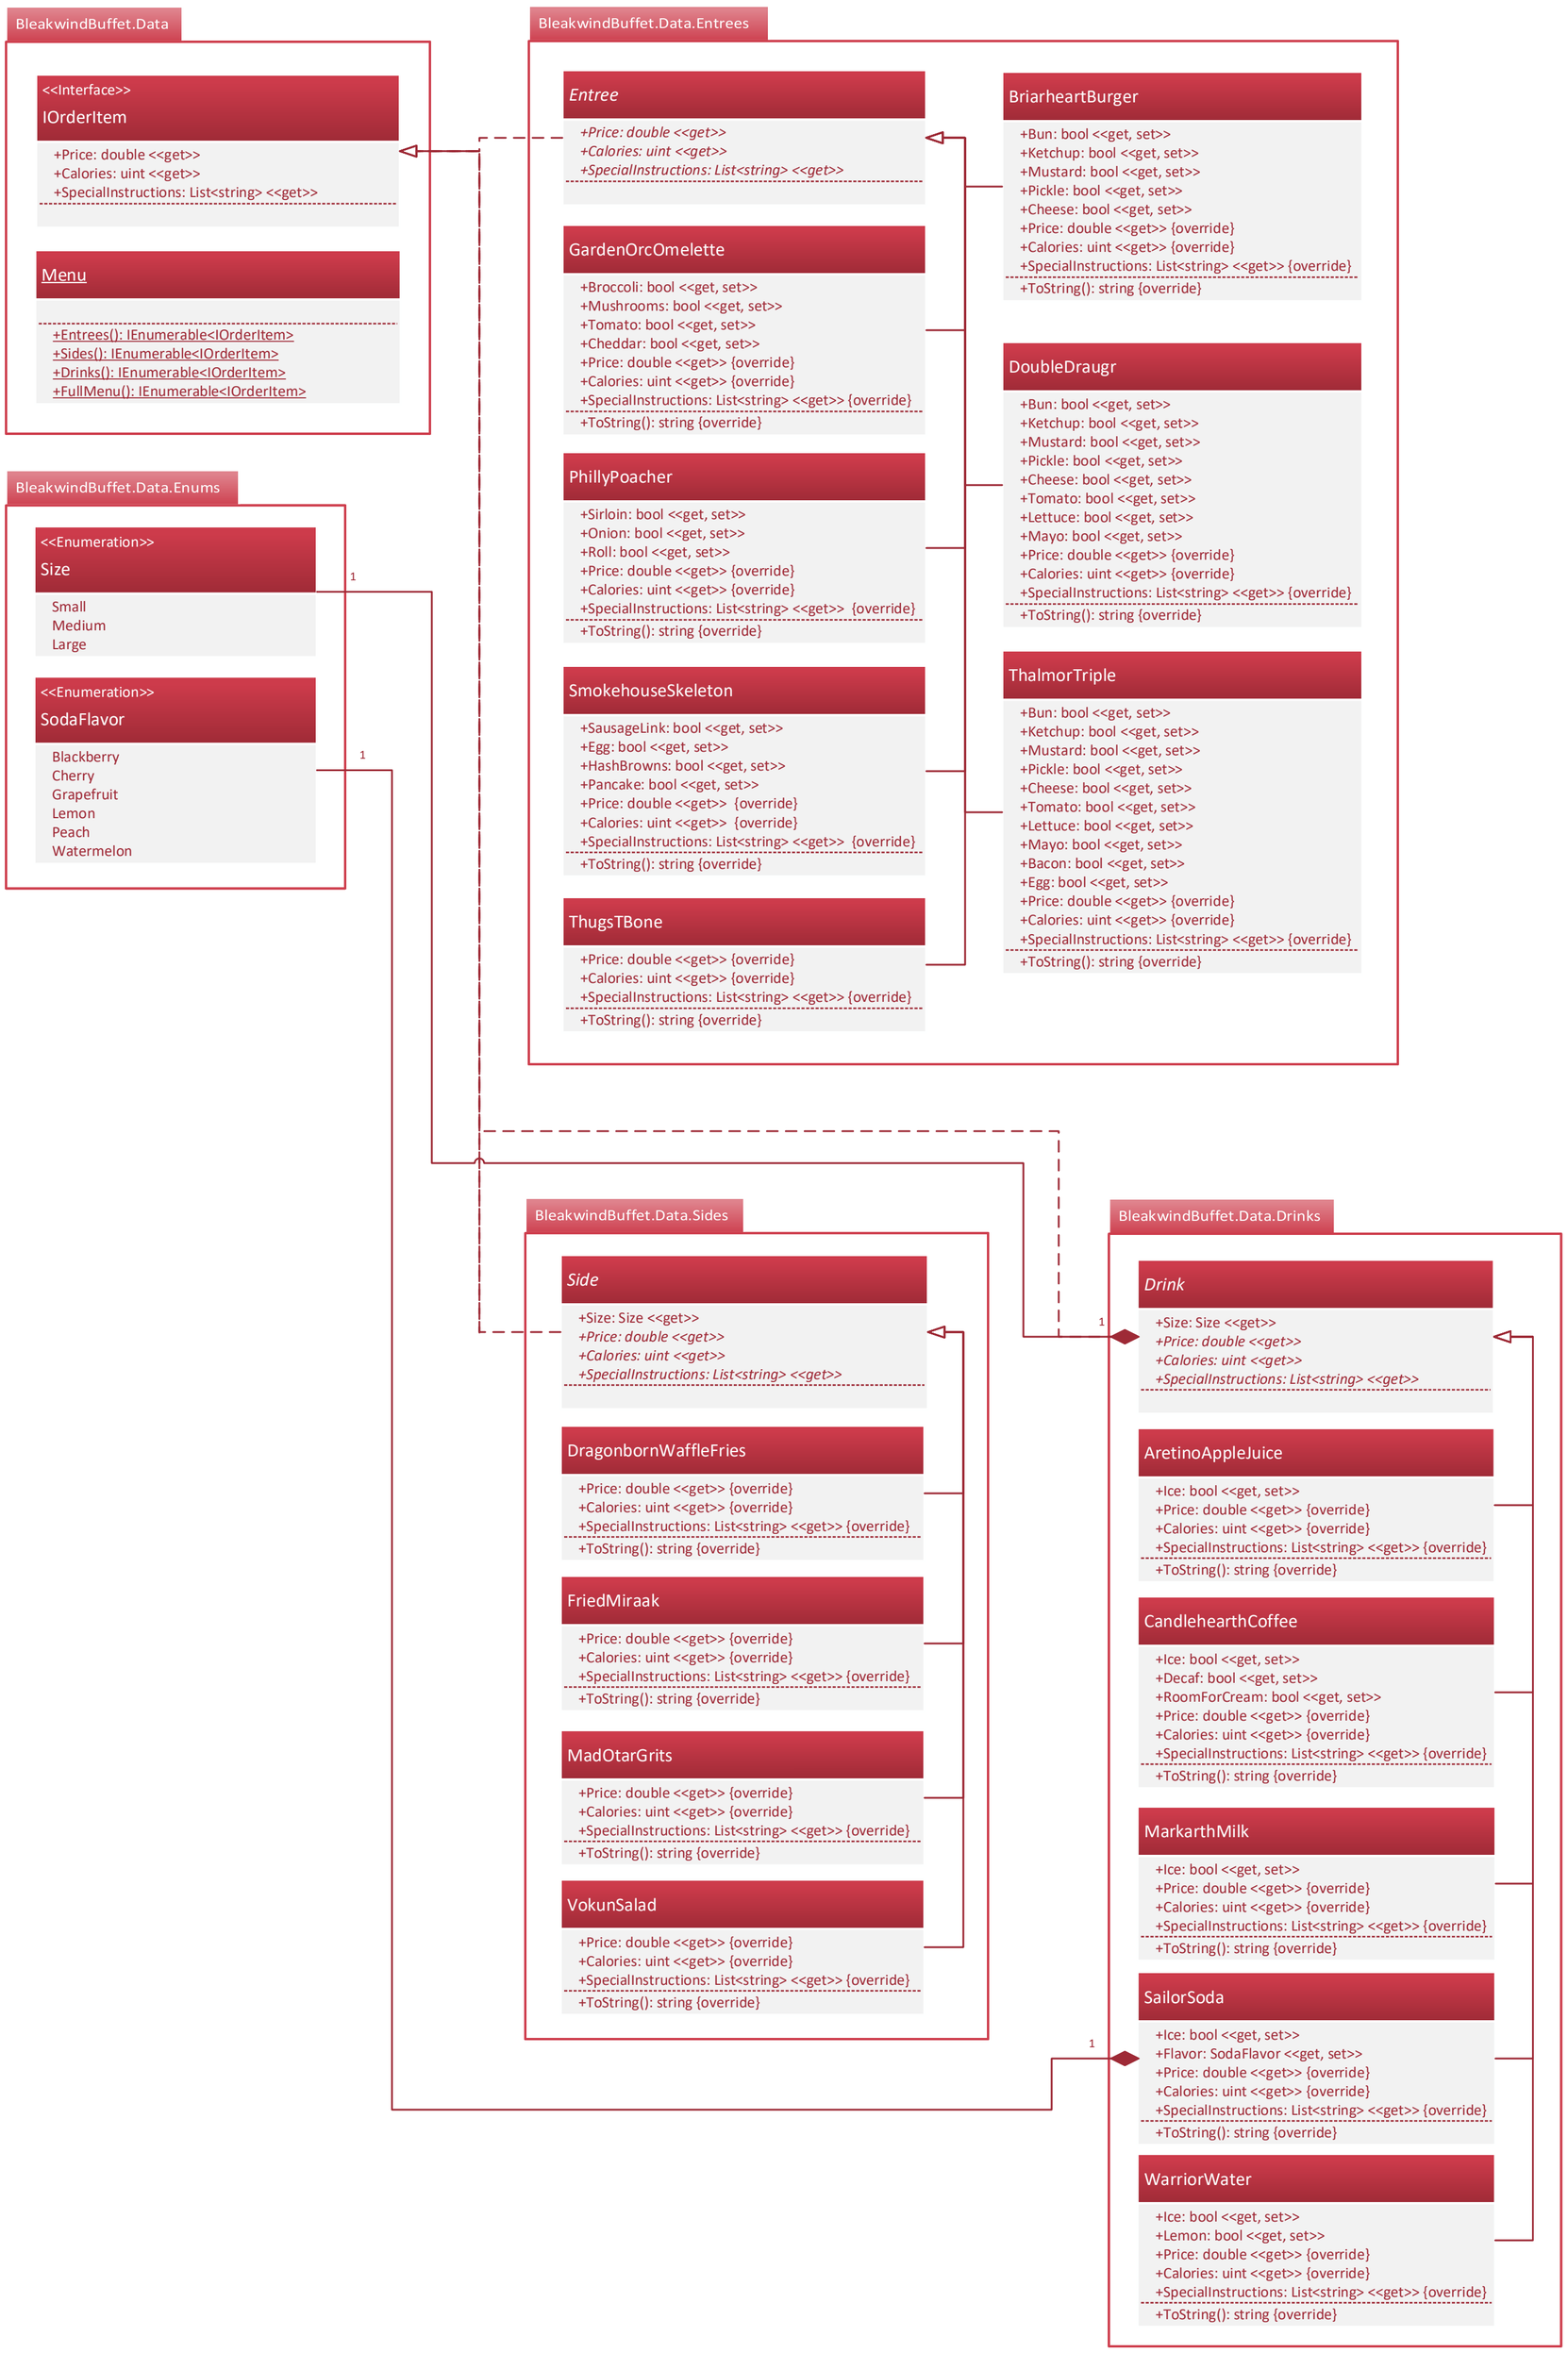
BleakwindBuffet.Data
<<Interface>>
IOrderItem
+Price: double <<get>>
+Calories: uint <<get>>
+SpecialInstructions: List<string> <<get>>
Menu
+Entrees(): IEnumerable<IOrderItem>
+Sides(): IEnumerable<IOrderItem>
+Drinks(): IEnumerable<IOrderItem>
+FullMenu(): IEnumerable<IOrderItem>
BleakwindBuffet.Data.Enums
<<Enumeration>>
Size
Small
Medium
Large
<<Enumeration>>
SodaFlavor
Blackberry
Cherry
Grapefruit
Lemon
Peach
Watermelon
1
1
BleakwindBuffet.Data.Entrees
Entree
+Price: double <<get>>
+Calories: uint <<get>>
+SpecialInstructions: List<string> <<get>>
GardenOrcOmelette
+Broccoli: bool <<get, set>>
+Mushrooms: bool <<get, set>>
+Tomato: bool <<get, set>>
+Cheddar: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
PhillyPoacher
+Sirloin: bool <<get, set>>
+Onion: bool <<get, set>>
+Roll: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
SmokehouseSkeleton
+SausageLink: bool <<get, set>>
+Egg: bool <<get, set>>
+HashBrowns: bool <<get, set>>
+Pancake: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
ThugsTBone
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
BriarheartBurger
+Bun: bool <<get, set>>
+Ketchup: bool <<get, set>>
+Mustard: bool <<get, set>>
+Pickle: bool <<get, set>>
+Cheese: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
DoubleDraugr
+Bun: bool <<get, set>>
+Ketchup: bool <<get, set>>
+Mustard: bool <<get, set>>
+Pickle: bool <<get, set>>
+Cheese: bool <<get, set>>
+Tomato: bool <<get, set>>
+Lettuce: bool <<get, set>>
+Mayo: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
ThalmorTriple
+Bun: bool <<get, set>>
+Ketchup: bool <<get, set>>
+Mustard: bool <<get, set>>
+Pickle: bool <<get, set>>
+Cheese: bool <<get, set>>
+Tomato: bool <<get, set>>
+Lettuce: bool <<get, set>>
+Mayo: bool <<get, set>>
+Bacon: bool <<get, set>>
+Egg: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
BleakwindBuffet.Data.Sides
Side
+Size: Size <<get>>
+Price: double <<get>>
+Calories: uint <<get>>
+SpecialInstructions: List<string> <<get>>
DragonbornWaffleFries
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
FriedMiraak
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
MadOtarGrits
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
VokunSalad
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
1
1
BleakwindBuffet.Data.Drinks
Drink
+Size: Size <<get>>
+Price: double <<get>>
+Calories: uint <<get>>
+SpecialInstructions: List<string> <<get>>
AretinoAppleJuice
+Ice: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
CandlehearthCoffee
+Ice: bool <<get, set>>
+Decaf: bool <<get, set>>
+RoomForCream: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
MarkarthMilk
+Ice: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
SailorSoda
+Ice: bool <<get, set>>
+Flavor: SodaFlavor <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}
WarriorWater
+Ice: bool <<get, set>>
+Lemon: bool <<get, set>>
+Price: double <<get>> {override}
+Calories: uint <<get>> {override}
+SpecialInstructions: List<string> <<get>> {override}
+ToString(): string {override}