# Virtel Audit, Administration, Operations and Performance Guide

Release 4.62

**Syspertec Communications** 

# **CONTENTS**

1	Ope		<b>3</b>
	1.1	Commands	3
	1.2	KILL Command	5
	1.3	LINES Command	5
	1.4	LINE Command	6
	1.5	LOG command	7
	1.6	LOG Status   Switch Commands	8
	1.7	MEMDISPLAY Command	9
	1.8	MSG Command	1
	1.9	NEW Command	1
	1.10	RELAY TRACE Command	1
	1.11	RELAYS Command	1
	1.12	SILENCE Command	2
	1.13	SNAP Command	2
	1.14	SNAPMSG Command	2
	1.15	SNAP80 Command	3
	1.16	SNAPW Command	4
	1.17	STAT Command	4
	1.18	STOP Command	4
	1.19	TCT Command	5
	1.20	TERM Command	5
	1.21	TRACE   NOTRACE Command	6
	1.22	UNLOAD Command	8
	1.23	VIRSV Command	8
	1.24	ZAP Command	9
2			1
	2.1	11	21
	2.2		25
	2.3		30
	2.4		34
	2.5	Web Entity Management	39
9	D6		. 1
3	3.1		5 <b>1</b> 51
	3.1		)1 )2
	3.3		52 54
			64 65
	3.4		
	3.5	VIRTEL SNAP	9

4	Audit	71
	4.1 VIRSTAT file	71
	4.2 SMF Support	83
5	Appendix	87
	5.1 Trademarks	87
	5.2 Open Source Software	87



# VIRTEL Audit, Administration, Operations and Performance

Warning: This is a draft version of the document.

Version: 4.62

Release Date: TBA. Publication Date: 17/02/2024

Syspertec Communication

196, Bureaux de la Colline 92213 Saint-Cloud Cedex Tél. : +33 (0) 1 46 02 60 42

www.syspertec.com

**Note:** Reproduction, transfer, distribution, or storage, in any form, of all or any part of the contents of this document, except by prior authorization of SysperTec Communication, is prohibited.

Every possible effort has been made by SysperTec Communication to ensure that this document is complete and relevant. In no case can SysperTec Communication be held responsible for any damages, direct or indirect, caused by errors or omissions in this document.

As SysperTec Communication uses a continuous development methodology; the information contained in this document may be subject to change without notice. Nothing in this document should be construed in any manner as conferring a right to use, in whole or in part, the products or trademarks quoted herein.

"SysperTec Communication" and "VIRTEL" are registered trademarks. Names of other products and companies mentioned in this document may be trademarks or registered trademarks of their respective owners.

CONTENTS 1

2 CONTENTS

**CHAPTER** 

**ONE** 

# **OPERATIONS**

# 1.1 Commands

VIRTEL allows certain functions to be controlled dynamically by console commands. Use one of the following methods to send a command to VIRTEL, according to the operating system:

# 1.1.1 z/OS Environment

The following modify command may be issued at the z/OS operator console, or from an SDSF session under TSO, in which case the command must be prefixed by the character "/":

F stcvirte, virtel-command

#### stcvirte

the name of the VIRTEL started task STC

## virtel-cmd

a VIRTEL command, as described in the following section.

# 1.1.2 z/VSE Environment

To send a command to VIRTEL, issue the following command at the VSE operator console:

MSG virtel, DATA=cirtel-command

#### virtel

The VIRTEL jobname (usually VIRTEL), or the partition in which VIRTEL is executing (for example, F4)

# virtel-cmd

A VIRTEL command, as described in the following section. Alternatively, issue the following command at the VSE operator console:

MSG Fx

#### $\mathbf{F}\mathbf{x}$

Partition in which VIRTEL is executing

The system responds with:

AR 0015 1I40I READY Fx-nnnnAR 0015

**Note:** Note the reply number (nnnn) and issue the following command:

nnnn virtel-cmd

#### nnnn

reply number

# $\mathbf{virtel\text{-}cmd}$

A VIRTEL command, as described in the following section

# 1.2 KILL Command

The KILL command can be used to stop a scenario.

```
KILL, T=termid
```

#### termid

terminal name

The KILL command requests VIRTEL to abnormally terminate the scenario currently active on the specified terminal.

# 1.3 LINES Command

The LINES command can be used to display a summary of the line status.

```
LINES | LINES, ACT | LINES, INACT
```

The LINES command displays the VIRTEL ACB name and a list of the lines defined in the VIRTEL configuration file. The optional keywords ACT or INACT may be used to restrict the display to lines that are in a "active" or "inactive" state respectively.

#### Example:

```
F VIRTEL, LINES
VIR02001 LINES
VIR0201I VIRTEL 4.62 APPLID=VIRTEL LINES
VIR0202I ALLOCATED IP ADDRESS = 192.168.170.047
VIRO2021 INT.NAME EXT.NAME TYPE ACB OR IP
VIR0202I ----- -----
VIRO202I C-HTTP HTTP-CLI TCP1 :41002
VIR0202I E-HTTP
                 HTTP-EDS TCP1
                                :41003
VIR0202I F-HTTP
                 HTTP-FOR TCP1
                               :41005
VIR0202I I-CONN
                 IVP1
                         *TCP1
VIR0202I LM01TX1
                 LM01TX1 /FAST UMEHTX1
VIR0202I O-HTTP
                 HTTP-OUT TCP1
                               £NONE£
VIR0202I P-PCLPDF PCL2PDF TCP1
                               £NONE£
VIR0202I V-HTTP
                 HTTP-VSR TCP1 :41004
VIR0202I W-HTTP
                 HTTP-W2H TCP1 :41001
VIR0202I 9-XMPASS VIRTELXM*XM2
                               XM44000
VIR0202I 9-XMVTA QLNKHOLT XM1
                                QLNKCICH
VIR0202I ---END OF LIST---
```

1.2. KILL Command 5

# 1.4 LINE Command

# 1.4.1 Display line detail

To display detail information about a Virtel line use the line detail command.

```
LINE=linename, DISPLAY (or L=linename, D)
```

#### linename

Internal or external name of the line

The LINE DISPLAY command displays the status of a line and its associated terminals.

## Example:

```
F VIRTEL, LINE=C-HTTP, D
VIR02001 LINE=C-HTTP, D
VIRO2071 LINE C-HTTP TCP1 HTTP STARTED
VIR0203I TERMINALS ASSOCIATED WITH LINE C-HTTP
VIRO203I TERMINAL RELAY
                         STATUS
VIR0203I -----
VIR0203I CLLOC000+
                                                LINKED
VIR0203I CLLOC001
                                                LINKED
VIR0203I CLLOC002
                                                LINKED
VIR0203I CLLOC003
                                                LINKED
VIR0203I CLLOC004
                                                LINKED
VIR0203I CLLOC005
                                                LINKED
VIR0203I CLLOC006
                                                LINKED
VIR0203I CLLOC007
                                                LINKED
VIR0203I CLLOC008
                                               LINKED
VIR0203I CLLOC009
                                                LINKED
VIR0203I CLVTA000 *W2HPOOL
                                                LINKED
VIR0203I CLVTA001 *W2HPOOL
                                                LINKED
VIR0203I CLVTA002 *W2HPOOL
                                               LINKED
VIR0203I CLVTA003 *W2HPOOL
                                               LINKED
VIR0203I CLVTA004 *W2HPOOL
                                               LINKED
VIR0203I ---END OF LIST---
VIR0204I TERMINALS IN POOL *W2HPOOL
VIRO204I TERMINAL RELAY PRINTER USED BY
VIR0204I -----
VIR0204I W2HTP000 REHVT000 REHIP000
VIRO204I W2HTP001 REHVT001 REHIP001
VIRO204I W2HTP002 REHVT002 REHIP002
VIRO204I W2HTP003 REHVT003 REHIP003
VIR0204I W2HTP004 REHVT004 REHIP004
VIR0204I ---END OF LIST---
```

# 1.4.2 Tracing a line

To activate or deactive a trace on the line the following command can be used:-:

```
LINE=linename, NOTRACE | TRACE [ or L=linename, N | T ]
```

# 1.4.3 Starting and Stopping A Line

To STOP or START a line use the LINE command with the START or STOP function.

```
LINE=linename,START | STOP

OR
L=linename,P | S
```

#### linename

Internal or external name of the line

The LINE START and LINE STOP commands perform the same function as the "S" and "P" commands on the "Status of lines". These commands may only be issued for line types AntiGATE, AntiPCNE, AntiFASTC, and TCP/IP.

# 1.5 LOG command

The LOG command enables the VIRTEL log to be spun off to the console, a JES2 output dataset , a dataset [new in V4.58]. The LOG command has the following format:-

```
F VIRTEL, LOG=CONSOLE | SYSOUT | BOTH | SPIN | FILE
```

where

- CONSOLE means switch console messages back to the console.
- SYSOUT means switch to spooling consoles messages to SYSOUT.
- BOTH means write console messages to the console and SYSOUT.
- $\bullet\,$  SPIN means spin off the current SYSOUT dataset.
- FILE means write messages to file.

# 1.5.1 LOG=SYSOUT TCT definition

Setting up VIRTEL to use the LOG=SYSOUT facility requires a change to the TCT definition to direct WTOs to a SYSOUT dataset. In the TCT code the following statement:-

```
LOG=(SYSOUT[,class[,destination]])

For example, LOG=(SYSOUT,A,EDSPRT)
```

1.5. LOG command 7

This directs all WTOs to a SYSOUT dataset rather than the system console log (SYSLOG). If you want WTO messages going to both the system console and a SYSOUT dataset than issue the following VIRTEL command:-

```
F VIRTEL, LOG=BOTH
```

# 1.5.2 LOG=FILE [New in V4.58]

Setting up Virtel to use the LOG=FILE facility requires a change to the TCT definition. In the TCT code the following statement:-

```
LOG=FILE
```

This will trigger the log program VIR0021A to write messages to either the VIRLOGX DD statement or the VIRLOGY DD statement depending on the active LOG. These DDNAMES need to be added to the Virtel procedure to support LOG=FILE option. The following DCB attributes. Recommended space allocation could be 10 tracks for each dataset.

```
LOGFILEX and LOGFILEY DCB attributes : PS, LRECL=166, RECFM=VB, BLKSIZE=2000
```

If either LOGFILE becomes full (X37 Abend) an automatic switch will occur to to the inactive logfile.

# 1.6 LOG Status | Switch Commands

To determine the status of the LOG file, or to switch the log file manually issue one of the following commands:-

F VIRTEL, LOG, D	Display active logfile
F VIRTEL, LOG, I	Switch logfiles

**Note:** If you issue the "SWITCH" or "DISPLAY" command and LOGFILES are not in use i.e. LOG=FILE is not coded in the TCT you will receive the message VIR0068E INVALID COMMAND.

# 1.7 MEMDISPLAY Command

To display Virtel Internal Memory Usage use the MEMDISPLAY command.

```
MEMDISPLAY
```

With the memory diagnostic tool active the MEMDISPLAY command summarize the VIRTEL subpool active allocated memory.

```
VIR0200I MEMDISPLAY
VIR0271I DISPLAY 978
SP1=00024478 SP2=00001044 SP3=0008E35F SP4=00002F61
    00910091 00040009 02380294 000B0011
SP5=000317DC SP6=0004DF73 SP7=00000000 SP8=00000220
    00C504C7 01370137 00000000 00000002
POOL CONTROL BLOCK. SUBPOOL=1
PAG=00109000 NFQ=00109008 #FQ=00000001 FRE=0000B2A0
PAG=000F9000 NFQ=000F9008 #FQ=00000001 FRE=00000080
PAG=000E9000 NFQ=000E9008 #FQ=00000001 FRE=00000078
POOL CONTROL BLOCK. SUBPOOL=2
PAG=1EC14000 NFQ=1EC14008 #FQ=00000005 FRE=0000EF68
POOL CONTROL BLOCK. SUBPOOL=3
PAG=1ECD4000 NFQ=1ECD4008 #FQ=00000002 FRE=00009DF8
PAG=1ED54000 NFQ=1ED54008 #FQ=00000002 FRE=00001750
PAG=1EC84000 NFQ=1EC84008 #FQ=00000001 FRE=00000878
PAG=1ED04000 NFQ=1ED04008 #FQ=00000001 FRE=00000878
PAG=1ED94000 NFO=1ED94008 #FO=00000002 FRE=00002768
PAG=1ECF4000 NFQ=1ECF4008 #FQ=00000001 FRE=00000878
PAG=1EE04000 NFQ=1EE04008 #FQ=00000001 FRE=00000878
PAG=1ED74000 NFQ=1ED74008 #FQ=00000001 FRE=00000878
PAG=1ECE4000 NFQ=1ECE4008 #FQ=00000001 FRE=00000878
PAG=1EC64000 NFQ=1EC64008 #FQ=00000001 FRE=00000878
POOL CONTROL BLOCK. SUBPOOL=4
PAG=1EC04000 NFQ=1EC04008 #FQ=00000004 FRE=0000CFA0
POOL CONTROL BLOCK. SUBPOOL=5
PAG=1ECA4000 NFQ=1ECA4008 #FQ=00000002 FRE=0000D870
PAG=1ED14000 NFQ=1ED14008 #FQ=00000001 FRE=000043B8
PAG=1ED24000 NFQ=1ED24008 #FQ=00000001 FRE=000043B8
PAG=1EC74000 NFO=1EC74008 #FO=00000001 FRE=0000A1D8
PAG=1EC54000 NFQ=1EC54008 #FQ=00000001 FRE=0000A1D8
PAG=1EBB4000 NFO=1EBB4008 #FO=00000001 FRE=000043B8
POOL CONTROL BLOCK. SUBPOOL=6
PAG=1EBF4000 NFQ=1EBF4008 #FQ=00000002 FRE=00000A50
PAG=1EBE4000 NFO=1EBE4008 #FO=00000001 FRE=00000088
PAG=1EBD4000 NFQ=1EBD4008 #FQ=00000001 FRE=000000B8
PAG=1EBC4000 NFQ=1EBC4008 #FQ=00000001 FRE=00000000
PAG=1EBA4000 NFQ=1EBA4008 #FQ=00000001 FRE=00000108
POOL CONTROL BLOCK. SUBPOOL=7
PAG=0000000 NFQ=00000000 #FQ=00000000 FRE=00000000
POOL CONTROL BLOCK. SUBPOOL=8
```

The display response is split into a summary section for each subpool and a detailed allocated page block and free queue element display for each subpool. In the summary display, each subpool has two displayed values. The top value is the amount of storage currently allocated and the value below represents the current

allocation in 1K chunks and a peak allocation in 1K chunks.

For example in the above display in SP5 we can see that there is an allocated value of 317DC bytes, represented by 00C5 in 1K chunks, and a peak value of 04C7 in 1K chunks. At the bottom of the display is a line which provide allocated, free and total values.

# 1.7.1 Enabling the MEMDISPLAY function

Memory Display feature is activated by using the MEMHST subparameter in the MEMORY parameter present in the VIRTCT. (see the VIRTCT subparameter MEMHST in "VIRTEL462 Installation User Guide").

# 1.7.2 Disabling the MEMDISPLAY function

It can be deactivated by using the command.

F VIRTEL, MEMDISPLAY, DISABLE

**Note:** This command should only be implemented when advised to do so by Technical Support. Performance degradation might occur due to the additional monitoring services. This will depend on VIRTEL demand.

# 1.8 MSG Command

To send a mesage to VIRTEL Multi-Session users use the MSG command:

```
MSG=message text
```

The specified message will be displayed on the VIRTEL multi-session screen.

# 1.9 NEW Command

The NEW command refreshes a VIRTEL program, VIRSV service or scenario.

```
NEW=progname
```

#### progname

program name

The NEW command requests VIRTEL to load a fresh copy of a program (presentation module, exit, etc) into the VIRTEL address space. This is required after an update has been made to a program. The message VIR0060W PROGRAM progname IS A NEW COPY indicates a successful reload. The message VIR0061W PROGRAM progname NOT IN MEMORY indicates that the program has not yet been loaded into the VIRTEL address space. In this case, VIRTEL will load the program automatically when it is next needed.

# 1.10 RELAY TRACE Command

Use the RELAY command to trace the Virtel buffers between Virtel and the application.

RELAY=relayname, NOTRACE | TRACE

# 1.11 RELAYS Command

To display a list of Virtel LU relays use the RELAY command.

```
RELAYS
```

The RELAYS command displays the VIRTEL ACB name and a list of the relay LUs opened by VIRTEL. Foe example:

1.8. MSG Command 11

# 1.12 SILENCE Command

The SILENCE command manages message suppression. The format of the command is:

```
SILENCE Toggle SILENCE mode ON or OFF
SILENCE=messagid Add message to message table
SILENCE=messageid,D Delete message from message table
SILENCE=RESET Reset message table and remove all entries
SILENCE=LIST List messages
```

The SILENCE command initially reverses the state of the SILENCE parameter as defined in the VIRTCT. A default static message table of connection and disconnection messages is built at initialization. This table includes the following messages - VIR0026W, VIR0028W, VIR0051I, VIR0052I, VIR0505I, VIR0507I, VIR1551I, VIRHT51I, VIRNA51I, VIRPF28I, VIRPF51I, VIRPF52I, VIRPF99I, VIRQ912W, VIRQ922W, VIRT912W, VIRT922W, VIR0002W, VIRU122I and VIR0914E. These messages ids are not effected by the RESET or LIST option of the SILENCE command.

# 1.13 SNAP Command

This command is used to take a dump of the Virtel SNAP internal trace table.

```
SNAP
```

The SNAP command prints the contents of the VIRTEL internal trace table to the SYSPRINT file . See "VIRTEL SNAP" for further information.

# 1.13.1 Terminal or Relay SNAP

```
SNAP,T=termid | R=relayname
```

#### termid

terminal name

# relayname

name of VTAM relay LU currently associated with the terminal

# 1.14 SNAPMSG Command

```
SNAPMSG, [ALL, RESET, LIST]

ALL - The SNAPMSG command requests VIRTEL to generate an automatic SNAP

after certain messages (VIR1902W VIR0026W VIR0052I VIR1552I VIR0526W

VIR1952I).

LIST - List all messages and Actions

RESET - Reset the dynamic table and clear out all messages.
```

```
SNAPMSG=message[,search string],action
```

The SNAPMSG commmand allows a SNAP or DUMP to be taken whenever a particular message number is issued by VIRTEL. The command has an additional search field which can be used to identify a message with a paticular character string, for example a specific return code. This feature allows upto 10 messagesto be held in a dynamic table, along with a static entry that can be defined in the TCT by using the SNAPMSG parameter in the TCT. See "SNAPMSG parameter" in the Virtel Installation Guide.

#### message

Any message that can be issued by Virtel.

#### search

Any seache criteria issued within the message. The search file is restricted to a maximum of 10 characters. Anything beyond will be ignored. Default search is none.

#### action

Possible values are S for SNAP, A for ABEND, and D to delete a message from the dynamic table. Virtel will abend with a U0999 abend code, reason code 15 if the ABEND action is used.

Default action is SNAP.

Examples:

```
F VIRTEL, SNAPMSG=VIRHT511, CALL, S
```

Add message VIRHT51I to SNAPMSG table and take a SNAP if the message is issued and the string "CALL" is found in the message.

```
F SPVIREH1, SNAPMSG, LIST
```

List message subjected to SNAPMSG processing. Example output would look like: -

```
VIR0200I SNAPMSG,LIST
VIR0225I MESSAGE TABLE DISPLAY 459
VIR0230I TCT MSG=VIR0202I,ACTION=S,SEARCH=41001
VIR0227I MSG. 01=VIR0202I,ACTION=S,SEARCH=41002
VIR0225I MESSAGE TABLE END
```

Delete message number 1 from the dynamic SNAPMSG table: -

```
F SPVIREH1, SNAPMSG, D=1
```

# 1.15 SNAP80 Command

```
SNAP80
```

The SNAP80 command prints the contents of the VIRTEL internal trace table in 80 column format, whatever the current value of the SNAPW parameter.

# 1.16 SNAPW Command

The format of the SNAP output can be adjusted with the SNAPW command.

SNAPW=80 | 132

The SNAPW command sets the width for future SNAP commands (80 or 132 columns). The SNAPW parameter in the VIRTCT determines the default width at VIRTEL startup. Refer to the section "Parameters of the VIRTCT" in the VIRTEL Installation Guide for details of the SNAPW parameter.

# 1.17 STAT Command

# 1.17.1 Display statistics file information

To display information about the Virtel statistics file management use the STAT command.

STAT, D

This command displays the status of the VIRSTATx files (message VIR0601I). The STAT command is used to manage the VIRTEL statistics recording files (VIRSTATx). This command can be used only if STATS=MULTI is specified in the VIRTCT.

## 1.17.2 Switch the VIRSTAT file

To switch the STATISTIC file using the STAT switch command.

STAT, I

This command forces VIRTEL to free the current VIRSTATx file and to start recording onto the next file.

## 1.18 STOP Command

To stop Virtel issue the STOP command:

STOP

The STOP command allows to STOP the VIRTEL task. This command is intended to be mainly used in VSE environment even if it is also available in z/OS environment. On z/OS environment you can also use the following command :

P VIRTEL

# 1.19 TCT Command

The TCT command displays some of the TCT options that have been defined in the active TCT.

```
F VIRTEL, TCT
VIR02001 TCT
VIR02701 DISPLAY
VIRTEL TCT=VIRTCTEH:
SILENCE=N, MEMORY=(A,N), BFVSAM=32768, BUFDATA=016, BUFSIZE=32000, STR=03
COUNTRY=FR, GMT=SYSTZ, DEFUTF8=IBM1147, LANG=E, MAXSOCK=00240, VSAMTYP=N
APPLID=VIRTEL, SMF=N, PASSTCK=Y, VIRSECU=Y, SWA=N, NBTERM=0500, NTASK=04
MEMORY=(SYS(0001688K,0001688K), DATA(0002304K,0003200K)), LOG=CONSOLE
VIR02801 END
```

# 1.20 TERM Command

Use the TERM command to activate a Terminal trace. This will trace data between the browser and Virtel.  $TERM = termid, NOTRACE \mid TRACE \; [or \; T = termid, N \; | \; T \; ]$ 

1.19. TCT Command

# 1.21 TRACE | NOTRACE Command

A trace can be activated or deactivated on a terminal, line or relay.

```
TRACE, T=termid
TRACE, L=linename
TRACE, R=relayname
NOTRACE, T=termid
NOTRACE, L=linename
NOTRACE, R=relayname
```

#### termid

terminal name

#### linename

Internal or external name of the line

## relayname

relay associated to the terminal

It is often easier to identify the relay used whose name appears at the bottom of the 3270 session screen as shown below.



Associated relay names

# linename

Internal or external name of the line

The following alternate forms of the TRACE/NOTRACE commands are also valid

```
TERM=termid, TRACE (or T=termid, T)
TERM=termid, NOTRACE (or T=termid, N)
LINE=linename, TRACE (or L=linename, T)
LINE=linename, NOTRACE (or L=linename, N)
                                                                       (continues on next page)
```

(continued from previous page)

```
RELAY=relayname, TRACE (or R=relayname, T)
RELAY=relayname, NOTRACE (or R=relayname, N)
```

#### termid

terminal name

#### linename

Internal or external name of the line

#### relayname

Name of VTAM relay LU currently associated with the terminal

# 1.21.1 Display a list of active traces

```
TRACE, DISPLAY | D
```

An example of the response is:-:

```
F VIRTEL, TRACE, DISPLAY or F VIRTEL, TRACE, D
VIRO2001 TRACE, D
VIRO2081 VIRTEL INTERNAL TRACE = YYY. EXT. BUFFERS = 0001/00FF.
VIRO2131 NO ACTIVE TRACES
```

# 1.21.2 Setting trace options

To set the trace options issue the following command:

```
TRACE, VIT=Y | N Y | N Y | N
```

The default VIT trace parametr is YYN. The external archive trace setting should only be set when instructed to by Virtel support.

The VIT indicators apply the the level of tracing.

```
- Y|N No tracing or minimal tracing
- Y|N Data elements traced
- Y|N External Archive active
```

#### 1.21.3 Deactivate all traces

```
NOTRACE, ALL
```

This command does not affect any memory trace. To stop a memory trace, refer to "Memory trace management"

# 1.22 UNLOAD Command

Unload the ARBO configuration file.

```
UNLOAD
UNLOAD, DSN=*dsname*
```

The UNLOAD commands writes the contents of the ARBO file. Depending on the VIRTEL JCL, the output will be directed to the SYSPUNCH DD statement. If no SYSPUNCH DD statement is defined, one will be allocated through dynamic allocation. Output will then by written to JES class SYSOUT=B or, if the DSN= option is specified, to the dsname provided. The dataset must be pre-allocated with DCB attributes LRECL=80,RECFM=FB,BLKSIZE=3200. The SYSPUNCH DD statement will be dynamically allocated if not provided in the Virtel JCL.

## 1.23 VIRSV Command

Refreshing a VIRSV Service program

```
VIRSV, NEW=servname
```

#### servname

service name

The VIRSV,NEW command requests VIRTEL to stop the requested VIRSV service. This has the effect of loading a fresh copy of the associated service program the next time the service is invoked by a scenario. The message VIR0260W SERVICE servname IS A NEW COPY indicates that the service was stopped successfully. The message VIR0261W

SERVICE servname NOT IN MEMORY indicates that the service is not yet started. In this case, VIRTEL will start the service and load the program automatically when it is next needed.

# 1.24 ZAP Command

The ZAP command allows dynamic patching of a Virtel Program

```
ZAP=progname+offset, verify, replace
```

#### progname

program name

#### offset

offset into program

#### verify

verify value (2 to 8 hexadecimal digits)

## replace

replacement value (2 to 8 hexadecimal digits)

The ZAP command allows the dynamic application of a corrective patch to a program while VIRTEL is running. This command is intended to be used only under the advice of Syspertec technical support personnel.

1.24. ZAP Command 19

**CHAPTER** 

**TWO** 

# **ADMINISTRATION**

# 2.1 Line Status Application

The Line Status sub-application allows the administrator to display the current status of lines and terminals or irrual circuits (CVC) managed by VIRTEL control, and optionally to modify the status of lines.

# 2.1.1 Displaying line status

The Line Status sub-application is invoked by pressing [PF9] in the Configuration Menu, by pressing [PF10] in the Sub- Application Menu, or via the Multi-Session Menu using a transaction which calls module VIR0027.

When the security subsystem is active, access to Line Status sub-application from the Configuration Menu or the Sub- Application Menu is controlled by the resource \$\$UTIL\$\$. When accessed by a transaction, normal transaction security rules will apply. Security management is described in chapter 5 of the VIRTEL Users Guide.

The sub-application begins by displaying the Line Status Display screen. Started lines are displayed in high-intensity or white text, stopped lines are displayed in low intensity or blue text.

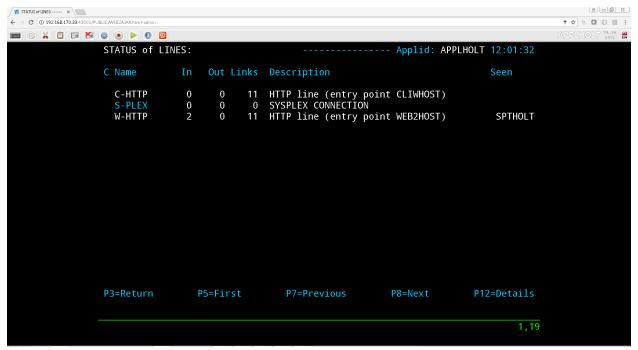


Fig.1 - Line Status Display screen

#### STATUS OF-LINES

Allows the administrator to display a subset of lines, by typing the first character of the name of each desired line into this field and pressing [Enter]. If the field is blank, all lines are displayed.

 $\mathbf{C}$ 

Command input field.

#### Name

The internal name of the line.

In

The number of virtual circuits currently in use by incoming calls.

Out

The number of virtual circuits currently in use by outgoing calls.

#### Links

The number of terminals linked to the line.

#### Description

Comments.

#### Seen

User name.

# 2.1.2 Positioning the list

If the line status display occupies more than one screen, you can scroll through the list of lines by using [PF5], [PF7] and [PF8].

#### [PF5]

return to the first page of the list.

#### [PF7]

scroll back to previous page.

#### [PF8]

scroll forward to next page.

# 2.1.3 Sending a command

To send a command to a line, place the cursor in the "C" field in front of the line name, type the command, then press [Enter]. The commands available are:

 $\mathbf{S}$ 

# Starts a line.

If the line is already started, VIRTEL attempts to start or restart any terminals associated with the line but not currently linked. This allows VIRTEL to recover LU's which have been deactivated and reactivated by VTAM, without stopping the line.

p

#### Stops a line.

The LINE START and STOP commands can also be issued from the z/OS or VSE console. See "Starting and stopping a line"

To return to the configuration menu, press [PF3] or [Clear].

# 2.1.4 Displaying Line Usage

To display the status and line usage place the cursor on the desired line in the Line Status Display screen and press [PF12].

Security rules are the same as those which apply to the previous screen.

This sub-application begins by displaying the terminal usage for the selected line, as shown in the example below:

```
ACTIVE TERMINALS for LINE: C-HTTP
                                                       Applid: APPLHOLT 12:20:43
Prefix : CL
                                         Defined:
                                                       11
                                                                Linked:
                                                                            11
                     Type : TCP1
Number of occupied circuits
                                    1
                                                                            33
                                         Number of connections
                                                                             0 mn
Maximum simultaneously used
                                    6
                                          Total time connected
          User
                             Time
Terminal
                    Sends
                                     Node
                                                 Remote number
                                                                     Call Data
         SPTHOLT
                              0 mn
CLVTA000
                         5
                                     REHVT000
                                                 192.168.092.047
                                                                    W2H
P3=Return
              P4=Next Line
                                     P5=First Line
                                                        P7=Previous
                                                                        P8=Next
```

Fig.2 - Line Usage Detail Display screen

#### ACTIVE TERMINALS for LINE

Indicates the internal name of the line whose virtual circuits are being displayed.

#### Prefix

The terminal name prefix associated with this line.

#### Type

The line type, as defined in the line definition.

#### Defined

The number of terminals defined for this line.

#### Linked

The number of terminals currently linked to this line.

#### Number of occupied circuits

The number of terminals or virtual circuits currently in use.

#### Number of connections

The total number of calls received.

#### Maximum simultaneously used

The maximum number of terminals or virtual circuits in use at any one time.

#### Total time connected

The total connection time.

#### **Terminal**

The terminal name (name of the virtual circuit).

#### User

User name if signed on to VIRTEL.

#### Sends

The number of messages sent to the terminal.

#### Time

The connection time in minutes.

## Node (for Minitel)

The name of the node to which the terminal is currently connected.

#### Node (for HTTP lines)

The relay name (3270 LU name) used to connect to the host application.

# Remote number (for X25 lines)

The X25 called number for an outgoing call, or the X25 calling number for an incoming call.

#### Remote number (for HTTP lines)

The IP address of the client.

#### Call Data (for X25 lines)

The call user data field of the call packet (for both incoming and outgoing calls).

# Call Data (for HTTP lines)

The external name of the transaction which represents the directory (pathname) in the URL.

If the Virtual Circuit Status Display occupies more than one screen, you can scroll through the list of terminals by using [PF7] and [PF8].

#### [PF7]

scroll back to previous page.

#### [**PF8**]

scroll forward to next page.

You can use the [PF4] and [PF5] keys to display information about the other lines under VIRTEL control. To view the terminal or Virtual Circuit Status Display screen for the following line, press [PF4]. To return to the Detail Usage Status Display screen for the first line defined in VIRTEL, press [PF5].

To return to the Lines Status Display, press [PF3]. To return to the Configuration Menu, press [Clear].

# 2.2 Memory Display Application

The VIRTEL memory management sub-application allows the system administrator to display VIRTEL memory utilisation in real time. The memory management sub-application is a pseudo-graphical display which shows the allocation of VIRTEL memory by function. VIRTEL manages its own memory, in order to avoid memory shortages as a result of fragmentation. The memory management display can be used by the administrator to help understand VIRTEL's memory requirements during normal operation.

To invoke the memory management sub-application, press [PA2] in the Configuration Menu to display the Sub-Application Menu, then press [PF4] in the Sub-Application Menu. The sub-application displays a screen similar to the example shown below. This screen represents the contents of the VIRTEL address space after deducting the space occupied by the VIRTEL kernel modules.

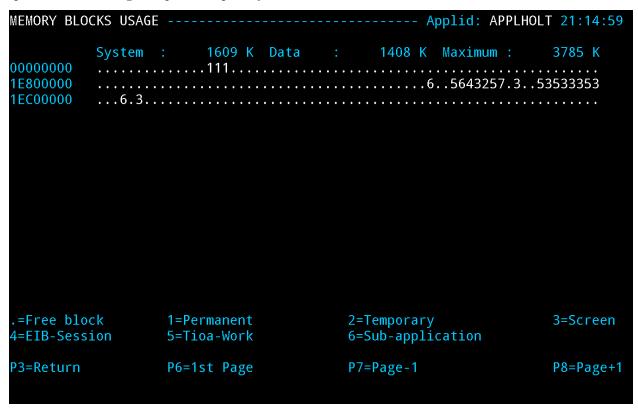


Fig 25. Memory display of VIRTEL address space

Each screen position represents a 2K memory block (if MEMORY=BELOW is specified in the VIRTCT), or a 64K memory block (if MEMORY=ABOVE). The address displayed at the start of each line is the virtual address represented by the first position in the line. Each free memory block is represented by a dot. Lines which consist entirely of dots are not displayed.

Permanently allocated memory blocks are represented by the following character types:

- 1. To avoid memory shortages as a result of fragmentation, these blocks are always allocated at the end of the VIRTEL address space.
- 2. Temporarily allocated memory blocks. Blocks of this type are allocated and freed by VIRTEL as required.
- 3. Memory blocks used by the VIRTEL Multi-Session feature to save screen images. Blocks of this type are allocated and freed by VIRTEL as required.

- 4. Memory blocks used for saving EIB and other session-related information. Blocks of this type are allocated and freed by VIRTEL as required.
- 5. Communication areas by VIRTEL sub-applications. Blocks of this type are allocated and freed by VIRTEL as required.
- 6. Sub-application modules loaded in the z/VSE SUBPOOL. Blocks of this type are allocated and freed by VIRTELas required.

# 2.2.1 Memory display in Memory=Test mode.

If MEMORY=TEST is specified in the VIRTCT, the memory management sub-application displays its results in a different format. MEMORY=TEST mode allows support technicians to analyse memory occupation by module, as a debugging aid for possible memory shortage problems.

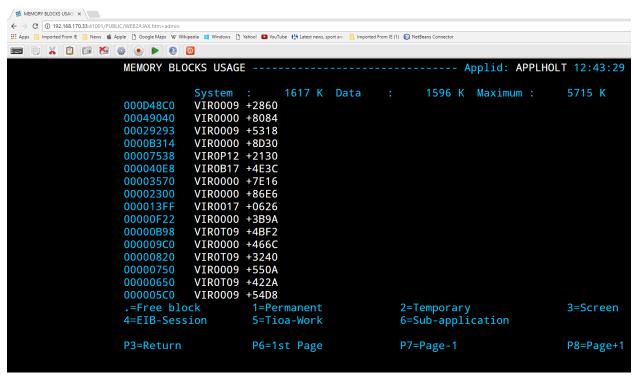


Fig. 26 - Memory display in MEMORY=TEST mode

Each line of the screen represents one VIRTEL module which has obtained one or more memory blocks. The first column represents the number of bytes of memory (en hexadecimal) currently allocated by the module. The first 16 modules are displayed, in descending order of memory utilisation.

Where the memory display occupies more than one screen, you can press [PF8] to view the following page, [PF7] to view the previous page, and [PF6] to go back to the first page.

To refresh the display with up-to-date information, press [Enter].

To return to the sub-application menu, press [PF3] or [Clear]

#### 5.2 Virtual Memory Display

The Memory display feature is a memory diagnostic tool created to trap possible invalid Virtel memory free requests. Such request can lead to ABEND0C4s and other unwanted behaviour. Virtel memory requests (PRENDRE and RENDRE) are tracked in a diagnostic storage area located above the bar. The area is 1MB

in size and can contain 65536 active storage requests. An active storage request is a storage area that has been gotten (PRENDRE) and is pending a Virtel storage release (RENDRE).

Note: This diagnostic tool should only be used when recommended by Technical Support.

# 2.2.2 Memory trace management

#### Activating the memory trace

A memory trace can be activated using a command or from the VIRTCT. In both case, VIRTEL records an history of memory allocations that appears in a SNAP listing. A memory trace can be activated by using the following command

```
MEMTRACE
```

The will produce the following response:

```
VIR02001 MEMTRACE
VIR02141 MEMORY TRACE STARTED
VIR02181 MEMORY TRACE FOUND 00000000 BLOCKS USING 00000000000000 BYTES

$\to$ (00000000 MEGS)$
```

#### Resetting the memory trace

A memory trace can be reseted by using the following command:-

```
MEMTRACE, Clear
```

The trace is stopped, memory blocks used by the memory trace are released, the trace is restarted.

```
VIR02001 MEMTRACE, CLEAR

VIR02181 MEMORY TRACE FOUND 00000011 BLOCKS USING 000000000053344 BYTES□

→ (00000000 MEGS)

VIR02161 CLEARING MEMORY TRACE

VIR02171 MEMORY TRACE CLEARED

VIR02141 MEMORY TRACE STARTED

VIR02181 MEMORY TRACE FOUND 00000000 BLOCKS USING 000000000000000 BYTES□

→ (00000000 MEGS)
```

#### Stopping the memory trace

A memory trace can be stopped by using the following command:-

```
NOMEMTRACE
```

The trace is stopped, memory blocks used by the memory trace are released.

#### **Setting Memory Trace in the VIRTCT**

A memory trace can be activated from the VIRTCT by using MEMORY=TEST or MEMORY=(ABOVE,TRACE) parameter. In such case, the is no message VIR0218I display in the log, but only the benefit of recording the history of memory allocations is kept in the SNAP.

Since it is not possible to stop a trace initialized in this way, it is best to only use this method to perform an analysis of the memory allocation during the startup phase. Once a memory trace activated, issuing a SNAP command produce a report of the memory allocations history in the SNAP listing.



Example of a memory allocataion history

# **Column Explanations**

- 1. Line or terminal name for which memory allocation is performed. This information is omitted when the allocation relates VIRTEL itself.
- 2. Task number behind the allocation request.
- 3. Register 14 value.
- 4. Register 15 value.
- 5. Program name + offset of the origin request.
- 6. Memory allocation type. (8040 = GETMAIN).
- 7. Memory block state.
- 8. Time of the allocation.
- 9. Type and size of the allocation. The two first bytes represents the type of memory allocated (See "Memory display of VIRTEL address space" for a complete description of the memory block type.). The six last bytes represents the size of the memory block allocated.
- 10. Reserved for internal use.

Tracing memory activity can produce an important overhead estimated to 20-30% of the activity. When using MEMTRACE command, the memory previously allocated to records history is released.

# 2.3 Maintenance

Maintence is normally delivered through email or by downloading a maintenance package from the Virtel ftp web server - http://ftp-group.syspertec.com/login/. Maintenance comes as either zaps to the Virtel mainframe modules or updates to the web elements. Application of the mainframe zaps is through the IBM Utility AMASPZAP. The updates to the web elements is through a Virtel GUI Drag and Drop interface or via a Virtel Batch process. This is found in the Administration Portal of Virtel. The Drag and Drop interface is described in section 1.6.2 in the Virtel User Guide.

# 2.3.1 Applying z/OS maintenance.

By default, maintenance to the z/OS components of Virtel is delivered as AMASPZAP control statements either delivered as an email attachment or dowloaded from the Syspertec ftp web server. The mainframe zap packages come as an accumulation file called either allptfs-mshpvrr.txt (z/VSE) or allptfs-mvsvrr-txt (z/OS).




Syspertec ftp web server

Once downloaded and unzipped, the zap package will contain a sequential text file of AMASPZAP statements. These should be uploaded to the Virtel CNTL file as PTFvrrMV. The JOB ZAPJCL, also located in the CNTL file, should then be submitted to apply the zaps contained in the PTFvrrMV file. As the PTFvrrMV is an accumulation of PTFs some editing will have to be done to remove zaps that have already been applied. Virtel will report the zap maintenace level when it starts up.

```
VIR0018I VIRTEL 4.62 HAS THE FOLLOWING PTF(S) APPLIED
VIR0018I 5530,5540,5549,5557,5559,5567
VIR0089I VIRTEL RUNNING FROM AN AUTHORIZED LIBRARY
```

# 2.3.2 Applying maintenance to the TRSF files


The updates to the web entities are delivered as an accumulation update file called *virtelvrrupdtnnnn1.zip* where nnnn is the update number. These update files can be downloaded from the Syspertec ftp web server. Applying updates to the web elements is through a manual drap and drop GUI or via a batch process. Download the update package and unzip the contents. A directory structure representing the Virtel SAMPTRSF directories will be built. Note, not all of the directories are shipped with an update package, only those that have maintenance will be shipped. Normally, the W2H-DIR contains the majority of web element updates. The Administration portal is used to upload the updates to the Virtel directories. After applying the updates to the Virtel directories refresh the browsers cache to force an update of the client web elements.

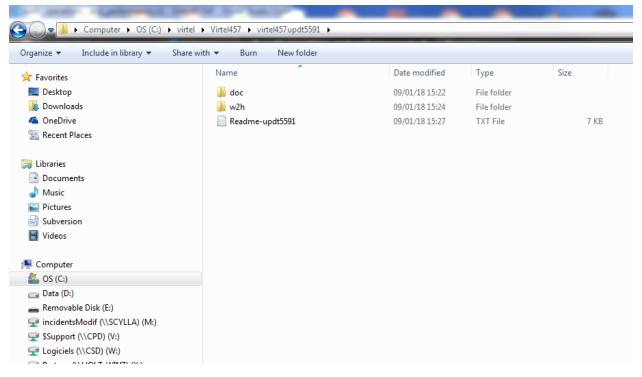

Unzipped update file


In the above example, the update file contains updates to the W2H and DOC directories. The members in each directory should be selected (CTRL-A) and dragged over to the "Drag and Drop" upload option of the Virtel Administration portal, normally setup on port 41001.

2.3. Maintenance 31

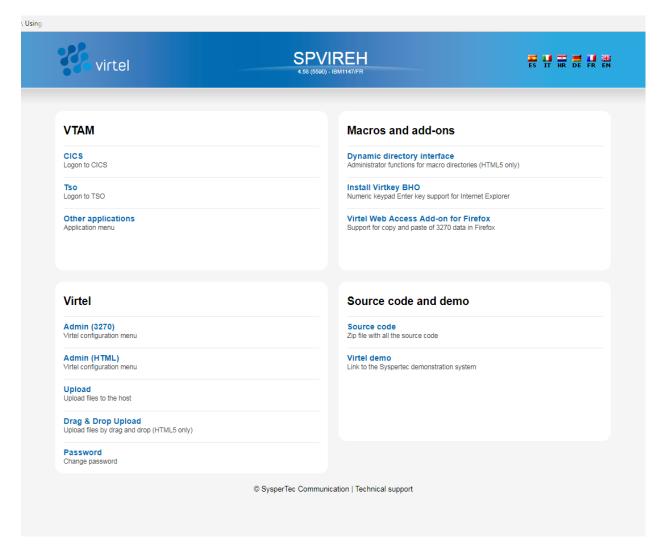

Virtel Administration Portal

Open the "Drag and Drop" interface in Virtel, and then drag the files over on to the relvant directory in the upload interface. A upload window will open showing the results of the upload.

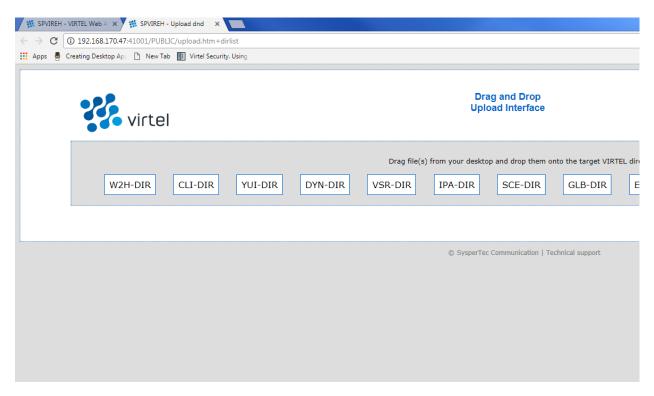

Virtel Drag and Drop Interface

# 2.3.3 Applying maintenance via batch.

A batch maintenace package called virtelrvvVMPnnnn.zip can also be used to apply maintenance to the SAMPTRSF file. Using the batch process doesn't require any manual process, it runs as a batch job on the mainfram. However, the target Virtel instance cannot be running at the same time. the process for applying a Virtel Maintenace Package is outlined in the Virtel Technical newsletter "TN201709 Virtel batch maintenance". This can be viewed online at <a href="http://virtel.readthedocs.io/en/latest/manuals/newsletters/TN201709/TN201709.html">http://virtel.readthedocs.io/en/latest/manuals/newsletters/TN201709/TN201709.html</a>

2.3. Maintenance 33

# 2.4 Correspondent Management

One of the methods which VIRTEL may use to identify users is by means of a security code which the user presents to VIRTEL, either in an incoming e-mail, or by means of a "cookie" included in an HTTP request by the browser. A user which VIRTEL recognizes in this way is known as a "Correspondent". VIRTEL stores the list of correspondents in a VSAM file known as the "Correspondent file", also known as the "VIRHTML" file.

VIRTEL uses the correspondent file for the following purposes: - the rules of an HTTP line permit VIRTEL to distinguish between correspondents and non-correspondents when processing incoming HTTP requests. When the requesting user is identified as a correspondent, a special entry point may be assigned, or a set of rules specific to the user may be executed. Refer to "Rules" in the VIRTEL Connectivity Reference manual for further details. - the rules of an HTTP line may assign a specific LU name to a correspondent connecting to a host application via web access. This is known as "LU nailing" and is described in more detail in the VIRTEL LU Nailing HOWTO manual. - a correspondent may be authorized to upload HTML pages and other elements into an HTMLTRSF file. For further details, refer to "Uploading pages by SMTP" and "Uploading pages by HTTP (secured by cookie)".

There are two types of correspondent: an e-mail correspondent and a local correspondent: - An e-mail correspondent is always defined by the VIRTEL administrator. When the administrator activates an email correspondent, VIRTEL sends an e-mail message to the correspondent containing the security code. The correspondent then either replies to the e-mail message or clicks on a link in the message to connect to VIRTEL. - A local correspondent is activated by the correspondent using a procedure known as "self-registration". The self-registration procedure creates a clickable link which delivers the security code to the correspondent's browser via a cookie. The VIRTEL administrator may optionally pre-define or change the characteristics of a correspondent by using the correspondent management sub-application. Self-registration is described in the VIRTEL LU Nailing HOWTO manual.

### 2.4.1 Access to the application

The correspondent management sub-application, which allows the VIRTEL administrator to define the parameters associated with a correspondent, is accessible by pressing [PF5] in the VIRTEL configuration menu, or [PF12] in the system services sub-application menu, or from the VIRTEL Multi-Session screen via an application referencing the module VIR0041A.

## 2.4.2 Security

When security is active, access to the correspondent management sub-application from the configuration menu or from the system services sub-application menu is controlled by the resource \$\$PCPC\$\$. When it is accessed by a transaction, the rules of security management of transactions will apply. Security management is described under the heading "Security" 282.

# 2.4.3 Objectives

This sub-application initially displays a summary screen of existing definitions presented in alphanumeric order. Access to the detail of a correspondent is achieved by positioning the cursor and pressing [PF12].



 $Summary\ of\ correspondence$ 

```
CORRESPONDENT DETAIL DEFINITION ------ Applid: APPLHOLT 23:41:49
Ιd
                      email address with '@' sign
                                     1:Email 2:Local+fixed 3:Local+changing
Type of Id
                  ===> 1
Activation message ===> To activate your Virtel connection, click:&Rhttp://192.
.68.170.33:41001/web2host.htm++&C
                                     Text of 'OK' message to user.
VTAM name
                                     &1 parameter to specify VTAM LU name
                ===> REHVT001
Rule Set
                                    Rules to choose an entry point
                 ===> TESTRULE
                                    Where data is to be uploaded
Directory
Last contact
                ===> 00000000
                                    Number of times cookie was updated
Contacts
Date created
                ===> 13 Mar 2017 23:41:49
                ===> SPTHOLT
Created by
Date activated
Activated by
Date disabled
Disabled by
P1=Update
                                                                 Enter=Add
                                 P3=Return
P4=Activate
                                 P5=Disable
                                                                 P6=Rules
CREATION OK
```

Correspondent detail screen (e-mail correspondent)

```
CORRESPONDENT DETAIL DEFINITION ------ Applid: SPVIRE2 16:40:04
Ιd
             ===> WKSTN-A2FE/SYSPERTEC
                              workstation/lan
Type of Id ===> 2
                                                 1:Email 2:Local+fixed 3:Local+changing
Activation message ===>
                                                 Text of 'OK' message to user.
VTAM name ===> RRVTC006 &1 parameter to specify VTAM LU name
Rule Set ===> Rules to choose an entry point
Directory ===> Where data is to be uploaded
Last contact ===> 30 Jun 2009 11:24:49 192.168.002.082
Contacts ===> 00000010 Number of times cookie was updated
Date created ===> 30 Jun 2009 10:35:30
Created by
                       ===> VIRDBA
Date activated ===> 30 Jun 2009 10:35:30
Activated by
                       ===> VIRDBA
Date disabled
                        ===>
Disabled by
                         ===>
P1=Update
                                                P3=Return
                                                                                         Enter=Add
P4=Activate
                                                P5=Disable
                                                                                         P6=Rules
```

Correspondent detail screen (local correspondent)

### 2.4.4 Field Contents

#### $\operatorname{Id}$

For an e-mail correspondent: the e-mail address of the correspondent. For a local correspondent: a unique identifier generated by the self-registration procedure, or assigned by the VIRTEL administrator.

### Type of Id

- 1. this is an e-mail correspondent
- 2. this is a local correspondent whose security code is generated at activation time and subsequently remains constant
- 3. this is a local correspondent whose security code changes each time it is accessed.

### Activation message

Message received by the user at time of activation of his account. This message can contain a link allowing the user to connect to a host application or to open the upload.htm page with automatic installation of an authorization cookie.

### The activation message may include the following variables:

&R meaning "insert a blank line".

&C meaning "insert security code". The activation security code is inserted into the message in the form VirtelCookie=xxx.

#### Rule Set

(optional) The name of the rule set associated with this user.

#### Directory

(optional) Name of the directory into which this correspondent may upload files.

#### Last contact

Date and time of the last transfer, and the IP address of the correspondent.

### Contacts

The number of contacts since the last activation.

### 2.4.5 Account activation

In order to be operational, a correspondent account must be activated. This is achieved by pressing [PF4] at the CORRESPONDENT DETAIL DEFINITION screen. In the case of an e-mail correspondent, VIRTEL will transmit an initial email to the correspondent containing the security code to be used for the transfers. The message ACTIVATION WAS REQUESTED indicates that the correspondent's security code has been activated, and, in the case of an e-mail correspondent, that the e-mail was sent successfully. The number of contacts is reset to zero.

Note: To activate an e-mail correspondent, the administrator must be logged on to VIRTEL via an entry point containing a transaction with external name \$MAIL\$ (application type=3) which contains, in the application field, the name of the SMTP line used by VIRTEL. The message YOU ARE NOT AUTHORISED TO USE THIS APPLICATION indicates that the \$MAIL\$ transaction is not defined.

# 2.4.6 Account deactivation

A correspondent's security code may be cancelled by deactivating with the [PF5] key. The message DISABLE WAS DONE indicates that the deactivation was successful.

# 2.4.7 Access to associated rule set

To display the list of rules associated with this correspondent, press the [PF6] key.

# 2.5 Web Entity Management

Web Entity Management is concerned with maintaining the Virtel Web entities, such as HTML template pages, CSS, JavaScript elements and images etc. These can all be uploaded to the VIRTEL directories by any of the following methods:

- 1. by web browser (HTTP) from a PC, with signon security. Provided by Administration Portal.
- 2. Via a batch process from a PC.
- 3. by e-mail (SMTP). (Corresspondence Management only)
- 4. by web browser (HTTP), with cookie security. (Corresspondence Management only)

# 2.5.1 Uploading by web browser (HTTP) (secured by signon)

The upload4.htm page allows the administrator to upload HTML pages and graphics to VIRTEL. When this page is first loaded, the web browser displays a signon dialog box requesting a userid and password. The userid allows the security product (RACF, ACF2, TSS, or VIRTEL) to determine which, if any, of the page upload transactions the user is authorized to use. Each VIRTEL directory has its own upload transaction, so that upload security can be applied individually to each directory, by authorizing users to the corresponding directory's upload transaction.

# 2.5.2 Definitions for upload (secured by signon)

All the elements needed for page upload by HTTP secured by signon are contained in the base configuration delivered with VIRTEL. Users who upgrade from a version prior to VIRTEL 4.27 while keeping their existing configuration need to add certain elements to their existing configuration to benefit from the new "page upload secured by signon" function.

The following steps show how to upgrade your configuration based on entry point WEB2HOST. You can also carry out these steps in batch by running the DEFUPLOD job in the SAMPLIB delivered with VIRTEL. Having updated the configuration, you then need to upload one new page (upload4.htm) to the W2H-DIR directory using the existing SMTP upload method.

1. In entry point WEB2HOST, define a new transaction W2H-68 with external name dirlist, application name VIR0041S and application type 2:

```
TRANSACTION DETAIL DEFINITION ---------------- Applid: SPVIRSSL 18:58:18
Internal name ===> W2H-6
                                          To associate with an entry point name
External name ===> dirlist
                                          Name displayed on user menu
Description
            ===> List of directories for page upload
                                  Option ===>
Application
             ===> VIR0041S
PassTicket
              ===> 0 Name ===>
                                          O=no 1=yes 2=unsigned
                  ===> 2
                                          1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Application type
Pseudo-terminals
                   ===> DELOC
                                          Prefix of name of partner terminals
                                          Specify when LOGMODE must be changed
Logmode
                                          1=menu 2=sub-menu 3=auto
How started
                  ===> 2
Security
                   ===> 0
                                          O=none 1=basic 2=NTLM 3=TLS 4=HTML
H4W commands ?
                                          O=no 1=yes 2=if2VIRTEL 4=auto
                   ===>
Logon message
TIOA at logon
TIOA at logoff
                   ===>
Initial Scenario
                                          Final Scenario
                   ===>
                                                              ===>
Input Scenario
                                          Output Scenario
P1=Update
                                   P3=Return
                                                                   P12=Server
```

Page upload by HTTP with signon: Transaction dirlist

2. Still in entry point WEB2HOST, define three new transactions W2H–71, W2H-72, W2H-73 with external names uplbas, uplw2h, and uplcli. Each of these transactions specifies VIR0041C as the application name and application type 2. The "Logon message" field contains the name of the target directory: HTMLBAS for transaction uplbas, W2HDIR for transaction uplw2h, and CLI-DIR for uplcli:

```
TRANSACTION DETAIL DEFINITION ---------- Applid: SPVIRSSL 19:01:00
Internal name ===> W2H-71
                                         To associate with an entry point name
External name ===> uplbas
                                         Name displayed on user menu
Description
             ===> Chargement des pages HTML (r{pertoire HTMLBAS)
Application
             ===> VIR0041C
                                 Option ===>
             ===> 0 Name ===>
                                         O=no 1=yes 2=unsigned
PassTicket
Application type
                                         1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
                                         Prefix of name of partner terminals
Pseudo-terminals
                  ===> DELOC
                                         Specify when LOGMODE must be changed
Logmode
How started
                                         1=menu 2=sub-menu 3=auto
                  ===> 2
                                         O=none 1=basic 2=NTLM 3=TLS 4=HTML
Security
H4W commands ?
                                         O=no 1=yes 2=if2VIRTEL 4=auto
Logon message
                  ===> HTMLBAS
TIOA at logon
                  ===>
TIOA at logoff
                  ===>
Initial Scenario
                                         Final Scenario
Input Scenario
                  ===>
                                         Output Scenario
                                                             ===>
P1=Update
                                  P3=Return
                                                                   P12=Server
```

### Page upload by HTTP with signon: Directory HTMLBAS

```
TRANSACTION DETAIL DEFINITION ------ Applid: SPVIRSSL 19:06:42
Internal name ===> W2H-72
                                         To associate with an entry point name
External name ===> uplw2h
                                         Name displayed on user menu
Description ===> Chargement des pages HTML (r{pertoire W2H-DIR)
Application ===> VIR0041C
                                 Option ===>
             ===> 0 Name ===>
                                         0=no 1=yes 2=unsigned
PassTicket
Application type
                                         1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
                                         Prefix of name of partner terminals
                  ===> DELOC
Pseudo-terminals
                                         Specify when LOGMODE must be changed
Logmode
How started
                  ===> 2
                                         1=menu 2=sub-menu 3=auto
Security
                                         O=none 1=basic 2=NTLM 3=TLS 4=HTML
H4W commands ?
                                         0=no 1=yes 2=if2VIRTEL 4=auto
                  ===> W2H-DIR
Logon message
TIOA at logon
TIOA at logoff
Initial Scenario
                                         Final Scenario
Input Scenario
                                         Output Scenario
P1=Update
                                  P3=Return
                                                                 P12=Server
                                                                         3,21
```

Page upload by HTTP with signon: Directory W2HDIR

```
TRANSACTION DETAIL DEFINITION ----------------- Applid: SPVIRSSL 19:07:44
Internal name ===> W2H-73
                                         To associate with an entry point name
External name ===> uplcli
                                         Name displayed on user menu
Description ===> Chargement des pages HTML (r{pertoire CLI-DIR)
             ===> VIR0041C
Application
                                 Option ===>
             ===> 0 Name ===>
                                         0=no 1=yes 2=unsigned
PassTicket
                                         1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Application type
                  ===> 2
Pseudo-terminals
                  ===> DELOC
                                         Prefix of name of partner terminals
                                         Specify when LOGMODE must be changed
Logmode
                                         1=menu 2=sub-menu 3=auto
How started
                                         O=none 1=basic 2=NTLM 3=TLS 4=HTML
Security
H4W commands ?
                                         0=no 1=yes 2=if2VIRTEL 4=auto
Logon message
                  ===> CLI-DIR
TIOA at logon
TIOA at logoff
                  ===>
Initial Scenario
                                         Final Scenario
                  ===>
                                                             ===>
Input Scenario
                                         Output Scenario
P1=Update
                                  P3=Return
                                                                  P12=Server
```

Page upload by HTTP with signon: Directory CLIDIR

3. Use your security package (VIRTEL/SECURITE, RACF, TOP SECRET, ACF2) to grant access to resources W2H-71 and HTMLBAS (for users authorized to upload pages to the HTMLBAS directory) and/or to resources W2H-72 and W2HDIR (for users authorized to upload pages to the W2H-DIR directory) and/or to resources W2H-73 and CLI-DIR (for users authorized to upload pages to the CLI-DIR directory). For more details, refer to the "VIRTEL Security Guide" manual.

# 2.5.3 Procedure for upload (secured by signon)


1. Display the upload4.htm page by entering the URL http://ipaddr:port/SECURE/upload4.htm+dirlist in your browser, or by clicking the "Upload" link on the VIRTEL Web2Host welcome page. Because the directory named SECURE is defined as a secure transaction, VIRTEL first requests the browser to display the password dialog box shown below:



Page upload by HTTP with signon: Entering the userid and password


The user must have authority to access the resource represented by the internal name of the page upload transaction for the desired directory.

2. After entering the user name and password, the upload4.htm page will be displayed:

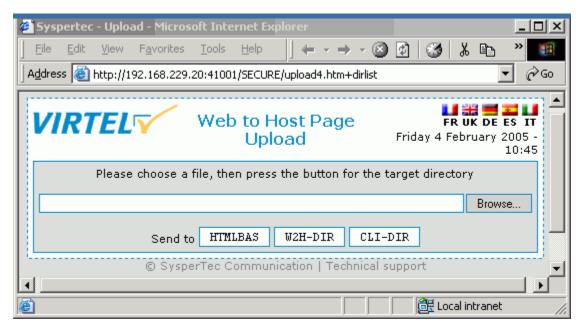


Page upload by HTTP with signon: Displaying the upload4.htm page

3. Press the "Browse" button to display the file selection dialog:

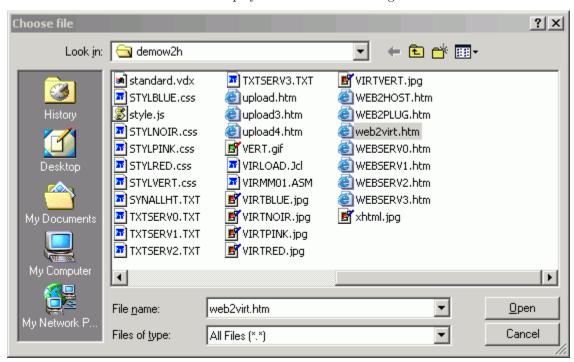


Page upload by HTTP with signon: File selection dialog

4. Select the file you want to upload, then press the "Open" button. The name of the selected file will be displayed in the input field:

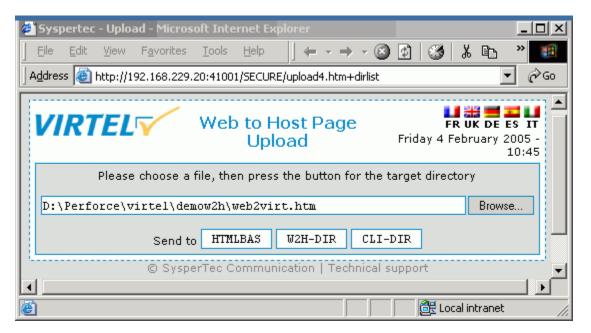

Page upload by HTTP with signon: Sending the file

5. Press the button corresponding to the target directory (W2H-DIR in this example) to upload the file to VIRTEL stores the file in the chosen directory, and displays the result:

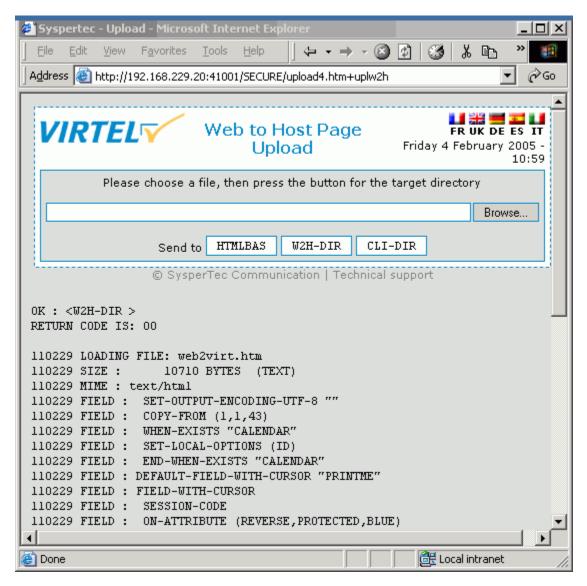

Page upload by HTTP with signon: Confirmation of file upload


Depending on the values specified in the directory definition, VIRTEL may convert the filename to upper case, and truncate the filename to a maximum length, before storing it in the directory. The filename after conversion and truncation must not duplicate any other filename in the directory. For example, when uploading to a directory defined using the default parameters (not case sensitive, with maximum filename length 8), the file links.gif would be stored under the name LINKS.GI

# 2.5.4 Uploading by web browser (HTTP) by GUI drag and drop

The VIRTEL administrator can upload pages to a VIRTEL directory using the drag and drop upload interface with the Firefox or Chrome browser. This method has the advantage that multiple pages can be uploaded to a VIRTEL directory (for example, W2H-DIR) in a single operation.

#### Upload interface in the VIRTEL menu


After clicking on the Drag & Drop Upload link on the VIRTEL Web Access menu (URL http://10.20.170.71: 41001), the VIRTEL administrator will be presented with a signon screen, followed by the drag and drop upload interface screen shown below:

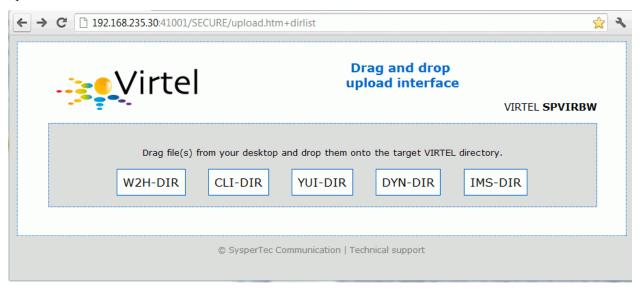

### Drag and drop upload interface

The administrator can then select one or more files using the workstation graphical user interface, drag them to the upload interface screen, and drop them on the button representing the VIRTEL directory (for example, CLI-DIR). Files in zipped archive may need to be extracted to a temporary directory first.

### Displaying upload results

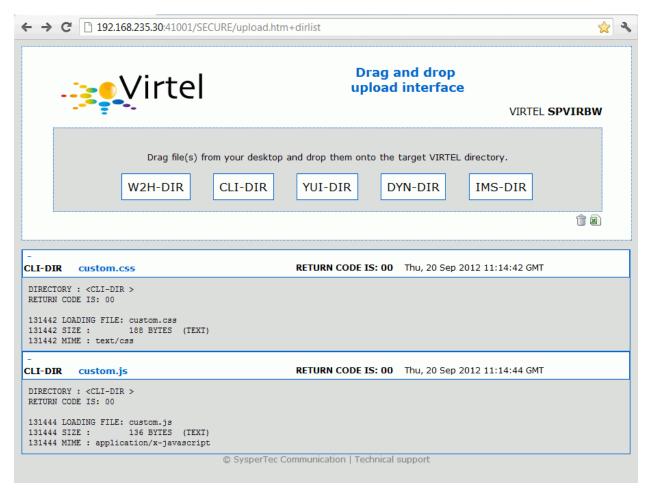

#### Displaying upload results

The results of the upload are displayed on the screen with a return code for each file uploaded. Each file should produce the message RETURN CODE IS: 00 In addition, by clicking on + or -, the administrator can open and close the detail display for each file uploaded.

#### **Upload summary report**

After multiple files have been uploaded, the drag and drop upload interface will display a summary showing the number of files processed with return code 00, and, in case of error, the number of files which failed to upload nonzero return codes.

The summary is not displayed when files are dragged and dropped one at a time.

In this example, one file has failed to upload because of an invalid VIRTEL tag, and the user has clicked on the + sign to the left of the file to expand the error messages:

+ W2H-DIR STYLBLUE.css	RETURN CODE IS: 00 Fri, 29 Mar 2013 11:28:03 GMT
+ W2H-DIR js01.js	RETURN CODE IS: 00 Fri, 29 Mar 2013 11:28:05 GMT
- W2H-DIR WEB2AJAX.htm	RETURN CODE IS: 32 Fri, 29 Mar 2013 11:28:05 GMT
DIRECTORY: <w2h-dir> RETURN CODE IS: 32  122805 LOADING FILE: WEB2AJAX.htm 122805 SIZE: 3083 BYTES (TEXT) 122805 MIME: text/html 122805 FIELD: SET-ENCODING-UTF-8 "" 122805 ERRM124 - INVALID FIELD</w2h-dir>	
+ W2H-DIR appmenu.htm	RETURN CODE IS: 00 Fri, 29 Mar 2013 11:28:07 GMT
+ W2H-DIR WEB2HOST.htm	RETURN CODE IS: 00 Fri, 29 Mar 2013 11:28:09 GMT
5 upload requests have been processed 4 with RETURN CODE IS: 00 1 with RETURN CODE IS: 32	
© SysperTec Communicat	ion   Technical support

 $Upload\ summary\ report$ 

48

# 2.5.5 Extracting upload results as an Excel spreadsheet

The Excel button allows the administrator to export the results log as a .SLK file which can be opened as an Excel spreadsheet.

Directory	File name	Report	Time
CLI-DIR	custom.css	RETURN CODE IS: 00	Thu, 13 Sep 2012 08:13:16 GMT
CLI-DIR	${\it custom.js}$	RETURN CODE IS: 00	Thu, 13 Sep 2012 08:13:16 GMT

The Delete button allows the administrator to clear the results log.

# 2.5.6 Uploading in batch with cURL

You can upload multiple pages (or other elements) at a time from a Windows workstation by using a command-line HTTP-client program, such as cURL from www.haxx.se. The following example shows a Windows command to upload all files of type .htm from the current directory to VIRTEL:

```
for %F in (*.htm) do curl -v -F "file=@%F;type=text/html" -u
virdba:virdbapw http://192.168.235.30:41001/SECURE/virmsg.txt+uplbas
```

In this example:

#### \*.htm

the files to be uploaded

### virdba:virdbapw

userid and password for VIRTEL

#### 192.168.235.30:41001

identifies the VIRTEL HTTP line

#### virmsg.txt

page template for displaying upload result messages

#### uplbas

external name of the upload transaction in VIRTEL which specifies the target directory (HTMLBAS). See "Uploading pages by HTTP (secured by signon)" for a list of upload transactions.

#### Note:

%F appears twice in the command shown above. In conformance with the syntax requirements of the Windows command interpreter, you must use %F if you execute the command from the command prompt, but %%F if you execute the command from within a command (.cmd) file.

## 2.5.7 Uploading in batch using the upl2virt command

For users of Windows XP and above, the command procedure upl2virt.cmd may be used to upload elements to VIRTEL from the Windows command prompt, or from Windows Explorer. upl2virt automatically generates the required cURL commands as described in the previous section.

#### Pre-requisites

upl2virt requires as a pre-requisite the cURL package described in the previous section.

Optionally, Bill Stewart's editvar freeware package from www.westmesatech.com may also be installed. This package allows upl2virt to securely prompt the administrator for a password. If the editvar package is not installed, then upl2virt can still prompt for a password but it will be unable to mask the password as the administrator types it into the command window.

#### Installation

upl2virt may be downloaded from VIRTEL to the workstation by entering the following URL in your browser:

```
http://10.20.170.71:41001/upl2virt.cmd
```

where 10.20.170.71 is the IP address of VIRTEL). When prompted, save the upl2virt.cmd file in a directory in your path (for example, C:WINDOWS).

Using upl2virt at the command prompt

To execute upl2virt as a command, open a Windows command prompt, navigate to the directory which contains the file(s) to be uploaded, and execute the command:

```
upl2virt [-u userid:password] -d directory -a 10.20.170.71
[-p port] [-r] [-f ctlfile] [-k] [file1 file2 ...]
```

In the above command:

#### userid:password

is your VIRTEL userid and password. If not specified, upl2virt will prompt for userid and password. If userid is specified without the password, then upl2virt will prompt for password.

#### $\operatorname{directory}$

is the name of the target VIRTEL directory (for example, CLI-DIR)

#### 10.20.170.71

is the IP address of VIRTEL

#### port

is the VIRTEL administration port number (default 41001).

**Note:** This is the port number for the WEB2HOST entry point, not the port number associated with the directory you are uploading to.

#### ctlfile

specifies the name of a control file containing a list of file names to be uploaded

#### file1 file2 ...

are the names of files to be uploaded

-r specifies recursion into subdirectories

-k

keeps the command window open after the last upload

If no file names are specified, and no control file is specified, the default is to upload all web elements from the current directory (and also from all subdirectories if the -r option is specified).

#### Using upl2virt from Windows Explorer

The upl2virt command may also be used to upload elements to VIRTEL from the Windows Explorer interface. Having selected one or more files in Windows Explorer, the administrator right-clicks on the selected files and chooses the "Send To" option, then chooses "Upload to VIRTEL" from the "Send To" menu. To activate the "Upload to VIRTEL" option in the "Send To" menu, use Windows Explorer to navigate to the "c:Documents and SettingsusernameSendTo" folder, where username is your Windows username. If you cannot see the SendTo folder, then click on "Tools" – "Folder options" – "View", tick the option "Display hidden files and folders", and click "OK".

In the "SendTo" folder, right click and select "New" – "Shortcut". Then click "Browse", navigate to the place where you stored the upl2virt.cmd file, and click on it. Click "Next" and enter a descriptive title for the menu item, such as "Upload to VIRTEL". Then click "Finish". You now have an item in the "SendTo" folder named "Upload to VIRTEL". Right-click on this item and choose "Properties". In the "Target" field you will see the path to the upl2virt.cmd file which you specified. Update this field with parameters as shown in the example below:

```
C:\WINDOWS\upl2virt.cmd -u MYUSERID -d CLI-DIR -a 10.1.12.101 -k
```

where:

### **MYUSERID**

is your VIRTEL userid

#### CLI-DIR.

is the name of the VIRTEL directory that this shortcut will upload to

### 10.1.12.101

is the IP address of VIRTEL.

You may omit the -u MYUSERID parameter and upl2virt will prompt you for your userid.

### 2.5.8 Uploading template pages using SMTP

Upload by SMTP allows the administrator to load HTML pages into VIRTEL by e-mail. VIRTEL sends the administrator an e-mail, and the administrator replies to this e-mail with the pages to be uploaded included as attachments. VIRTEL sends another e-mail to inform the administrator that the upload was successful. The administrator saves this e-mail and replies to it the next time he has a set of pages to upload.

### Definitions for page upload by SMTP

- Check the definition of your SMTP line (F1 then F12 from the Configuration Menu, see the VIRTEL Connectivity Reference documentation).
- Press F5 from the Configuration Menu and define an e-mail correspondent specifying W2H-DIR as the directory name:

```
CORRESPONDENT DETAIL DEFINITION ------ Applid: SPVIRE2 14:19:33
Id
                   ===> upload2@saint.cloud.com
                   email address with '@' sign
                  ===> 1 1:Email 2:Local+fixed 3:Local+changing
Type of Id
Activation message ===> To upload file(s) to VIRTEL, reply to this message.
                   Text of 'OK' message to user.
VTAM name
                  ===> &1 parameter to specify VTAM LU name
Rule Set
                  ===> ADMRSET1 Rules to choose an entry point
                   ===> W2H-DIR Where data is to be uploaded
Directory
Last contact
                  ===> QUEUE ACTIVATION
                  ===> 00000000 Number of times cookie was updated
Contacts
Date created
                  ===> 11 May 2004 14:19:29
Created by
                   ===> VIRDBA
                  ===> 11 May 2004 14:19:33
Date activated
                   ===> VIRDBA
Activated by
Date disabled
                   ===>
Disabled by
                   ===>
P1=Update
                               P3=Return
                                                                  Enter=Add
P4=Activate
                               P5=Disable
                                                                  P6=Rules
ACTIVATION WAS REQUESTED
```

Page upload by SMTP: Creating an e-mail correspondent

#### Procedure for page upload by SMTP

1. Activate the e-mail correspondent: see "Account activation" under the heading "Correspondent Management". This triggers the sending of an e-mail containing the security code, as in the following example:-

```
Date: Tue, 27 Apr 2004 12:04:40 +0100
From: virtel@client.com
Organization: SYSPERTEC COMMUNICATION
To: upload2@saint.cloud.com
Message-id:
<20040427120439.07F5DA7C.5E416500Bgpamk4WZRKKBiZWjS4OTlqSES4OWlA==>
Subject: OK : < W2H-DIR >
SECURITY TOKEN:
```

(continues on next page)

(continued from previous page)

```
20040427120439.07F5DA7C.5E416500Bgpamk4WZRKKBiZWjS4OTlqSES4OWlA==
To upload file(s) to VIRTEL, reply to this message.
```

Page upload by SMTP: activation e-mail

- 2. Reply to this e-mail, with the files to be uploaded (HTML pages, graphics, etc) included as attachments. VIRTEL recognizes the security code returned automatically by the e-mail client in the "Message-id" field, and loads the attached files into the directory defined in the definition of the correspondent.
- 3. VIRTEL replies by sending an e-mail containing the result of the upload. The following example shows the reply sent by VIRTEL to a request to upload two files: LOGOVERT.GIF and WEB2VIRT.HTM. The "Message-id" field in this e-mail contains the new security code. You can reply to this e-mail the next time you have files to upload.

```
Date: Tue, 27 Apr 2004 12:39:14 +0100
From: virtel@client.com
Organization: SYSPERTEC COMMUNICATION
To: upload2@saint.cloud.com
Message-id:
<20040427123911.07F5CDC4.F669FC80Bqpamk4WZRKKBiZWjS40TlqSES40WlA==>
Subject: OK : <W2H-DIR >
VirtelCookie=
20040427123911.07F5CDC4.F669FC80Bgpamk4WZRKKBiZWjS4OTlqSES4OWlA==
RETURN CODE IS: 00
123911 MESSAGE RECEIVED
123912 LOADING FILE: LOGOVERT
123912 SIZE: 14357 BYTES (BINARY)
123912 MIME : image/jpeg
123914 LOADING FILE: WEB2VIRT
123914 SIZE: 11477 BYTES (TEXT)
123914 MIME : text/html
123914 FIELD : SET-OUTPUT-ENCODING-UTF-8 ""
123914 FIELD : COPY-FROM (1,1,43)
123914 FIELD: FIELD-WITH-CURSOR
123914 FIELD: FIELD-WITH-CURSOR
```

 $Page\ upload\ by\ SMTP: upload\ response\ e\text{-}mail$ 

Depending on the values specified in the directory definition, VIRTEL may convert the filename to upper case, and truncate the filename to a maximum length, before storing it in the directory. The filename after conversion and truncation must not duplicate any other filename in the directory. For example, when uploading to a directory defined using the default parameters (not case sensitive, with maximum filename length 8), the file links.gif would be stored under the name LINKS.GI

# 2.5.9 Uploading pages by HTTP (secured by cookie)

The upload.htm page allows HTML pages or graphics to be uploaded to VIRTEL. The user's identity is guaranteed by a cookie named VirtelRef= whose value changes after each upload. The value of the cookie is the same as the security code used for uploading by SMTP.

To upload a page, a user must:

- have a valid cookie (obtained by activation of the VIRTEL e-mail correspondent)
- click on the link contained in the e-mail, which displays the upload.htm page and loads the cookie into the browser (first time only)
- click the "Browse" button and select a file
- click the "Send" button

The VIRTEL response is displayed in the page and is similar to the response received by e-mail when uploading via SMTP.

### Definitions for page upload (secured by cookie)

All the elements needed for page upload by HTTP secured by cookie are contained in the base configuration delivered with VIRTEL 4.27. Users who upgrade to VIRTEL 4.27 while keeping their existing configuration need to add certain elements to their existing configuration to benefit from the new "page upload secured by cookie" function. The following steps show how to upgrade your configuration based on entry point WEB2HOST. You can also carry out these steps in batch by running the DEFUPLOD job in the SAMPLIB delivered with VIRTEL version 4.27. Having updated the configuration, you then need to upload three new elements (upload.htm, default.js, and logo\_3.gif) to the W2HDIR directory using the existing SMTP upload method.

1. In entry point WEB2HOST, define a new transaction W2H-70, with external name upload. This transaction specifies VIR0041C as the application name and application type 2. The "Logon message" field is blank to indicate to VIRTEL that the name of the target directory is to be found in the definition of the e-mail correspondent:

```
TRANSACTION DETAIL DEFINITION ----------- Applid: SPVIRSSL 16:44:31
Internal name ===> W2H-70
                                         To associate with an entry point name
External name ===> upload
                                         Name displayed on user menu
Description ===> Upload HTML pages (secured by cookie)
Application ===> VIR0041C
                                 Option
PassTicket
             ===> 0 Name ===>
                                         0=no 1=yes 2=unsigned
                                         1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Application type ===> 2
                  ===> DELOC
Pseudo-terminals
                                         Prefix of name of partner terminals
                                         Specify when LOGMODE must be changed
Logmode
                  ===> 2
                                         1=menu 2=sub-menu 3=auto
How started
Security
                  ===> ()
                                         O=none 1=basic 2=NTLM 3=TLS 4=HTML
H4W commands ?
                                         O=no 1=yes 2=if2VIRTEL 4=auto
Logon message
TIOA at logon
                  ===>
TIOA at logoff
Initial Scenario
                                         Final Scenario
                                                             ===>
Input Scenario
                                         Output Scenario
P1=Update
                                  P3=Return
                                                                  P12=Server
```

Page upload by HTTP with cookie: Creating the 'upload' transaction

- 2. Check the definition of your SMTP line (F1 then F12 from the Configuration Menu, see the VIRTEL Connectivity Reference documentation).
- 3. Press F5 from the Configuration Menu and define an e-mail correspondent specifying directory name W2H-DIR and ruleset name ADMRSET1:

```
CORRESPONDENT DETAIL DEFINITION ------ Applid: SPVIRE2 14:39:04
e-mail address ===> upload2@saint.cloud.com
                    email address with '@' sign
                   ===> 1
                                      1:Email 2:Local+fixed 3:Local+changing
Type of Id
Activation message ===> To upload to VIRTEL, click: &Rhttp://192.168.229.
→20:4100
1/web2host/upload.htm+upload+&C
                                       Text of 'OK' message to user.
VTAM name
                 ===> &1 parameter to specify VTAM LU name
Rule Set
                 ===> ADMRSET1 Rules to choose an entry point
Directory
                 ===> W2H-DIR Where data is to be uploaded
Last contact
                 ===>
Contacts
                 ===> 00000000 Number of times cookie was updated
Date created
                 ===> 11 May 2004 14:19:29
Created by ===> VIRDBA
Date activated ===> 11 May 2004 14:39:04
Activated by ===> VIRDBA
Date disabled
                   ===>
Disabled by
                   ===>
```

(continues on next page)

(continued from previous page)

P1=Update	P3=Return	Enter=Add
P4=Activate	P5=Disable	P6=Rules
ACTIVATION WAS REQUESTED		

Page upload by HTTP with cookie: Creating the e-mail correspondent

4. Press F6 then F12 to create rule UPLOAD1B in ruleset ADMRSET1 :

```
DETAIL of RULE from RULE SET: ADMRSET1 ----- Applid: SPVIRE2 14:40:59
Name
             ===> UPLOAD1B
                                        Rule priority is per name
Status
            ===> ACTIVE
                                        Mon, 24 Sep 2001 14:19:14
Description ===> Rule for WEB2HOST administrator
Entry point
             ===> WEB2HOST
                                        Target Entry Point
             ===>
                                                    optional &1 value
Parameter
Trace ===>
                                        1=commands 2=data 3=partner
C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
0 IP Subnet ===>
                                        Mask
                                                 ===>
5 HTTP Host ===> :41001
0 eMail
            ===>
0 Calling DTE ===>
                                        Calling DTE address
0 Called
                                        Called DTE address
0 CUD0 (Hex) ===>
                                        First 4 bytes of CUD (X25 protocol)
0 User Data ===>
       ===> M:
                         T:
                                 ₩:
                                         T:
0 Days
                                                 F:
                                                         S:
0 Start time ===> H:
                                        End time ===> H:
                                                            M:
                         M:
                                 S:
P1=Update
                                  P3=Return
                                                                Enter=Add
P4=Activate
                                  P5=Inactivate
                                                                P12=Entry P.
```

Page upload by HTTP with cookie: Creating rule UPLOAD1B

5. Define two new rules attached to the HTTP line. The first rule, which specifies \$COOKIE\$ as the entry point name, will be used for administrators; the second rule, which specifies entry point WEB2HOST, is for all other users:

```
LIST of RULES in RULE SET: W-HTTP ----- Applid: SPVIRE2
→14:44:14
Name
                 Description
                                                                    Entry
        Status
                                                                    Point
WHT00100 ACTIVE
                 HTTP access (users authorised by cookie)
                                                                    $COOKIE$
WHT00200 ACTIVE
                 HTTP access (other users)
                                                                    WEB2HOST
P1=Update
                    P2=Suppress
                                            P3=Return
P6=1st page
                    P7=Page-1
                                                                   P12=Edit
                                            P8=Page+1
```

List of rules associated with UPLOAD

```
DETAIL of RULE from RULE SET: W-HTTP ------- Applid: SPVIRE2 14:45:34

Name ===> WHT00100 Rule priority is per name

Status ===> ACTIVE Mon, 24 Sep 2001 14:19:14

(continues on next page)
```

(continued from previous page)

```
Description ===> HTTP access (users authorised by cookie)
Entry point ===> $COOKIE$
                                      Target Entry Point
            ===>
Parameter
                                                optional &1 value
            ===>
                                      1=commands 2=data 3=partner
C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
0 IP Subnet ===>
                                      Mask ===>
0 HTTP Host ===>
0 eMail
0 Calling DTE ===>
                                      Calling DTE address
0 Called
                                      Called DTE address
0 CUD0 (Hex) ===>
                                      First 4 bytes of CUD (X25 protocol)
0 User Data ===>
0 Days
           ===> M:
                        T:
                                        T:
                                                    S:
                                W:
                                              F:
                                                         M:
0 Start time ===> H:
                        M:
                                S:
                                       End time ===> H:
P1=Update
                                P3=Return
                                                            Enter=Add
P4=Activate
                                P5=Inactivate
                                                            P12=Entry P.
```

Page upload by HTTP with cookie: Rule \$COOKIE\$ of the HTTP line

```
DETAIL of RULE from RULE SET: W-HTTP ----- Applid: SPVIRE2 14:45:34
           ===> WHT00200
Name
                                      Rule priority is per name
                                      Mon, 24 Sep 2001 14:19:14
            ===> ACTIVE
Status
Description ===> HTTP a
ccess (users authorised by cookie)
Entry point ===> WEB2HOST
                                      Target Entry Point
Parameter
            ===>
                                                 optional &1 value
Trace
            ===>
                                      1=commands 2=data 3=partner
C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
0 IP Subnet ===>
                                      Mask ===>
0 HTTP Host
            ===>
0 eMail
0 Calling DTE ===>
                                      Calling DTE address
0 Called
                                      Called DTE address
0 CUD0 (Hex) ===>
                                      First 4 bytes of CUD (X25 protocol)
0 User Data ===>
                                       T:
0 Days
           ===> M:
                        T:
                                W:
                                              F:
                                                     S:
                                       End time ===> H:
0 Start time ===> H:
                         M:
                                 S:
                                                           M:
                                                                  S:
P1=Update
                                 P3=Return
                                                            Enter=Add
P4=Activate
                                 P5=Inactivate
                                                            P12=Entry P.
```

Page upload by HTTP with cookie: Rule WEB2HOST of the HTTP line


### Procedure for page upload (secured by cookie)

1. (First time only) Activate the e-mail correspondent: see "Account activation". This triggers the sending of an e-mail containing the security code, as in the following example:

```
Date: Tue, 27 Apr 2004 13:08:44 +0100
From: virtel@client.com
Organization: SYSPERTEC COMMUNICATION
To: upload2@saint.cloud.com
Message-id:
<20040427130843.07F5D1DC.56A85680Bgpamk4WZRKKBiZWjS4OTlqSES4OWlA==>
Subject: OK : < W2H-DIR >
SECURITY TOKEN:
20040427130843.07F5D1DC.56A85680Bgpamk4WZRKKBiZWjS4OTlqSES4OWlA==
To upload to VIRTEL, click:
http://192.168.229.20:41001/web2host/upload.htm+upload+VirtelCookie=20040
427130843.07F5D1DC.56A85680Bgpamk4WZRKKBiZWjS4OTlqSES4OWlA==
```


Page upload by HTTP with cookie: activation e-mail

2. Click the link in the e-mail to open the upload.htm page:

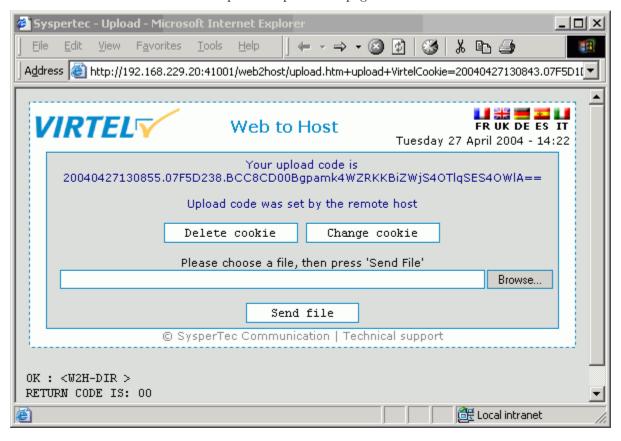


Page upload by HTTP with cookie: Displaying the upload.htm page

3. Click the "Browse" button and the file selection dialog will be displayed:

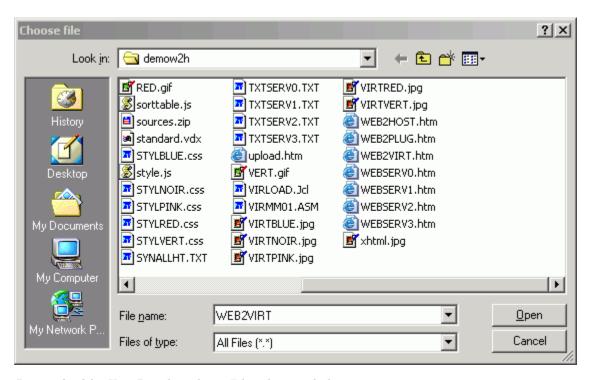


Page upload by HTTP with cookie: File selection dialog

4. Select the file you want to upload, then press the "Open" button. The name of the selected file will be displayed in the input field:

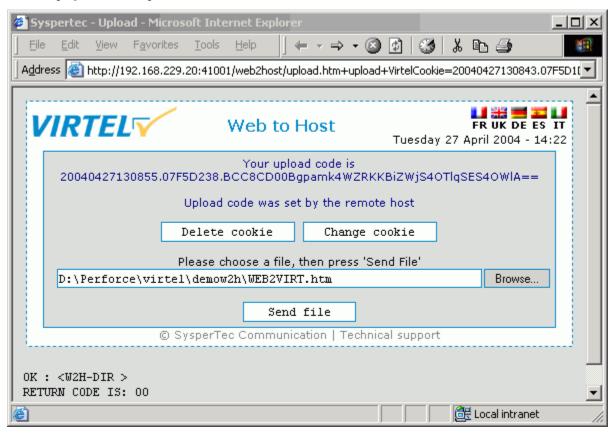

Page upload by HTTP with cookie: Sending the file

5. Press the "Send File" button to upload the file to VIRTEL. VIRTEL stores the file in the directory (W2H-DIR in this example) specified in the definition of the correspondent associated with the cookie. VIRTEL then displays the result of the upload:

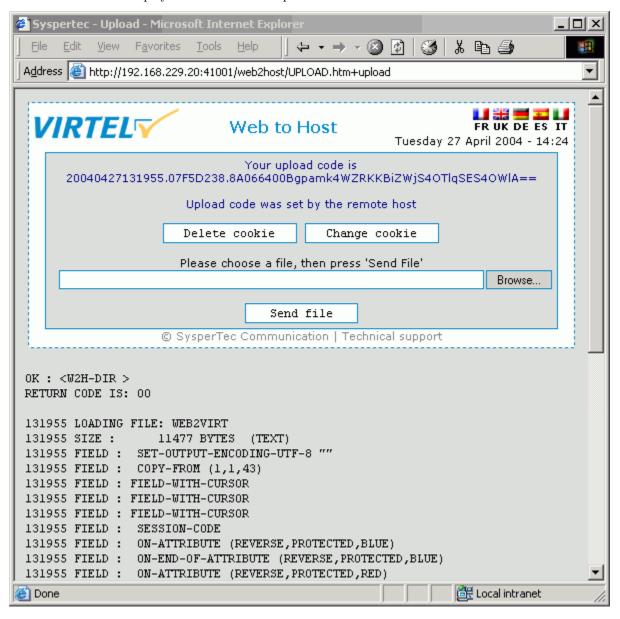

Page upload by HTTP with cookie: Confirmation of file uploadr

From now on, the cookies are managed automatically. After each upload, VIRTEL sends a new cookie to the browser, as indicated by the message "Upload code was set by the remote host".

Depending on the values specified in the directory definition, VIRTEL may convert the file name to upper case, and truncate the filename to a maximum length, before storing it in the directory. The filename after conversion and truncation must not duplicate any other filename in the directory. For example, when uploading to a directory defined using the default parameters (not case sensitive, with maximum filename length 8), the file links.gif would be stored under the name LINKS.GI

**CHAPTER** 

THREE

# **PERFORMANCE**

The VIRTEL started task offers the administrator 5 sources of information to verify the correct functioning and performance of VIRTEL, to monitor its activity, or to diagnose possible problems:

- the CONSOLE file
- the VIRLOG file
- the VIRTEL Logger
- the TRACE in the VIRTRACE file
- the SNAP in the SYSPRINT file

# 3.1 CONSOLE file

In z/OS environment, the CONSOLE file is written to the VIRTEL started task's JESMSGLG file.

In **VSE environment**, the CONSOLE file is written to the VIRTEL partition's POWER LST file (LIST-LOG)

The CONSOLE file allows the administrator to monitor the startup and subsequent activity of VIRTEL. Using the console file, the administrator can check that the VSAM files are correctly opened, verify that the customer key has been correctly recognized, check the initialization of the TCP/IP sockets interface using the correct IP address and port, and monitor connections and disconnections of terminals and applications.

**Note:** The SILENCE=YES parameter in the VIRTCT allows the suppression of certain console messages relating to the connection and disconnection of terminals.

```
--- SATURDAY, 03 JUN 2017 ---
IRR0101 USERID SPTHOLT IS ASSIGNED TO THIS JOB.
ICH700011 SPTHOLT LAST ACCESS AT 14:11:09 ON SATURDAY, JUNE 3, 2017
£HASP373 SPTHOLTN STARTED - INIT 1 - CLASS A - SYS MVS1
IEF4031 SPTHOLTN - STARTED - TIME=14.12.57
VIR60041 ATTACH VIRSV SUCCESSFUL TCB=008D6728 PROG=VSVTINIT
VSV02071 VIRSV V3R3 STARTED
VIR60061 INITIALIZE VIRSV SUCCESSFUL TCB=008B86E0 PROG=VIR6001
VIR00061 VIRTEL IS USING VIRTCT 'VIRTCTHP'
VIR00001 STARTING LICENCE CP00286465-VWA-L02052017 (2017 - 07 - 15)
VIR00181 VIRTEL 4.56 HAS THE FOLLOWING PTF(S) APPLIED
VIR00181 S440,5470,5478,5499,5505,5505A
VIR00891 VIRTEL RUNNING FROM AN AUTHORIZED LIBRARY
VIR00801 VIRTEL IS USING RACROUTE SECURITY
VIR08601 VIRTEL IS USING RACROUTE SECURITY
VIR08611 MIXED-CASE PASSWORD SUPPORT IS ACTIVE
VIR00241 OPENING FILE VIRARBO
VIR00241 OPENING FILE VIRARBO
VIR00241 OPENING FILE VIRSWAP
VIR00241 OPENING FILE VIRSWAP
VIR00241 OPENING FILE SAMPTRSF
VIR00241 OPENING FILE HTMLTRSF
           J0B04749
J0B04749
           J0B04749
J0B04749
                                                                                                                                                                                                                                                                                            JUNE 3. 2017
            J0B04749
           J0B04749
J0B04749
           J0B04749
J0B04749
           J0B04749
J0B04749
             J0B04749
            J0B04749
            J0B04749
            J0B04749
             J0B04749
           J0B04749
01
                                                     VIR0024I OPENING FILE HTMLT
VIR0024I ATTACHING SUBTASKS
           J0B04749
J0B04749
02
                                                                                          VIRTEL LOG ROUTINE
                                                                                                                                                                       VIR0002A LOADED
                                                     VIR00241 READING VIRARBO
VIR0089W HOST IPADDR. OVI
VIR0000I THIS COPY OF VI
            J0B04749
                                                                                                                                               OVERRIDDEN FROM PARM WITH IP=192.168.170.033
```

Fig. 4 Example of CONSOLE file

### 3.2 VIRLOG file

This is a printable file with record length 131 and record format FA which provides a record of IP connections to VIRTEL. The figure below shows an example of VIRLOG entries for incoming HTTP calls:

The LINE column shows the internal name of the HTTP line. The LOCAL column shows the name of the rule selected for each call. The PSEUDO column shows the VIRTEL terminal name used.

The next column contains "I" to indicate this is an incoming call.

The STARTED and ENDED columns show the start and end time of each IP session.

The PRICE column represents the duration of the transaction in hundredths of a second This value may be modified by exit 7.

The RECEIVED and SENT columns contain the number of bytes received from and sent to the browser. The REMOTE ADDRESS column contains the IP address of the browser.

The USER column contains the userid if the transaction is secured. The next column contains the HTTP status code (for static pages) The last three 8-byte columns represent:

- The external name of the VIRTEL transaction which represents the HTTP path name.
- The name of the HTML page.
- For static pages: The name of the VIRTEL directory containing the HTML page.
- For dynamic pages: The internal name of the HTTP transaction which was used to populate the page.

The figure below shows an example of VIRLOG entries for X25 calls:

The LINE column shows the internal name of the X25 line.

The LOCAL column shows the called subaddress for incoming calls, or the name of the associated AntiGATE or AntiPCNE terminal for outgoing calls.

The PSEUDO column shows the VIRTEL terminal name used.

In the next column "I" indicates an incoming call, "O" indicates an outgoing call. The STARTED and ENDED columns show the start and end time of each call.

The PRICE column represents the duration of the transaction in hundredths of a second, except for calls on Fast Connect lines, where the PRICE column contains the "X25 units sent" value supplied by NPSI. This value may also be modified by exit 7.

The RECEIVED and SENT columns contain the number of bytes received from and sent to the X25 line.

The REMOTE ADDRESS column contains the caller X25 number for incoming calls, or the called X25 number for outgoing calls.

The last column contains the PCNE call user data (if present), otherwise it contains the default entry point name for X25 calls specified by the DEFENTR parameter in the VIRTCT. For GATE calls this column is blank.

3.2. VIRLOG file 63

# 3.3 VIRTEL logger

The CONSOLE log can also be written to the system logger when LOG=LOGGER is specified in the TCT. VIR0002B is a batch program that can be run to extract the VIRTEL records from the System Logger.

The figure below shows an example of JCL to extract and format the VIRTEL LOG entries recorded in the System Logger:

```
//LOGGER PROC P=
//S01 EXEC PGM=VIR0002B, PARM='&P'
//STEPLIB DD DSN=VIRTEL.LOADLIB, DISP=SHR
//VIRLOG DD SYSOUT=*, DCB=BLKSIZE=25500
// PEND
//S01 EXEC LOGGER, P='DELETE(>2)'
VIRLOG DCB LRECL=255, BLKSIZE=25500, RECFM=VB

*Fig. 7 Example of JCL to extract the VIRTEL LOG from the System Logger*
```

The available JCL parameters are:

The date format is yyyyddd.

# 3.3.1 Examples

```
COPY (>2) Copy records older than 2 days
COPY(>0) Copy up to yesterday
DELETE(>2) Delete records older than 2 days
COPY(2015047) Copy records from 2015.047
COPY(2015047,2015048) Copy records from 2015.047 thru to 2015.048

DELETE(2015047) Delete records prior to 2015.047
COPY(>0), DELETE(>1) Will copy records from the previous and earlier,
and will then delete from 2 days ago leaving about 24 hours of data in the

Jog stream.
```

Fig. 8 Example of VIRTEL LOGGER extraction parameter

## 3.4 Virtel trace

All messages which pass between a terminal and a host application, or all messages received and sent on a line, can be traced to a print file.

Activation and deactivation of a trace on a terminal or a line is performed by means of the TRACE and NO-TRACE commands (see "VIRTEL commands" and "Activating and deactivating a terminal or line trace").

**Note:** A terminal or line trace remains active until a corresponding NOTRACE command is issued or until the VIRTEL started task terminates.

It is also possible to trace specific incoming calls ("tracing by rule"). In this case, activation of the trace is specified in the definition of the rule which VIRTEL uses to route the incoming call. For example, a rule can be created to activate the trace for calls which originate from a specific terminal address (X25 or IP). The trace can be activated for commands and/or data packets.

Activation or deactivation of a "trace by rule" is performed via the VIRTEL on-line configuration menus, and consists of updating the "Trace" field in the rule definition, followed by pressing the F1 key. See "Rules" in the VIRTEL Connectivity Reference manual for more details.

**Note:** A "trace by rule" remains active as long as the "Trace" field in the rule definition is not empty. Message VIR0036W confirms the activation of the trace.

In **z/OS environment**, the trace data is written to the VIRTRACE file in the VIRTEL started task. In **VSE environment**, the trace data is written to the POWER LST file of the VIRTEL partition.

Activation and deactivation of a memory trace is performed by means of the MEMTRACE and NOMEMTRACE commands (see "Memory Trace Management"). The allocation memory is written in the SNAP file when a SNAP command is issued.

### 3.4.1 Contents of the trace

Line type	Contents of line trace	Contents of terminal trace or trace by rule
НТТР	All messages flowing between the VIRTEL HTTP server and client browsers	Terminal without relay: None Terminal with relay: Con- tents of the 3270 datastream between VIRTEL and the host application
SMTP	All messages flowing to and from the VIRTEL SMTP server	None
XOT	All messages flowing between VIRTEL and the router, including the XOT headers	All X25 messages (excluding the XOT header) belonging to the specified virtual cir- cuit.
/GATE /FASTC	Messages on the control session between the MCH LU	Messages on the data session between the CVC LU
	and the CTCP (call packet and call acknowledgement)	and the offices of dextpage ets, X25 RESET and CLEAR commands)

3.4. Virtel trace 65

Table 3.1 – continued from previous page

Line type	Contents of line trace	Contents of terminal trace or trace by rule
/PCNE	None	Data flowing between the terminal LU and the application.
APPC	N/A	Messages on the LU6.2 session
GATE FASTC	N/A	Messages on the data session between the NCP and VIR- TEL.
3270	N/A	The 3270 datastream between the terminal and VIR-TEL, and the 3270 datastream between VIRTEL and the host application.
PCNE (Minitel)	N/A	The Vidéotex datastream between the terminal and VIR-TEL, and the 3270 datastream between VIRTEL and the host application.

### 3.4.2 Trace Examples

```
LCL712 11A: from application SPCICST 13:05:47.48
00000 F1C2 *1B * 099A95B4
LCL712 11A: from application SPCICST 13:05:47.49
00000 F5C2114B E9131140 5B290242 F1C0F8E2 89879596 9540A396 40C3C9C3 E24011C1
→*5B..Z.. $...1é8Signon to CICS .A* 099A95B4
00020 40290242 F4C0F0C1 D7D7D3C9 C4290242 F5C0F0E2 D7C3C9C3 E2E34011 C8F02902
→* ...4é0APPLID...5é0SPCICST .H0..* 099A95D4
00040 42F4C0F0 E3A89785 40A896A4 9940A4A2 85998984 40819584 409781A2 A2A69699
→*.4é0Type your userid and passwor* 099A95F4
00060 846B40A3 88859540 979985A2 A240C5D5 E3C5D97A 114BD929 0242F4C0 F0E4A285
→*d, then press ENTER:..R...4é0Use* 099A9614
00080 99898440 4B404B40 4B404B29 0241F442 F5114BF1 1DF0114B F4290242 F4C0F0C7
000A0 9996A497 8984404B 404B404B 290241F4 42F5114C 4B1DF011 4CE92902 42F4C0F0
→*roupid . . . . . . 4.5.< . . . . . . . 460* 099A9654
000C0 D781A2A2 A6969984 404B404B 404B2903 41F442F5 C04C114D C11DF011 4DF92902
000E0 42F4C0F0 D3819587 A4818785 404B404B 404B2902 41F442F5 114E4C1D F01150D5
→*.4é0Language . . . . . . . 4.5.+<.0.&N* 099A9694
00100 290242F4 C0F0D585 A640D781 A2A2A696 9984404B 404B404B 290341F4 42F5C04C
→*...4é0New Password . . . . . . 4.5é<* 099A96B4
00120 1150F11D F0115A50 1D7C115B 5B1DF011 5B602902 42F2C0F8 C4C6C8C3 C5F3F5F2
→*.&1.0.&.to.$$.0.$-...2é8DFHCE352* 099A96D4
```

#### Example of terminal trace (inbound 3270 terminal)

```
X001T007 XOT: RECEIVED FROM ROUTER
                                                            13:48:15.57
00000 00000003 100121
* ....
                                   * 0989117C
X001T007 XOT: RECEIVED FROM ROUTER
                                                            13:48:15.72
00000 00000083 10013200 A0402000 D9030853 59535843 46544104 08535953 58434654 \square
→*.....to ....SYSXCFTA..SYSXCFT* 0989117C
00020 42050653 59535041 53060102 07030024 02160102 17010163 6E434654 20593D4D
→*B..SYSPAS.....$......cnCFT Y=M* 0989119C
00040 2C443D32 30303530 31303531 33343831 3536302C 563D3233 302C5A3D 702D312D
→*, D=2005010513481560, V=230, Z=p-1-* 098911BC
00060 31352D2D 4D565332 3230432D 41323330 3033352D 32303031 2F31302F 32322C4B
→*15--MVS220C-A230035-2001/10/22,K* 098911DC
00080 3D514334 443248
→*=QC4D2H
                                   * 098911FC
X001T007 XOT: SENT TO ROUTER
                                                            13:48:15.72
00000 00000003 100141
                                   * 0989117C
→* ....
X001T007 XOT: RECEIVED FROM ROUTER 13:48:15.72
00000 00000023 1001245A 56444850 37444C4E 39374A49 36513153 49594C2C 433D3830
→*...£..$ZVDHP7DLN97JI6Q1SIYL,C=80* 0989117C
00020 33333430 333832
→*3340382
                                   * 0989119C
X001T007 XOT: SENT TO ROUTER
                                                            13:48:15.73
00000 00000003 100161
```

#### Example of line trace (XOT line)

00000 00324020 00D9030D 4F502020 20202020 43504158 31040	(continues on next page)
P001I001 AP80LU51 I09: DATA TO CFTBACB1	15:10:12.47
→ *CPBX1\$ * 098911A2	
00020 43504258 31060101 07030024 02160100 170101	
→ *".toOP CPAX1OP * 09891182	
00000 22003240 2000D903 0D4F5020 20202020 20435041 58310	40D 4F502020 20202020
X001T007 XOT: INBOUND DATA	15:10:12.46
→ * ACKO * 098A417C	
00000 00C1C3D2 F00D25	
X001T007 XOT: OUTBOUND DATA	15:10:12.23
* ACKO * 0989617C	
00000 C1C3D2F0 0D25	
P001I001 AP80LU51 I09: DATA FROM CFTBACB1	15:10:12.23
*CFTPSITXCPAX1 PQRS * 0989617D	
00000 C3C6E3D7 E2C9E3E7 C3D7C1E7 F1404040 D7D8D9E2 40404	
* CFTPSITXCPAX1 PQRS * 09891182 P0011001 AP80LU51 I09: DATA TO CFTBACB1	15:10:12.21
	1040 400D25
X001T007 XOT: INBOUND DATA 00000 00C3C6E3 D7E2C9E3 E7C3D7C1 E7F14040 40D7D8D9 E2404	
* 0989617E	15:10:12.08
00000 OF	Ц
X001T007 XOT: OUTBOUND X25 COMMAND	15:10:11.99
*BCPCNE1 * 09896176	
00000 0BF00806 0018800A 42070743 030302CC 0300C018 80105	043 4E4531
X001T007 005: INBOUND CALL PACKET	15:10:11.97

3.4. Virtel trace 67

(continued from previous page)

Example of "trace by rule" (XOT terminal to application on /PCNE line)

### 3.5 VIRTEL SNAP

VIRTEL maintains an internal trace table in which it records significant events which occur during VIRTEL processing. The SNAP command allows the administrator to obtain a snapshot listing of the contents of the trace table at a given point in time.

The SNAP listing is primarily intended for use by VIRTEL development personnel and will normally need to be forwarded to Syspertec for analysis. For customer diagnostics, the TRACE command (described above) may often be more useful.

**Note:** The format, the contents, and the size of the SNAP depend on the SNAPW, TRACEIG, TRACEB, TRACEON parameters in the VIRTCT.

The internal trace table is recorded in a circular fashion, so that each new event added to the table overlays and replaces the oldest event in the table. The table contains a fixed number of event slots (determined by the TRACBIG parameter in the VIRTCT), and additionally certain events may have a variable amount (up to 256 bytes) of data recorded. The variable data is stored in a separate area whose size is determined by the TRACEB parameter in the VIRTCT, and this area is also filled in a circular manner, with the oldest information being dropped from the table when new information is added. Thus, depending on the values of the TRACBIG and TRACB parameters, older entries in the trace table may no longer have data associated with them.

Clearly, the greater the level of activity in the VIRTEL system, the quicker the trace table will wrap and information will be pushed out to make way for new entries. Thus, in order for the SNAP listing to provide useful information, the size of the trace table and its associated buffer area must be adequate for the level of system activity, and the SNAP command must be issued as quickly as possible after the event under investigation occurs. In some cases it may be necessary to use an automation tool to issue the SNAP command immediately following the appearance of a certain console message.

As well as dumping the contents of the internal trace table, the SNAP command also dumps certain VIRTEL internal control blocks. A dump of the control blocks associated with a particular terminal may optionally be requested.

The SNAP command is described under the heading "VIRTEL commands". VIRTEL may also produce a SNAP listing automatically if a program check or other abend occurs during VIRTEL processing.

In **z/OS** environment, the SNAP output is written to the SYSPRINT file in the VIRTEL started task. In **z/VSE** environment, the SNAP output is written to the POWER LST file of the VIRTEL partition.

**Note:** Several SNAP commands may be issued during a single run of VIRTEL. The output file may thus contain successive SNAP listings concatenated one after the other.

3.5. VIRTEL SNAP 69

DATE=04 J	un 2017	7 TIME= 19	:12:38 T	ASK=	ABEND	=	TERM=	APPLICATION=APPLHOLT	VERSION=4.56	MVS
		RTEC COMMUN								
		JREAUX DE L								
		SAINT CLOU								
		PERMANENT								
TERMINAL	TASK	R15	R14	MODULE	OFFS	FUNCT	TΠN	1/10000 S.		
		RT=13063910								
DELOC003	02DD	00000004	9E98AB52	VIR0017	+3922	000C	WRITE END	1306391013		
DELOCOOS	02DD	1EC1C7D8	9E9E5EC2	VIR0C12		8042	£FREEMAIN	1306391013		
DELOCOOS	02DD	1EC1CACO	9E9E5EDA	VIRØC12		8042	£FREEMAIN	1306391013		
DELOC003	02DD	1EAF7078	9E9E5EF0	VIR0C12		8042	£FREEMAIN	1306391013		
DELOCOOS	02DD	1EAFF640	9E9E2962	VIR0C12		802E	£DETACH	1306391013		
DELOCOOS	02DD	1EAADEC0	8002CA62	VIR0009		806C	£ENDING	1306391013		
DELOC003	02DD	00480522	9E9C696A	VIROOPE		400A	ERRMSG	1306391013		
DELOCOOS	EEDD	1E93B4C7	9E9C69F8	VIROOPE		8088	£LOG FINI	1306391069		
DELOCOØ3	02DD	00026210	9E9C6A18	VIROOPE	+0880	808A	£REO STATS	1306391069		
DELOC003	02DD	1EAF5F10	0000D4B6	VIR0000		804B	£POST	1306391069		
DELOCOOS	02DD	1EAFF640	9E9C6BB4	VIROOPE	+0D1C	802E	£DETACH	1306391069		
DELOCOOS	02DD	1EAAE0AC	8002CA80	VIR0009	+2AE8	806F	£NO TIMER	1306391069		
DELOCOØ3	02DD	1EC06A68	8002CBCA	VIR0009	+2032	8042	£FREEMAIN	1306391069		
DELOCOØ3	02DD	00000000	80020096	VIR0009	+2CFE	3032	CONTINUE	1306391069		
DELOCOOS	02DD	1EC06CA0	8002CD9A	VIR0009	+2E02	8042	£FREEMAIN	1306391069		
DELOC003	02DD	1EAFF640	8002CD9A	VIR0009	+2E02	8021	£RECANY	1306391069		
DELOC003	02DD	1EAFF638	8002DE86	VIR0009	+3EEE	8042	£FREEMAIN	1306391069		
HTTP-W2H	EEDD	1E93B5CC	9E9E4B4A	VIRØC12	+2F32	804E	£CREATE	1306391069		
HTTP-W2H	02DD	1EB14BA8	8002F470	VIR0009	+54D8	8040	£GETMAIN	1306391069		
HTTP-W2H	02E0	00000008	8002F5BE	VIR0009		804D	TO LINE	1306391070		
HTTP-W2H	02E0	1EAF5440	9EA88722	VIRHTTP	+ØBBA	8043	TO TCP	1306391070		
HTTP-W2H	02E0	1EAF5440	9EA88F1C	VIRHTTP	+13B4	0404	SEND	1306391070		
HTTP-W2H	EEE0	1E93B6D1	9EA92598	VIRHTTP	+AA30	0822	/WRITE	1306391070		
HTTP-W2H	02E0	1EB14998	9E9F4564	VIR0T09	+35B4	8040	£GETMAIN	1306391070		
J-HTTP	EEE0	1E93B7D6	000E0F5A	VIR0006	+1AFA	808E	£VIRLOG	1306391083		
J-HTTP	02E0	00000000	000DF688	VIR0006	+0228	8048	£WAIT	1306391084		
HTTP-W2H	02E0	0000000	1EB14998		+0000	0804	/EXITAF	1306391084		
HTTP-W2H	02DE	1EB150A8	9E9F46F4	VIR0T09		8042	£FREEMAIN	1306391090		
DELOC006	02DE	1EAF4FC0	9EA8887A	VIRHTTP		8085	£CVC FINI	1306391090		
HTTP-W2H	02DE	1EAF4FC0	9EA87CE0	VIRHTTP		081A	/READ	1306391090		
HTTP-W2H	02DE	1EB150A8	9E9F41F0	VIR0T09		8040	£GETMAIN	1306391090		
HTTP-W2H	02DF	1EB14D20	9E9F46F4	VIR0T09	+3744	8042	£FREEMAIN	1306391095		
DELOC004	02DF	1EAF4098	9EA8887A	VIRHTTP		8085	£CVC FINI	1306391095		
HTTP-W2H	02DF	1EAF4098	9EA87CE0	VIRHTTP		081A	/READ	1306391095		
HTTP-W2H	02DF	1EB14D20	9E9F41F0	VIR0T09		8040	£GETMAIN	1306391095		
HTTP-W2H	02E0	1EB14998	9E9F46F4	VIR0T09		8042	£FREEMAIN	1306391100		
DELOC003	02E0	1EAF5440	9EA8887A	VIRHTTP		8085	£CVC FINI	1306391100		
HTTP-W2H	02E0	1EAF5440	9EA87CE0	VIRHTTP	+0178	081A	/READ	1306391100		

Example of SNAP listing

70

## 3.5.1 Message-triggered SNAPMSG

The SNAPMSG command requests VIRTEL to generate an automatic SNAP after certain messages (VIRI902W, VIR0026W, VIR0052I, VIR1552I, VIR0526W or VIR1952I). Only one SNAP can also be obtained with user specific code provided by SYSPERTEC for messages VIRHT31E and VIRHT63E. See "VIRTEL commands". See the SNAPMSG command for further details.

**CHAPTER** 

**FOUR** 

### **AUDIT**

### 4.1 VIRSTAT file

The VIRSTAT file is a sequential file into which VIRTEL writes connection statistics.

Note: When the STATS=YES parameter is coded in the VIRTCT, the VIRSTAT file is reinitialised at each VIRTEL startup. With STATS=YES, VIRTEL must be stopped periodically in order to avoid filling the VIRSTAT file, and the file should be defined as a GDG in order not to lose the information from a previous run. The STATS=MULTI parameter may be coded in the z/OS environment to permit continuous operation.

Trying to browse the contents of the file from ISPF while it is in use by VIRTEL, can result to the obtain a system message indicating that the file is empty. In reality this is not true, because in fact the records are buffered in memory before being written in block.

The format of the statistics records depends on the value specified in the "Write Stats to" field of the VIRTEL terminal definition (refer to the VIRTEL Connectivity Reference manual for details of terminal definitions). Each terminal may request statistics in one or more of the possible formats:

#### Classic

VIRSTAT classic format recording is intended for use with Minitel calls on terminals associated with NPSI lines (Gate or Fast Connect).

#### Alternate X25

VIRSTAT alternate format recording may be requested for terminals associated with any X25 line (GATE, FASTC, XOT).

### Web

VIRSTAT format suitable for terminals associated with an HTTP line.

For terminals associated with all other line types (including /GATE, /PCNE, and /FASTC) the statistics record may not contain meaningful information and the statistics field in the terminal definition should be left blank.

The statistics file may contain a mixture of classic, alternate X25, and web format records. The record type indicator at position 61 of each record identifies the format of the particular record.

### 4.1.1 VIRSTAT classsic format

For terminals which specify classic format recording (STATS=1), the VIRSTAT record format is shown in the following table:

```
**Position
                             Type of information **
             Format
1 to 8
           Alphanumeric
                           Terminal name
9 to 12
           Packed Decimal Date (CCYYDDDF)
13 to 16
           Packed Decimal Time (HHMMSSTF)
           Alphanumeric
17 to 28
                           User id
29 to 36
         Alphanumeric
                           Originating terminal name (outbound calls)
37 to 40
           Hexadecimal
                           No of bytes inbound (uncompressed)
41 to 44
           Hexadecimal
                           No of bytes inbound (compressed)
45 to 48
           Hexadecimal
                           No of bytes outbound (uncompressed)
49 to 52
          Hexadecimal
                           No of bytes outbound (compressed)
53 to 56
         Hexadecimal
                          No of sends
57 to 60
           Hexadecimal
                           No of receives
61 to 61
          Alphanumeric
                          Record type (C=cumulative, P=partial, E=end) [1]
62 to 62
          Alphanumeric
                           Compression level (0,1,2)
63 to 70
           Alphanumeric
                           Minitel: Server access node
           Alphanumeric
71 to 74
                           Minitel: Call duration in minutes (ZZZ9)
75 to 82
         Alphanumeric
                           Session start date (MM/DD/YY)
83 to 86
         Alphanumeric
                           Session start date (.DDD)
87 to 94
           Alphanumeric
                           Session start time (HH.MM.SS)
95 to 102
           Alphanumeric
                           Session end date (MM/DD/YY)
103 to 106 Alphanumeric
                           Session end date (.DDD)
107 to 114 Alphanumeric
                           Session end time (HH.MM.SS)
115 to 115 Alphanumeric
                           Tarification level (External Servers)
116 to 116 Alphanumeric
                           Disconnection Type (T=by TIME-OUT)
                           X25 units received (Fast-Connect)
117 to 120
           Hexadecimal
121 to 124
           Hexadecimal
                           X25 units sent (Fast-Connect)
```

Format of VIRSTAT record (classic format)

For NPSI Fast Connect lines, the X25 accounting statistics are recorded in billing units provided by NPSI at virtual circuit disconnection time. Their interpretation depends on the TAXUNIT parameter in the NPSI X25.MCH macro. Similarly, the session start and end times (Fast Connect only) are provided by NPSI and depend on the clock settings in the NCP. For other types of lines, accounting statistics and times are generated by VIRTEL.

### Type C (cumulative)

Records are implemented at terminal disconnection.

#### Type P (partial)

Records are implemented at regular intervals.

### Type E (end of job)

Records are implemented at VIRTEL shutdown.

### 4.1.2 VIRSTAT alternative X25 format

For terminals which specify alternate X25 format recording (STATS=4), the VIRSTAT record format is shown in the following table:

		_
Position	Format	Type of information
1 to 8	Alphanumeric	Terminal name
9 to 12	Packed Decimal	Date (CCYYDDDF)
13 to 16	Packed Decimal	Time (HHMMSSTF)
17 to 36	Alphanumeric	Remote X25 number
37 to 40	Hexadecimal	Unused
41 to 44	Hexadecimal	Unused
45 to 48	Hexadecimal	Unused
49 to 52	Hexadecimal	Unused
53 to 56	Hexadecimal	Unused
57 to 60	Hexadecimal	Unused
61 to 61	Alphanumeric	Record type (I=inbound, O=outbound) [1]
62 to 62	Alphanumeric	Unused
63 to 70	Alphanumeric	Originating GATE/PCNE terminal name (outbound)
		Entry point name (inbound)
71 to 74	Alphanumeric	Unused
75 to 82	Alphanumeric	Session start date (MM/DD/YY)
83 to 86	Alphanumeric	Session start date (.DDD)
87 to 94	Alphanumeric	Session start time (HH.MM.SS)
95 to 102	Alphanumeric	Session end date (MM/DD/YY)
103 to 106	Alphanumeric	Session end date (.DDD)
107 to 114	Alphanumeric	Session end time (HH.MM.SS)
115 to 115	Alphanumeric	Unused
116 to 116	Alphanumeric	Disconnection Type (T=by TIME-OUT)
117 to 120	Hexadecimal	Unused
121 to 124	Hexadecimal	Call duration in 1/100 second

Format of VIRSTAT record (alternate X25 format)

For NPSI Fast Connect lines, the X25 session start and end times are provided by NPSI at virtual circuit disconnection time and depend on the clock settings in the NCP. For other types of lines, times are generated by VIRTEL.

### Type I (inbound)

Records relate to X25 incoming calls.

### Type O (outbound)

Records relate to X25 outgoing calls.

For terminals which specify web format recording (STATS=5 or STATS=6), the VIRSTAT record format is shown in the following tables:

Position	Format	Type of information
1 to 8	Alphanumeric	Terminal name
9 to 12	Packed Decimal	Date (CCYYDDDF)
13 to 16	Packed Decimal	Time (HHMMSSTF)
17 to 31	Alphanumeric	Caller's IP address
32 to 36	Alphanumeric	Alphanumeric
37 to 44	Alphanumeric	Entry point name
45 to 52	Alphanumeric	Transaction external name

(continues on next page)

53 to 60	Alphanumeric	Rule name
61 to 61	Alphanumeric	Record type (H=HTTP inbound)
62 to 64	Alphanumeric	Unused
65 to 68	Alphanumeric	Error code
69 to 76	Alphanumeric	Relay LU name
77 to 84	Alphanumeric	Call duration in 1/100 second
85 to 92	Alphanumeric	No of bytes received
93 to 100	Alphanumeric	No of bytes sent
101 to 108	Alphanumeric	Session start date (MM/DD/YY)
109 to 116	Alphanumeric	Session start time (HH.MM.SS)
117 to 124	Alphanumeric	Session end time (HH.MM.SS)

Format of VIRSTAT record (type 5 for Web Access)

This record type is written when 5 is specified in the STATS field of the terminal definition used for the HTTP line. If the terminal is disconnected by TIMEOUT, the "Error Code" field contains the word "TIME".

Position	Format	Type of information
1 to 8	Alphanumeric	Terminal name
9 to 12	Packed Decimal	Date (CCYYDDDF)
13 to 16	Packed Decimal	Time (HHMMSSTF)
17 to 31	Alphanumeric	Caller's IP address
32 to 36	Alphanumeric	Caller's port number
37 to 44	Alphanumeric	Entry point name
45 to 52	Alphanumeric	Transaction external name
53 to 60	Alphanumeric	Rule name
61 to 61	Alphanumeric	Record type (B=binary HTTP inbound)
62 to 64	Alphanumeric	Unused
65 to 68	Alphanumeric	Error code
69 to 76	Alphanumeric	Relay LU name
77 to 80	Hexadecimal	Call duration in 1/100 second
81 to 84	Hexadecimal	No of bytes received
85 to 88	Hexadecimal	No of bytes sent
89 to 108	Alphanumeric	User name
109 to 124	Alphanumeric	URL parameter

Format of VIRSTAT record (type 6 for Web Access)

For this record type, the counters are in binary, and the Session Date and Time fields are replaced by User name (20 bytes) and URL parameter (first 16 bytes).

This record type is written when 6 is specified in the STATS field of the terminal definition used for the HTTP line.

## 4.1.3 Printing the contents of the VIRSTAT file (X25)

The VIR0070 program allows the contents of the VIRSTAT file to be printed. The source for this program is supplied in the SSL (VSE) or in the SAMPLIB (z/OS) and you can use this as the basis of a user-written program to print statistics.

Examples of the JCL required to execute this program are shown below:

```
* $$ JOB JNM=VIRSTAT,CLASS=0,DISP=D
* $$ LST DISP=D,CLASS=V,DEST=(,SPTUSER)
// JOB VIRPRNT
// LIBDEF *,SEARCH=VIRT442.SUBLIB
// DLBL STAT,'VIRTEL.VIRSTAT.ESDS',,VSAM,CAT=VSESPUC
// EXEC VIR0070,SIZE=AUTO
/*
/&
* $$ EOJ
```

Fig. 17 VIR0070 JCL to print VIRSTAT file (VSE)

```
//VIRSTAT JOB 1, USER, CLASS=A, MSGCLASS=X, NOTIFY=&SYSUID
//TRI EXEC PGM=SORT
//SYSPRINT DD SYSOUT=*
//SYSOUT DD SYSOUT=*
//SORTWK01 DD UNIT=3380, SPACE=(TRK, (100, 20), RLSE)
//SORTWK02 DD UNIT=3380, SPACE=(TRK, (100, 20), RLSE)
//SORTIN DD DISP=SHR, DSN=VIRTEL.STAT
//SORTOUT DD DSN=&&STAT, UNIT=SYSDA, DISP=(, PASS),
// DCB=(LRECL=255,BLKSIZE=2550,RECFM=FB),
// SPACE=(TRK, (100,20), RLSE)
//SYSIN DD *
SORT FIELDS=(1,16,A), FORMAT=CH
END
//STAT EXEC PGM=VIR0070
//STEPLIB DD DISP=SHR, DSN=VIRT442.LOADLIB
//SYSUDUMP DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//VIRSTAT DD DISP=(OLD, DELETE), DSN=&&STAT
```

VIR0070 JCL to print VIRSTAT file (z/OS)

## 4.1.4 Printing the contents of the VIRSTAT file (HTTP)

The PRTSTATW program supplied with the system allows printing of type 6 records from the VIRSTAT file. This program is delivered as a load module in the VIRTEL LOADLIB (from version 4.45 onwards) and the execution JCL is provided as member JCLPRTST in the VIRTEL SAMPLIB.

Examples of the execution JCL for this program are shown below.

### z/VSE JCL

In the VSE environment the VIRPRTST job, loaded into the POWER reader queue during VIRTEL installation, contains an example of JCL for printing the VIRSTAT file. This job is an example only and must be modified before execution:

```
* $$ JOB JNM=VIRPRTST, CLASS=0, DISP=D
* $$ LST DA
// JOB VIRPRTST
* *********************
* * VIRTEL: EXAMPLE JCL TO EXECUTE STAT VIRTEL PRINT *
* **********************
// LIBDEF *, SEARCH=(VIRT452.SUBLIB, PRD2.CONFIG, PRD1.BASE)
// DLBL SORTIN1, 'VIRTEL.STAT',, VSAM, CAT=VSESPUC
// DLBL SORTOUT, '%VIRTEL.SORTFILE', 0, VSAM, CAT=VSESPUC, DISP=(NEW, KEEP), C
RECORDS=(10,100), RECSIZE=255
* // DLBL SORTOUT, 'VIRTEL.SORTFILE', 0, SD
* // EXTENT SYS001, SYSWK2, 1, 0, NNNN, 15
* // ASSGN SYS001, DISK, VOL=SYSWK2, SHR
// EXEC SORT, SIZE=100K
SORT FIELDS=(01,08,A), FORMAT=CH
RECORD TYPE=F, LENGTH=255
END
/*
* OPTIONS FOR PRINT OR COUNT
* // DLBL SYSPRINT DD SYSOUT=*
* // DLBL SYSABEND DD SYSOUT=*
* // DLBL IJSYSLS DD SYSOUT=*
// DLBL VIRSTAT, '%VIRTEL.SORTFILE', 0, VSAM, CAT=VSESPUC, DISP=(, DELETE)
// ASSGN SYS007, SYSLST
// ASSGN SYS006, SYSRDR
// EXEC PGM=PRTSTATW, SIZE=AUTO
PRTSTATW PRINT NNN 0250
SELDATE 01012011 31122012
SELTERM DEVTA* CLVTA*
* * MAIN CARD (REQUIRED)
* * _____
* * 1 2 3 4 5 6
* *1...!...0....!...0....!...0....!...0....
* *PRTSTATW PRINT BREAK USER NNN PPPP
* * SPECIFIC REQUEST TO PRINT THE STATISTICS
* *PRTSTATW COUNT $ALL$ NNN PPPP
* * SPECIFIC REQUEST TO COUNT THE NUMBERS OF DIFFERENT
* * USERS
* *SELECT CARD (OPTIONAL)
* * ______
 * 1 2 3 4 5 6
* *1...5....0....5....0....5....0
* *SELDATE DDMMYYYY DDMMYYYY
* * DATE SELECTION BEGIN,
* * END DATE
```

(continues on next page)

PRTSTATW JCL to print VIRSTAT file in VSE (type=6)

### z/OS JCL

In the z/OS environment the JCL for executing the PRTSTATW program is supplied as member JCLPRTST in the VIRTEL SAMPLIB:

```
//VIRPRTST JOB 1, USER, CLASS=A, MSGCLASS=X, NOTIFY=&SYSUID
/*JOBPARM LINES=9999
//*-----*
//* VIRSTAT FILE PRINTING JOB *
//* VIRSTAT RECORD TYPE 6 (VSTA-RECORD-TYPE='B') *
//*----*
// SET LOAD=yourqual.VIRTnnn.LOADLIB
// SET STAT=yourqual.VIRTnnn.STAT
//*----*
//JOBLIB DD DISP=SHR, DSN=&LOAD
//*
//STEP0 EXEC PGM=SORT
//SYSOUT DD SYSOUT=*
//SORTIN DD DISP=SHR, DSN=&STAT
//SORTOUT DD DSN=&&SORTSTAT, DISP=(NEW, PASS), UNIT=SYSDA,
// DCB=(BLKSIZE=2550, LRECL=255, RECFM=FB),
// SPACE=(TRK, (1,1))
//SYSIN DD *
SORT FIELDS=(1,8,A), FORMAT=CH
//STEP1 EXEC PGM=PRTSTATW
//SYSPRINT DD SYSOUT=*
//SYSABEND DD SYSOUT=*
//IJSYSLS DD SYSOUT=*
//*
//VIRSTAT DD DSN=&&SORTSTAT, DISP=OLD
//SYSIN DD *
PRTSTATW PRINT NNN 0250
SELDATE 01012011 31122012
SELTERM DEVTA* CLVTA*
* ..!...0....!...0....!...0....!...0....!...0....
//* MAIN CARD (required)
//* -----
//* 1 2 3 4 5 6
//* 1...!...0....!...0....!...0....!...0....!...0....
```

(continues on next page)

```
//* PRTSTATW PRINT BREAK USER NNN PPPP
//* specific request to print the statistics
//* PRTSTATW COUNT $ALL$ NNN PPPP
//* specific request to count the numbers of different
//* users
//* SELECT CARD (optional)
//* -----
//* 1 2 3 4 5 6
//* 1...5....0....5....0....5....0....5....0
//* SELDATE DDMMYYYY DDMMYYYY
//* DATE selection begin,
//* end date
//* SELTERM TTTTTTTT XXXXXXXX YYYYYYYY ZZZZZZZZ (up to 8 bytes)
//* SELUSER USER4571890123457789 (up to 20 bytes)
//* SELPARM PARM457189012345 (up to 16 bytes)
//* 1...!....0....!....0....!....0....!....0....!
//* The '*' character allows a generic evaluation.
//
```

PRTSTATW JCL to print VIRSTAT file in z/OS (type=6)

### This JCL consists of two main steps:

- a first step to sort the file
- $\bullet\,$  a second step to PRINT or COUNT the records

## 4.1.5 Sorting the VIRSTAT file

The sort requirements are determined by the type of report desired. Since the PRTSTATW program offers the option of selecting records and also offers up to two levels of report break to allow printing of subtotals, it is important to specify the appropriate sort criteria to obtain the correct result.

The sort operates on one or more criteria, in ascending (A) or descending (D) mode. You should adapt the SORT SYSIN according to the syntax of the specific SORT program being used.

Several examples of sort criteria are shown below for various fields: terminal (TERM), date (DATE), user name (USER), URL parameter (PARM)

```
SORT FIELDS=(1,8,A) --> TERM A: ascending D: descending SORT FIELDS=(9,4,A) --> DATE SORT FIELDS=(89,20,A) --> USER SORT FIELDS=(109,16,A) --> PARM SORT FIELDS=(1,8,A,), FORMAT=CH sort by TERM SORT FIELDS=(1,8,A,89,20,A), FORMAT=CH sort by TERM first then USER SORT FIELDS=(1,7,15,A) --> IP Adress (for $ALL$ request) SORT FIELDS=(89,20,A,17,15,A), FORMAT=CH sort for $ALL$ request
```

PRTSTATW JCL sort criteria

For example, to obtain a report in ascending order of session start date, specify the following statements in the SORT SYSIN:

```
//SYSIN DD *
SORT FIELDS=(9,4,A), FORMAT=CH
//*
```

### 4.1.6 PRTSTATW program

The PRTSTATW program executed in the second step reads the sorted output file from the first step. It contains required and optional SYSIN cards.

PRTSTATW first SYSIN card

#### Columns 1 to 8

Program name: must be PRTSTATW

#### Columns 11 to 16

Report type: specify PRINT (print report) or COUNT (calculate number of distinct users)

#### Columns 31 to 35

Optionally specify BREAK if report break is desired (up to 2 levels) for printing (PRINT) or \$ALL\$ if counting (COUNT)

### Columns 37 to 40

Optionally indicates the type of report break: TERM (break on change of terminal name), USER (break on change of user name), DATE (break on change of date) or PARM (break on change of URL parameter)

#### Columns 43 to 46

Optionally indicates the second level report break (TERM, USER, DATE, or PARM)

### Columns 51 to 53

Optionally specify N (no) or O (yes) to print additional trace information (program trace, input/output trace, and miscellaneous trace respectively). The default is N for each trace.

#### Columns 56 to 59

Maximum number of pages to be printed (default 50 pages)

```
Second card (Optional)

1 2 3 4 5 6

1...5...0...5...0...5...0...5...0...5...0

SELDATE DDMMYYYY DDMMYYYY

DATE selection begin,

end date

SELTERM TTTTTTTT XXXXXXXX YYYYYYYY ZZZZZZZZZ (up to 8 bytes)

SELUSER USER4571890123457789 (up to 20 bytes)

SELPARM PARM457189012345 (up to 16 bytes)
```

 $PRTSTATW\ second\ SYSIN\ card$ 

This card allows records to be selected according to 4 fields: DATE (selection by date range), TERM (selection of up to 4 different terminal names, otherwise 4 different HTTP lines), USER (selection by user name), PARM (selection by URL parameter).

It is possible to make a **generic** selection by coding a '\*' character at the end of a field. For example, specifying a terminal selection value of DEVT\* allows the program to select all records whose terminal name begins with DEVT.

#### Columns 1 to 7

Optional, indicates the selection type: SELDATE (for DATE), SELTERM (for terminal), SELUSER (for user), or SELPARM (for URL parameter).

### Columns 11 to 19

Indicates up to 8 characters for the chosen value (SELDATE and SELTERM). The value may end in '\*' for a generic search.

### Columns 21 to 29

For SELDATE: second date in the range, for SELTERM: second terminal name (optional)

#### Columns 31 to 39

For SELTERM: third terminal name (optional)

#### Columns 41 to 49

For SELTERM: fourth terminal name (optional)

#### Columns 21 to 40

For SELUSER:up to 20 characters for the user name. The value may end in '\*' for a generic search.

#### Columns 21 to 36

For SELPARM: up to 16 characters for the URL parameter. The value may end in '\*' for a generic search.

#### **Counter Report**

Clients who wish to obtain the total number of unique users can execute the PRTSTATW program with the SYSIN shown below.

For the SORT: the first sort field is the user name, and the second sort field is the IP address:

```
//SYSIN DD *
SORT FIELDS=(89,20,A,17,15,A),FORMAT=CH
//
```

### For the PRTSTATW program:

```
//SYSIN DD *
PRTSTATW COUNT $ALL$ NNN 0465
SELDATE 01012011 30122011
SELTERM DEVTA* CLVTA*
```

COUNT and \$ALL\$ are required. The selection cards are optional. They allow for example to report for a given period the number of different users connected to the system in HTTP mode and/or to filter on an HTTP line defined with transaction security active, which requires the user to sign on.

For z/OS, sample JCL for the user counter report is supplied in the JCLCOUST member of the VIRTEL SAMPLIB. For VSE, a sample job named VIRCOUST is loaded into the POWER Reader Queue at installation time.

1== VIRTEL == Statistics file COUNT job == Submit on: 18-01-2011 at: 14:23:12 PAGE: 000 Parameters CARDS list read by PRTSTATW						
PRISTATW COUNT		\$ALL\$	PARM NNN 0469			
SELDATE 0101201		ı				
*!0!	0!0.	!	0!0!0			
18-01-2011	14.23.12		* S U M M A R Y *			
18-01-2011			With criterias put for selection	n at.□		
<pre>→top of listir</pre>			nion dilational part and discount			
18-01-2011	=		Total Records read	: 🗆		
<b>→</b> 00207						
18-01-2011	14:23:12		Total Calls selected	: 🗆		
<b>→</b> 00017						
18-01-2011	14:23:12		Total Calls duration	: 🗆		
→001hr04mn35s						
18-01-2011	14:23:12		Total Calls ended by "Timeout"	: 🗆		
<b>→</b> 00007						
18-01-2011	14:23:12		Total Defined different Users	: 🗆		
→00004	14 02 10		T . 1 . 2 . 1			
18-01-2011	14:23:12		Total Calls without signature	:⊔		
→00001	14.02.10		The death of the country of the coun			
18-01-2011	14:23:12		End of execution			

 $PRTSTATW\ user\ counter\ report$ 

## 4.2 SMF Support

Using VIRTEL 4.53+ and onwards allows VIRTEL SMF support writing VIRSTATS records into SMF. The VIRTCT must be reassembled and link-edited with a new value SMF or (SMF,nnn) for the STATS parameter to have this feature active. The SMF record format is the same as the current STATS record but prefixed by the standard SMF header. The default SMF record number is 223, but it can be modified using the (SMF,nnn) syntax.

### 4.2.1 Printing the VIRSTAT SMF record

The SMFPRINT/SMFPRINTL jobs in VIRTEL.SAMPLIB can be used to print the Virtel SMF records. The SMFPRINT job is an example of printing SYS1.MANx datasets and calls a REXX procedure called SMFREXX. SMFPRINT can be used to process Virtel SMF stats records written by Virtel V4.59. The SMFPRNTL job in VIRTEL.SAMPLIB can Be used to print Virtel SMF records that have been written to a z/OS LOGSTREAM. This job calls the SMFREXXL REXX procedure to format and print the SMF records extracted from the LOGSTREAM. Virtel V4.60 onwards has a different SMF record format to older versions of Virtel.

**Note:** Due to changes in the stats record formats the REXX procedure SMFREXXL must be used to format records from V4.60 onwards.

Messages "VIR0612E VIRSTAT SMFWTM FAILED. RC=rc" and "VIR0611I VIRSTAT NOW RECORD-ING TO SMF" are in relation with SMF support. See "Virtel Messages and Operations" manual for more details.

### 4.2.2 Structure of the Binary STATS record.

The segment within the SMF record starts at offset X'0E'. For Virtel V4.59 or less the following structure is used: -

							(continues on next page)
*H\$NBOUT2	2 DS	XL4			OUTPUT CO	UNT	42310349
*H\$NBIN1	DS	XL4			INPUT COU	NT	42310349
H\$SPENT	DS	CL8			Durée d'a	ppel en 1/100s	42310349
H\$RELAY	DS	CL8			NOM DU RE	LAY	42310349
H\$STATUS	DS	CL4			HTTP STAT	US	42310349
	DS	CL3			filler		42310349
H\$CUMPAR	DS	CL1			H HTTP en	trant	42310349
H\$RULE	DS	CL8			RULE (def	ault to LINE)	42310349
H\$TRANS	DS	CL8			TRANSACTI	ON	42310349
H\$ENTRY	DS	CL8			ENTRY POI	NT	42310349
H\$IPPORT	DS	CL5			CALLER IP	PORT	42310349
H\$IPADDR	DS	CL15			CALLER IP	ADDRESS	42310349
H\$TIME	DS	PL4			HEURE STA	TISTIQUES	42310349
H\$DATE	DS	PL4			DATE STAT	ISTIQUES	42310349
H\$LUNAME	DS	CL8			NOM DU TE	RMINAL	42310349
HSTATS	DSECT						42310349
*							42310349
*						*	42310349
*	DESCR	IPTION DU	FICHIER	DES ST	ATISTIQUES	(MCVFALT2)	42310349
*						*	42310349


(continues on next page)

. . . . . . . . .

4.2. SMF Support 83

TI C D VIII D D	Da	GT 0	DYMES DECETIED	40010040
H\$BYTRD	DS	CL8	BYTES RECEIVED	42310349
H\$BYTST	DS	CT8	BYTES SENT	42310349
H\$START1	DS	CL8	SESSION START DATE GREGORIENNE	42310349
H\$START3	DS	CL8	SESSION START TIME	42310349
H\$END3	DS	CL8	SESSION END TIME	42310349
LHSTATS	EQU	*-HSTATS	LONGUEUR ENREGISTREMENT	42310349

### Example of output:-

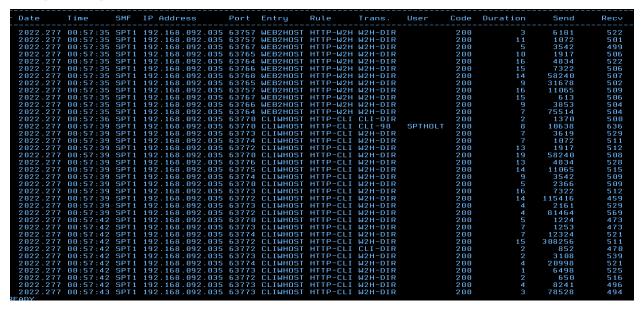

For Virtel V4.60 onwards, the record structures for STATS=5 (Type H) and STATS=6 (TYPE B) are as follows: -

```
TYPE H - Counters are printed characters
        DESCRIPTION DU FICHIER DES STATISTIQUES (MCVFALT2)
HSTATS DSECT
H$LUNAME DS CL8
                                    NOM DU TERMINAL
H$DATE DS PL4
                                    DATE STATISTIQUES
H$TIME DS PL4
                                   HEURE STATISTIQUES
H$CUMPAR DS CL1
                                    H HTTP entrant
        DS
             CL3
                                    filler
H$IPADDR DS CL40 (was 15)
                                    CALLER IP ADDRESS
H$ENTRY DS CL8
                                    ENTRY POINT
H$TRANS DS
             CL8
                                    TRANSACTION
H$RULE DS
             CL8
                                    RULE (default to LINE)
H$STATUS DS CL4
                                    HTTP STATUS
H$RELAY DS
           CL8
                                    NOM DU RELAY
H$SPENT DS
             CL8
                                    Durée d'appel en 1/100s
H$BYTRD DS
             CL8
                                    BYTES RECEIVED
H$BYTST DS
              CL8
                                    BYTES SENT
              CL8
H$START1 DS
                              SESSION START DATE GREGORIENNE
```

(continues on next page)

					(continued from previous page)
H\$START3	DS	CL8		SESSION START TIME	
H\$END3	DS	CL8		SESSION END TIME	
H\$PXYADR	DS	CL40		PROXY IP ADDRESS	
	DRG	HSTATS+255			
LHSTATS	EQU	*-HSTATS		LONGUEUR ENREGISTREM	ENT
*					*
*	TYPE	B - Counter	s are binary	values	*
*	DESCR	IPTION DU F	ICHIER DES ST	ATISTIQUES (MCVFALT3)	*
*					*
*					
BSTATS	DSECT	1			
B\$LUNAME	DS	CL8		NOM DU TERMINAL	
B\$DATE	DS	PL4		DATE STATISTIQUES	
B\$TIME	DS	PL4		HEURE STATISTIQUES	
B\$CUMPAR	DS	CL1		B Binaire HTTP entra	nt
	DS	CL3		filler	
B\$IPADDR	DS	CL40 (was	15)	CALLER IP ADDRESS	
B\$ENTRY	DS	CL8		ENTRY POINT	
B\$TRANS	DS	CL8		TRANSACTION	
B\$RULE	DS	CL8		RULE (default to LIN	E)
B\$STATUS	DS	CL4		HTTP STATUS	
B\$RELAY	DS	CL8		NOM DU RELAY	
B\$SPENT	DS	XL4		Durée d'appel en 1/1	00s
B\$BYTRD	DS	XL4		BYTES RECEIVED	
B\$BYTST	DS	XL4		BYTES SENT	
B\$USERID		CL20		USERID	
B\$PARM	DS	CL16		PARAMETER	
B\$PXYADR		CL40		PROXY IP ADDRESS	
	DRG	BSTATS+255			
LBSTATS	EQU	*-BSTATS		LONGUEUR ENREGISTREM	ENT

Example of output : -

4.2. SMF Support 85

NUMBER OF RECORDS IN ERROR 0								
Date Time SMF ( IP Addresses Callers/Prox. 2022.296 10:48:01 SPI1 192.168:92.35:55500 2022.296 10:48:34 SPI1	y> Entry	Rule	Trans.	Userid	CDE	Duration	Send F	Recei
2022.296 10:48:00 SPT1 192.168.92.35:56501	CLIWHOST	HTTP-CLI	CLI-DIR		304		195	5
2022.296 10:48:01 SPT1 192.168.92.35:56500	CLIWHOST	HTTP-CLI	CLI-90	SPTHOLT	200		10041	
2022.296 10:48:01 SPT1 192.168.92.35:56500	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	
2022.296 10:48:01 SPT1 192.168.92.35:56501	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	
2022.296 10:48:01 SPT1 192.168.92.35:56502	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	
2022.296 10:48:01 SPT1 192.168.92.35:56500	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	
2022.296 10:48:01 SPT1 192.168.92.35:56501	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	5
2022.296 10:48:01 SPT1 192.168.92.35:56502	CLIMHOSI	HITP-CLI	M2H-DIR		304		195	
2022.296 10:48:01 SPT1 192.168.92.35:56501 2022.296 10:48:01 SPT1 192.168.92.35:56500	CLIMHUSI	HITP-LLI	WZH-DIR		304 304		195 195	5 5
2022.296 10:48:01 SPT1 192.168.92.35:56500 2022.296 10:48:01 SPT1 192.168.92.35:56501	CLIMHUSI	HITP-LLI	WZH-DIR		304		195	5
2022.296 10:40:01 SPT1 192.166.92.35:56501 2022.296 10:48:01 SPT1 192.168.92.35:56502	CLIMBOSI	HITTE CLI	WZH-DIR		304		195	5
2022.296 10:40:01 SPT1 192.160.92.35:56501	CLIMMOST	HITP-CLI	WZH-DIR		304		195	5
2022.296 10:40:01 SPT1 192.166.92.35:56501 2022.296 10:48:01 SPT1 192.168.92.35:56501	CLIMHOST	HTTD-CLI	WZH-DIK		304		195	5
2022.296 10:40:01 SPT1 192.166.92.35:56501	CLIMHOST	HTTD-CLI	WZH-DIK		304		195	5
2022.296 10:48:34 SPT1 192.168.92.35:56501	CLIMINST	HTTP-CLT	M2H-DIR		304		195	5
2022.296 10:48:34 SPT1 192.168.92.35:56506	CLIMINST	HTTP-CLT	M2H-DIR		304	5	195	5
2022.296 10:48:34 SPT1 192.168.92.35:56500	CLIWHOST	HTTP-CLT	W2H-DIR		304		195	5
2022.296 10:48:34 SPT1 192.168.92.35:56502	CLTWHOST	HTTP-CLT	W2H-DIR		304		195	5
2022.296 10:48:34 SPT1 192.168.92.35:56502	CLIWHOST	HTTP-CLT	CLI-DIR		304		195	5
2022.296 10:48:34 SPT1 192.168.92.35:56506	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	5
2022.296 10:48:34 SPT1 192.168.92.35:56500	CLIWHOST	HTTP-CLI	W2H-DIR		304	8	195	5
2022.296 10:48:34 SPT1 192.168.92.35:56502	CLIWHOST	HTTP-CLI	W2H-DIR		304	4	195	5
2022.296 10:48:35 SPT1 192.168.92.35:56506	CLIWHOST	HTTP-CLI	W2H-DIR		304	2	195	5
2022.296 10:48:35 SPT1 192.168.92.35:56502	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	
2022.296 10:48:35 SPT1 192.168.92.35:56502	CLIWHOST	HTTP-CLI	W2H-DIR		304		195	
2022.296 13:36:54 SPT1 192.168.92.35:57542	CLIWHOST	HTTP-CLI	W2H-DIR		404		268	
2022.296 13:42:21 SPT1 192.168.92.35:57569	CLIWHOST	HTTP-CLI	CLI-DIR		304		128	
2022.296 13:42:33 SPT1 192.168.92.35:57569	CLIWHOST	HTTP-CLI	CLI-90	SPTHOLT			10638	
2022.296 13:42:33 SPT1 192.168.92.35:57575	CLIWHOST	HITP-CLI	W2H-DIR		304		128	
2022.296 13:42:34 SPT1 192.168.92.35:57569	CLIWHOST	HTTP-CLI			304		128	
2022.296 13:42:34 SPT1 192.168.92.35:57574	CLIWHOST	HTTP-CLI			304	32	128	
2022.296 13:42:34 SPT1 192.168.92.35:57573	CLIWHOST	HTTP-CLI			304		128	4
2022.296 13:42:34 SPT1 192.168.92.35:57576	CLIWHOST	HTTP-CLI			304		128	4
2022.296 13:42:34 SPT1 192.168.92.35:57577 2022.296 13:42:34 SPT1 192.168.92.35:57569	CLIWHOST				304 304		128	4
2022.296 13:42:34 SPT1 192.168.92.35:57569 2022.296 13:42:34 SPT1 192.168.92.35:57573	CLIWHOST				304		128	4
2022.296 13:42:34 SPT1 192.166.92.35:57573 2022.296 13:42:34 SPT1 192.168.92.35:57574	CLIMHOSI	HTTP-CLI HTTP-CLI			304		128 128	4
2022.296 13:42:34 SPT1 192.166.92.35:57574 2022.296 13:42:34 SPT1 192.168.92.35:57575	CLIMHUSI	HTTP-CLI			304		128	4
2022.296 13:42:34 SPT1 192.166.92.35:57575 2022.296 13:42:34 SPT1 192.168.92.35:57575	CLIWHOST				304		128	4
2022.296 13:42:34 SPT1 192.166.92.35:57575 2022.296 13:42:34 SPT1 192.168.92.35:57574	CLIWHOST				304		128	5
2022.296 13:42:34 SPT1 192.168.92.35:57574	CLIWHOST				304		128	5
2022.296 14:02:47 SPT1 192.168.92.35	CLIMHOST	HTTP-CLI			200		243	7
192.168.40.111	CETWINGS		WELL DIN				2.73	
2022.296 14:02:47 SPT1 192.168.92.35	CLIWHOST	HTTP-CLI	W2H-DIR		200	3	243	13
192.168.40.111								
F1=HELP F2=SPLIT F3=END F4=RETURN F5=IFIND	F6=B00K F7=UP F8	B=DOWN F	F9=SWAP	F10=LEFT	F1	1=RIGHT F	12=RETRIE	EVE
						•	•	

**CHAPTER** 

**FIVE** 

### **APPENDIX**

### 5.1 Trademarks

SysperTec, the SysperTec logo, syspertec.com and VIRTEL are trademarks or registered trademarks of SysperTec Communication Group, registered in France and other countries.

IBM, VTAM, CICS, IMS, RACF, DB2, MVS, WebSphere, MQSeries, System z are trademarks or registered trademarks of International Business Machines Corp., registered in United States and other countries.

Adobe, Acrobat, PostScript and all Adobe-based trademarks are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and other countries.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States and other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries. Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service names of others.

# 5.2 Open Source Software

The current VIRTEL Web Access product uses the following open source software:

- jQuery
  Under MIT license https://jquery.org/license/
- jQuery\_UI
  Under MIT license http://en.wikipedia.org/wiki/JQuery UI