



Leaflet for the map: panning, zoom, markers.

CARTO raster tiles for the map layer.

Labels are a separate layer, drawn on top.

A waypoint is a **lat/lng** pair.

?w=40.7391,-73.9905&vt=Add+bike+lane

Each point snaps to the nearest **graph node**.




Two waypoints, one route.

OSRM does the routing, foot profile,
with **Multilevel Dijkstra**.



Drag the line to add a **mid waypoint**.
Tap a waypoint to **delete** it.
First is **start**, last is **end**.
Everything else is derived from the list.

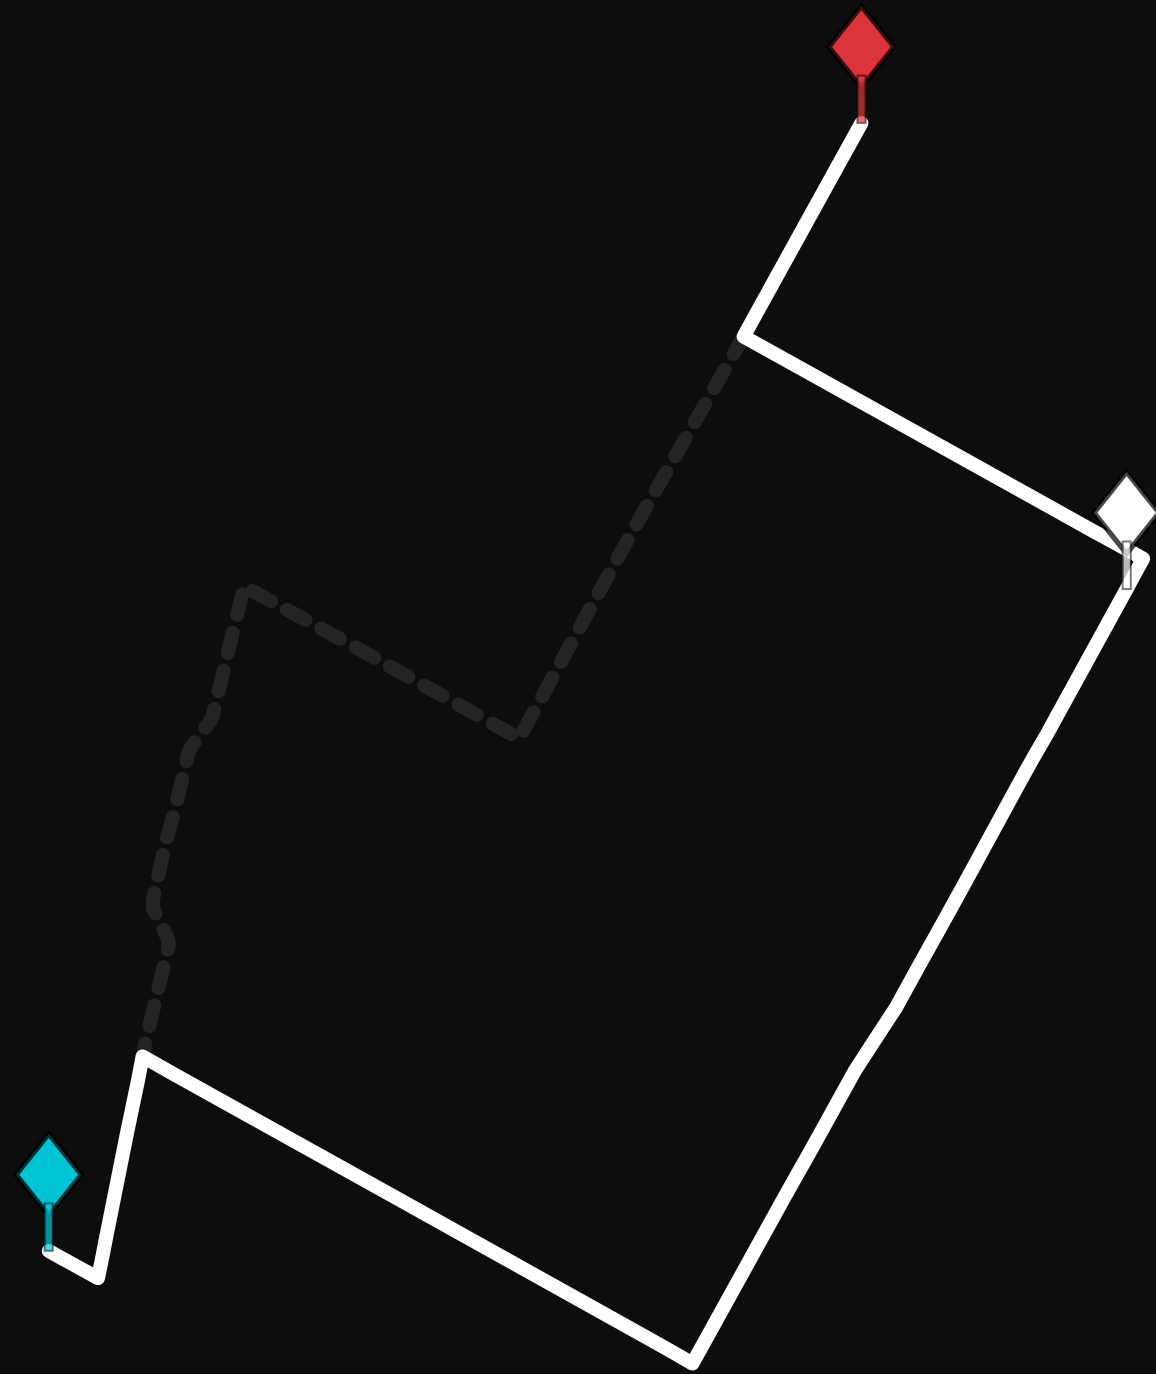


One crossing becomes **5 blocks**:


4 street blocks + 1 intersection.

Each graph edge/node is assigned
to exactly one block.

One device, **one vote per block, per type.**

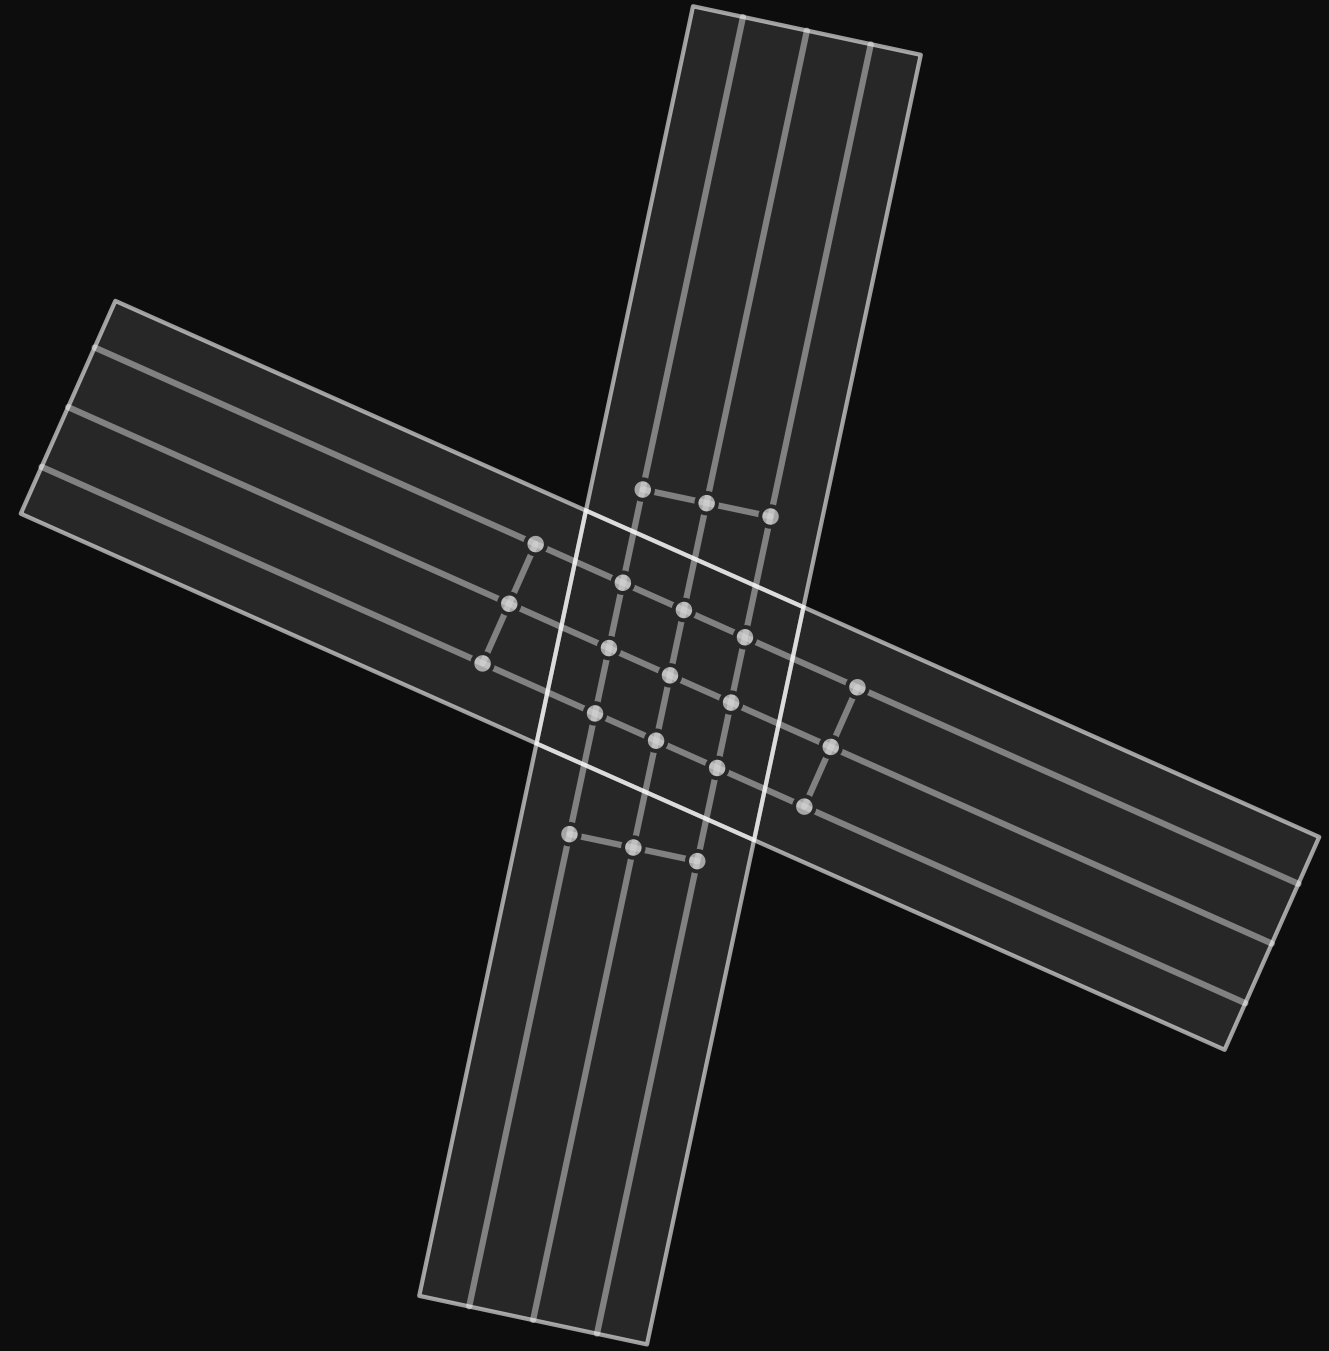

Block heat = **(up votes) - (down votes)**.
Log-scaled and min-max-scaled.

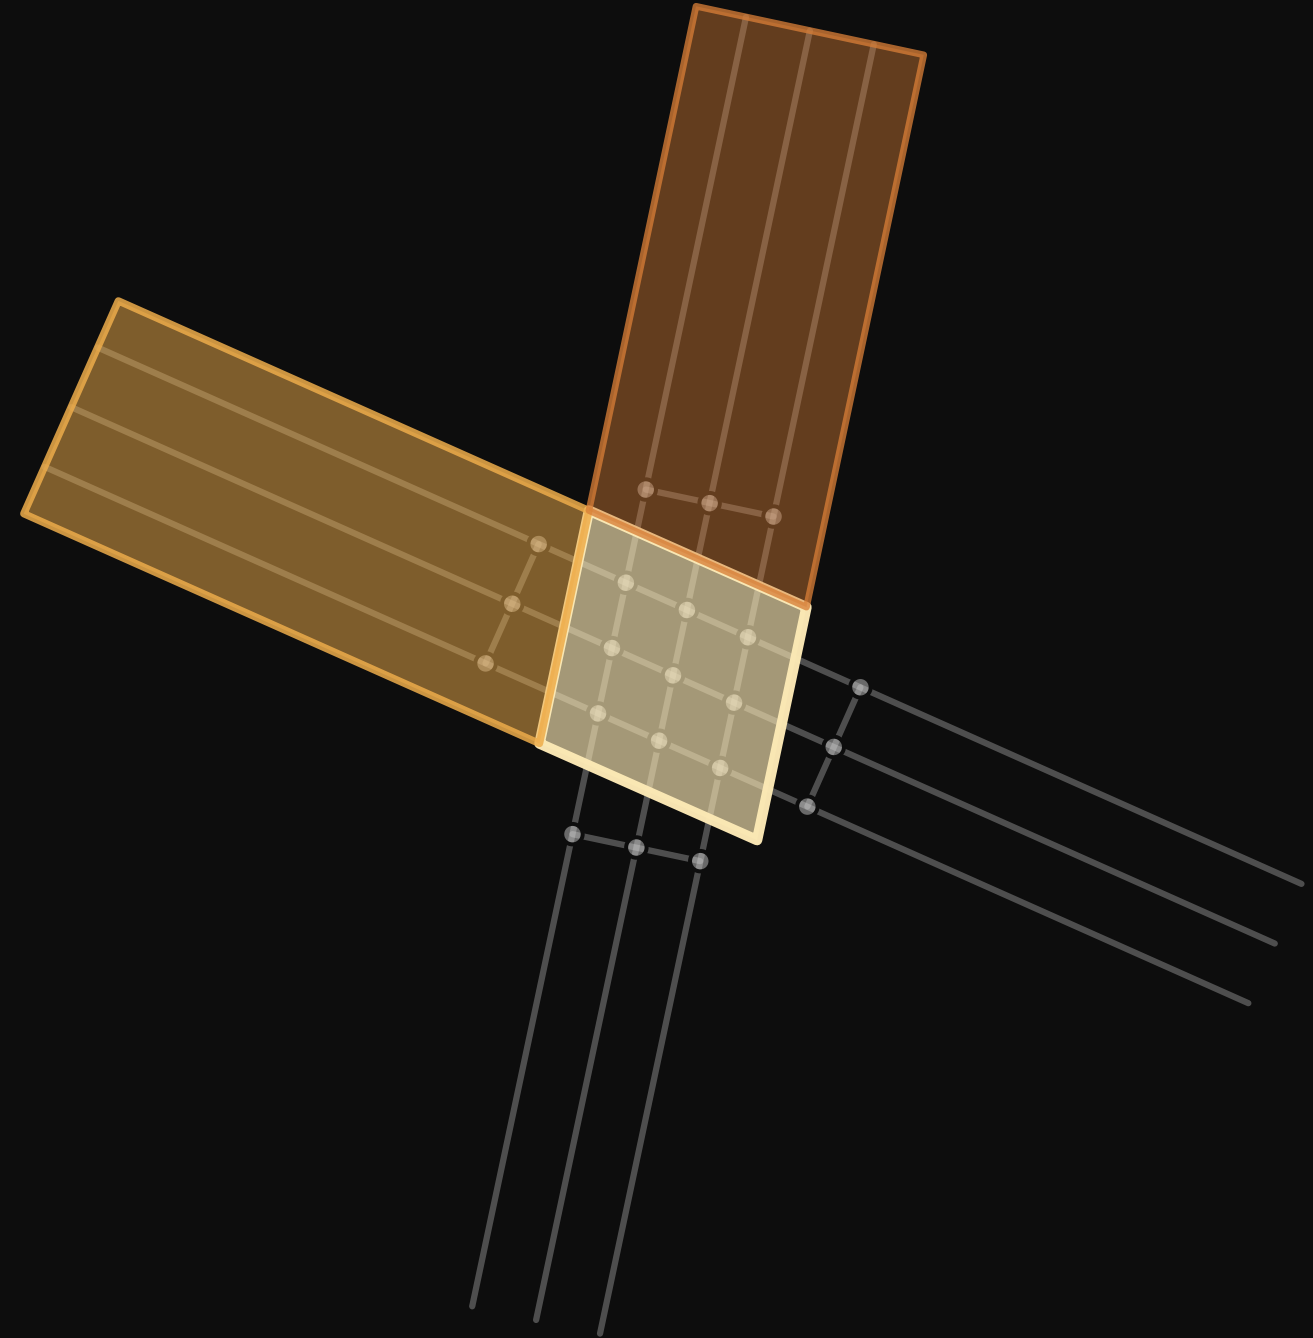


Per vote type, the **6 strongest edges** compete, ranked by **net votes**.

No minimum – one vote can earn a pin.

Same-type pins stay **1 km** apart.

One pin per block, 50 pins per map.

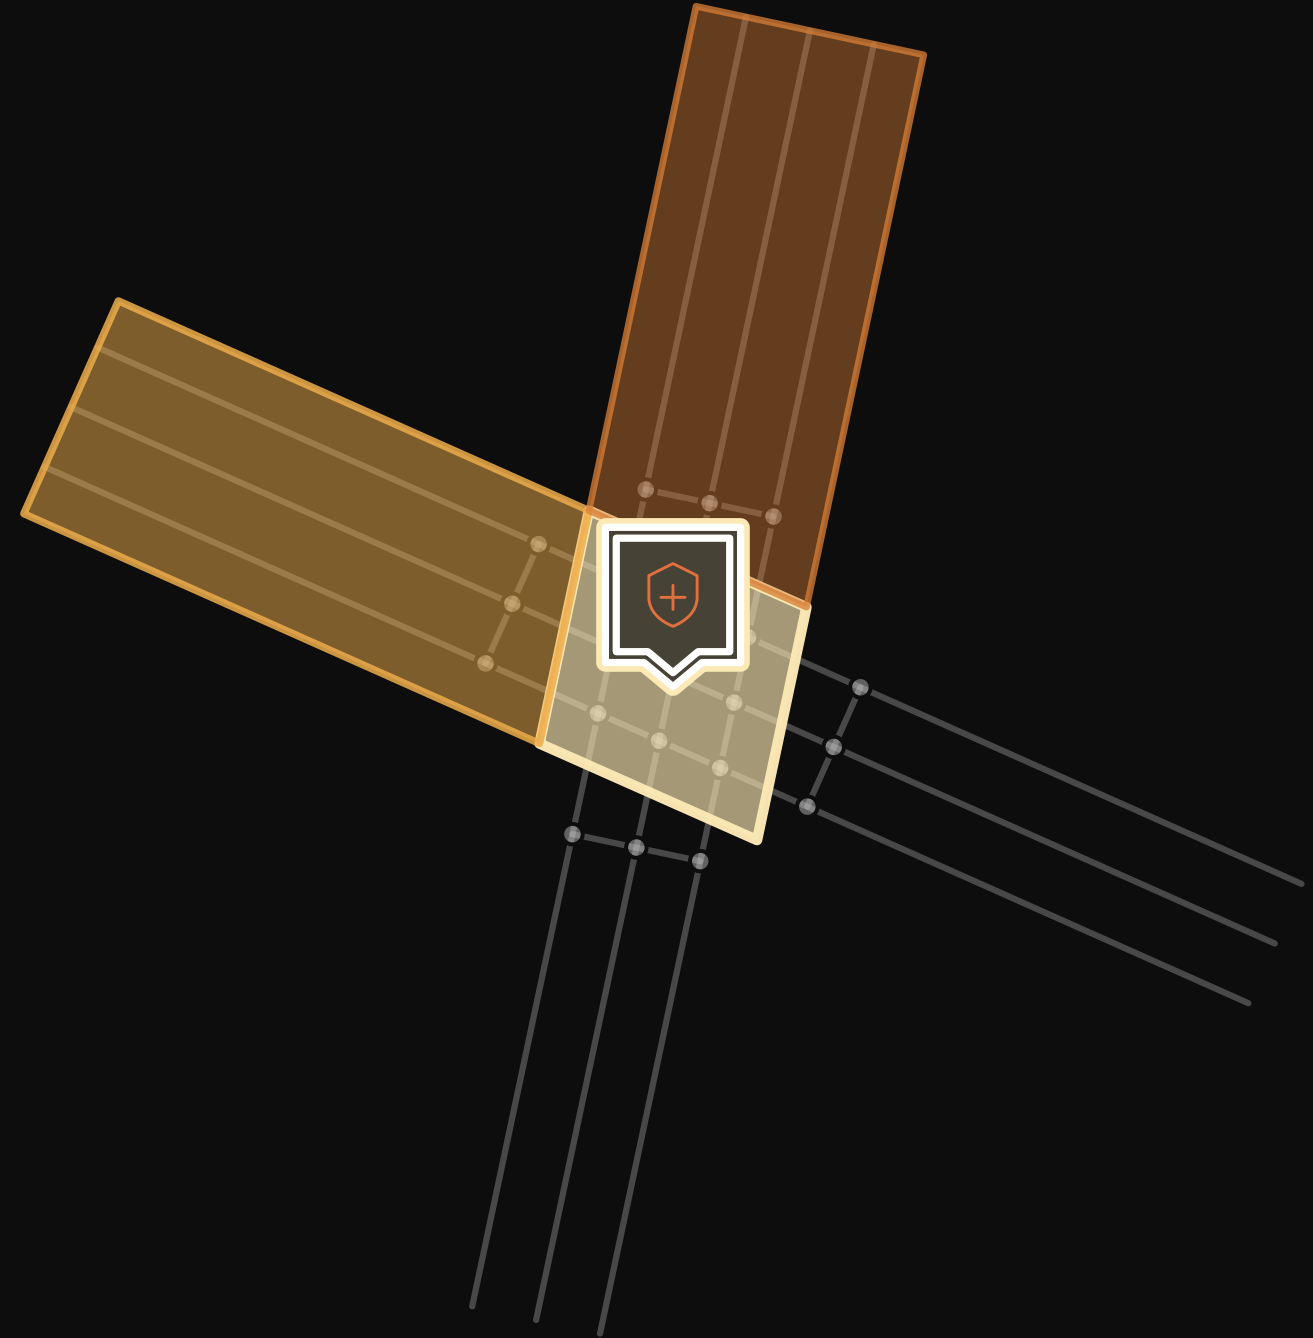

Start at the **highest vote count edge**.
Grow along the strongest neighbor, both ways.
Length budget: **$2700 \text{ m} + 660 \cdot \sqrt{\text{score}}$**
(after some tweaking).
Pin a ghost waypoint where routing diverges.
No more than 5 waypoints.

