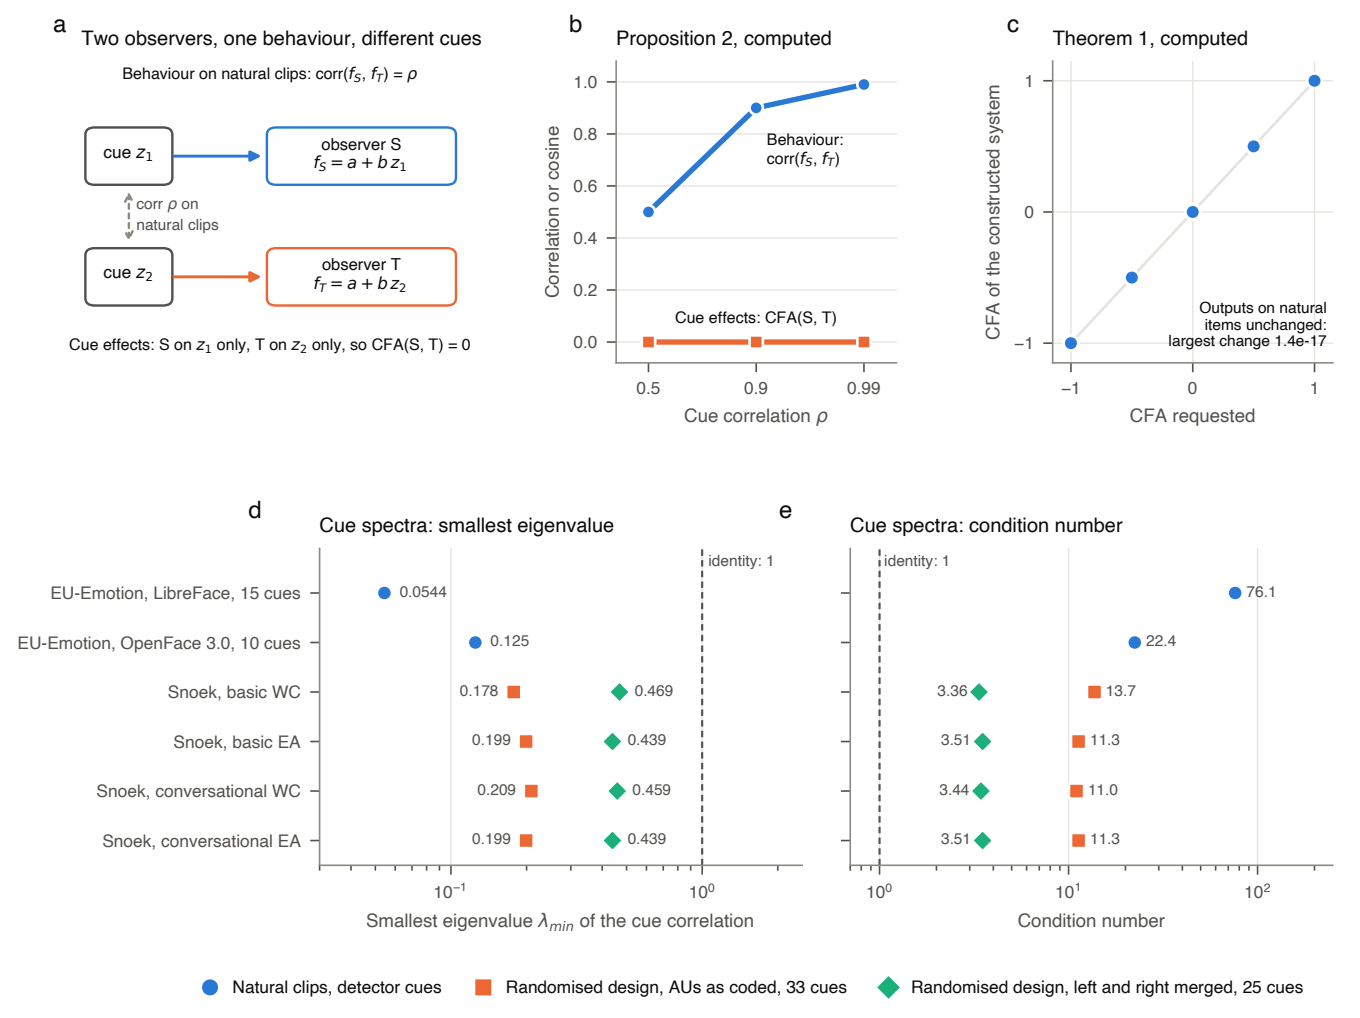
a
Two observers, one behaviour, different cues
Behaviour on natural clips: corr(f_S, f_T) = ρ
cue z_1
observer S
$f_S = a + b\,z_1$
corr ρ on
natural clips
cue z_2
observer T
$f_T = a + b\,z_2$
Cue effects: S on z_1 only, T on z_2 only, so CFA(S, T) = 0
b
Proposition 2, computed
Correlation or cosine
Behaviour:
corr(f_S, f_T)
Cue effects: CFA(S, T)
Cue correlation ρ
c
Theorem 1, computed
CFA of the constructed system
Outputs on natural
items unchanged:
largest change 1.4e-17
CFA requested
d
Cue spectra: smallest eigenvalue
identity: 1
EU-Emotion, LibreFace, 15 cues
EU-Emotion, OpenFace 3.0, 10 cues
Snoek, basic WC
Snoek, basic EA
Snoek, conversational WC
Snoek, conversational EA
0.0544
0.125
0.178
0.469
0.199
0.439
0.209
0.459
0.199
0.439
Smallest eigenvalue λ_{min} of the cue correlation
e
Cue spectra: condition number
identity: 1
76.1
22.4
3.36
13.7
3.51
11.3
3.44
11.0
3.51
11.3
Condition number
Natural clips, detector cues
Randomised design, AUs as coded, 33 cues
Randomised design, left and right merged, 25 cues