

PUSH POSSIBLE™

MANHATTAN SCALE™

SINGLE SIGN-ON GUIDE: OKTA

SINGLE SIGN-ON GUIDE: OKTA

Copyright and Disclaimer

Copyright © 2026 Manhattan Associates, Inc. All rights reserved.

This documentation, as well as the software described in it, is furnished under license and may be used or copied only in accordance with the terms of such license. The information in this documentation is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by Manhattan Associates, Inc. ("Manhattan"). No third-party patent liability is assumed with respect to the use of the information contained herein. While every precaution has been taken in the preparation of this documentation, Manhattan assumes no responsibility for errors or omissions.

EXCEPT WHERE EXPRESSLY PROVIDED OTHERWISE, ALL CONTENT, MATERIALS AND INFORMATION, ARE PROVIDED ON AN "AS IS" AND "AS AVAILABLE" BASIS. MANHATTAN EXPRESSLY DISCLAIMS ALL WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.

Except as permitted by license, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted, in any form by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of Manhattan Associates.

Manhattan Associates is a registered trademark of Manhattan Associates, Inc.

All other brands, products, or services are trademarks, registered trademarks, or service marks of their respective companies or organizations.

Contact Address:

Manhattan Associates, Inc.
2300 Windy Ridge Parkway,
Atlanta, Georgia 30339

<http://www.manh.com/>

Region	Telephone	Email
Americas	+1 877.756.7435 (U.S. and Canada only) +1 404.965.4025	callcenter@manh.com
Asia	(00) 800.988.0885 (China only) +86 21 3311 3499	asiacustomersupport@manh.com
Europe, Middle East, and Africa	+44 (0) 1344 318400 (UK) +31 (0)30 214 3400 (NL)	emeacustomersupport@manh.com
Australia	+61 1300787050	aucustomersupport2@manh.com

Unsure whom to contact? Call +1 404.965.4025 and you will be routed to the appropriate support group.

SINGLE SIGN-ON GUIDE: OKTA

Confidentiality

Rights to the Content of This Work

This material is protected by the Copyright Act of 1976, as amended, as an unpublished work and the foregoing notice and legend shall not be deemed to constitute publication or an intent to publish there under. These materials are proprietary and confidential information of Manhattan Associates, Inc., and may not be disclosed and used only as authorized in the License Agreement and Confidentiality Agreement controlling such disclosure and use.

Modification to the Content of This Work

Manhattan Associates, Inc. reserves the right, at any time and without notice, to change these materials or any of the functions, features or specifications of any of the software described herein. Manhattan Associates shall have no warranty obligation with respect to these materials or the software described herein, except as provided in Manhattan Associates' software license agreement with an authorized licensee.

Trademarks and Copyrights

Manhattan Associates and Manhattan Associates SCALE are trademarks of Manhattan Associates, Inc. All other company and product names may be trademarks of their respective owners. The information contained herein is subject to change without notice.

Revisions

Date	Description	Applies to build
June 22, 2021	Created	Build Number as per GA

Table of Contents

Revisions	3
Overview	1
OKTA.....	2
Prerequisites.....	2
Create Web Application.....	3
Create Native Application	8
API Confidential Application [Optional].....	11
Configure Scopes and Claims	13
Configure Trusted Origins	17
Configure SCALE to use Okta	20

SINGLE SIGN-ON GUIDE: OKTA

Overview

The SCALE metadata web application, RF, web services, Warehouse Mobile, and Desktop applications use single sign-on (SSO) to allow users access to SCALE with their standard company credentials. SCALE accomplishes this using the OAuth 2.0 protocol with OpenID Connect. SCALE supports the following SSO services:

- Microsoft Entra ID (Azure AD)
- Active Directory Federation Services (AD FS)
- OKTA

This guide is for setting up a Single Sign-on with OKTA.

SINGLE SIGN-ON GUIDE: OKTA

OKTA

OKTA provides secure single sign-on cloud software that helps companies manage and secure user authentication for the applications. This also helps the developers to build identity controls into applications, website web services, and devices.

Prerequisites


- Understanding of OIDC and its flows.
- Have API Management licensed within OKTA
- The users need to be added to the group that needs to access the SCALE or TPM.

Create Web Application

The user needs to create a web application for SCALE to work with OKTA,

1. Log in to Okta with admin account credentials.
2. Navigate to the Menu >> Applications.

Figure 1

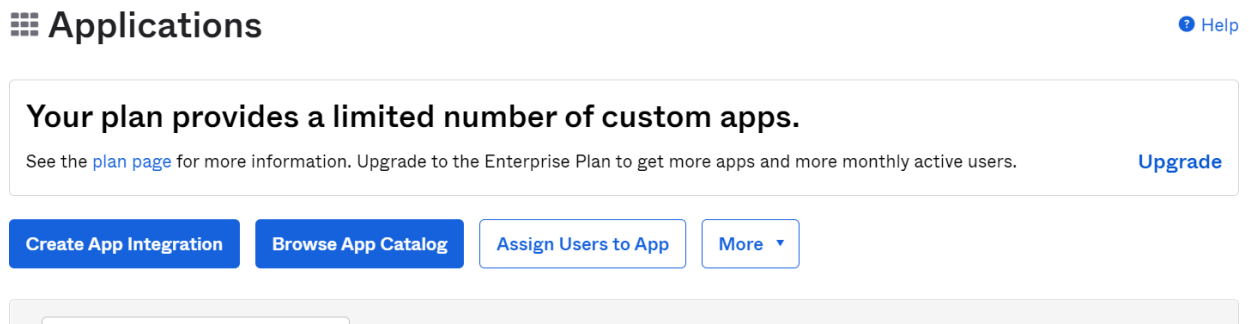

3. Click **Create App Integration** button.
4. In the Create a new app integration page, select Sign-on method as **OIDC-OpenID Connect** and Application type as **Web Application** and click **Next**.

SINGLE SIGN-ON GUIDE: OKTA

Figure 2

Create a new app integration

Sign-on method
[Learn More](#)

- ☒ **OIDC - OpenID Connect**
Token-based OAuth 2.0 authentication for Single Sign-On (SSO) through API endpoints. Recommended if you intend to build a custom app integration with the Okta Sign-In Widget.
- ☐ **SAML 2.0**
XML-based open standard for SSO. Use if the Identity Provider for your application only supports SAML.
- ☐ **SWA - Secure Web Authentication**
Okta-specific SSO method. Use if your application doesn't support OIDC or SAML.
- ☐ **API Services**
Interact with Okta APIs using the scoped OAuth 2.0 access tokens for machine-to-machine authentication.

Application type
What kind of application are you trying to integrate with Okta?

Specifying an application type customizes your experience and provides the best configuration, SDK, and sample recommendations.

- ☒ **Web Application**
Server-side applications where authentication and tokens are handled on the server (for example, Go, Java, ASP.Net, Node.js, PHP)
- ☐ **Single-Page Application**
Single-page web applications that run in the browser where the client receives tokens (for example, Javascript, Angular, React, Vue)
- ☐ **Native Application**
Desktop or mobile applications that run natively on a device and redirect users to a non-HTTP callback (for example, iOS, Android, React Native)

[Cancel](#) [Next](#)

5. Enter an appropriate **App Integration** name. In the **Grant type** sections, select the following check boxes as Client Credential, Implicit (Hybrid), and Authorization Code. By default, the Authorization Code and Implicit is checked.

Figure 3

SINGLE SIGN-ON GUIDE: OKTA

General Settings

App integration name

Scale 2021 Web App

Logo (Optional) ?

Grant type

[Learn More](#)

Client acting on behalf of itself

☒ Client Credentials

Client acting on behalf of a user

☒ Authorization Code

☐ Refresh Token

☒ Implicit (Hybrid)

6. Enter the following URL information,

Sign-in redirect URIs:

- `https://<hostname>/scale/security/postredirecturi`
- `https://<hostname>/tpm/security/postredirecturi`
- `https://<hostname>/scale/security/warehousemobilepostredirecturi/`
- `https://<hostname>/scale/security/login`
- `https://<hostname>/rf/logon.aspx`
- `https://<hostname>/tpm/security/login`

Figure 4

Sign-in redirect URIs

Okta sends the authentication response and ID token for the user's sign-in request to these URIs

[Learn More](#)

`https://<hostname>/scale/security/postredirecturi`

×

`https://<hostname>/tpm/security/postredirecturi`

×

`https://<hostname>/scale/security/warehousemobilepostredirecturi`

×

`https://<hostname>/scale/security/login`

×

`https://<hostname>/rf/logon.aspx`

×

`https://<hostname>/tpm/security/login`

×

+ Add URI

SINGLE SIGN-ON GUIDE: OKTA

Sign-out redirect URIs:

- `https://<hostname>/scale/security/error?resourcekey=MSG_SIGNOUT01&isRF=Y`
- `https://<hostname>/scale/security/error?resourcekey=MSG_SIGNOUT01`
- `https://<hostname>/WarehouseMobile/?messageCode=SIGNOUT02`

Figure 5

The screenshot shows the 'Sign-out redirect URIs (Optional)' configuration page in Okta. On the left, there is a text block explaining that after an application contacts Okta to close a user session, the user is redirected to one of the listed URIs, followed by a 'Learn More' link. On the right, there is a list of three URIs, each in a text box with a delete 'x' button to its right. The URIs are: `https://<hostname>/scale/security/error?resourcekey=MSG_SIGNO`, `https://<hostname>/scale/security/error?resourcekey=MSG_SIGNO`, and `https://<hostname>/WarehouseMobile/?messageCode=SIGNOUT0`. At the bottom of the list is a '+ Add URI' button.

Note: Replace the `<hostname>` with the FQDN of the hostname in the URL.

7. Leave Trusted Origins blank.
8. Set Assignments Controlled Access to “**Allow everyone in your organization to access**” and click on **Save**.
9. A new web application will be created.
10. Make a note of the **Client Id** and **Client Secret** and **OKTA domain available in** the screen page. This information will be used in the future to configure SSO for SCALE,

Figure 6

The screenshot shows the 'Client Credentials' configuration page in Okta. It has a title 'Client Credentials' and an 'Edit' link in the top right. There are two main fields: 'Client ID' and 'Client secret'. The 'Client ID' field contains a text box with a generated ID and a copy icon; below it is the text 'Public identifier for the client that is required for all OAuth flows.' The 'Client secret' field contains a text box with a masked secret and a copy icon; below it is the text 'Secret used by the client to exchange an authorization code for a token. This must be kept confidential! Do not include it in apps which cannot keep it secret, such as those running on a client.'

SINGLE SIGN-ON GUIDE: OKTA

Figure 7

General Settings

Edit

Okta domain

dev- .okta.com

Create Native Application

1. Navigate to **Menu >> Applications** and click the **Create App Integration**
2. Select Sign-on method as **OIDC-OpenID Connect** and Application type as **Native Application** and click **Next**

Figure 8

The screenshot shows a modal window titled "Create a new app integration" with a search bar at the top. It is divided into two main sections: "Sign-on method" and "Application type".

Sign-on method

- ☒ **OIDC - OpenID Connect**
Token-based OAuth 2.0 authentication for Single Sign-On (SSO) through API endpoints. Recommended if you intend to build a custom app integration with the Okta Sign-In Widget.
- ☐ **SAML 2.0**
XML-based open standard for SSO. Use if the Identity Provider for your application only supports SAML.
- ☐ **SWA - Secure Web Authentication**
Okta-specific SSO method. Use if your application doesn't support OIDC or SAML.
- ☐ **API Services**
Interact with Okta APIs using the scoped OAuth 2.0 access tokens for machine-to-machine authentication.

Application type

What kind of application are you trying to integrate with Okta?

Specifying an application type customizes your experience and provides the best configuration, SDK, and sample recommendations.


- ☐ **Web Application**
Server-side applications where authentication and tokens are handled on the server (for example, Go, Java, ASP.Net, Node.js, PHP)
- ☐ **Single-Page Application**
Single-page web applications that run in the browser where the client receives tokens (for example, Javascript, Angular, React, Vue)
- ☒ **Native Application**
Desktop or mobile applications that run natively on a device and redirect users to a non-HTTP callback (for example, iOS, Android, React Native)

At the bottom right, there are "Cancel" and "Next" buttons.

3. Enter the App Integration name and select the Grant Type as **Refresh Token**. Authorization Code will be selected by default (if not select it).

Figure 9

SINGLE SIGN-ON GUIDE: OKTA

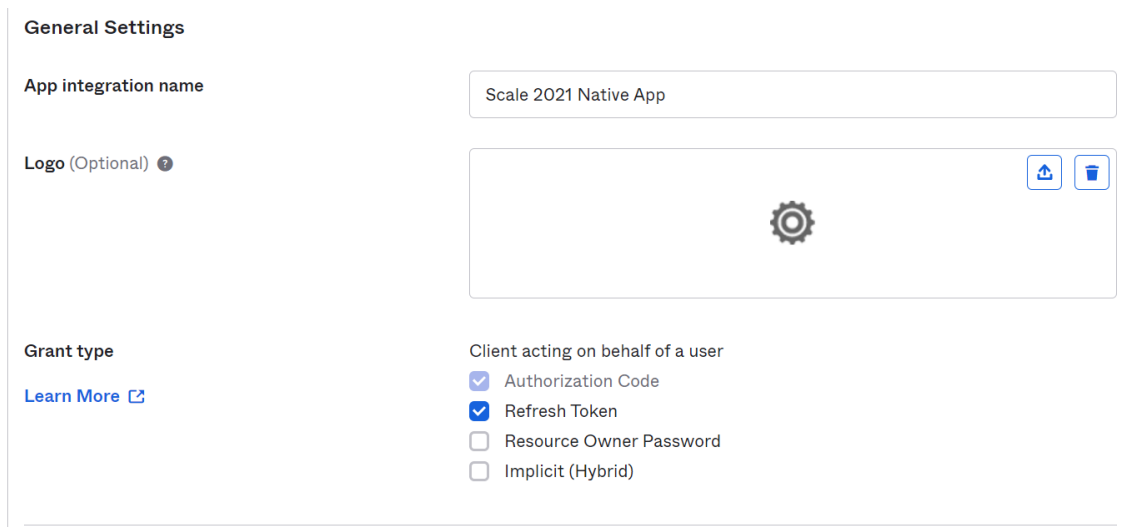

The screenshot shows the 'General Settings' page for an application. The 'App integration name' field contains 'Scale 2021 Native App'. The 'Logo (Optional)' field has a gear icon and upload/delete buttons. Under 'Grant type', the 'Client acting on behalf of a user' section is expanded, showing 'Authorization Code' and 'Refresh Token' selected with checkboxes, and 'Resource Owner Password' and 'Implicit (Hybrid)' unselected.

General Settings

App integration name: Scale 2021 Native App

Logo (Optional) ⓘ

Grant type

[Learn More](#) ⓘ

Client acting on behalf of a user


- ☒ Authorization Code
- ☒ Refresh Token
- ☐ Resource Owner Password
- ☐ Implicit (Hybrid)

4. Enter the following URI information **Sign-in redirect URIs**

https://<hostname>/scale/security/postredirecturi

https://<hostname>/scale/security/warehousemobilepostredirecturi/

Figure 10

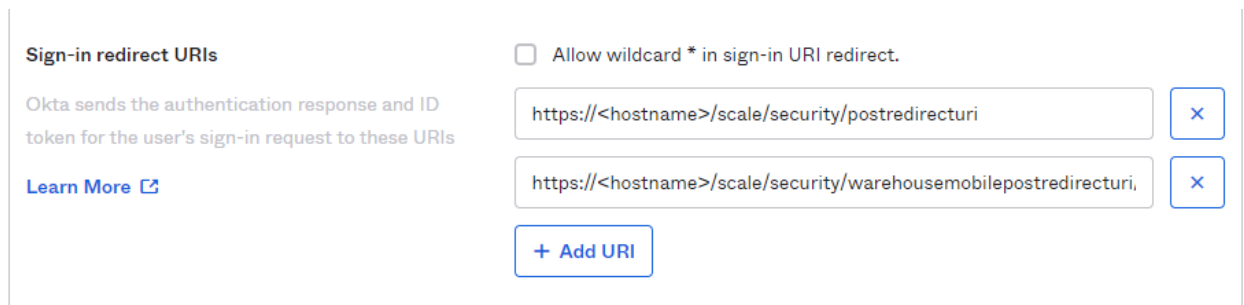

The screenshot shows the 'Sign-in redirect URIs' configuration page. It includes a checkbox for 'Allow wildcard * in sign-in URI redirect.' which is unchecked. There are two input fields containing the URLs 'https://<hostname>/scale/security/postredirecturi' and 'https://<hostname>/scale/security/warehousemobilepostredirecturi,' each with a delete button (X). At the bottom is an '+ Add URI' button.

Sign-in redirect URIs

Okta sends the authentication response and ID token for the user's sign-in request to these URIs

[Learn More](#) ⓘ

☐ Allow wildcard * in sign-in URI redirect.

https://<hostname>/scale/security/postredirecturi

https://<hostname>/scale/security/warehousemobilepostredirecturi,

+ Add URI

Sign-out redirect URIs. Leave it blank.

Note: replace the <hostname> with the FQDN of the hostname in the URL.

- Set Assignments Controlled Access to **“Allow everyone in your organization to access”** and click **Save**.
- A new native application will be created.
- Make note of the **Native client id** on the next page which will be used later to configure SSO for SCALE. When you create the app, you choose the application type as Native Application hence here the **Client ID** will be considered as **Native Client ID**

SINGLE SIGN-ON GUIDE: OKTA

Figure 11

Client Credentials [Edit](#)

Client ID

Public identifier for the client that is required for all OAuth flows.

Client authentication

- ☒ **Use PKCE (for public clients)**
Uses Proof Key for Code Exchange (PKCE) instead of a client secret. A one-time key is generated by the client and sent with each request. Instead of proving the identity of a client, this ensures that only the client which requested the token can redeem it.
- ☐ **Use Client Authentication**
Not secure for distributed native apps. A client secret is embedded in the client and is sent with requests, proving the identity of the client.

API Confidential Application [Optional]

This is an optional application only required if custom code like MHE, exit points, Azure functions, and host system, needs to call SCALE API marked as SCALEUser role. This is OAuth 2.0 client credentials grant flow. The SCALEAPI user needs to be manually created in the SCALE User Profile configurations to make use of this flow. Below are the steps to create this application.

1. Navigate to the menu and click on applications and click on Create App Integration
2. Select Sign-on method as OIDC-OpenID Connect and Application type as Web Application and click next.

Figure 12

Create a new app integration

Sign-on method
[Learn More](#)

- ☒ **OIDC - OpenID Connect**
Token-based OAuth 2.0 authentication for Single Sign-On (SSO) through API endpoints. Recommended if you intend to build a custom app integration with the Okta Sign-In Widget.
- ☐ **SAML 2.0**
XML-based open standard for SSO. Use if the Identity Provider for your application only supports SAML.
- ☐ **SWA - Secure Web Authentication**
Okta-specific SSO method. Use if your application doesn't support OIDC or SAML.
- ☐ **API Services**
Interact with Okta APIs using the scoped OAuth 2.0 access tokens for machine-to-machine authentication.

Application type
What kind of application are you trying to integrate with Okta?

Specifying an application type customizes your experience and provides the best configuration, SDK, and sample recommendations.


- ☒ **Web Application**
Server-side applications where authentication and tokens are handled on the server (for example, Go, Java, ASP.Net, Node.js, PHP)
- ☐ **Single-Page Application**
Single-page web applications that run in the browser where the client receives tokens (for example, Javascript, Angular, React, Vue)
- ☐ **Native Application**
Desktop or mobile applications that run natively on a device and redirect users to a non-HTTP callback (for example, iOS, Android, React Native)

[Cancel](#) [Next](#)

SINGLE SIGN-ON GUIDE: OKTA

3. Give the App Integration name and choose the grant type as Client Credential. Authorization Code will be selected by default (if not select it).

Figure 13

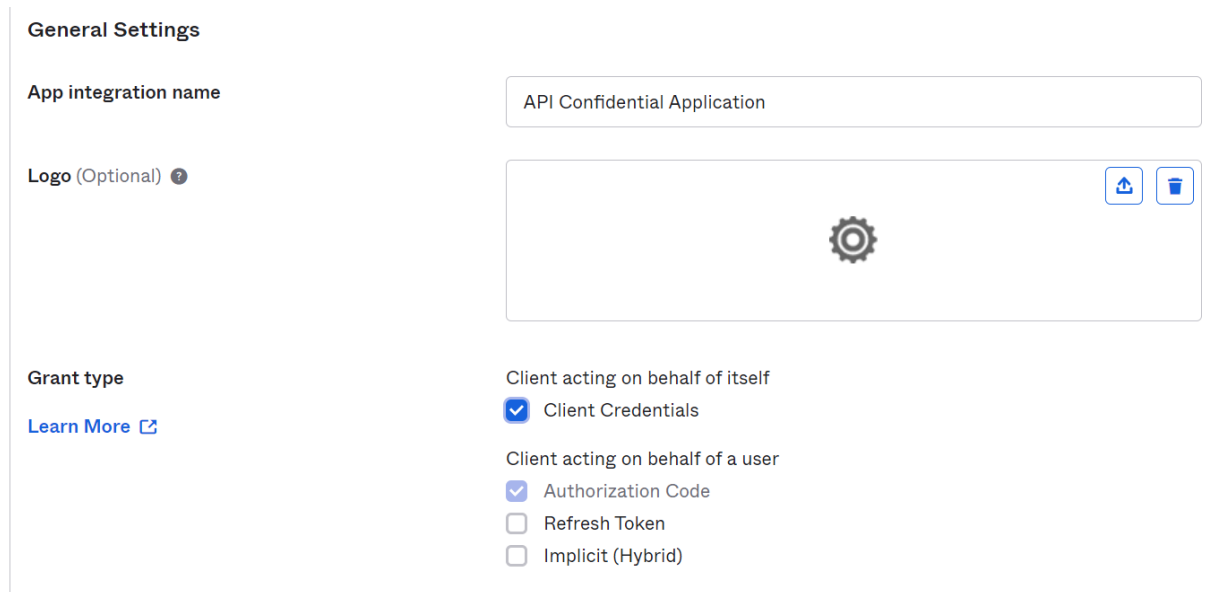

The screenshot shows the 'General Settings' section of an Okta application integration configuration. The 'App integration name' field is set to 'API Confidential Application'. The 'Logo (Optional)' field is empty, showing a gear icon and upload/delete buttons. Under 'Grant type', 'Client acting on behalf of itself' is selected with 'Client Credentials' as the grant type. 'Client acting on behalf of a user' is also shown with 'Authorization Code' as the grant type. A 'Learn More' link is present next to the 'Grant type' label.

General Settings

App integration name: API Confidential Application

Logo (Optional) 

Grant type

[Learn More](#) 

Client acting on behalf of itself

☒ Client Credentials

Client acting on behalf of a user

☒ Authorization Code

☐ Refresh Token

☐ Implicit (Hybrid)


4. For this application, we don't need any Sign-in redirect and Sign-out redirect URIs but there is a validation on the portal hence let it be the default.
5. Leave Trusted Origins blank.
6. Set Assignments Controlled Access to “**Allow everyone in your organization to access**” and click on **Save**.
7. Make a note of the **Client ID** and **Client Secret**.

Note: Scale does not keep these values, the program which will call Scale APIs using SCALEAPI user will need it to generate the token.

Configure Scopes and Claims


1. Navigate to **Menu >> Security >> API**.
2. Click the Authorization server tab and then click the Name. For example: click on default as shown in the image below.

Figure 14

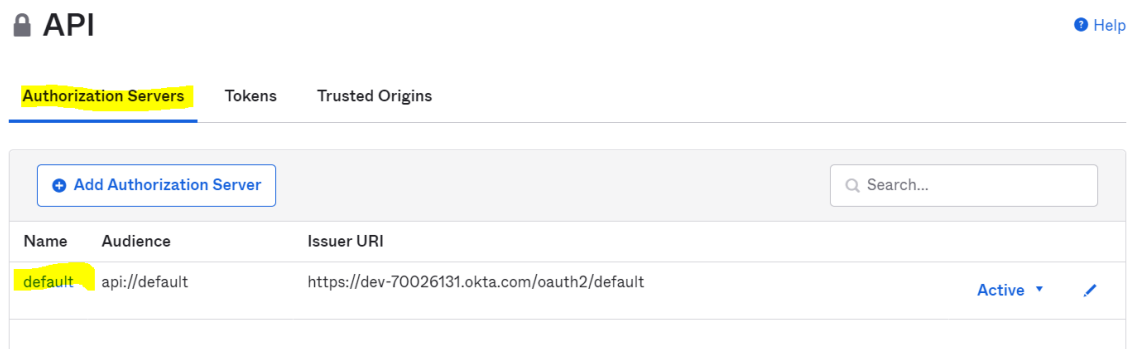

3. It is mandatory to have Audience as **api://default**: It is recommended we do not change it. Make a note of the issuer URI. Use the Scope and Claims tab for configurations.

Figure 15

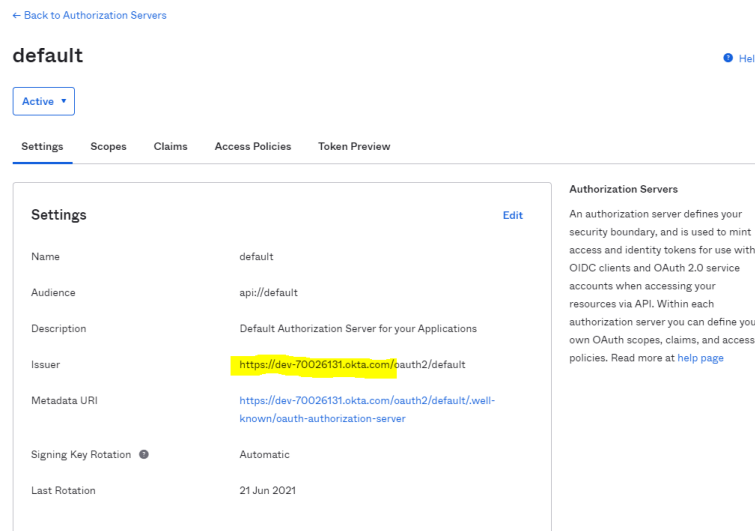

4. Go to the Scope tab section and add the below scopes,
 - a. Confidential

Figure 14

SINGLE SIGN-ON GUIDE: OKTA

Add Scope

Name

confidential

For example: email

Display phrase ?

For example: Access your email
40 characters remaining

Description ?

For example: This allows you to use your email to login to the app

User consent ?

☐ Require user consent for this scope
☐ Block services from requesting this scope

Default scope

☐ Set as a default scope

Metadata

☐ Include in public metadata

Create

Cancel

b. Customwebapi

Figure 16

Add Scope

Name

customwebapi

For example: email

Display phrase ?

For example: Access your email
40 characters remaining

Description ?

For example: This allows you to use your email to login to the app

User consent ?

☐ Require user consent for this scope
☐ Block services from requesting this scope

Default scope

☐ Set as a default scope

Metadata

☐ Include in public metadata

Create

Cancel

SINGLE SIGN-ON GUIDE: OKTA

5. Go to the **Claims** tab section and add the below claims,

a. **SCALEUSER Role**

Name - roles

Include in token type - ID Token

Value -

```
isMemberOfGroupNameStartsWith("<<CONFIGSCALEGROUPNAME>>") ?  
{ "SCALEUSER" , "CONFIGUSER" : isMemberOfGroupNameStartsWith("  
<<SCALEUSERGROUPNAME>>") ? "SCALEUSER" :  
isMemberOfGroupNameStartsWith("<<TPMUSERGROUPNAME>>  
") ? "TPMUSER" : ""
```

Replace the <<SCALEUSERGROUPNAME>> name with the actual Okta group name (SCALE user access group) and replace the <<TPMUSERGROUPNAME>> name with the actual Okta group name (TPM user access group) and replace the <<CONFIGSCALEGROUPNAME>> with the actual Okta group name (CONFIG user access group.)

Figure 17

Add Claim

Name: roles

Include in token type: ID Token, Always

Value type: Expression

Value: `isMemberOfGroupName("scaleusers") ? "SCALEUSER"`
[Expression Language Reference](#)

Disable claim: ☐ Disable claim

Include in: ☒ Any scope, ☐ The following scopes:

Create Cancel

b. **UPN**

Name – upn

Include in token type- ID Token

Value- user.email

Figure 18

SINGLE SIGN-ON GUIDE: OKTA

Add Claim

Name: upn

Include in token type: ID Token Always

Value type: Expression

Value: user.email
[Expression Language Reference](#)

Disable claim: ☐ Disable claim

Include in: ☒ Any scope
☐ The following scopes:

Create Cancel

- c. **UPN**
Name – upn
Include in token type – Access Token
Value- user.email

Figure 19

Add Claim

Name: upn

Include in token type: Access To... Always

Value type: Expression

Value: user.email
[Expression Language Reference](#)

Disable claim: ☐ Disable claim

Include in: ☒ Any scope
☐ The following scopes:

Create Cancel

SINGLE SIGN-ON GUIDE: OKTA

Note: The UPN as a claim added twice to include in both the token type ID Token and Access Token

d. **Confidential role**

Name – roles

Include in token type – Access Token

Value - app.clientId == "<<Client_ID>>" ? "Confidential":"SCALEUSER"

Included in – customwebapi, open id (type in text box and select the suggested one)

Figure 20

Add Claim

Name: roles

Include in token type: Access To... Always

Value type: Expression

Value: app.clientId == "<<Client_ID>>" ? "Confidential":"SCALEUSER"
[Expression Language Reference](#)

Disable claim: ☐ Disable claim

Include in: ☐ Any scope ☒ The following scopes:
customwebapi x openid x


Create Cancel

Configure Trusted Origins

1. Navigate back to **Trusted Origin** tab under API and select **Redirect**

Figure 21

SINGLE SIGN-ON GUIDE: OKTA

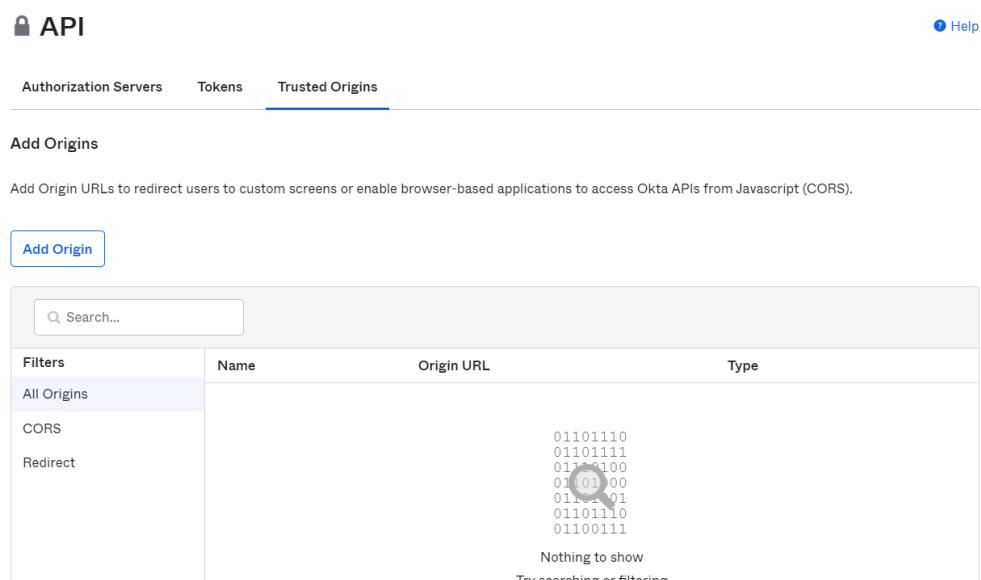

2. Click **Add Origin** button and add the following FQDN of the server URL as below,
- Name: Organization origin name (any)
 - Origin URL: <https://<Servername>>
 - Type: Redirect

Figure 22

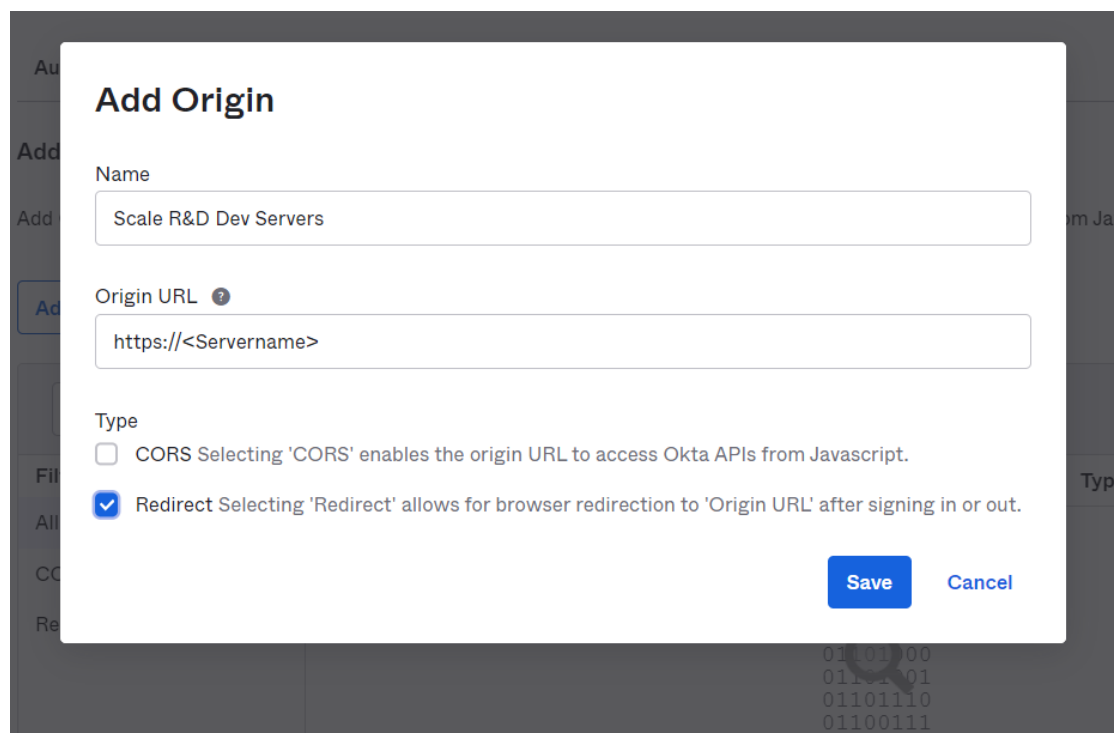


Figure 23

SINGLE SIGN-ON GUIDE: OKTA

 API

[Help](#)

Authorization Servers

Tokens

Trusted Origins

Add Origins

Add Origin URLs to redirect users to custom screens or enable browser-based applications to access Okta APIs from Javascript (CORS).

Add Origin

Q Search...

Filters

All Origins

CORS

Redirect

Name	Origin URL	Type
Scale R&D Dev Servers	https:// i.com	Redirect

Configure SCALE to use Okta

For SCALE to use Okta, we can configure SSO using the SCALE PowerShell module.

1. Open PowerShell on the SCALE application server as an administrator.
2. Run command `Set-SCALESingleSignOn`
3. Provide the values as follows:
 - **AuthenticationInstance:** The OKTA domain
 - **ClientId:** The client id what you noted while creating the web application
 - **Domain:** (Leave it blank)
 - **TenantId:** oauth2/default
 - **NativeClientId:** The client id that you noted while creating the Native Application
 - **ConfidentialClientId:** The client id that you noted while creating the web application
 - **Key:** The client secret what you noted while creating the web application
 - **APICConfidentialClientId:** (Leave it blank)
 - **EnvironmentName:** This is the name of the environment you want to update this SSO value. An empty string means Default Database.

Figure 24



```
PS C:\Windows\system32> Set-SCALESingleSignOn
cmdlet Set-SCALESingleSignOn at command pipeline position 1
Supply values for the following parameters:
AuthenticationInstance: https://dev-70026131.okta.com/
ClientId: 
Domain: 
TenantId: oauth2/default
NativeClientId: 
ConfidentialClientId: 
APICConfidentialClientId: 
Key: 
EnvironmentName: 
PS C:\Windows\system32>
```

Note: Once we update the SSO values it is mandatory to do Reset (Run %SCALE_HOME%/reset.bat) for the values to be reflected.

Configure load balancer.

1. Open the SCALE toolbox as an admin user.
2. Navigate to System Tools and double-click the **High Availability** option

Figure 25

SINGLE SIGN-ON GUIDE: OKTA


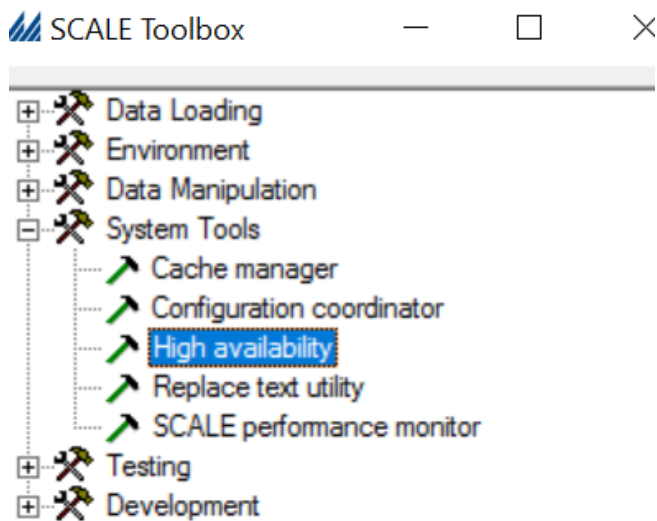



Figure 26

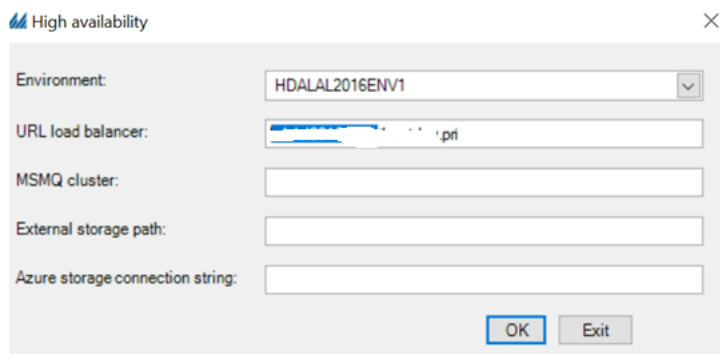

3. Now open a browser and navigate to the SCALE application using the full domain name (i.e. <https://hostname/SCALE/security/login>). You will be redirected to [OKTA](#) and asked for your domain login id and password if not logged in with your domain account already.

Figure 27

SINGLE SIGN-ON GUIDE: OKTA

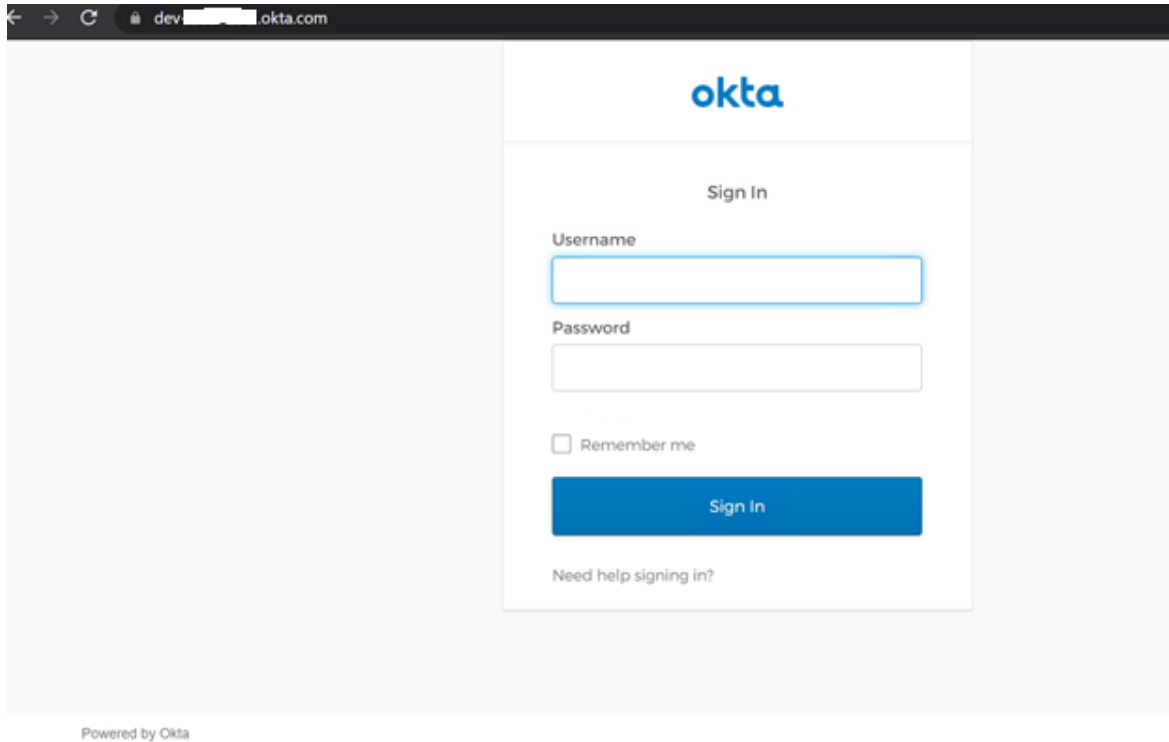

Upgrading customer

Customer Upgrading to 2023 or above that

If you are upgrading SCALE to 2023 or above, please follow step 5 under Configure Scopes and Claims
To add CONFIGUSER