




MANUAL DE DEPLOY CON GITHUB Y RENDER

Paso 1

Pantalla principal de Render.

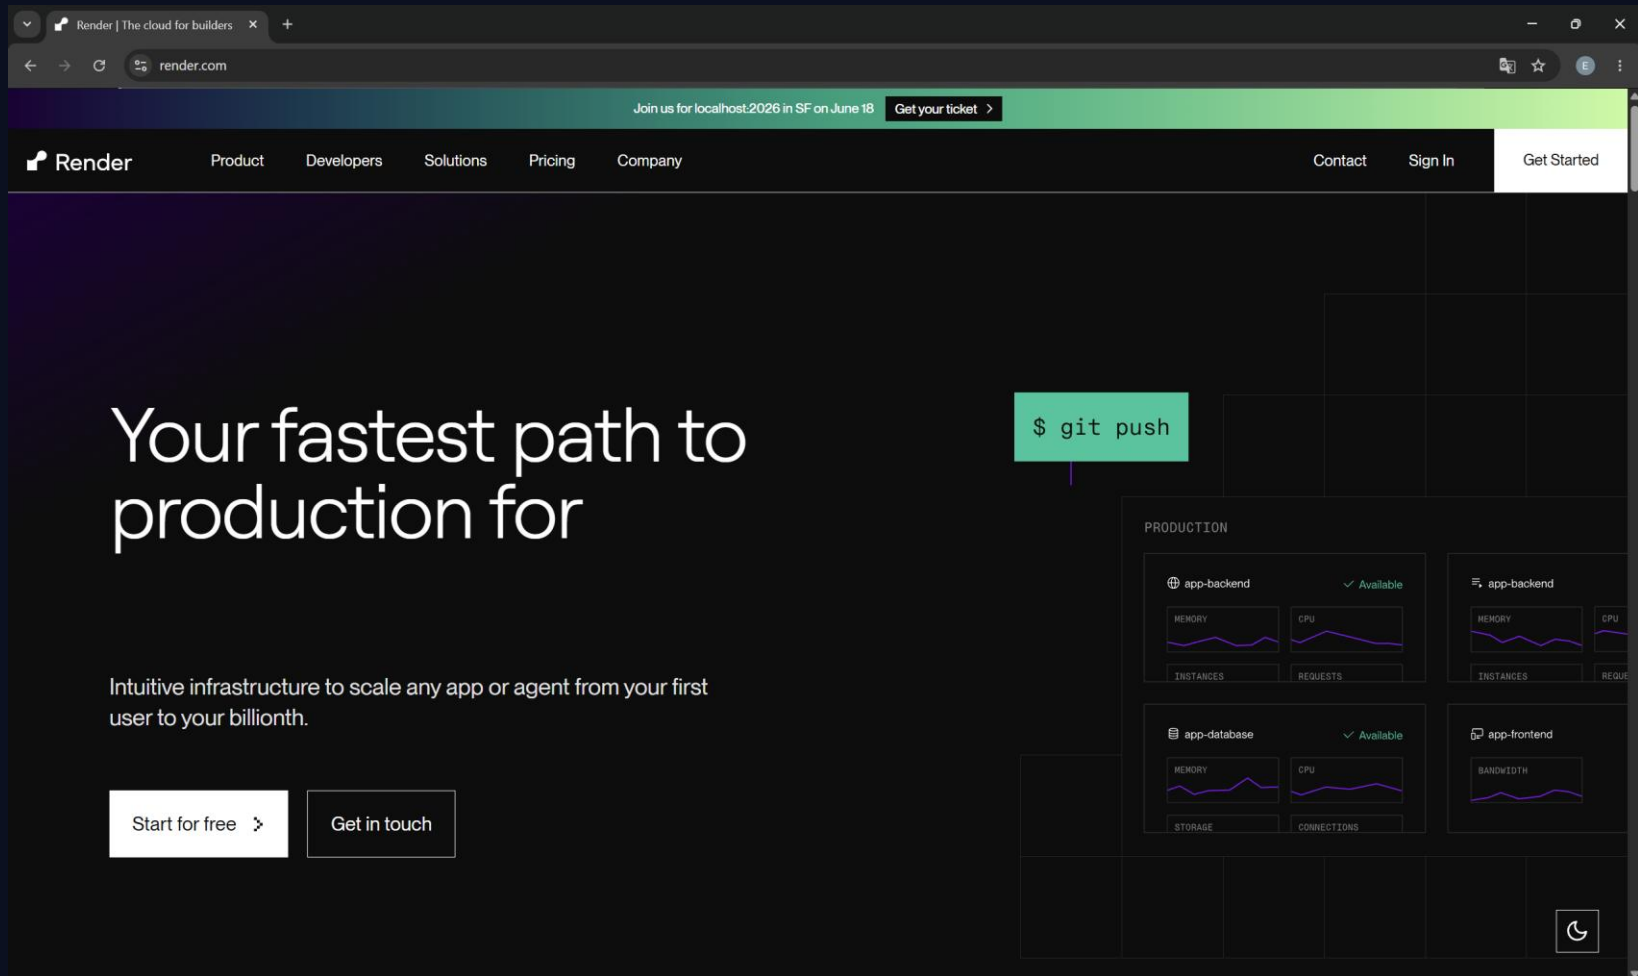

Paso 2

Inicio de sesión en Render.

 Render

Sign In to Render

 GitHub

 GitLab

 Bitbucket

 Google

or

Email

Password

Sign in


Sign in with SSO

Need an account? [Sign up](#)

Forgot your password? [Reset it](#)

Paso 3

Verificación del correo electrónico.

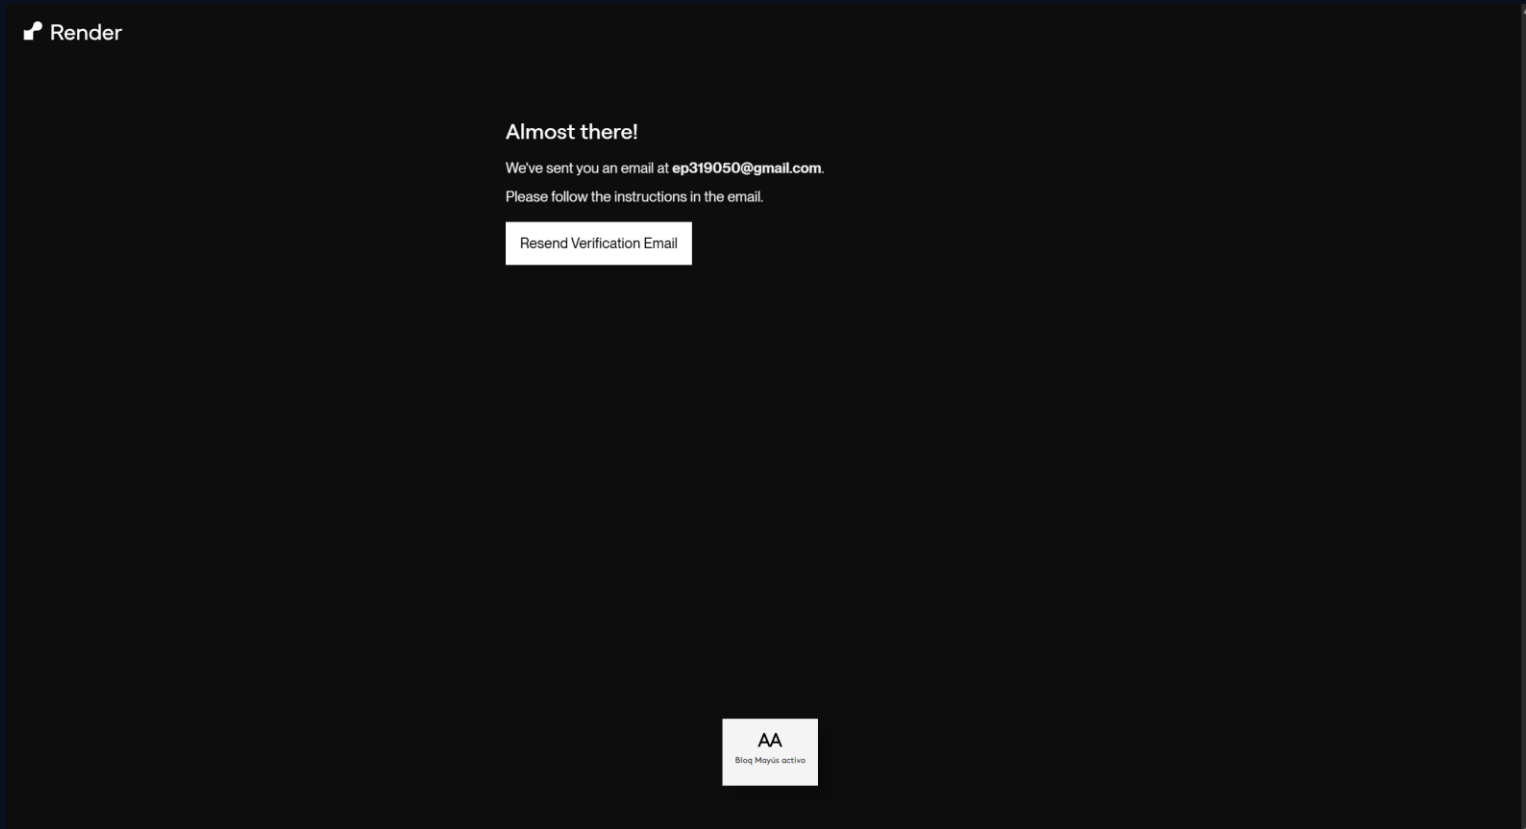

Paso 4

Creación del workspace.

 Render

Create a new workspace

Workspaces are shared areas where teams deploy and operate their code

What would you like to call your workspace? Optional

What will you use this workspace for?

☒ Work

☐ Personal projects

☐ Other

How many developers (including yourself) will be working together?

☒ Just me

☐ 2-10

☐ 11-50

☐ 51-150


☐ More than 150

[Next →](#)

[Skip Survey](#)


Paso 5

Selecciona Static Sites

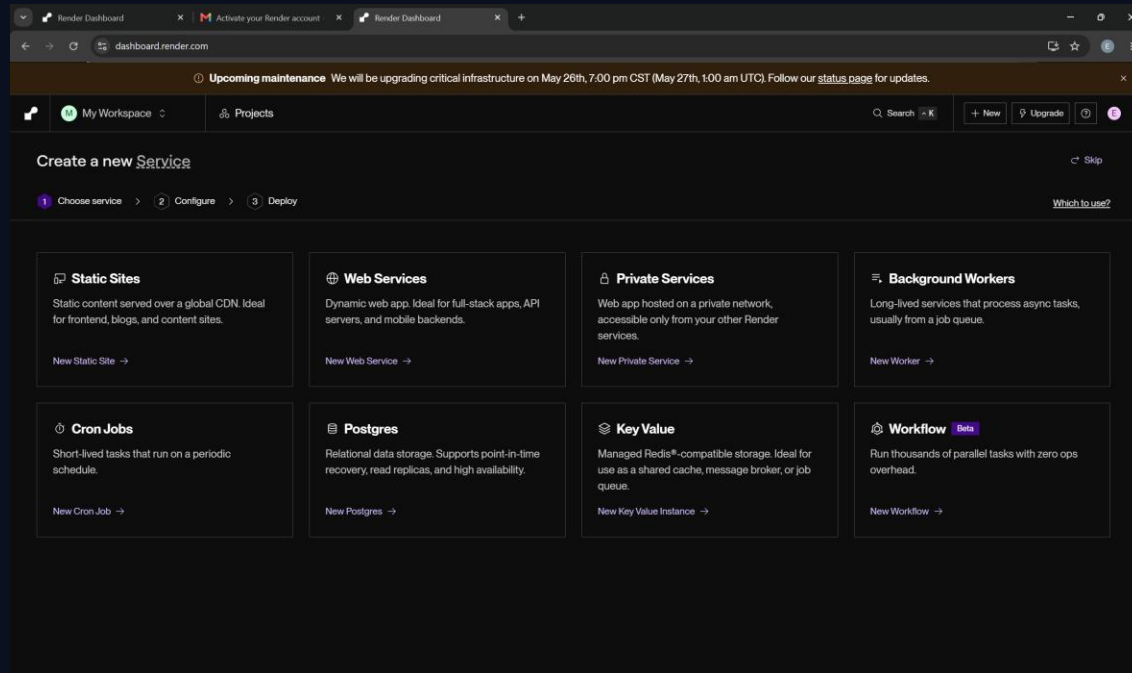


Paso 6

Autorización de GitHub.

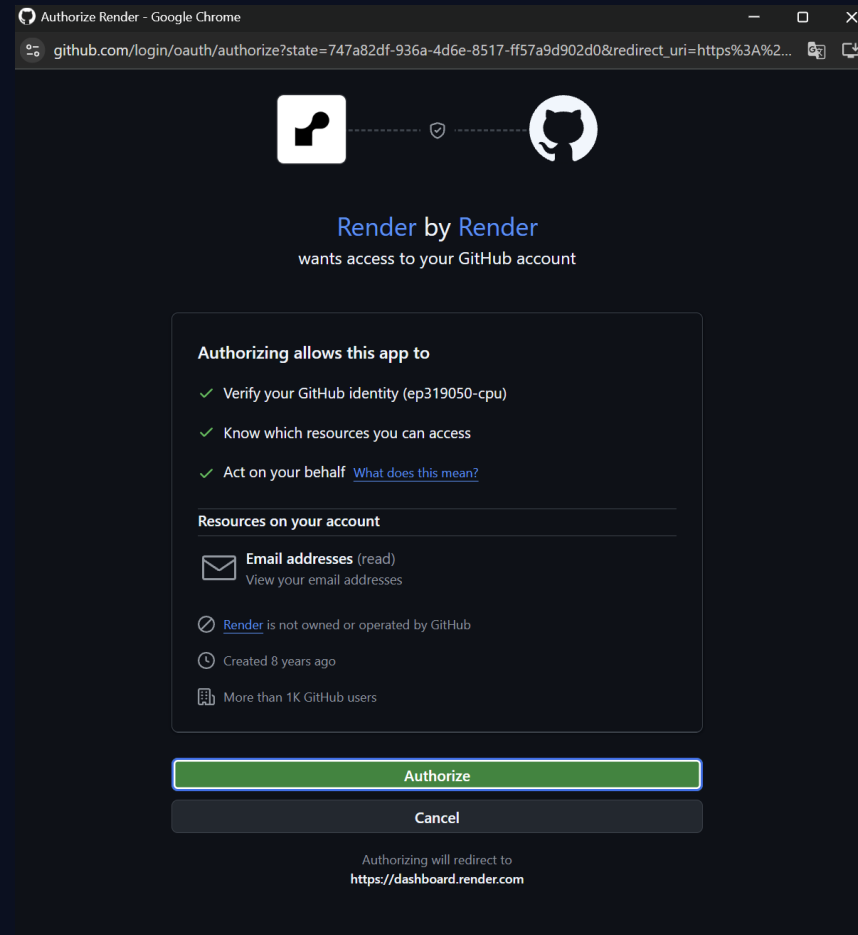

Paso 7

Selección del repositorio.

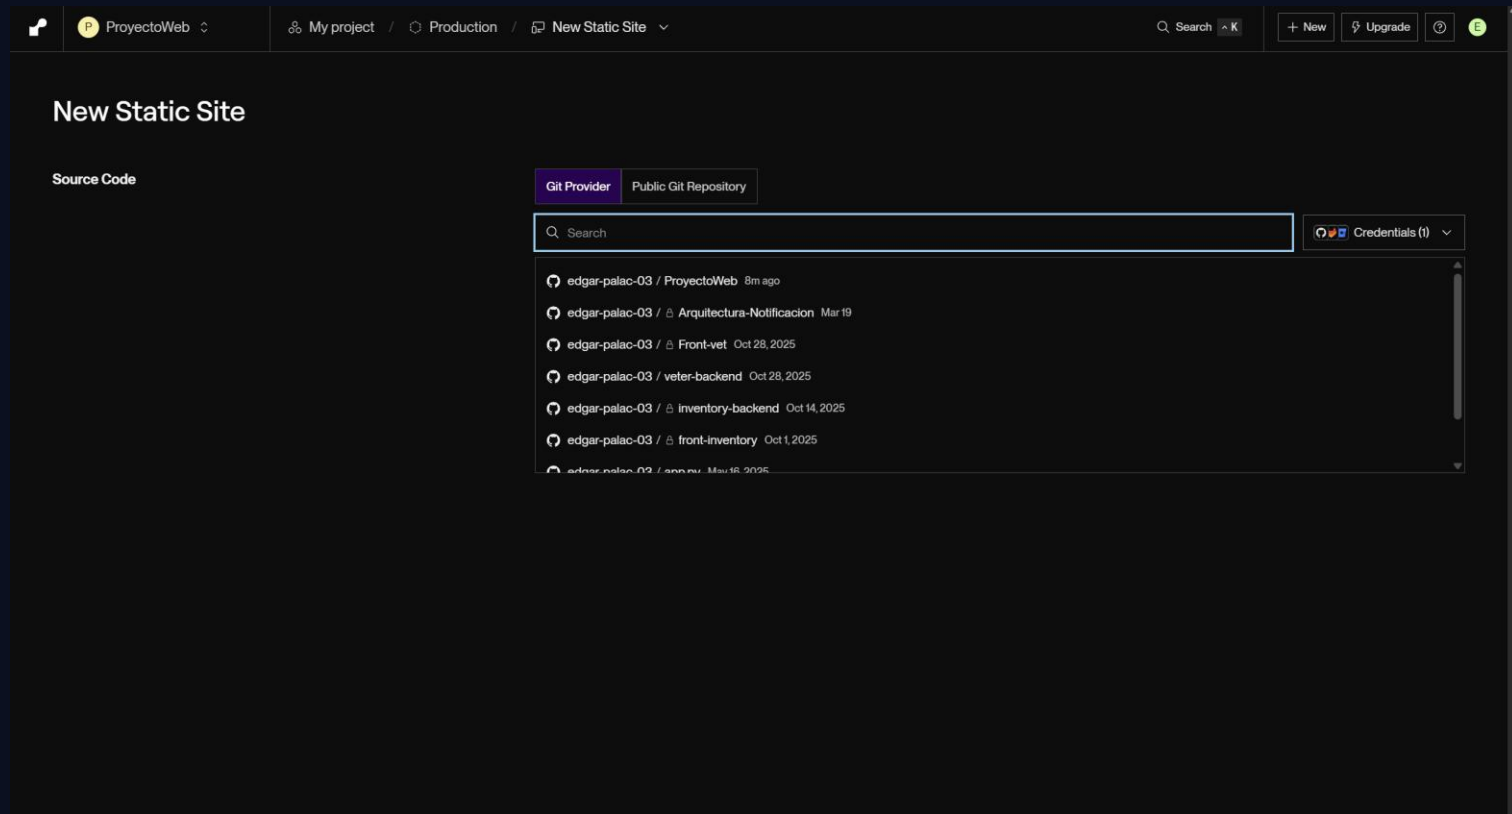

Paso 9

Configuración del proyecto.

 ProjectoWeb

My project / Production / New Static Site

K

+ New Upgrade ? E

Source Code

edgar-palac-03 / ProjectoWeb • 11m ago Edit

Name

A unique name for your static site.

ProjectoWeb

Project Optional

Add this static site to a project once it's created.

My project / Production

Branch

The Git branch to build and deploy.

main ×

Root Directory Optional

If set, Render runs commands from this directory instead of the repository root. Additionally, code changes outside of this directory do not trigger an auto-deploy. Most commonly used with a monorepo.

e.g. src

Build Command

Render runs this command to build your app before each deploy.

\$

Publish Directory

The relative path of the directory containing built assets to publish. Examples: ../build, dist and frontend/build.

.

Environment Variables

Set environment-specific config and secrets (such as API keys), then read those values from your code. [Learn more.](#)

Paso 10

Deploy del proyecto.

The screenshot displays the Render dashboard interface. The top navigation bar includes the project name 'ProyectoWeb', a breadcrumb trail 'My project / Production / ProyectoWeb', a search bar, and buttons for '+ New', 'Upgrade', and user profile. The left sidebar contains navigation links: Environment, ProyectoWeb, Events (highlighted), Settings, MONITOR, Metrics, MANAGE, Environment, Previews, Redirects/Rewrites, Headers, Changelog, Invite a friend, Contact support, and Render Status.

The main content area shows the 'ProyectoWeb' static site deployment. It includes a 'Manual Deploy' button, service ID 'srv-d88b9qsm0tmc738jhbp0', repository 'edgar-palac-03 / ProyectoWeb' on the 'main' branch, and the URL 'https://proyectoweb-5qng.onrender.com'. A deployment log for May 22, 2026 at 1:59 PM shows the following steps:


```
May 22, 2026 at 1:59 PM [Live]
e83d53e Subiendo contenido

May 22
01:59:57 PM ==> Cloning from https://github.com/edgar-palac-03/ProyectoWeb
01:59:58 PM ==> Checking out commit e83d53e13c2c3d26873427154c4d551376b89243 in branch main
01:59:59 PM ==> Empty build command; skipping build
02:00:00 PM ==> Uploading build...
==> Your site is live 🎉
```

A footer message suggests: 'Need better ways to work with logs? Try the Render CLI, Render MCP Server, or set up a log stream integration'.

Paso 11

Resultado final del proyecto.

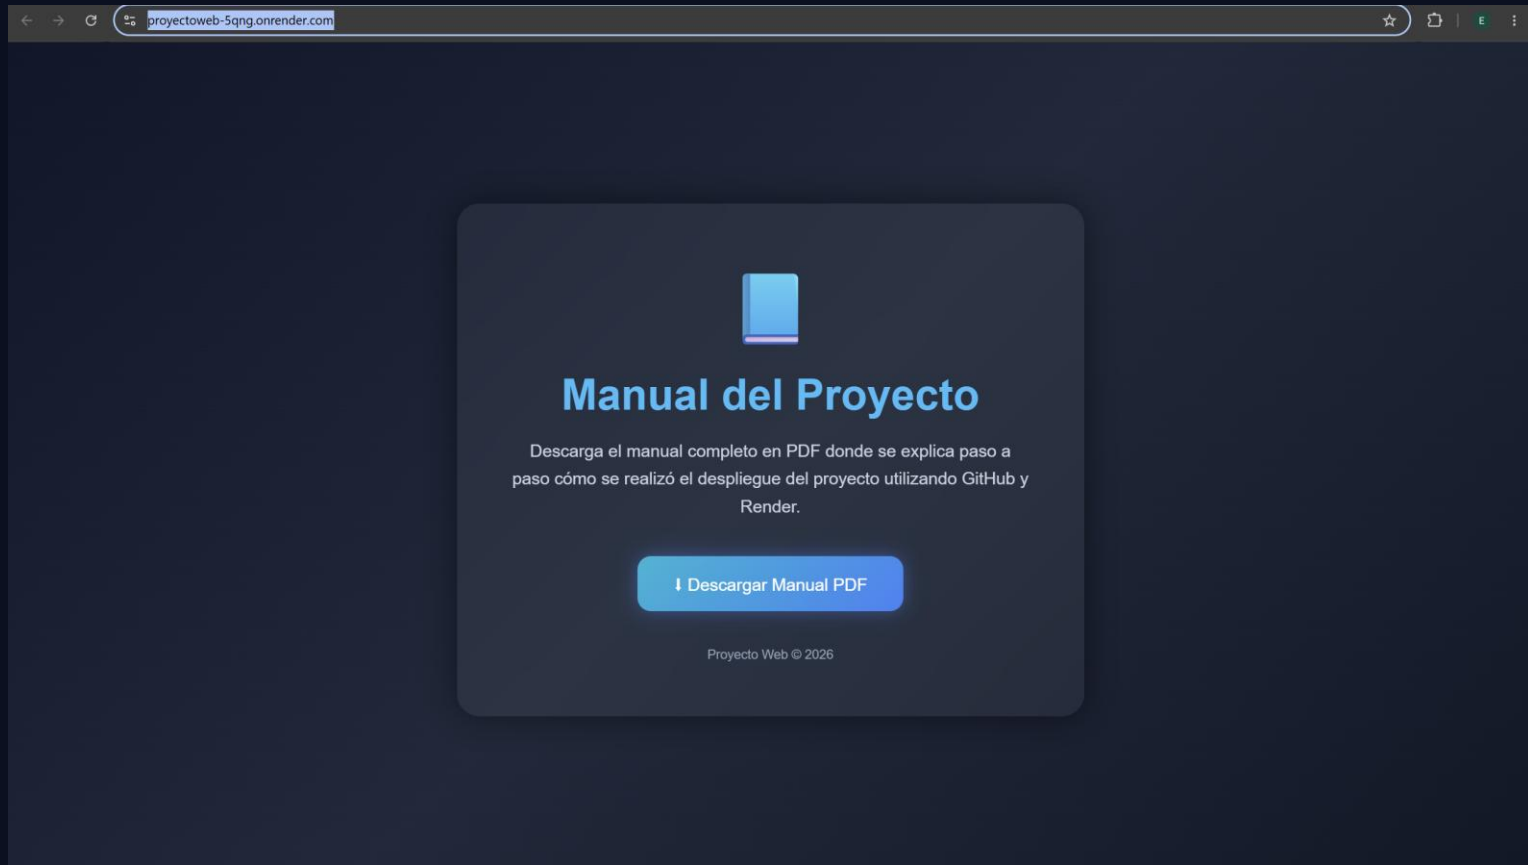



¡Proyecto publicado exitosamente!