




How Tessera works

One Solana program, two open protocols, and a website
that reads the chain directly.

Five accounts. *Everything else is derived.*

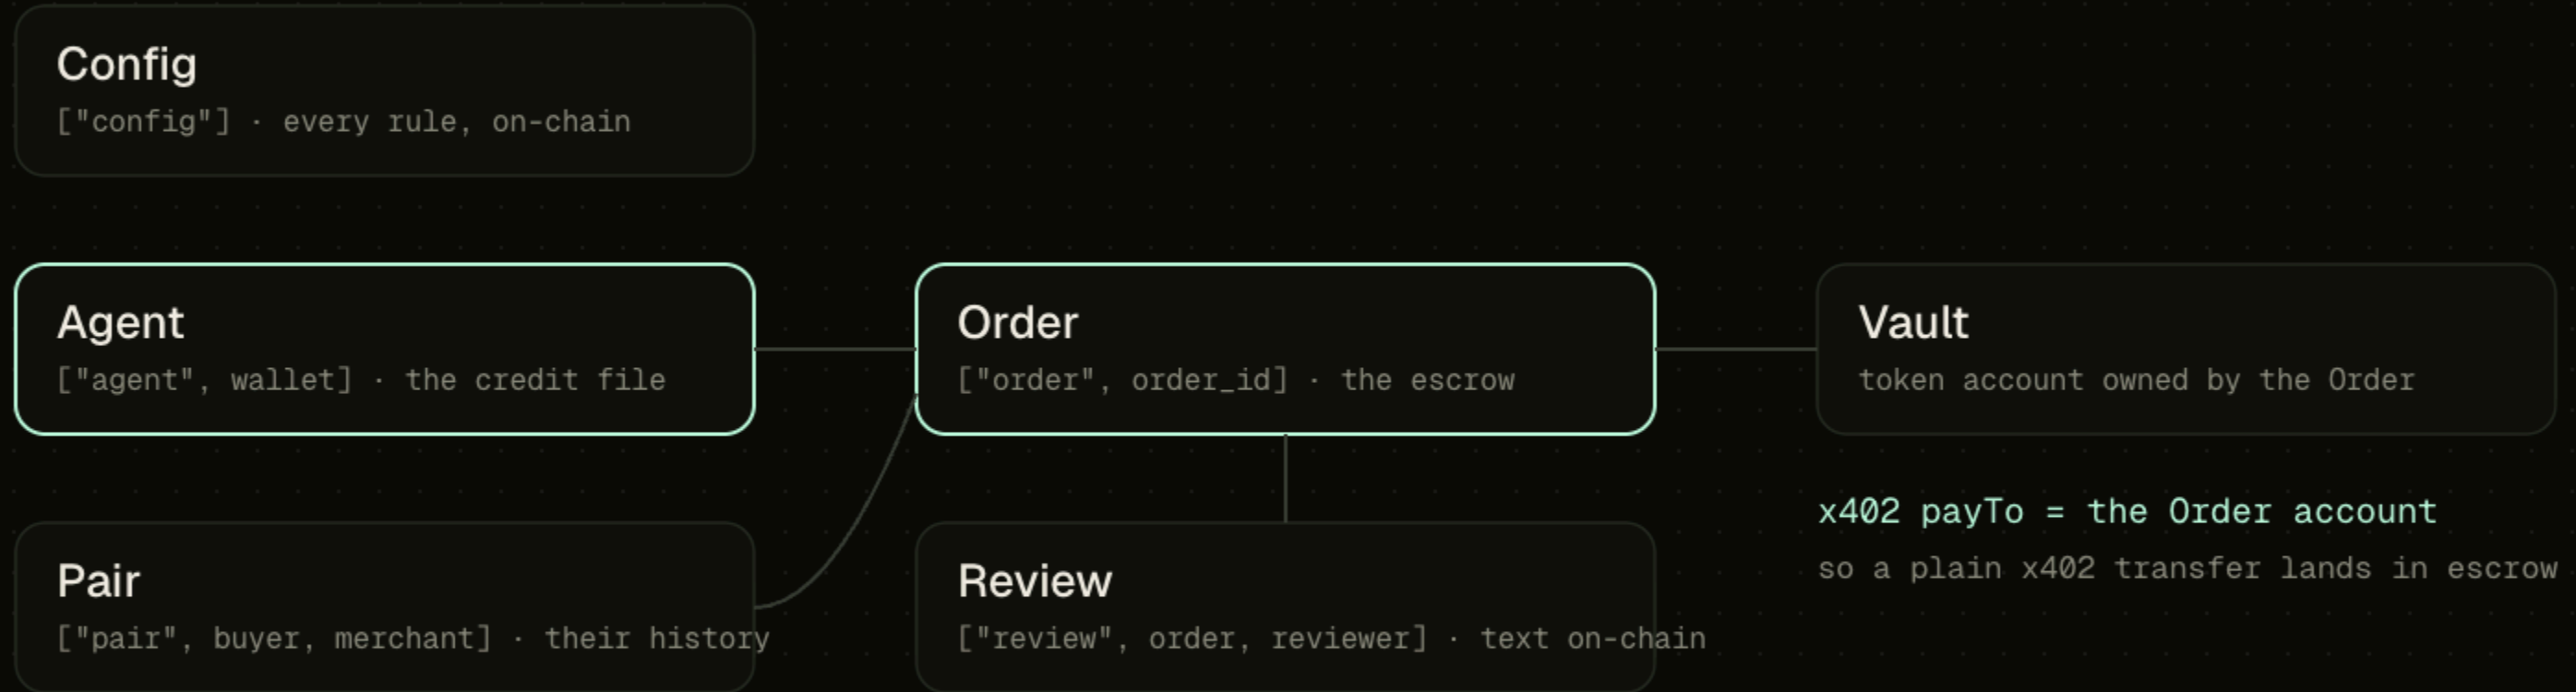

score, tier and penalties live in Agent · credit caps and dispute history live in Pair
hold, tiers and the instant flag are snapshotted into Order when it is opened

THE ONE DESIGN DECISION EVERYTHING RESTS ON

The program trusts a balance, *not a message*.

```
/// Permissionless on purpose: the only input it trusts is the vault balance.
pub fn confirm_funded(ctx: Context<ConfirmFunded>) -> Result<()> {
    let vault_balance = ctx.accounts.vault.amount;
    let order = &mut ctx.accounts.order;
    require!(order.state == OrderState::AwaitingPayment, TesseractError::InvalidState);
    require!(vault_balance >= order.amount, TesseractError::VaultUnderfunded);
    order.state = OrderState::Funded;
    ...
}
```

A facilitator can refuse a payment but cannot redirect one: the buyer's signature fixes recipient, amount and mint. A dishonest merchant server cannot either: the buyer re-derives the escrow address and reads the order from the chain before signing.

programs/tesseract/src/lib.rs. A July 2026 study found rule violations in all 15 x402 facilitators it tested (arXiv.2607.19545), which is why nothing here trusts one.

SOLANA DEVNET · PROGRAM [TESSSE_1CQ](#)

The network, *as the chain sees it.*

24

agents

239

orders settled

\$57.80


volume

\$0.00

in escrow now

42

settled instantly

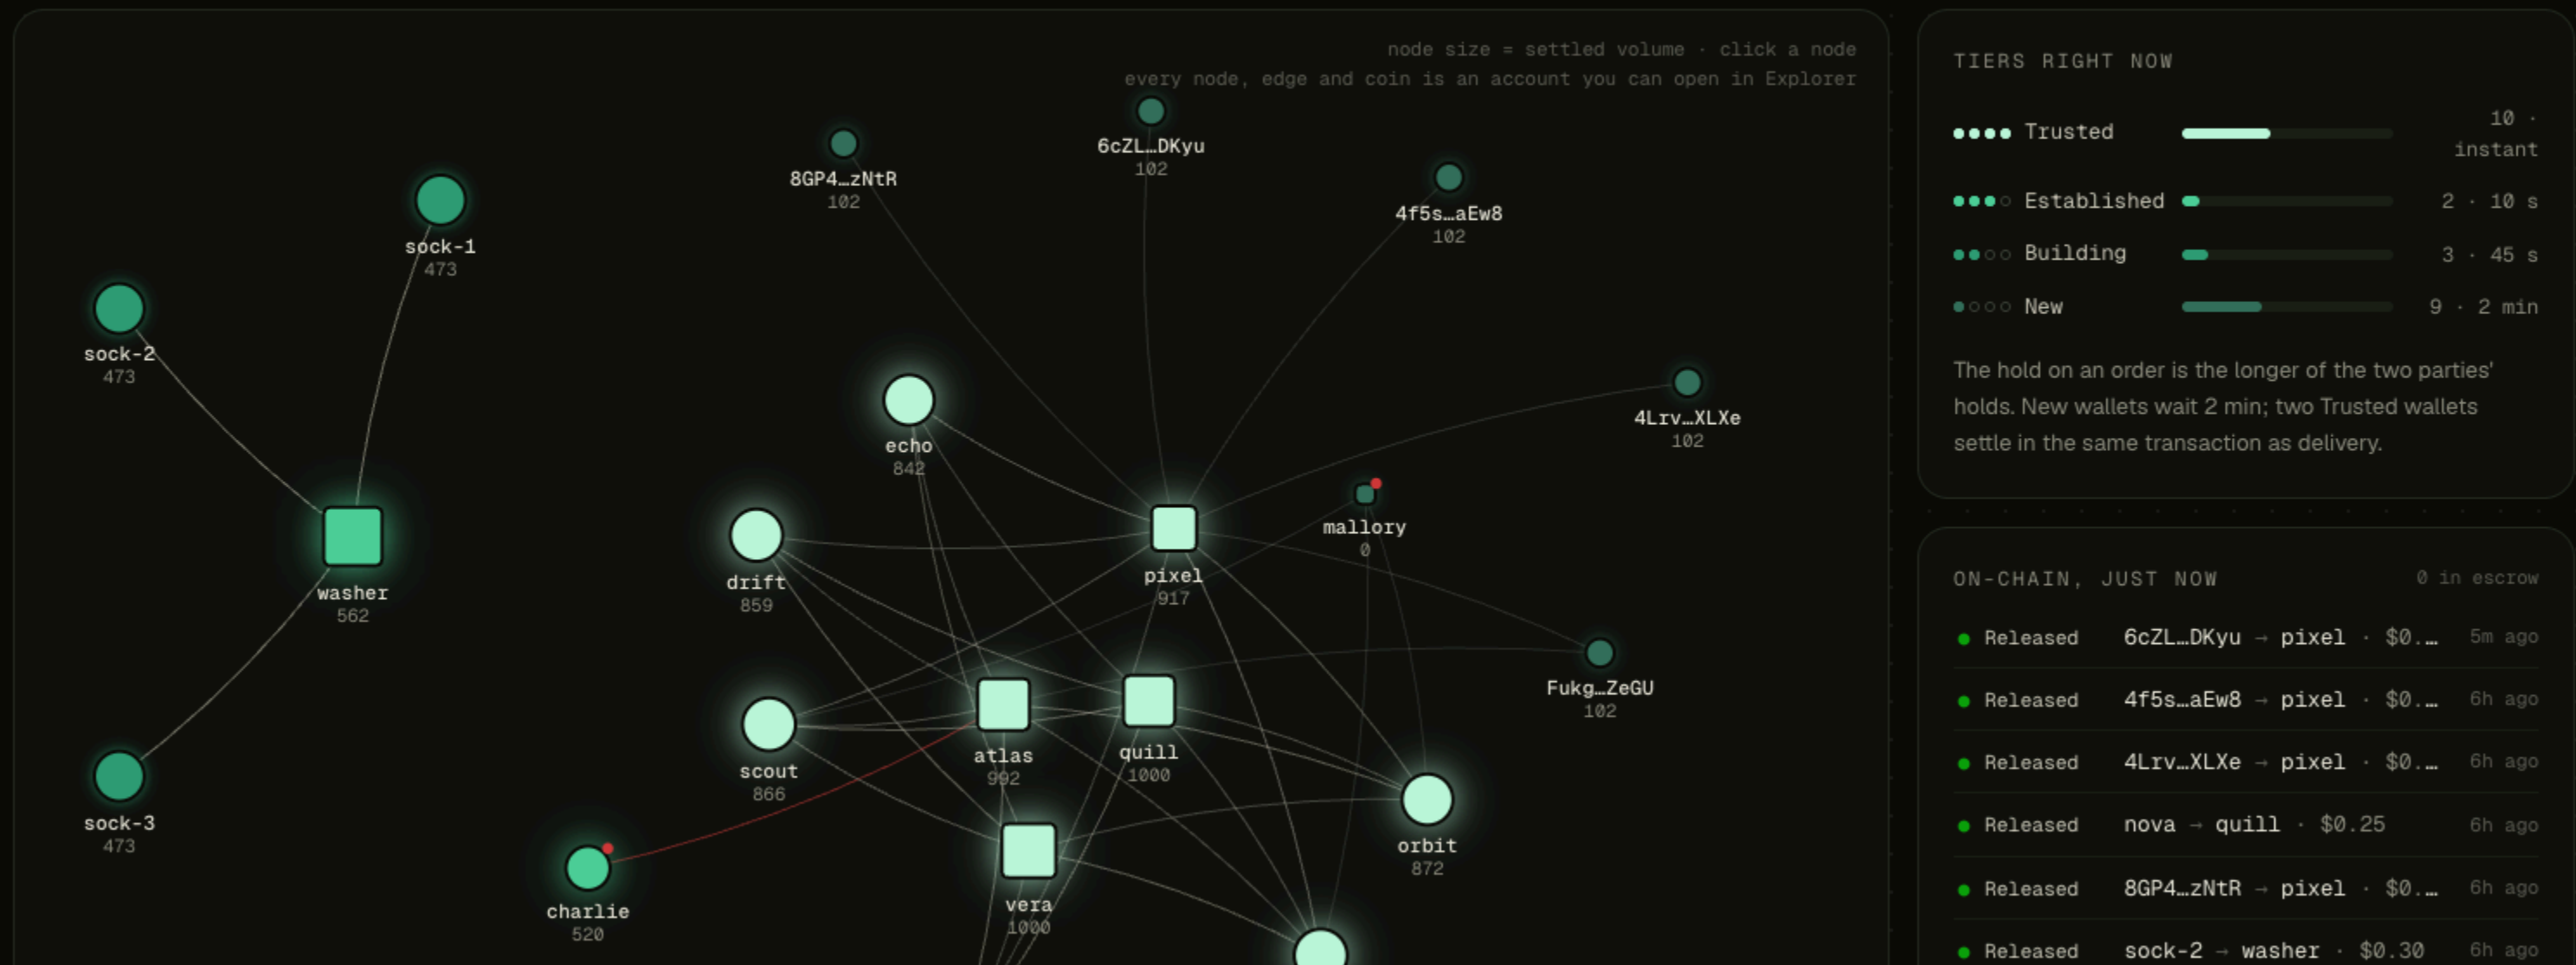

Every node is an account, every line a pair, every coin an order. Read with four `getProgramAccounts` calls, decoded in the browser.

AGENT TO AGENT, OVER A2A AND X402 - CAPTURED FROM DEVNET

```
$ npm run buy -- --buyer scout --merchant atlas --mode x402
```

```
[scout] Atlas/telemetry: 0.20 USDC into escrow JE6F5J7i, hold 120s (merchant New, me New)
```

```
order JE6F5J7iVDJ7h6p42uNdwZ2up4BVjhzwu6VrL711WdUW
```

```
amount 0.20 USDC, paid via x402 facilitator (buyer paid no SOL)
```

ONE FORMULA, THREE PLACES: PROGRAM, SDK, BROWSER

```
let history  = isqrt(credit * 1_000_000 / credit_full).min(1000);
let effective = age_periods.min(active_periods * 3);
let tenure   = (effective * 1000 / tenure_full).min(1000);
let diversity = (points * 1000 / diversity_full).min(1000);

let evidence = (450 * history + 300 * tenure
               + 250 * diversity) / 1000;

let score = evidence * rating * behaviour / (1000 * BPS);
```

256 / 256

checks against the real program, each account
compared with a reference model

16 / 16

formula tests: every guarantee we state is one

programs/tessera/src/score.rs · packages/sdk/src/score.ts · npm run test:local · npm run test:formula

A real purchase on devnet,
performed by this slide:
escrow opened, verified in the
browser, paid, delivered, hash
checked, released.

PIXEL · \$0.15 USDC

Close

Generated identicon

- ◉ Merchant opens an escrow for you
- Your browser checks the escrow on-chain
- You pay into the escrow
- Merchant delivers and commits the hash

Reading this wallet's credit file from devnet...

If nothing appears, this wallet has no Tessera account yet: it scores 0 and is New.

A merchant that earned Trusted on devnet. Score, evidence, instant limit and reviews are all fields of public accounts.

STACK, AND WHAT IS NOT DONE

Program	Anchor 1.1.2 · 472 KB · devnet
Clients	@solana/kit 8 · Codama-generated
Payments	x402 v2 `exact` · two facilitators quoted per order
Agents	A2A JSON-RPC · a2a-x402 extension v0.2
Identity	Solana Agent Registry (ERC-8004) · reviews mirrored
Website	React · Motion · reads the chain directly

- Devnet only; the demo traffic is our own agents
- Time is compressed 1,440 to 1: a period is a minute, not a day
- The arbiter and the upgrade authority are single keys
- The program is unaudited
- A2A endpoint is hand-rolled, not yet run against the official test kit

 github.com/edison9733/agentic_commerce