

Ex. No.: 05	JavaScript Timers and Objects
17.02.2026	

a) Timed Quiz Webpage**Aim:**

To develop a JavaScript-based quiz application with a countdown timer that automatically submits after a fixed duration and displays the final score.

Description:

This application presents 5 multiple-choice questions to the user with a total time limit of 10 seconds. A warning message appears when only 5 seconds remain. The quiz auto-submits when the timer reaches zero, disables all inputs, and displays the final score using DOM manipulation.

Procedure:

1. Create HTML structure with questions and radio buttons
2. Use setInterval() for countdown timer
3. Display warning at 5 seconds
4. Auto-submit when timer reaches 0
5. Use JavaScript to calculate score
6. Disable inputs after submission

Code:

```
<!DOCTYPE html>
<html>
<head>
<title>Quiz App</title>
<style>
body{
font-family: Arial;
text-align:center;
background:#f0f8ff;
}
.container{
width:400px;
margin:auto;
background:white;
padding:20px;
margin-top:40px;
```

```

border-radius:10px;
box-shadow:0 0 10px gray;
}
.warning{
color:red;
font-weight:bold;
}
</style>
</head>
<body>
<div class="container">
<h2>Quiz App</h2>
<h3 id="timer">Time Left: 10</h3>
<p id="warning" class="warning"></p>
<form id="quizForm">
<p>1. HTML stands for?</p>
<input type="radio" name="q1" value="a"> Hyper Text Markup Language<br>
<input type="radio" name="q1" value="b"> High Text Machine Language<br>
<p>2. CSS is used for?</p>
<input type="radio" name="q2" value="a"> Styling<br>
<input type="radio" name="q2" value="b"> Programming<br>
<p>3. JavaScript is?</p>
<input type="radio" name="q3" value="a"> Programming Language<br>
<input type="radio" name="q3" value="b"> Database<br>
<p>4. Which is a loop?</p>
<input type="radio" name="q4" value="a"> for<br>
<input type="radio" name="q4" value="b"> print<br>
<p>5. DOM stands for?</p>
<input type="radio" name="q5" value="a"> Document Object Model<br>
<input type="radio" name="q5" value="b"> Data Object Model<br>
<br>
<button type="button" onclick="submitQuiz()">Submit</button>
</form>
<h3 id="result"></h3>
</div>
<script>
let time = 10;
let timer = setInterval(function(){
time--;
document.getElementById("timer").innerHTML = "Time Left: " + time;
if(time == 5){
document.getElementById("warning").innerHTML = "Only 5 seconds remaining!";
}
if(time == 0){
clearInterval(timer);
submitQuiz();
}
}


```

```

},1000);
function submitQuiz(){
clearInterval(timer);
let answers = {
q1:"a",
q2:"a",
q3:"a",
q4:"a",
q5:"a"
};
let score = 0;
for(let i=1;i<=5;i++){
let q = document.querySelector('input[name="q'+i+'"]:checked');
if(q && q.value === answers["q"+i]){
score++;
}
}
document.getElementById("result").innerHTML = "Your Score: " + score + "/5";
let inputs = document.querySelectorAll("input");
inputs.forEach(i => i.disabled = true);
}
</script>
</body>
</html>

```

Output:

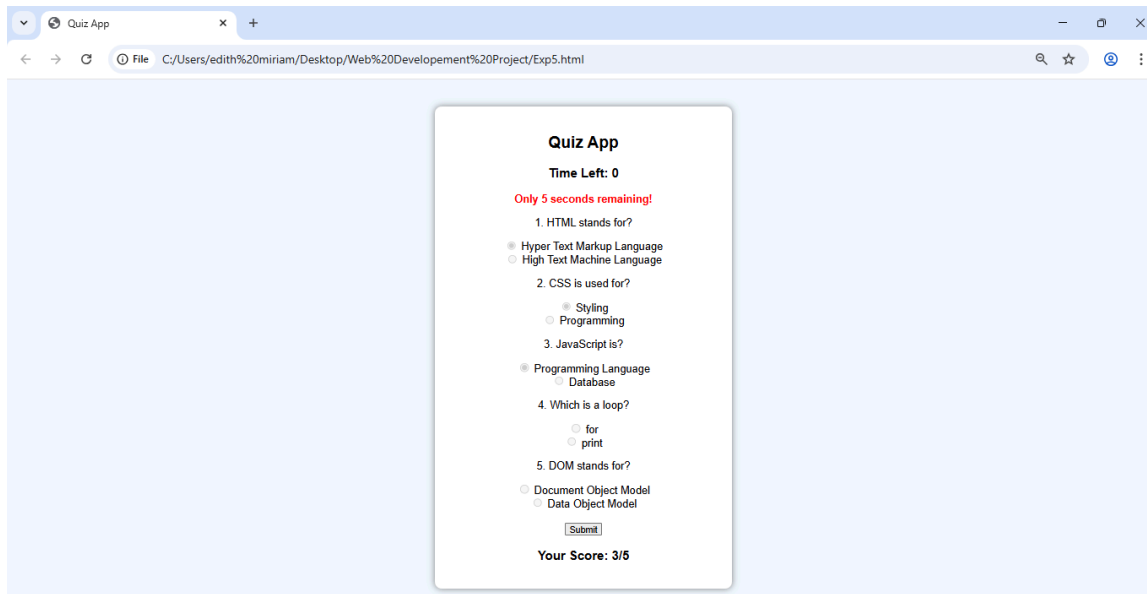

Result:

The experiment was successfully completed.

