

Ex. No.: 06	Interactive Event Details Display using jQuery
24.02.2026	

a) Interactive Event Details Display using jQuery**Aim:**

To develop an interactive event display system using jQuery that shows/hides event details, highlights selected events, and passes event data to a registration form.

Description:

This webpage displays multiple events. Each event has a title, date, and hidden details section. When the user clicks “Show Details”, additional information appears using animation. The selected event is highlighted, and users can register by clicking a button that redirects them to a registration form with the event name auto-filled.

Procedure:

1. Create multiple <div> elements with class event.
2. Add event title (<h3>), date (<p>), hidden details section.
3. Use jQuery: slideToggle() for animation, text() to change button text, css() to highlight event, Traversing methods like closest(), find()
4. Use alert() to display event title.
5. Use localStorage to pass event name to the next page.

Code:

```
<!DOCTYPE html>
<html>
<head>
<title>Quiz App</title>
<style>
body{
font-family: Arial;
text-align:center;
background:#f0f8ff;
}
.container{
width:400px;
margin:auto;
background:white;
padding:20px;
margin-top:40px;
```

```

border-radius:10px;
box-shadow:0 0 10px gray;
}
.warning{
color:red;
font-weight:bold;
}
</style>
</head>
<body>
<div class="container">
<h2>Quiz App</h2>
<h3 id="timer">Time Left: 10</h3>
<p id="warning" class="warning"></p>
<form id="quizForm">
<p>1. HTML stands for?</p>
<input type="radio" name="q1" value="a"> Hyper Text Markup Language<br>
<input type="radio" name="q1" value="b"> High Text Machine Language<br>
<p>2. CSS is used for?</p>
<input type="radio" name="q2" value="a"> Styling<br>
<input type="radio" name="q2" value="b"> Programming<br>
<p>3. JavaScript is?</p>
<input type="radio" name="q3" value="a"> Programming Language<br>
<input type="radio" name="q3" value="b"> Database<br>
<p>4. Which is a loop?</p>
<input type="radio" name="q4" value="a"> for<br>
<input type="radio" name="q4" value="b"> print<br>
<p>5. DOM stands for?</p>
<input type="radio" name="q5" value="a"> Document Object Model<br>
<input type="radio" name="q5" value="b"> Data Object Model<br>
<br>
<button type="button" onclick="submitQuiz()">Submit</button>
</form>
<h3 id="result"></h3>
</div>
<script>
let time = 10;
let timer = setInterval(function(){
time--;
document.getElementById("timer").innerHTML = "Time Left: " + time;
if(time == 5){
document.getElementById("warning").innerHTML = "Only 5 seconds remaining!";
}
if(time == 0){
clearInterval(timer);
submitQuiz();
}
}


```

```

},1000);
function submitQuiz(){
clearInterval(timer);
let answers = {
q1:"a",
q2:"a",
q3:"a",
q4:"a",
q5:"a"
};
let score = 0;
for(let i=1;i<=5;i++){
let q = document.querySelector('input[name="q'+i+'"]:checked');
if(q && q.value === answers["q"+i]){
score++;
}
}
document.getElementById("result").innerHTML = "Your Score: " + score + "/5";
let inputs = document.querySelectorAll("input");
inputs.forEach(i => i.disabled = true);
}
</script>
</body>
</html>

```

Output:

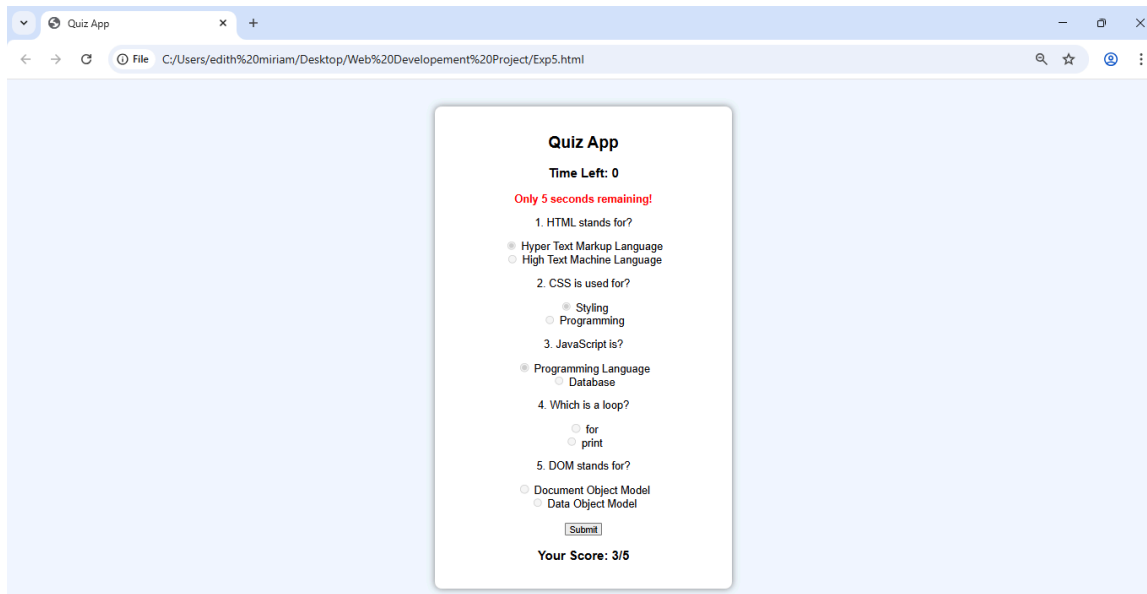

Result:

The experiment was successfully completed.

