

SQL (Part 3)

Instructor: Shel Finkelstein

Reference:

*A First Course in Database Systems,
3rd edition, Chapter 6.4.3-6.4.7*

Important Notices

- Lab2 assignment was posted on Piazza under Resources→Lab2 on Sunday, April 14.
 - Lab2 will be discussed at Lab Sections.
 - Due **Sunday, April 28**, by 11:59pm.
 - Late Lab Assignments will not be accepted.
 - Be sure that you post the correct file!
 - Your solution should be submitted via Canvas as a zip file.
 - Canvas will be used for both Lab submission and grading.
 - Load file for Lab2 has been posted to Piazza.
 - Helps with testing, but we won't post query solutions.
 - Lab1 solution has been posted on Piazza.
- The **second** Gradiance Assignment, "CMPS 182 Spring 2019 #2", has been assigned, and is due **Friday, April 26**, by 11:59pm.

Important Notices

- **Reminder:** Midterm is on **Wednesday, May 8.**
 - No make-ups, no early Midterms, no late Midterms ... and no devices.
 - You may bring a **single two-sided 8.5" x 11" sheet of paper** with as much info written (or printed) on it as you can fit and read unassisted.
 - No sharing of these sheets will be permitted.
 - “Practice Midterm” from Spring 2017 has been posted on Piazza under Resources → Exams.
 - Solution will be posted there next week ... but take it yourself first.
 - Some questions are on topics we haven't covered yet.
 - Hope that all requests for DRC accommodation have been submitted.
 - Piazza announcement will describe required seating pattern for Midterm.
- See [Small Group Tutoring website](#) for LSS Tutoring with [Chandler Hawkins](#).

Aggregates

- Basic SQL has 5 aggregation operators: SUM, AVG, MIN, MAX, COUNT.
- Aggregation operators are applied on scalar values, that is, a scalar attribute such as salary or $1.1 \times \text{salary}$.
 - An exception: COUNT(*) which counts the number of tuples.
- Used for computing summary results over a table. Examples:
 - Find the average/min/max score of all students who took CMPS180.
 - Find the number of movies released in 2012.
 - Find the total salary of employees in Sales department.

Aggregates (cont'd)

- Aggregate operators are specified in the SELECT clause.
- Suppose A is a column in a table.
 - COUNT([DISTINCT] A)
 - Returns the number of [different] values in the A column.
 - SUM([DISTINCT] A)
 - Returns the sum of all [different] values in the A column.
 - AVG([DISTINCT] A)
 - Returns the average of all [different] values in the A column.
 - MAX(A)/MIN(A)
 - Returns the maximum value or minimum value in the A column.

Aggregation Example

- MovieExec(name, address, cert#, netWorth)
SELECT AVG(netWorth)
FROM MovieExec;
- Finds the average of “netWorth” values for tuples in the relation MovieExec.

MovieExec

name	address	cert#	netWorth
S. Spielberg	X	38120	3000000
G. Lucas	Y	43918	4000000
W. Disney	Z	65271	5000000

More Aggregation Examples

```
SELECT COUNT(*)  
FROM StarsIn;
```

```
SELECT COUNT(starName)  
FROM StarsIn;
```

```
SELECT COUNT(DISTINCT starName)  
FROM StarsIn;
```

```
SELECT MAX(length), MIN(length)  
FROM Movies;
```

Aggregation and Grouping Example

- Movies(title, year, length, genre, studioName, producerC#)
SELECT studioName, SUM(length)
FROM Movies
GROUP BY studioName;
- For each studio, find the sum of lengths of all movies from that studio.

Movies

...	studioName	length
...	Dreamworks	120
...	Dreamworks	162
...	Fox	152
...	Universal	230
...	Fox	120

Aggregation and Grouping

- GROUP BY clause follows the WHERE clause.

```
SELECT [DISTINCT] c1, c2, ..., cm, AGGOP(...)  
FROM R1, R2, ..., Rn  
[WHERE condition]  
[GROUP BY <list of grouping attributes>]  
[ORDER BY <list of attributes [ASC | DESC] >]
```

If SELECT clause has aggregates AGGOP, then c_1, c_2, \dots, c_m must come from the list of grouping attributes.

- Let Result begin as an empty multiset of tuples.
- For every tuple t_1 from R_1 , t_2 from R_2 , ..., t_n from R_n
 - If t_1, \dots, t_n satisfy *condition* (i.e., condition evaluates to true), then add the resulting tuple that consists of c_1, c_2, \dots, c_m components (including attributes of AGGOP operators) of the t_i into Result.
- Group the tuples in Result according to list of grouping attributes.
 - If GROUP BY is omitted, the entire table is regarded as ONE group.
- Apply aggregate operator(s) on tuples in each group to get tuple put in Result.
- If ORDER BY <list of attributes> exists, order the tuples in Result according to the ORDER BY clause.
- If DISTINCT is stated in the SELECT clause, remove duplicates in Result.
- Return the final Result.

Grouping and Aggregation Examples

```
SELECT studioName  
FROM Movies  
GROUP BY studioName;
```

```
SELECT DISTINCT studioName  
FROM Movies;
```

- The two queries above are equivalent.
- It is possible to write GROUP BY without aggregates (and aggregates without GROUP BY).

Movies(title, year, length, genre, studioName, producerC#)
MovieExec(name, address, cert#, netWorth)

```
SELECT e.name, AVG(m.length)  
FROM MovieExec e, Movies m  
WHERE m.producerC# = e.cert#  
GROUP BY e.name;
```

For each exec, show the exec's name, and the average length of movies made by that exec.

What's the Result?

A	B	C	D
a1	b1	1	7
a1	b1	2	8
a2	b1	3	9
a3	b2	4	10
a2	b1	5	11
a1	b1	6	12

```
SELECT A, B, SUM(C), MAX(D)
FROM R
GROUP BY A, B;
```

What if query asked for B after SUM(C)?

What if query didn't ask for B in the SELECT?

Grouping, Aggregation, and Nulls

- NULLs are ignored in any aggregation.
 - They do not contribute to the SUM, AVG, COUNT, MIN, MAX of an attribute.
 - COUNT(*) = number of tuples in a relation (even if some columns are null)
 - COUNT(A) is the number of tuples with non-null values for attribute A
- SUM, AVG, MIN, MAX on an empty result (no tuples) is NULL.
 - COUNT of an empty result is 0.
 - I think that SUM on an empty result should be 0 ... but it isn't, it's NULL.
- GROUP BY does not ignore NULLs.
 - The groups that are formed with a GROUP BY on attributes A_1, \dots, A_k may have NULL values for one or more of these attributes.

Examples with NULL

- Suppose R(A,B) is a relation with a single tuple (NULL, NULL).

```
SELECT A, COUNT(B)
FROM R
GROUP BY A;
```

```
SELECT A, COUNT(*)
FROM R
GROUP BY A;
```

```
SELECT A, SUM(B)
FROM R
GROUP BY A;
```

HAVING Clause

```
SELECT [DISTINCT] c1, c2, ..., cm AGGOP(...)
FROM   R1, R2, ..., Rn
[WHERE condition]
[GROUP BY <list of grouping attributes>]
[HAVING condition]
[ORDER BY <list of attributes [ASC | DESC] >]
```

Note that HAVING clause
cannot exist without
GROUP BY

- HAVING: Choose groups based on some aggregate property of the group itself.
 - Think of it as like a WHERE clause applied to groups.
- The same attributes and aggregates that can appear in the SELECT can appear in the HAVING clause condition.
 - Which attributes and aggregates? Why?

Semantics of HAVING

- Let Result begin as an empty multiset of tuples.
- For every tuple t_1 from R_1 , t_2 from R_2 , ..., t_n from R_n
 - If t_1, \dots, t_n satisfy *condition* (i.e., condition evaluates to true), then add the resulting tuple that consists of c_1, c_2, \dots, c_m (including attributes in AGGROP operators) components of the t_i into Result.
- Group the tuples in Result according to list of grouping attributes. If GROUP BY is omitted, the entire table is regarded as ONE group.
- Apply aggregate operator on tuples of each group.
- Apply condition of HAVING clause to each group. Remove groups that do not satisfy the HAVING clause.
- If ORDER BY <list of attributes> exists, order the tuples in Result according to ORDER BY clause.
- If DISTINCT is stated in the SELECT clause, remove duplicates in Result.
- Return the final Result.

HAVING Example 1

(assume that MovieExec.name is UNIQUE)

```
SELECT e.name, SUM(m.length)
FROM MovieExec e, Movies m
WHERE m.producerC# = e.cert#
GROUP BY e.name
HAVING MIN(m.year) < 1930;
```

Find the name and total film length for just those producers who made at least one film prior to 1930.

HAVING Example 2

(Assume that MovieExec.name is UNIQUE)

```
SELECT e.name, SUM(m.length)
FROM MovieExec e, Movies m
WHERE m.producerC# = e.cert#
GROUP BY e.name
HAVING COUNT(DISTINCT m.year) >= 4;
```

Find the total film length for just those producers who made films in at least 4 different years.

What would happen if MovieExec.name wasn't UNIQUE?

HAVING Example 3

```
SELECT e.name, SUM(m.length), MAX(m.year)
FROM MovieExec e, Movies m
WHERE m.producerC# = e.cert#
GROUP BY e.name
HAVING COUNT(DISTINCT m.year) >= 4
      AND MIN(m.year) < 1930;
```

Find the total film length and the latest movie year, for just those producers who made movies in at least 4 different years, and made at least one film prior to 1930.

HAVING Example

Find the age of the youngest sailor with age ≥ 18 , for each rating that has at least 2 such sailors.

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1;
```

<u>sid</u>	sname	rating	age
22	Dustin	7	45.0
31	Lubber	8	55.5
71	Zorba	10	16.0
64	Horatio	7	35.0
92	Frodo	1	28.0
38	Sam	1	30.0
29	Brutus	1	33.0
58	Rusty	10	35.0

Example of HAVING Semantics: 1

- Take the cross product of all relations in the FROM clause.

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1;
```

<u>sid</u>	sname	rating	age
22	Dustin	7	45.0
31	Lubber	8	55.5
71	Zorba	10	16.0
64	Horatio	7	35.0
92	Frodo	1	28.0
38	Sam	1	30.0
29	Brutus	1	33.0
58	Rusty	10	35.0

Example of HAVING Semantics: 2

- Apply the condition in the WHERE clause to every tuple.


```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1;
```

<u>sid</u>	sname	rating	age
22	Dustin	7	45.0
31	Lubber	8	55.5
71	Zorba	10	16.0
64	Horatio	7	35.0
92	Frodo	1	28.0
38	Sam	1	30.0
29	Brutus	1	33.0
58	Rusty	10	35.0

Example of HAVING Semantics: 3

- For simplicity, let's ignore the rest of the columns (since they are not needed).

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1;
```

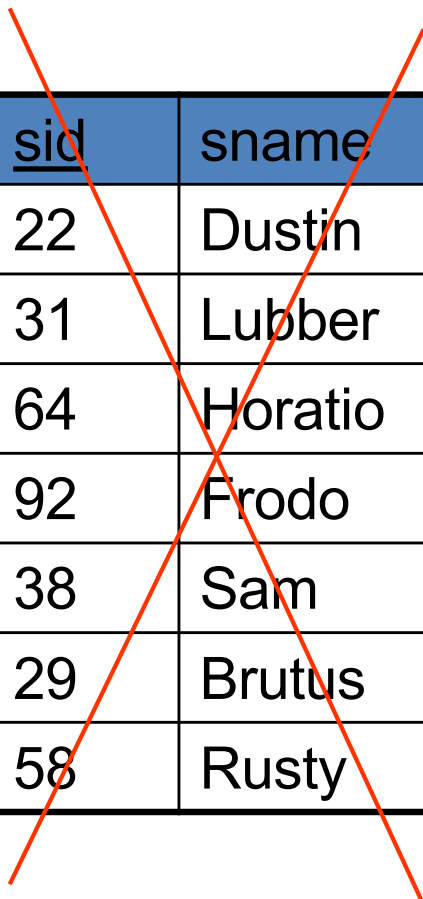

<u>sid</u>	sname	rating	age
22	Dustin	7	45.0
31	Lubber	8	55.5
64	Horatio	7	35.0
92	Frodo	1	28.0
38	Sam	1	30.0
29	Brutus	1	33.0
58	Rusty	10	35.0

Example of HAVING Semantics: 4

- **Sort** the table according to the GROUP BY columns.

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1;
```

rating	age
7	45.0
8	55.5
7	35.0
1	28.0
1	30.0
1	33.0
10	35.0

rating	age
1	28.0
1	30.0
1	33.0
7	35.0
7	45.0
8	55.5
10	35.0

Note: Don't actually have to sort to do GROUP BY

Example of HAVING Semantics: 5

- Apply condition of HAVING clause to each group. Eliminate the groups which do not satisfy the condition in the HAVING clause.
- Next, we evaluate the SELECT clause.

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1;
```

rating	age
1	28.0
1	30.0
1	33.0
7	35.0
7	45.0
8	55.5
10	35.0

Example of HAVING Semantics: 6

- Generate one tuple for each group, according to the SELECT clause.

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1;
```

rating	age
1	28.0
7	35.0

More Examples

- Find the minimum age of sailors in each rating category such that the average age of sailors in that category is greater than the minimum age of all sailors.

```
SELECT S.rating, MIN(S.age)
FROM Sailors S
GROUP BY S.rating
HAVING AVG(S.age) > (SELECT MIN(S2.age)
                     FROM Sailors S2);
```

More Examples

- Find the second minimum age of sailors.

```
SELECT MIN(S.age)
FROM Sailors S
WHERE S.age > (SELECT MIN(S2.age)
               FROM Sailors S2);
```

- What happens when there is only one sailor?
- What happens when all sailors have the same age?
- What happens when there are no sailors?
- Can you figure how to find the third minimum age of sailors?

Some Incorrect Examples

- Find the second minimum age of sailors.
All answers below are incorrect!

```
SELECT MIN(S.age)
FROM Sailors S
WHERE S.age > MIN(S.age);
```

```
SELECT MIN(S.age)
FROM Sailors S
WHERE S.age > MIN(S2.age);
```

```
SELECT MIN(S.age)
FROM Sailors S
WHERE S.age > ( MIN(S2.age)
                FROM Sailors S2 );
```

```
SELECT MIN(S.age)
FROM Sailors S
WHERE S.age > MIN ( SELECT S2.age
                    FROM Sailors S2 );
```

Aggregates can't appear in WHERE clauses, except in legal subqueries, as on previous slide.

More Examples

Customers

<u>cid</u>	cname	level	type	age
36	Cho	Beginner	snowboard	18
34	Luke	Inter	snowboard	25
87	Ice	Advanced	ski	20
39	Paul	Beginner	ski	33

Activities

<u>cid</u>	<u>slope-id</u>	<u>day</u>
36	s3	01/05/09
36	s1	01/06/09
36	s1	01/07/09
87	s2	01/07/09
87	s1	01/07/09
34	s2	01/05/09

Slopes

<u>slope-id</u>	name	color
s1	Mountain Run	blue
s2	Olympic Lady	black
s3	Magic Carpet	blue
s4	KT-22	green

COUNT Examples

- Find the total number of customers

```
SELECT COUNT(cid)
FROM Customers;
```

- Find the total number of days that customers engaged in activities

```
SELECT COUNT(DISTINCT day)
FROM Activities;
```

- Compare to:

```
SELECT COUNT(day)
FROM Activities;
```

Alternatively, the last query could have been written as:

```
SELECT COUNT(*)
FROM Activities;
```

But only because day can't be NULL

COUNT Examples, with Join

- Find the number of activities done by advanced customers .
SELECT COUNT(a.cid)
FROM Customers c, Activities a
WHERE a.cid = c.cid
AND c.level = 'Advanced';
- Find the number of activities done by different advanced customers.
SELECT COUNT(DISTINCT a.cid)
FROM Customers c, Activities a
WHERE a.cid = c.cid
AND c.level = 'Advanced';

Would these queries have same results with COUNT(c.cid) instead of COUNT(a.cid)?

What about if queries had COUNT(*)/COUNT(DISTINCT *) instead?

COUNT Examples, with JOIN and GROUP BY

- For each day, find the number of activities that were done by advanced customers.

```
SELECT a.day, COUNT(a.cid)
FROM Customers c, Activities a
WHERE a.cid = c.cid
      AND c.level = 'Advanced'
GROUP BY a.day;
```

- For each day, find the number of different advanced customers who did at least one activity.

```
SELECT a.day, COUNT(DISTINCT a.cid)
FROM Customers c, Activities a
WHERE a.cid = c.cid
      AND c.level = 'Advanced'
GROUP BY a.day;
```


COUNT Examples, with JOIN and GROUP BY and HAVING

- For each customer level, find the number of times that customers who are at that level went on a red slope, giving level as well as number of times, ... but only if the number of times is at least 3.
 - The number of times should appear as redCount in the result.

```
SELECT c.level, COUNT(*) AS redCount
FROM Customers c, Activities a, Slopes s
WHERE a.cid = c.cid
      AND a.slopeid = s.slopeid
      AND s.color = 'Red'
GROUP BY c.level
HAVING COUNT(*) >= 3;
```

SUM, AVG

- Find the total revenue of the company, assuming Sales has qty and price columns.

```
SELECT SUM(qty*price)
FROM Sales;
```

- Find the average salary of employees in the Marketing department.

```
SELECT AVG(salary)
FROM Employees
WHERE department='Marketing';
```

MIN, MAX

- Find the name and age of the oldest snowboarders.

```
SELECT c.cname, MAX(c.age)
FROM Customers c
WHERE c.type='snowboard';
```

- **WRONG!**
- The non-aggregate columns in the SELECT clause must come from the attributes in the GROUP BY clause.

MIN, MAX with Subquery

- Find the name and age of the oldest snowboarders.

```
SELECT c.cname, c.age
FROM Customers c
WHERE c.age = (SELECT MAX(c2.age)
               FROM Customers c2
               WHERE c2.type='snowboard');
```

Will this query execute correctly?

NO!

If not, how would you correct it?

MIN, MAX

- Find the age of the youngest participant for each type of activity that Beginners participate in.

```
SELECT c.type, MIN(c.age)
FROM Customers c
WHERE c.level='Beginner';
```

- Wrong!
- The non-aggregate columns in the SELECT clause must come from the attributes in the GROUP BY clause.
 - If there is an aggregate in the SELECT clause but no GROUP BY, then all tuples satisfying the WHERE clause are in a single group, and no attributes are in the GROUP BY clause, hence ... (what?).

MIN, MAX with GROUP BY

- Find the age of the youngest participant for each type of activity that Beginners participate in.

```
SELECT c.type, MIN(c.age)
FROM Customers c
WHERE c.level='Beginner'
GROUP BY c.type;
```

- Wrong!
- Selects age of youngest Beginner for activity types that Beginners participate in.

MIN, MAX with GROUP BY and EXISTS

- Find the age of the youngest participant for each type of activity that Beginners participate in.

```
SELECT c.type, MIN(c.age)
FROM Customers c
WHERE EXISTS ( SELECT *
                FROM Customers c2
                WHERE c2.level='Beginner'
                AND c2.type=c.type )
GROUP BY c.type;
```

- Right!
- Selects age of youngest participant for activity types that at least one Beginner participates in.

MIN, MAX with GROUP BY and HAVING

- Find the age of the youngest participant for each type of activity that Beginners participate in.

```
SELECT c.type, MIN(c.age)
FROM Customers c
GROUP BY c.type
HAVING SOME ( c.level='Beginner' );
```

- Right
- Selects age of youngest participant for activity types that at least one Beginner participates in.

ANY/SOME in HAVING

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1 AND SOME (S.age > 40);
```

rating	age
1	28.0
1	30.0
1	33.0
7	35.0
7	45.0
8	55.5
10	35.0

rating	age
7	35.0

EVERY (not ALL) in HAVING

```
SELECT S.rating, MIN (S.age)
FROM Sailors S
WHERE S.age >= 18
GROUP BY S.rating
HAVING COUNT (*) > 1 AND EVERY (S.age ≤ 40);
```


rating	age
1	28.0
1	30.0
1	33.0
7	35.0
7	45.0
8	55.5
10	35.0

rating	age
1	28.0

Careful ...

- Find the activities of Luke.

```
SELECT *  
FROM Activities a  
WHERE a.cid = (SELECT c.cid  
                FROM Customers c  
                WHERE c.cname='Luke');
```



If there is only one Luke in the Customers table, the subquery returns only one cid value. SQL returns that single cid value to be compared with a.cid.

However, if the subquery returns more than one value, a **run-time error** occurs.

Reminder: Use of ALL

- Find the names of all customers whose age is greater than the age of **every** snowboarder.

```
SELECT c.name  
FROM Customers c  
WHERE c.age > ALL (SELECT c2.age  
                   FROM Customers c2  
                   WHERE c2.type = 'snowboard');
```

What happens if there
are no snowboarders?

```
SELECT c.name  
FROM Customers c  
WHERE c.age > (SELECT MAX(c2.age)  
              FROM Customers c2  
              WHERE c2.type = 'snowboard');
```

What happens if there
are no snowboarders?

Reminder: Use of ANY/SOME (Synonyms)

- Find the names of all customers whose age is greater than the age of **some** snowboarder.

```
SELECT c.name  
FROM Customers c  
WHERE c.age > SOME (SELECT c2.age  
                     FROM Customers c2  
                     WHERE c2.type = 'snowboard');
```

What happens if there
are no snowboarders?

```
SELECT c.name  
FROM Customers c  
WHERE c.age > (SELECT MIN(c2.age)  
              FROM Customers c2  
              WHERE c2.type = 'snowboard');
```

What happens if there
are no snowboarders?

GROUP BY: Relaxing a Restriction

- For each cid, give cid and the days on which customer did an activity, with COUNT of number of activities done on that day.

```
SELECT c.cid, a.day, COUNT(*)  
FROM Customers c, Activities a  
WHERE a.cid = c.cid  
GROUP BY c.cid, a.day;
```

- For each cid, give cid, level and the days on which customer did an activity , with COUNT of number of activities done on that day.

```
SELECT c.cid, c.level, a.day, COUNT(*)  
FROM Customers c, Activities a  
WHERE a.cid = c.cid  
GROUP BY c.cid, a.day;
```

- Is this legal SQL?
- We'll accept this on tests and homeworks, if you do it right.

Even though level isn't a GROUP BY attribute, this is okay in most SQL databases!

Why? cid is the entire primary key of Customers, so level is not ambiguous.

Practice Homework 4

- Beers(name,manufacturer)
- Bars(name,address,license)
- Sells(bar,beer,price)
- Drinkers(name,address,phone)
- Likes(drinker,beer)
- Frequent(drinker,bar)
- Friends(drinker1, drinker2)

1. Find all beers liked by two or more drinkers.
2. Find all beers liked by three or more drinkers.
3. Find all beers liked by friends of Anna.
4. Find all bars that sell a beer that is cheaper than all beers sold by the bar '99 Bottles'.