

HCAL Reconstruction: MC Correction Functions Update

Edmund Berry¹

¹Brown University

Friday, May 16, 2014



BROWN

Introduction

- Have derived (**improved**) MC correction functions for OOT PU
- Same derivation method as used for data
- Procedure:
 - Run Alexandre's ratio method on zero PU MC
 - Derive correction functions based on the pulse shape
 - Use the same definitions, fits, and methods as in data
 - **Validate results on MC with OOT PU**

Method

- Process a high- p_T QCD sample in two ways:
 - No pileup: for MC truth comparison (DONE)
 - With pileup: for validation (Processing)
- Compare results event-by-event, channel-by-channel:
 - No pileup
 - vs. with pileup and no corrections
 - vs. with pileup and corrections


Datasets

- Consider three GEN-SIM datasets (no PU) at T1_US_FNAL:

Dataset	Production release
/MinBias_TuneZ2star_13TeV-pythia6/Summer13-START53_V7C-v1/GEN-SIM	CMSSW_5_3_10_patch2
/QCD_Pt-1800_TuneZ2star_13TeV_pythia6/Fall13-POSTLS162_V1-v1/GEN-SIM	CMSSW_6_2_0_patch1
/QCD_Pt-80to120_TuneZ2star_13TeV_pythia6/Fall13-POSTLS162_V1-v1/GEN-SIM	CMSSW_6_2_0_patch1

- QCD_Pt-1800 dataset:
 - HcalNoiseAnalyzer ntuples on FNAL EOS:
/eos/uscms/store/user/eberry/QCD1800MC/
- QCD_Pt-80to120 dataset:
 - HcalNoiseAnalyzer ntuples on FNAL EOS:
/eos/uscms/store/user/eberry/QCD80to120MC/
- MinBias dataset:
 - HcalNoiseAnalyzer ntuples on FNAL EOS:
/eos/uscms/store/user/eberry/MinBiasMC/

Comparison in ieta

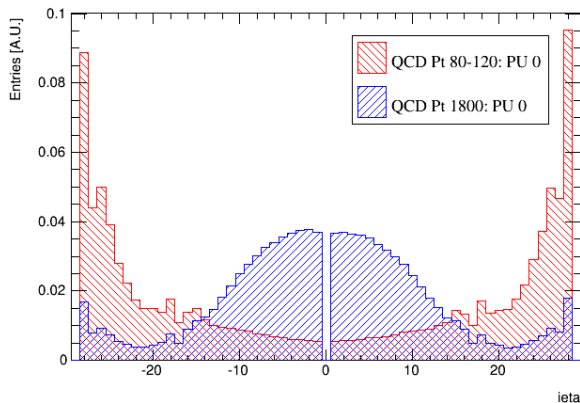


- QCD_Pt-80to120 dataset more focused on HE (good)

Processing pileup sample


- Need to overlay QCD with MinBias
- Use `MixingModule` in `CMSSW_6_2_8`
- Pileup scenario: `AVE_50_BX_25ns`
- Two stages:
 - 1) DIGI, L1, DIGI2RAW, HLT
 - 2) RAW2DIGI L1Reco RECO
- Stage 1 all done: `cmsDriver` and `python cfg`
- Stage 2 all done: `cmsDriver` and `python cfg`
- High PU is **VERY** CPU intensive: 2 minutes/event

PU vs. No PU single digi comparison

single DIGI comparison: HB

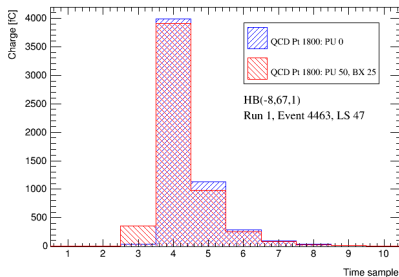

single DIGI comparison: HE


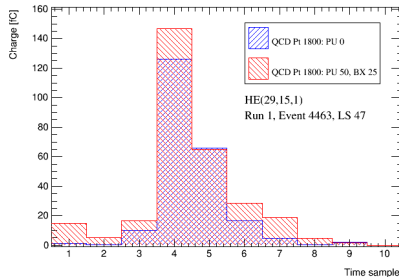


- HE as expected.
- HB as expected in TS3. Strangeness in TS4 + TS5.
- Focusing on HE

Fits

- Fits have been improved! Better agreement now.
- Parameters available on [GitHub](#)
- Same functions as Alexandre for a1, a2, a3
 - 6 polynomials: 1 for each of 6 regions
- For a_1, this function works better on MC:
 - if $x < [6]$: $f(x) = [0] \cdot \text{Exp}([1] + [2] \cdot x) + [3] + [4] \cdot x$
 - if $x > [6]$: $f(x) = [5] \cdot (x - [6]) + c$
 - c is chosen to ensure continuity of $f(x)$ at $[6]$


Fit of a 1 in HB (log)

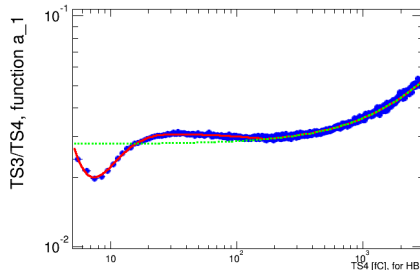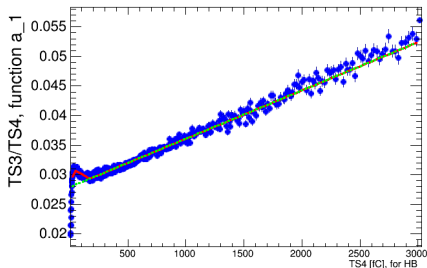


- Fit done on zero pileup sample: use only green line
- Fits now extend to TS4 = 3000 fC
- Parameters available on [GitHub](#)

Function fitting on zero pileup sample: a1

Fit of a1 in HB (lin)

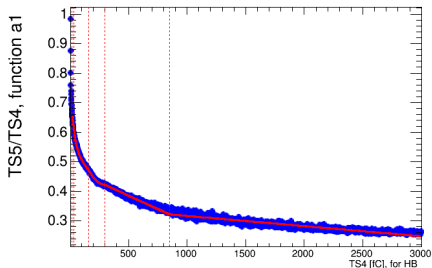


Fit of a1 in HB (log)

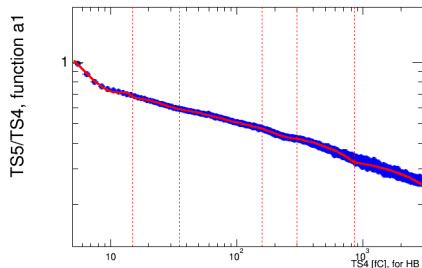


- Fit done on zero pileup sample
- Red lines correspond to fit ranges (Alexandre's functions)
- Parameters available on [GitHub](#)

Function validation on zero pileup sample: a1

Validation of a1 in HB
(TS4 > 0 fC)

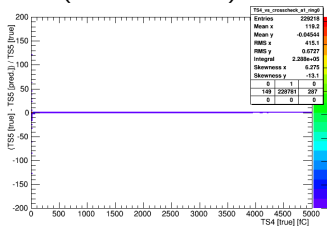


Validation of a1 in HB
(TS4 > 500 fC)

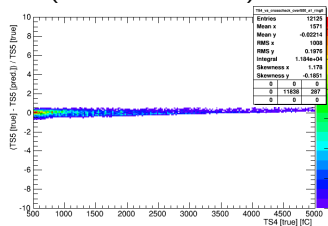


- Done on zero pileup sample
- y-axis: (TS5 true - TS5 pred.) / TS5 true
- x-axis: TS4 true
- Better performance than a_1

Function fitting on zero pileup sample: a2

Fit of a2 in HB (lin)

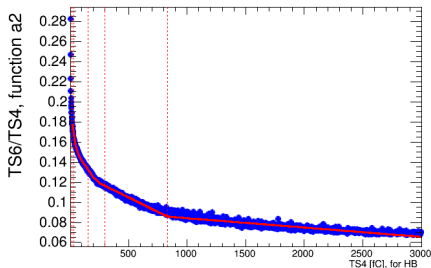


Fit of a2 in HB (log)

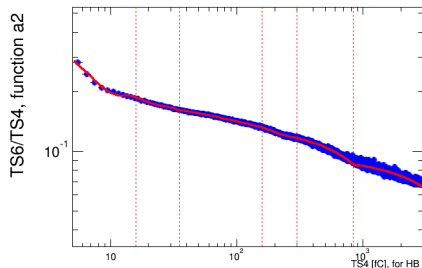


- Fit done on zero pileup sample
- Red lines correspond to fit ranges (Alexandre's functions)
- Parameters available on [GitHub](#)

Function validation on zero pileup sample: a2

Validation of a2 in HB
(TS4 > 0 fC)

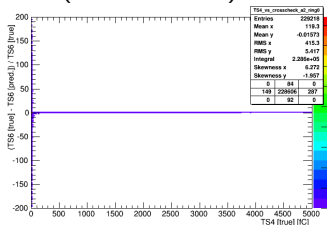


Validation of a2 in HB
(TS4 > 500 fC)

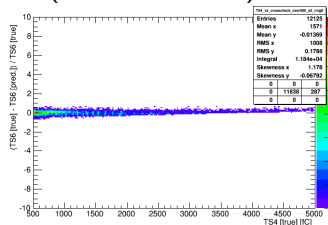


- Done on zero pileup sample
- y-axis: $(TS6 \text{ true} - TS6 \text{ pred.}) / TS6 \text{ true}$
- x-axis: $TS4 \text{ true}$
- Better performance than a 1

Function fitting on zero pileup sample: a3

Fit of a3 in HB (lin)

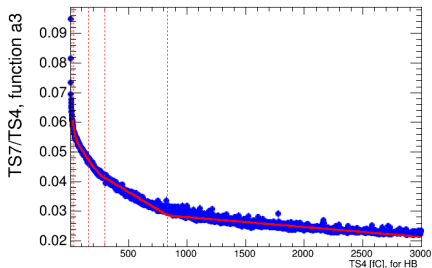


Fit of a3 in HB (log)

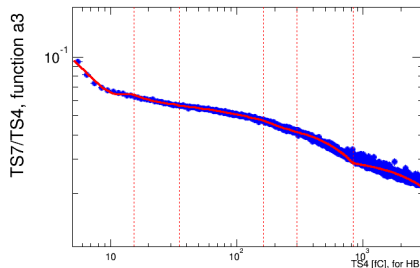


- Fit done on zero pileup sample
- Red lines correspond to fit ranges (Alexandre's functions)
- Parameters available on [GitHub](#)

Function validation on zero pileup sample: a3

Validation of a3 in HB (TS4 > 0 fC)

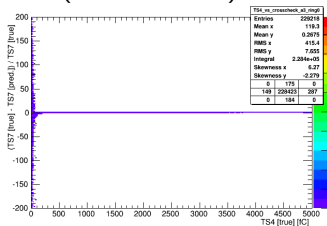


Validation of a3 in HB (TS4 > 500 fC)

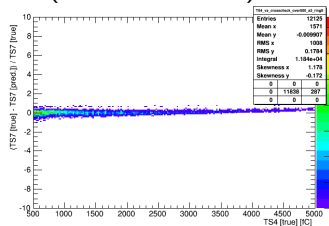


- Done on zero pileup sample
- y-axis: (TS7 true - TS7 pred.) / TS7 true
- x-axis: TS4 true
- Better performance than a_1

Results in HB

No correction applied

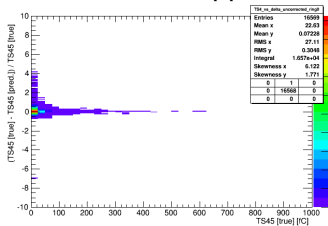


With correction applied

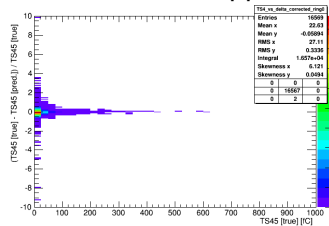


- Done on high pileup sample
- y-axis: $(TS45 \text{ true} - TS45 \text{ pred.}) / TS45 \text{ true}$
- x-axis: TS45 true

Results in HE: 17:20

No correction applied

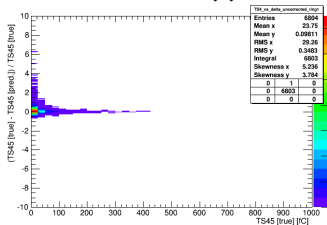


With correction applied

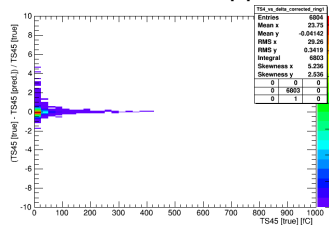


- Done on high pileup sample
- y-axis: $(TS45 \text{ true} - TS45 \text{ pred.}) / TS45 \text{ true}$
- x-axis: TS45 true

Results in HE: 28:28

No correction applied

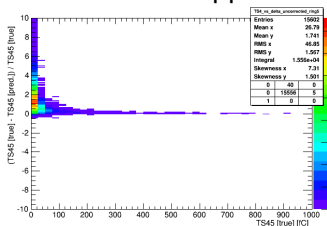

With correction applied

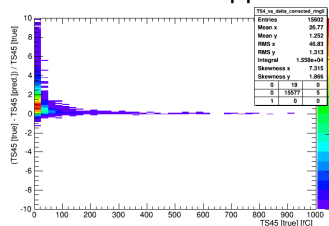

- Done on high pileup sample
- y-axis: $(TS45 \text{ true} - TS45 \text{ pred.}) / TS45 \text{ true}$
- x-axis: TS45 true

Conclusion

- Processed zero-PU samples: OK for shape studies
- Processed high-PU samples: OK for validation
- Fit functions **ready to go** using Alexandre's method:
 - Improved over fit functions from earlier talks
 - Fit functions model the zero-PU pulse shapes well
 - Fit functions now predict the high-PU pulses well
- Pictures of all fits available **here**