

P1132R4

out_ptr - a scalable output pointer abstraction

Published Proposal, 2019-06-17

Authors:

[JeanHeyd Meneide](#)

[Todor Buyukliev](#)

[Isabella Muerte](#)

Audience:

LWG

Project:

ISO/IEC JTC1/SC22/WG21 14882: Programming Language — C++

Latest:

https://the-phd.github.io/vendor/future_cxx/papers/d1132.html

Implementation:

https://github.com/ThePhD/out_ptr

Reply To:

[JeanHeyd Meneide](#) | [@thephantomderp](#)

Abstract

out_ptr and inout_ptr are abstractions to bring both C APIs and smart pointers back into the promised land by creating a temporary pointer-to-pointer that updates (using a reset call or semantically equivalent behavior) the smart pointer when it destructs.

Table of Contents

1 Revision History

- 1.1 Revision 4 - June 17th, 2019
- 1.2 Revision 3 - January 21st, 2019
- 1.3 Revision 2 - November 26th, 2018
- 1.4 Revision 1 - October 7th, 2018
- 1.5 Revision 0

2 Motivation

3 Design Considerations

- 3.1 Synopsis
- 3.2 Overview
- 3.3 Safety
- 3.4 Safety: Exceptions
- 3.5 Casting Support
 - 3.5.1 Casting Support: easy `void**` support
 - 3.5.2 Casting Support: to arbitrary `T`
- 3.6 Reallocation Support
- 3.7 Footguns?
- 3.8 Extension Points
 - 3.8.1 Rejected: just adding `get_ref` to related non-shared pointers
 - 3.8.2 Rejected: adding `&operator` to this type

- 3.8.3 Rejected: unrestricted ADL
- 3.8.4 Rejected: restricted ADL using in-class friend functions

4 Implementation Experience

- 4.1 Why Not Wrap It?

5 Performance

- 5.1 For `std::out_ptr`
- 5.2 For `std::inout_ptr`

6 Bikeshed

- 6.1 Alternative Specification
- 6.2 Naming

7 Proposed Changes

- 7.1 Proposed Feature Test Macro and Header
- 7.2 Intent
- 7.3 Proposed Wording

8 Acknowledgements

References

Informative References

§ 1. Revision History

§ 1.1. Revision 4 - June 17th, 2019

- Remove default `void**` conversion after discussion with LEWG and Boost members.
- Forwarded to LWG: just needs to be wording approved now!

§ 1.2. Revision 3 - January 21st, 2019

- Add details discussing upcoming implementations in [§4 Implementation Experience](#).
- Add section about implementation churn.
- Add details about flow control statements and temporary evaluation for [§3.7 Footguns?](#).
- Wording is now relative to [\[n4800\]](#), the latest working draft of the C++ Standard.

§ 1.3. Revision 2 - November 26th, 2018

- Add [§3.7 Footguns?](#) section.
- Discuss implementation experience in more detail.
- Add exception inspection and reasoning.
- Add additional design decision information about customization points.

§ 1.4. Revision 1 - October 7th, 2018

Add wording. Incorporate wording feedback. Eliminate CTAD design. Add a few more words about implementation experience.

§ 1.5. Revision 0

Initial release.

§ 2. Motivation

You're right that code shouldn't be using `shared_ptr`, I was trying to make it work with as little change as possible but after that and other more recent problems I'm finding a huge refactoring less and less avoidable. I'll make sure to turn everything into `unique_ptr` (there is no shared ownership anyways).

Your `out_ptr` will still be massively helpful. — *King_DuckZ, September 25th, 2018*

This library automates the `.reset(...)` and `--` sometimes additionally `--` the `.release()` call for smart pointers when interfacing with `T**` output arguments.

Shared Code		
From libavformat <pre>#include <memory> #include <avformat.h> struct AVFormatContextDeleter { void operator() (AVFormatContext* c) noexcept { avformat_close_input(&c); avformat_free_context(c); } }; typedef std::unique_ptr<AVFormatContext, AVFormatContextDeleter> AVFormatContext; // Signature from libavformat: // int avformat_open_input(AVFormatContext **ps, const char *url, AVInputFormat *fmt, AVDictionary **options)</pre>		
Current Code	With Prop	
<pre>int main (int, char* argv[]) { AVFormatContext context(avformat_alloc_context()); // ... // used, need to reopen AVFormatContext* raw_context = context.release(); if (avformat_open_input(&raw_context, argv[0], nullptr, nullptr) != 0) { std::stringstream ss; ss << "ffmpeg_image_loader could not open file '" << path << "'"; throw FFmpegInputException(ss.str().c_str()); } context.reset(raw_context); // ... off to the races ! return 0; }</pre>	<pre>int main (int, char* argv[]) { AVFormatContext context(avf // ... // used, need to reopen if (avformat_open_input(std argv[0], nullptr, n std::stringstream s ss << "ffmpeg_image << argv[0] throw FFmpegInputEx } // ... off to the races! return 0; }</pre>	

We have very good tools for handling unique and shared resource semantics, alongside more coming with [Intrusive Smart Pointers](#). Independently between several different companies, studios, and shops -- from VMWare and Microsoft to small game development startups -- a common type has been implemented. It has many names: `ptrptr`, `OutPtr`, `PtrToPtr`, `out_ptr`, [WRL::ComPtrRef](#), [a proposal on std-proposals](#) and even [unary operator& on CComPtr](#). It is universally focused on one task: making it so a smart pointer can be passed as a parameter to a function which uses an output pointer parameter in C API functions (e.g., `my_type**`).

This paper is a culmination of a private survey of types from the industry to propose a common, future-proof, high-performance `out_ptr` type that is easy to use. It makes interop with pointer types a little bit simpler and easier for everyone

who has ever wanted something like `my_c_function( &my_unique )`; to behave properly.

In short: it's a thing convertible to a `T**` that updates (with a reset call or semantically equivalent behavior) the smart pointer it is created with when it goes out of scope.

§ 3. Design Considerations

The core of `out_ptr`'s (and `inout_ptr`'s) design revolves around avoiding the mistakes of the past, preventing continual modification of new smart pointers and outside smart pointers's interfaces to perform the same task, and enabling some degree of performance efficiency without having to wrap every C API function.

§ 3.1. Synopsis

The function template's full specification is:

```
namespace std {
    template <class Pointer, class Smart, class... Args>
    out_ptr_t<Smart, Pointer, Args...>
    out_ptr(Smart& s, Args&&... args) noexcept;

    template <class Smart, class... Args>
    out_ptr_t<Smart, POINTER_OF(Smart), Args...>
    out_ptr(Smart& s, Args&&... args) noexcept;

    template <class Pointer, class Smart, class... Args>
    inout_ptr_t<Smart, Pointer, Args...>
    inout_ptr(Smart& s, Args&&... args) noexcept;

    template <class Smart, class... Args>
    inout_ptr_t<Smart, POINTER_OF(Smart), Args...>
    inout_ptr(Smart& s, Args&&... args) noexcept;
}
```

Where `POINTER_OF` is the `::pointer` type, then the `::element_type*` type, then `typename std::pointer_traits<Smart>::element_type*` type in that order. The return type `out_ptr_t` and its sister type `inout_ptr_t` are templated types and must at-minimum have the following:

```
template <class Smart, class Pointer, class... Args>
class out_ptr_t {
public:
    out_ptr_t(Smart&, Args...);
    ~out_ptr_t () noexcept(...);
    operator Pointer* () noexcept;
};

template <class Smart, class Pointer, class... Args>
class inout_ptr_t {
public:
    inout_ptr_t(Smart&, Args...);
    ~inout_ptr_t () noexcept;
    operator Pointer* () noexcept;
};
```

We specify "at minimum" because we expect users to override this type for their own shared, unique, handle-alike, reference-counting, and etc. smart pointers. The destructor of `~out_ptr_t()` calls `.reset()` on the stored smart pointer of type `Smart` with the stored pointer of type `Pointer` and arguments stored as `Args...`. `~inout_ptr_t()` does the same, but with the additional caveat that the constructor for `inout_ptr_t(Smart&, Args&&...)` also calls `.release()`, so that a `reset` doesn't double-delete a pointer that the expected re-allocating API used with `inout_ptr` already handles.

We chose this extension point because the other options (ADL extension, friend ADL extension) have proven to not be very feasible in the long run of maintainability. While we are wary that users open up namespace `std` we also recognize that it is essentially the best way that someone can extend this type to pointers and handles that are `_not_` part of the standard. If this only works with standard types -- and only standard types that are explicitly sanctioned -- then this type is almost certainly not worth it. See [§3.8 Extension Points](#) for more details.

§ 3.2. Overview

`out_ptr/inout_ptr` are free functions meant to be used for C APIs:

```
error_num c_api_create_handle(int seed_value, int** p_handle);
error_num c_api_re_create_handle(int seed_value, int** p_handle);
void c_api_delete_handle(int* handle);

struct resource_deleter {
    void operator()( int* handle ) {
        c_api_delete_handle(handle);
    }
};
```

Given a smart pointer, it can be used like so:

```
std::unique_ptr<int, resource_deleter> resource(nullptr);
error_num err = c_api_create_handle(
    24, std::out_ptr(resource)
);
if (err == C_API_ERROR_CONDITION) {
    // handle errors
}
// resource.get() the out-value from the C API function
```

Or, in the re-create (reallocation) case:

```
std::unique_ptr<int, resource_deleter> resource(nullptr);
error_num err = c_api_re_create_handle(
    24, std::inout_ptr(resource)
);
if (err == C_API_ERROR_CONDITION) {
    // handle errors
}
// resource.get() the out-value from the C API function
```

§ 3.3. Safety

This implementation uses a pack of `...Args` in the signature of `out_ptr` to allow it to be used with other types whose `.reset()` functions may require more than just the pointer value to form a valid and proper smart pointer. This is the case with `std::shared_ptr` and `boost::shared_ptr`:

```
std::shared_ptr<int> resource(nullptr);
error_num err = c_api_create_handle(
    24, std::out_ptr(resource, resource_deleter{})
);
if (err == C_API_ERROR_CONDITION) {
    // handle errors
}
// resource.get() the out-value from
// the C API function
```

Additional arguments past the smart pointer stored in `out_ptr`'s return type will perfectly forward these to whatever `.reset()` or equivalent implementation requires them. If the underlying pointer does not require such things, it may be ignored or discarded (optionally, with a compiler error using a static assert that the argument will be ignored for the given type of smart pointer).

Of importance here is to note that `std::shared_ptr` can and will overwrite any custom deleter present when called with just `.reset(some_pointer);`. Therefore, we make it a compiler error to not pass in a second argument when using `std::shared_ptr` without a deleter:

```
std::shared_ptr<int> resource(nullptr);
error_num err = c_api_create_handle(
    42, std::out_ptr(resource)
); // ERROR: deleter was changed
    // to an equivalent of
    // std::default_delete!
```

It is likely the intent of the programmer to also pass the fictional `c_api_delete_handle` function to this: the above constraint allows us to avoid such programmer mistakes.

§ 3.4. Safety: Exceptions

This is two-fold. First, by placing the `.reset()` call into the destructor of `out_ptr/inout_ptr`, we can guarantee safety that trivial code does not have. For example, consider this abstracted form of the production code shown in the Tony Table:

```
std::unique_ptr<int> num(new int());
// use, then have to prepare for some
// c_api call
int* raw_num = num.release();
if (my_c_api_call(&raw_num) != 0) {
    // leak if the c api call does nothing!!
    throw std::runtime_error("leaking memory!");
}
num.reset(raw_num);
```

If the user used `std::inout_ptr`, the value would be guaranteed to put back into the unique pointer, and then subsequently destroyed as the stack continued to be unwound.

Secondly, the destructor for `out_ptr` calls to `.reset()`. The only case where this is questionable is with `std::shared_ptr`: the creation of the passed-in deleter might throw, and thusly the call cannot be `noexcept`. This means that the destructor might throw if `std::shared_ptr`'s `.reset()` throws: in this case, `std::terminate` would be called.

§ 3.5. Casting Support

There are also many APIs (COM-style APIs, base-class handle APIs, type-erasure APIs) where the initialization requires that the type passed to the function is of some fundamental (`void**`) or base type that does not reflect what is stored exactly in the pointer. Therefore, it is necessary to sometimes specify what the underlying type `out_ptr` uses is stored as.

It is also important to note that going in the *opposite* direction is also highly desirable, especially in the case of doing API-hiding behind an e.g. `void*` implementation. `out_ptr` supports both scenarios with an optional template argument to the function call.

§ 3.5.1. Casting Support: easy `void**` support

Consider this DirectX Graphics Infrastructure Interface (DXGI) function on `IDXGIFactory6`:

```

HRESULT EnumAdapterByGpuPreference(
    UINT Adapter,
    DXGI_GPU_PREFERENCE GpuPreference,
    REFIID riid,
    void** ppvAdapter
);

```

Using `out_ptr`, it becomes trivial to interface with it using an exemplary `std::unique_ptr<IDXGIAdapter, ComDeleter> adapter`:

```

HRESULT result = dxgi_factory.
EnumAdapterByGpuPreference(0,
    DXGI_GPU_PREFERENCE_MINIMUM_POWER,
    IID_IDXGIAdapter,
    std::out_ptr<void*>(adapter)
);
if (FAILED(result)) {
    // handle errors
}
// adapter.get() contains strongly-typed pointer

```

No manual casting, `.release()` fiddling, or `.reset()` is required: the returned type from `out_ptr` handles that. This is because the `out_ptr_t` and `inout_ptr_t` types have conversion operations to not only the detected `::pointer` or `::element_type*` of the smart pointer, but a `reinterpret_cast` conversion to `void*` as well. While the size of `void*` is not required by the C++ standard to be the same as the size of any other types pointer (except const/volatile qualified `char*`), most C APIs that use this technique have already sanctioned the conversion from whatever type the API works with to `void*` and, subsequently, `void**`.

This idiom is also useful for the `QueryInterface` base function for COM's `IUnknown`, and for Vulkan's `vkMapMemory`.

§ 3.5.2. Casting Support: to arbitrary T

In many cases, there is a typical C structure or similar that C++ users are sanctioned to derive and extend with their own data, with the promise that as long as the pointed passed to the function has a base class or matching type. It also happens that someone needs to cast from a type-erased `void*` to a more-derived type. There are also cases where the type stored in `std::unique_ptr<T, Deleter>` uses `Deleter` to override the `::pointer` type, making `std::unique_ptr` store the (fat, offset) `::pointer` that is convertible to `T*`.

For example, one technique detailed by a graphics develop helped them make an agnostic `graphics_handle` type: a type-erased pointer for DirectX or a regular integer for OpenGL. This requires casting from a chunk of type-erased storage to a more concrete `ID3D11Texture*` or similar. Allowing for `out_ptr` to work on that level was critical for its usage in these cases.

It is imperative that the user be allowed to specify a casting parameter that the `out_ptr_t/inout_ptr_t`, and that is done by simply adding a type when calling the desired function. Consider a specialized `std::unique_ptr<int, fd_deleter>` where `::pointer` is a typedef to a special `fd` type:

```

struct fd {
    int handle;

    fd()
    : fd(nullptr) {}
    fd(std::nullptr_t)
    : handle(static_cast<intptr_t>(-1)) {}
    fd(FILE* f)
#ifdef _WIN32
    : handle(f ? _fileno(f) : static_cast<intptr_t>(-1)){}
#else
    : handle(f ? fileno(f) : static_cast<intptr_t>(-1)) {}
#endif // Windows
    }

    explicit operator bool() const;

    bool operator==(std::nullptr_t) const;
    bool operator!=(std::nullptr_t) const;
    bool operator==(const fd& fd) const;
    bool operator!=(const fd& fd) const;
};

struct fd_deleter {
    using pointer = fd;
    void operator()(fd des) const;
};

```

Casting in this case is cumbersome and often error-prone to do properly when interfacing with C or C++ standard library facilities. It becomes trivial with `std::out_ptr`:

```

std::unique_ptr<int, fd_deleter> my_unique_fd;
auto err = fopen_s( std::out_ptr<FILE*>(my_unique_fd), "prod.csv", "rb" );
// check err, then work with raw fd

```

This is an example of a codebase which works primarily off of file descriptors, but wants to interop with the standard C and C++ libraries. The cast here is valid and properly opens the file, while the `fd` type handles converting in and out of the type safely and seamlessly, without going through extra effort or having to interact more closely with the POSIX API. This makes it easy to perform interop with a "high-level" or "convertible" type, while still working with the desired "low-level" or "native" type.

This also demonstrates `out_ptr`'s ability to work with offset/fat/not-quite-exactly pointers, which are allowed by `std::unique_ptr` and the upcoming `std::retain_ptr`.

The full example code for Windows and *Nix platforms is [available as a compile-able example](#).

§ 3.6. Reallocation Support

In some cases, a function given a valid handle/pointer will delete that pointer on your behalf before performing an allocation in the same pointer. In these cases, just `.reset()` is entirely redundant and dangerous because it will delete a pointer that it does not own. Therefore, there is a second abstraction called `inout_ptr`, so aptly named because it is both an input (to be deleted) and an output (to be allocated post-delete). `inout_ptr`'s semantics are exactly like `out_ptr`'s, just with the additional requirement that it calls `.release()` on the smart pointer upon constructing the temporary `inout_ptr_t`.

This can be heavily optimized in the case of `unique_ptr`, but to do so from the outside requires Undefined Behavior or modification of the standard library. See [§5.2 For std::inout_ptr](#) for further explication.

§ 3.7. Footguns?

As far as we know and have designed this specification, `std::out_ptr` and `std::inout_ptr` have no hidden or easy-to-access footguns for its intended usage. Originally, `std::out_ptr` was going to potentially include a runtime parameter to encapsulate the behavior of `std::inout_ptr`; however, it was deemed much better design to separate the two out into separate functions. This also matched VMWare's implementation experience with the type and generated far superior code. It also made it easier to know when to pick `out_ptr` versus `inout_ptr`: one is for regular allocations that just create something new, the other is for the case when you need to reallocate into the pointer and thusly can save some instructions.

Furthermore, all examples of `out_ptr/inout_ptr` include usage as a temporary to a function call. Let us assume someone wanted to get sufficiently clever:

```
std::unique_ptr<int> u_ptr;
auto op = std::out_ptr(u_ptr);
int err = c_function_call(op);
if (err != 0) {
    throw std::runtime_error()
}
```

This still behaves the same: but, `.reset()` will be called before the `unique_ptr` goes out of scope. Unless the user performs extraordinary gymnastics to circumvent the typical lifetime of the factory-generated `out_ptr`, there are no footguns in regular and general usage.

The only other place where someone could be sufficiently clever is with a function call `_and_` a flow control statement. For example, an `if` statement that initializes something and also tests the smart pointer in that same `if` statement will extend lifetimes in a very poor order:

```
std::unique_ptr<foo_handle, foo_deleter> my_unique(nullptr);

if (get_some_pointer(std::out_ptr(my_unique)); my_unique) {
    std::cout << "yay" << std::endl;
}
else {
    std::cout << "oh no" << std::endl;
}
```

This happens whether the expression is chained with multiple comma/conditional expressions or if someone uses the new flow-control initializer statements. This is an unfortunately holdover of how temporaries are treated, and rather being fixed with flow control initializer statements the same quirky rules for the old `if` were carried over.

This was pointed out as strange, but we feel this is not much of a blocker for this proposal. All RAII-based, action-on-destroy resources suffer from this problem: it is neither a new nor novel problem. One does not use a `std::lock_guard` in similar fashion to the snippet above; neither should `std::out_ptr` be used to that effect. Even [Microsoft's Raymond Chen](#) takes issues with temporary destructors and lifetimes in `if` statements and similar.

§ 3.8. Extension Points

A number of extension points were considered for this proposal. We have purposefully selected the ability to specialize the class template because it is the most flexible approach that allows library authors outside of the `std::` namespace customize their types to work properly. This proposal rose primarily out of seeing many `_different_` kinds of smart pointers handled in many codebases, from hobby to industry, that are currently not covered (and likely not to be covered in the near future) by the standard. Therefore, an extension mechanism that is available to library authors and users seems to be the most efficient.

It is also important that we limit the surface area in which the user can harm themselves and their users. ADL, for example, can cause supreme danger because the overloads of `std::out_ptr` and `std::inout_ptr` are variadic forwarding templates which handle when a user might want to pass additional arguments to `offset_ptr` or similar. This can be quite dangerous as it is ripe territory for ambiguities.

Class template specialization requires exactly matching arguments and does not suffer from potential convertibility in which other solutions might pick wrong overloads or select the wrong extension call because of mixed-namespace arguments. It also prevents build breaks from being introduced in subtle and hard-to-catch ways. It is also much less likely for someone to try to apply `std::enable_if_t` or Concept constraints on their template class specializations to resolve ambiguities because of the exact-matching feature, as opposed to functions where partial and full specialization are hazardous and error-prone to get right.

Below are catalogued some explored and **ultimately rejected** customization points.

§ 3.8.1. Rejected: just adding `get_ref` to related non-shared pointers

This solution seeks to resolve performance problems and reseating issues by having `std::unique_ptr` add a `T*& get_ref()` function on itself that an `inout_ptr` solution or C function user might take advantage of. The problem is this breaks encapsulation over its knee and destroys and integrity the pointer value has from `unique_ptr`'s invariant. Additionally, it means that all libraries have to provide a function on their types that they currently do not provide (and for very good reason). While tempting as low-hanging fruit, this is an extraordinary example of a simple design which has far-reaching, poor consequences.

§ 3.8.2. Rejected: adding `&operator` to this type

This is the same sin committed by Microsoft with `CComPtr` that ushered in the age of `std::addressof` with all due experience for Windows users. While proposed a few times throughout history (including in the early incubation tank of std-proposals), this is not a mistake the community should make twice.

§ 3.8.3. Rejected: unrestricted ADL

`std::swap` works out fairly nicely as an extension point. Coming up with a fairly expansive name that is not as common as `swap` and designating that to be the ADL extension point could be worth doing. Also creating callable Customization Point Objects that `using std::the_func` before calling `the_func` in an unqualified manner is similar to the design decision ranges made.

Unfortunately, ADL is also entirely unconstrained once opened up in this manner. It takes careful programming and perhaps a bit of SFINAE to ensure there are no collisions, especially in the "base cases" users might want to specialize for. This can lead to brittle code that breaks when we ship updates to the desired ADL extension point, or users that under or over-constrain their version of the function. It exposes too much surface area for the programmer to load not a footgun but a landmine that either their future selves, coworkers, or left-behind future colleagues might get lost on.

It is a considerable contender but for the above reasons -- especially since `out_ptr/inout_ptr` need to have unconstrained variadic arguments to pass additional extra arguments to pointers like `boost::/std::shared_ptr` or `boost::intrusive_ptr` or the upcoming `std::retain_ptr` -- it is rejected.

§ 3.8.4. Rejected: restricted ADL using in-class friend functions

At first, this idea is tempting. It is used in `abseil` to e.g. provide hash customization and allows the implementer to access the internals of the pointer they are adding it to. Having a `static friend` function seems to cover the biggest risks (asides from template footguns in the previous section). In a world where building from source and owning your dependencies is ideal, or being able to freeze versions at will and edit code that you know is abandon-ware, this seems like the ideal solution that covers most use cases. It also seems to prevent the more naughty use cases of ADL.

Unfortunately, this requires opt-in from every author of a library type. This means that either you fork the library to your own version and patch it, maintain a patch in the case of an author who does not deem you adding that extension point useful, or just own the library and stay up to date. While feasible for large teams that have bandwidth to spend on this problem, this is problematic for smaller teams and hobby developers. It is a good way to do extension, but it is a novel idea and only tested within a few libraries. There are also issues of legality when performing modification to headers and compiled code directly to support this idiom: `out_ptr` as currently designed does not fall prey to such problems.

Already, users have sent me tweets and e-mails about extending this for their own types that they do not own. It would defeat the purpose of this type to require explicit opt-in.

§ 4. Implementation Experience

This library has been brewed at many companies in their private implementations, and implementations in the wild are scattered throughout code bases with no unifying type. As noted in [§2 Motivation](#), Microsoft has implemented this in `WRL::ComPtrRef`. Its earlier iteration -- `CComPtr` -- simply overrode `operator&`. We assume they prefer the former after having forced the need with `CComPtr` for `std::addressof`. the WRL is a public library used in thousands of applications, and has an interface similar to the proposed `std::out_ptr/std::inout_ptr`.

VMWare has a type that much more closely matches the specification in this paper, titled `Vtl::OutPtr`. The primary author of this paper wrote and used `out_ptr` for over 5 years in their code base working primarily with graphics APIs such as DirectX and OpenGL, and more recently Vulkan. They have also seen a similar abstraction in the places they have interned at.

Similarly, Adobe's Chromium project has its [own version of out_ptr](#).

The primary author of [\[p0468\]](#) in pre-r0 days also implemented an overloaded `operator&` to handle interfacing with C APIs, but was quickly talked out of actually proposing it when doing the proposal. That author has joined in on this paper to continue to voice the need to make it easier to work with C APIs without having to wrap the function.

Given that many companies, studios and individuals have all invented the same type independently of one another, we believe this is a strong indicator of agreement on an existing practice that should see a proposal to the standard.

A [full implementation with UB and friendly optimizations is available in the repository](#). The type has been privately used in many projects over the last four years, and this public implementation is already seeing use at companies today. It has been particularly helpful with many COM APIs, and the re-allocation support in `inout_ptr` has been useful for FFmpeg's functions which feature reallocation support in their functions (e.g., `avformat_open_input`).

A version of this library is going to be available in Boost in time for 1.70, which should roll out in April. It has been extensively proofed and checked over by Peter Dimov and Glen Fernandes in initial vetting for [the Boost.SmartPtr repository at this issue](#).

§ 4.1. Why Not Wrap It?

A common point raised while using this abstraction is to simply "wrap the target function". We believe this to be a non-starter in many cases: there are thousands of C API functions and even the most dedicated of tools have trouble producing lean wrappers around them. This tends to work for one-off functions, but suffers scalability problems very quickly.

Templated intermediate wrapper functions which take a function, perfectly forwards arguments, and attempts to generate e.g. a `unique_ptr` for the first argument and contain the boiler plate within itself also causes problems. Besides from the (perhaps minor) concern that such a wrapping function disrupts any auto-completion or tooling, the issue arises that C libraries -- even within themselves -- do not agree on where to place the `some_c_type**` parameter and detecting it properly to write a generic function to automatically do it is hard. Even within the C standard library, some functions have output parameters in the beginning and others have it at the end. The disparity grows when users pick up libraries outside the standard.

§ 5. Performance

Many C programmers in our various engineering shops and companies have taken note that manually re-initializing a `unique_ptr` when internally the pointer value is already present has a measurable performance impact.

Teams eager to squeeze out performance realize they can only do this by relying on type-punning shenanigans to extract the actual value out of `unique_ptr`: this is expressly undefined behavior. However, if an implementation of `out_ptr` could be friended or shipped by the standard library, it can be implemented without performance penalty.



Below are some graphs indicating the performance metrics of the code. 5 categories were measured:

- "c_code": handwritten C code, which does not use this idiom
- "clever": uses UB to alias the pointer value stored in `std::unique_ptr`
- "friendly": modifies VC++'s, libc++'s, and libstdc++'s `std::unique_ptr`s to allow the implementation to friend the `out_ptr` implementation, to access the internals without UB
- "manual": does the work by-hand using reset/release from a `std::unique_ptr`
- "simple": a `out_ptr` implementation that naively resets

The full JSON data for these benchmarks is available [in the repository](#), as well as all of the code necessary to run the benchmarks across all platforms with a simple CMake build system.


§ 5.1. For `std::out_ptr`

You can observe two graphs for two common `unique_ptr` usage scenarios, which are using the pointer locally and discarding it ("local"), and resetting a pre-existing pointer ("reset") for just an output pointer:

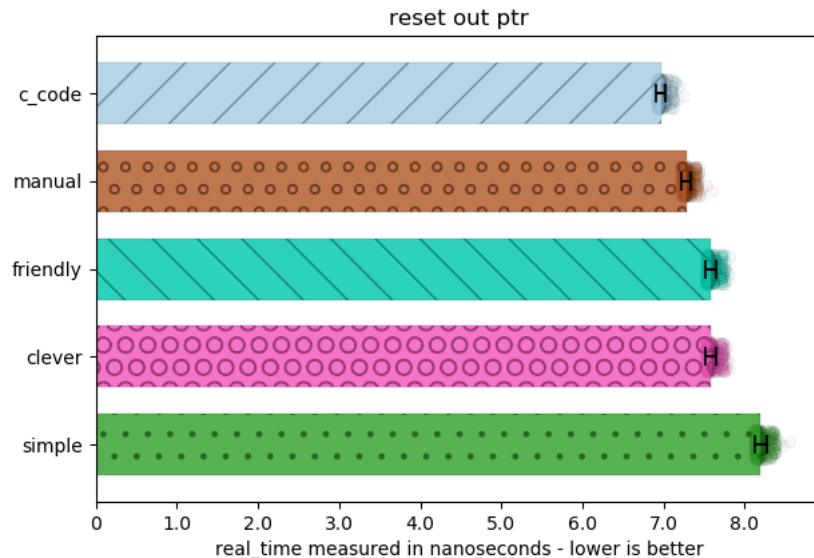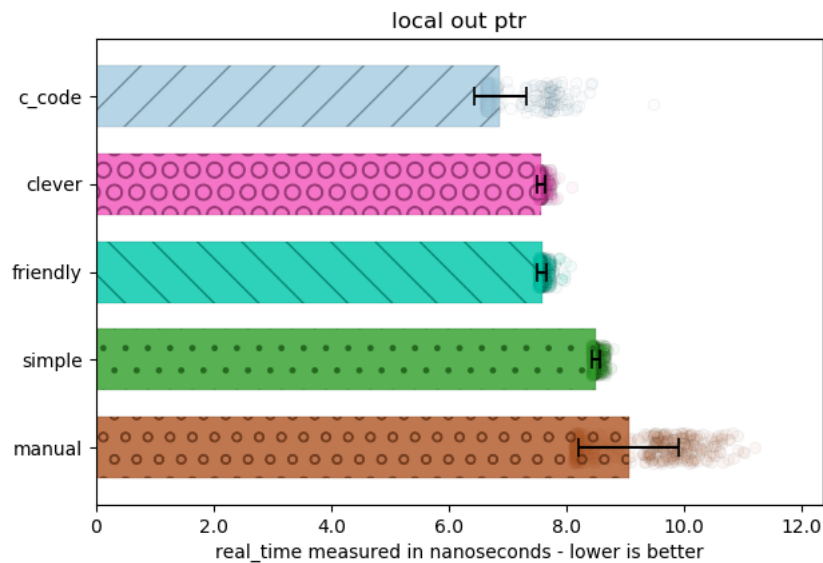

§ 5.2. For `std::inout_ptr`

The speed increase here is even more dramatic: reseating the pointer through `.release()` and `.reset()` is much more expensive than simply aliasing a `std::unique_ptr` directly. Places such as VMWare have to perform Undefined Behavior to get this level of performance with `inout_ptr`: it would be much more prudent to allow both standard library vendors and users to be able to achieve this performance without hacks, tricks, and other I-promise-it-works-I-swear pledges.

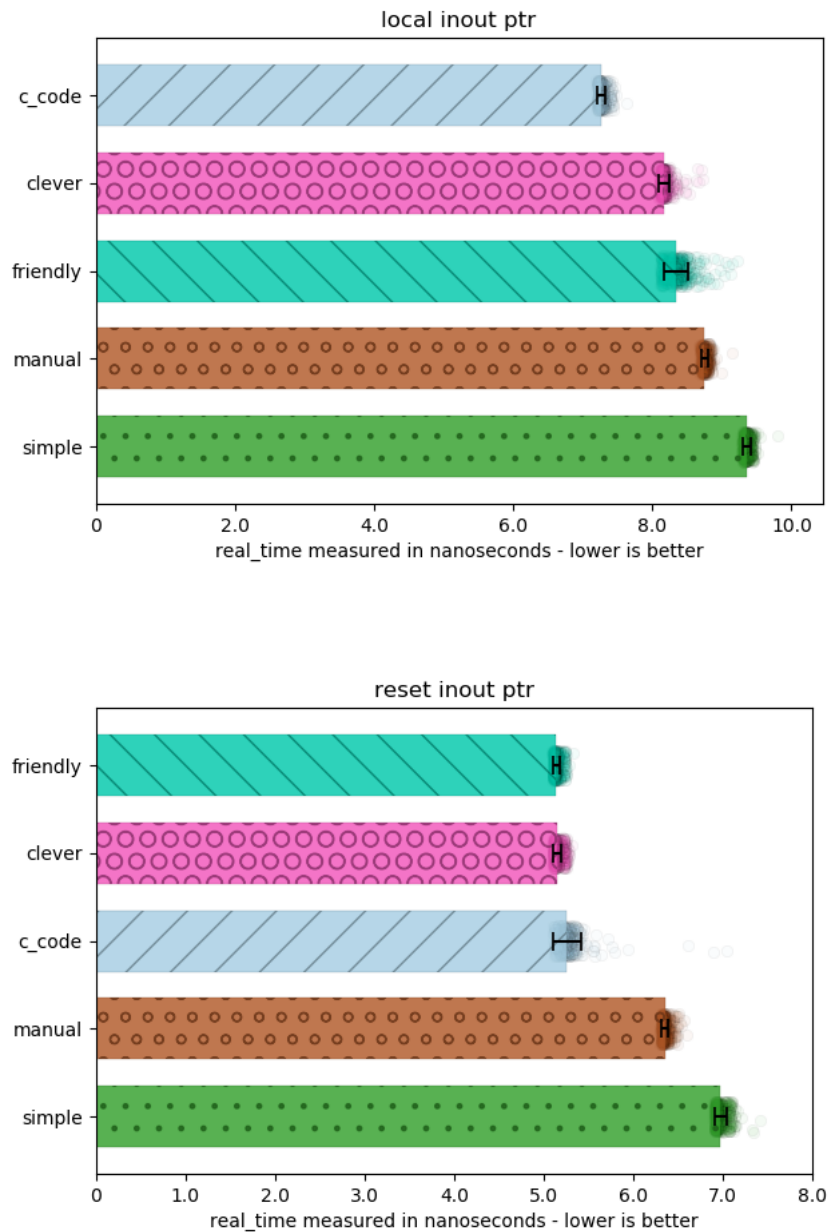

§ 6. Bikeshed

As with every proposal, naming, conventions and other tidbits not related to implementation are important. This section is for pinning down all the little details to make it suitable for the standard.

§ 6.1. Alternative Specification

The authors of this proposal know of two ways to specify this proposal's goals.

The authors have settled on the approach in [§3.1 Synopsis](#). We believe this is the most robust and easiest to use: singular names tend to be easier to teach and use for both programmers and tools. We discuss the older techniques to uphold thorough discussion and inspection of the solution space.

The first way is to specify both functions `out_ptr` and `inout_ptr` as factories, and then have their types named differently, such as `std::out_ptr_t` and `std::inout_ptr_t`. The factory functions and their implementation will be fixed in place, and users would be able to (partially) specialize and customize `std::out_ptr_t` and `std::inout_ptr_t` for types external to the stdlib for maximum performance tweaking and interop with types like `boost::shared_ptr`, `my_lib::local_shared_ptr`, and others. This is the direction this proposal takes.

The second way is to specify the class names to be `std::out_ptr` / `std::inout_ptr`, and then used Template Argument Deduction for Class Templates from C++17 to give a function-like appearance to their usage. Users can still specialize for types external to the standard library. This approach is more Modern C++-like, but contains a caveat.

Part of this specification is that you can specify the stored pointer for the underlying implementation of `out_ptr` as shown in [§3.5 Casting Support](#). Template Argument Deduction for Class Templates does not allow partial specialization (and for good reason, see the interesting example of `std::tuple<int, int>{1, 2, 3}`). The "Deduction Guides" (or CTAD) approach would accommodate [§3.5 Casting Support](#) using functions with a more explicit names, such as `out_ptr_cast<void*>( ... );` and `inout_ptr_cast<void*>( ... );`.

§ 6.2. Naming

Naming is hard, and therefore we provide a few names to duke it out in the Bikeshed Arena:

For the `out_ptr` part:

- `out_ptr`
- `c_ptr`
- `c_out_ptr`
- `out_c_ptr`
- `alloc_c_ptr`
- `out_smart`
- `ptrptr`
- `ptr_to_ptr`
- `ptr_to_smart`
- `ptr_ref`

For the `inout_ptr` part:

- `inout_ptr`
- `c_in_ptr`
- `c_inout_ptr`
- `inout_c_ptr`
- `realloc_c_ptr`
- `inout_smart`
- `realloc_ptr_to_ptr`
- `realloc_ptr_to_smart`
- `realloc_ptr_ref`

As a pairing, `out_ptr` and `inout_ptr` are the most cromulent and descriptive in the authors' opinions. The type names would follow suit as `out_ptr_t` and `inout_ptr_t`. However, there is an argument for having a name that more appropriately captures the purpose of these abstractions. Therefore, `c_out_ptr` and `c_inout_ptr` would be even better, and the shortest would be `c_ptr` and `c_in_ptr`.

§ 7. Proposed Changes

The following wording is for the Library section, relative to [n4800]. This feature will go in the `<memory>` header, and is added to [utilities.smartptr] §20.11, at the end as subsection 9.

§ 7.1. Proposed Feature Test Macro and Header

This should be available with the rest of the smart pointers, and thusly be included by simply including `<memory>`. If there is a desire for more fine-grained control, then we recommend the header `<out_ptr>` (subject to change based on bikeshed painting above). There has been some expressed desire for wanting to provide more fine-grained control of what entities the standard library produces when including headers: this paper does not explicitly propose adding such headers or doing such work, merely making a recommendation if this direction is desired by WG21.

The proposed feature test macro for this is `__cpp_lib_out_ptr`. The exposure of `__cpp_lib_out_ptr` denotes the existence of both `inout_ptr` and `out_ptr`, as well as its customization points `out_ptr_t` and `inout_ptr_t`.

§ 7.2. Intent

The intent of this wording is to allow implementers the freedom to implement the return type from `out_ptr` as they so choose, so long as the following criteria is met:

- the return type is of the name `inout_ptr_t/out_ptr_t` and is a template with 3 template parameters;
- the destructor of `inout_ptr_t/out_ptr_t` properly re-seats the pointer owned/stored by whatever smart/fancy pointer is passed as the first argument to `out_ptr`;
- the proper implicit conversion operators are added to the type,
- the standard library implementation itself does not specialize `inout_ptr_t/out_ptr_t`'s templates, either fully or partially, so that the user can override the behavior of these templates as they so choose;
- `std::shared_ptr` used with the `out_ptr` or `inout_ptr` functions will produce a diagnostic if it is called without a second argument meant to be passed as the deleter to a `.reset()` call; and
- `std::shared_ptr` used with `inout_ptr_t` will always result in a diagnostic because it is impossible to completely release the resource from its shared ownership.

The goals of the wording are to not restrict implementation strategies (e.g., a `friend` implementation as benchmarked above for `unique_ptr`, or maybe a UB/IB implementation as also documented above). It is also explicitly meant to error for smart pointers whose `.reset()` call may reset the stored deleter (à la `boost::shared_ptr/std::shared_ptr`) and to catch programmer errors.

§ 7.3. Proposed Wording

Note: The  character is used to denote a placeholder number which shall be selected by the editor.  represents the top-level entry place. For N4800, that  is 20.

Append to §17.3.1 General [support.limits.general]'s Table 35 one additional entry:

Macro name	Value	Header(s)
<code>__cpp_lib_out_ptr</code>	201811L	<code><memory></code>

Modify §20.10.1 In general [memory.general] as follows:

¹ The header defines several types and function templates that describe properties of pointers and pointer-like types, manage memory for containers and other template types, destroy objects, and construct multiple objects in uninitialized memory buffers (20.10.3–19.10.11). The header also defines the templates `unique_ptr`, `shared_ptr`, `weak_ptr`, `out_ptr_t`, `inout_ptr_t`, and various function templates that operate on objects of these types (20.11).

Add §20.10.2 Definitions [**memory.defns**] as follows:

¹ Definition: Let `POINTER_OF_OR(T, U)` denote a type that is:

- `T::pointer` if the qualified-id `T::pointer` is valid and denotes a type, or
- otherwise, `typename T::element_type*` if the qualified-id `T::element_type` is valid and denotes a type,
- otherwise, `U`.

² Definition: Let `POINTER_OF(T)` denote a type that is defined as `POINTER_OF_OR(T, typename std::pointer_traits<T>::element_type*)`.

Add to §20.10.3 (previously §20.10.2) Header `<memory>` synopsis [**memory.syn**] the `out_ptr`, `inout_ptr`, `out_ptr_t` and `inout_ptr_t` functions and types:

```
// 20.11.9, out_ptr_t
template <class Smart, class Pointer, class... Args>
    class out_ptr_t;

// 20.11.10, out_ptr
template <class Pointer, class Smart, class... Args>
    out_ptr_t<Smart, Pointer, Args...> out_ptr(Smart& s, Args&&... args) noexcept;

template <class Smart, class... Args>
    out_ptr_t<Smart, POINTER_OF(Smart), Args...> out_ptr(Smart& s, Args&&... args) noexcept;

// 20.11.11, inout_ptr_t
template <class Smart, class Pointer, class... Args>
    class inout_ptr_t;

// 20.11.12, inout_ptr
template <class Pointer, class Smart, class... Args>
    inout_ptr_t<Smart, Pointer, Args...> inout_ptr(Smart& s, Args&&... args) noexcept;

template <class Smart, class... Args>
    inout_ptr_t<Smart, POINTER_OF(SMART), Args...> inout_ptr(Smart& s, Args&&... args) noe
```

Insert §20.11.9 [**out_ptr.class**]:

20.11.9 Class Template `out_ptr_t` [out_ptr.class]

¹ `out_ptr_t` is a type used with smart pointers ([[smartptr](#)] 20.11) and types which are designed on the same principles to interoperate easily with functions that use output pointer parameters. [Note — For example, a function of the form `void foo(void**)`. — end note]

² `out_ptr_t` may be specialized ([[temp.class.spec](#)] 13.6.5) for program-defined types and shall meet the observable behavior in the rest of this section.

```
namespace std {  
  
    template <class Smart, class Pointer, class... Args>  
    class out_ptr_t {  
    public:  
        // 20.11.9.1, constructors  
        out_ptr_t(Smart&, Args...) noexcept;  
        out_ptr_t(out_ptr_t&&) noexcept;  
  
        // 20.11.9.2, assignment  
        out_ptr_t& operator=(out_ptr_t&&) noexcept;  
  
        // 20.11.9.3, destructors  
        ~out_ptr_t() noexcept(see-below);  
  
        // 20.11.9.4, conversion operators  
        operator Pointer*() noexcept;  
  
    private:  
        Smart* s; // exposition only  
        tuple<Args...> a; // exposition only  
        Pointer p; // exposition only  
    };  
};
```

² If `Smart` is a specialization of `shared_ptr` and `sizeof...(Args) == 0`, the program is ill-formed. `Pointer` shall meet the [Cpp17NullablePointer](#) requirements ([[nullablepointer.requirements](#)] 16.5.3.3)).

³ [Note: It is typically a user error to reset a `shared_ptr` without specifying a deleter, as `std::shared_ptr` will replace a custom deleter with the default deleter upon usage of `.reset()`, as specified in 20.11.3.4. — end note]

20.11.9.1 Constructors [out_ptr.class.ctor]

```
out_ptr_t(Smart& smart, Args&&... args) noexcept;
```

¹ Effects: initializes `s` with `addressof(smart)`, `a` with `std::forward<Args>(args)...`, and initializes `p` to its value initialization.

```
out_ptr_t(out_ptr&& rhs) noexcept;
```

² Effects: initializes `s` with `std::move(rhs.s)`, `a` with `std::move(args)...`, and `p` with `std::move(rhs.p)`. Then sets `rhs.p` to `nullptr`.

20.11.9.2 Assignment [out_ptr.class.assign]

```
out_ptr_t& operator=(out_ptr&& rhs) noexcept;
```

¹ Effects: Equivalent to:

```

s = std::move(rhs.s);
a = std::move(rhs.a);
p = std::move(rhs.p);
rhs.p = nullptr;
return *this;

```

20.11.9.3 Destructors [out_ptr.class.dtor]

```

~out_ptr_t() noexcept(see-below);

```

¹ Let SP be `POINTER_OF_OR(Smart, Pointer)` ([memory.defns] 20.10.2).

² Effects: Equivalent to:

```

— if (p != nullptr) { s->reset( static_cast<SP>(p), std::forward<Args>(args)... ); }
if the expression s->reset( static_cast<SP>(p), std::forward<Args>(args)... ) is well-formed,
— otherwise if (p != nullptr) { *s = Smart( static_cast<SP>(p), std::forward<Args>
( args )... ); } ;

```

where `Args` are the arguments stored in `a`.

⁴ Throws:

```

— no exceptions and is noexcept if std::is_pointer_v<Smart> is true;
— any exceptions and is conditionally noexcept from s->reset( static_cast<SP>(p),
std::forward<Args>(args)... ); if the expression s->reset( static_cast<SP>(p),
std::forward<Args>(args)... ) is well-formed;
— otherwise, any exceptions and is conditionally noexcept from *s = Smart( static_cast<SP>(p),
std::forward<Args>(args)... ); ;

```

where `Args` are the arguments stored in `a`.

20.11.9.4 Conversions [out_ptr.class.conv]

```

operator Pointer*() noexcept;

```

¹ Effects: returns a pointer to `p`.

Insert §20.11.10 [out_ptr]:

20.11.10 Function Template `out_ptr` [out_ptr]

¹ `out_ptr` is a function template that produces an object of type `out_ptr_t` ([out_ptr.class] 20.11.9).

```
namespace std {  
  
    template <class Pointer, class Smart, class... Args>  
    out_ptr_t<Smart, Pointer, Args...> out_ptr(Smart& s, Args&&... args) noexcept;  
  
    template <class Smart, class... Args>  
    out_ptr_t<Smart, POINTER_OF(Smart), Args...> out_ptr(Smart& s, Args&&... args) noexcept;  
  
}
```

² Effects: The first overload is Equivalent to: `return out_ptr_t<Smart, Pointer, Args...>(s, std::forward<Args>(args)...)`;

³ Effects: The second overload is Equivalent to: `return out_ptr_t<Smart, POINTER_OF(Smart), Args...>(s, std::forward<Args>(args)...)`;

Insert §20.11.11 [inout_ptr.class]:

20.11.11 Class Template `inout_ptr_t` [`inout_ptr.class`]

¹ `inout_ptr_t` is a type used with smart pointers ([`smartptr`] 20.11) and types which are designed on the same principles to interoperate easily with functions that use output pointer parameters. [*Note:* For example, a function of the form `errno_t foo_realloc(void**);` — *end note*].

² `inout_ptr_t` may be specialized ([`temp.class.spec`] 13.6.5) for program-defined types and shall meet the observable behavior in the rest of this section.

```
namespace std {  
  
    template <class Smart, class Pointer, class... Args>  
    class inout_ptr_t {  
    public:  
        // 20.11.11.1, constructors  
        inout_ptr_t(Smart&, Args...) noexcept;  
        inout_ptr_t(inout_ptr_t&&) noexcept;  
  
        // 20.11.11.2, assignment  
        inout_ptr_t& operator=(inout_ptr_t&&) noexcept;  
  
        // 20.11.11.3, destructors  
        ~inout_ptr_t() noexcept(see below);  
  
        // 20.11.11.4, conversion operators  
        operator Pointer*() noexcept;  
  
    private:  
        Smart* s; // exposition only  
        tuple<Args...> a; // exposition only  
        Pointer p; // exposition only  
    };  
};
```

² If `Smart` is a specialization of `shared_ptr`, the program is ill-formed. `Pointer` shall meet the `Cpp17NullablePointer` requirements ([`nullablepointer.requirements`] 16.5.3.3).

³ [*Note:* It is impossible to properly release the managed resource from a `shared_ptr` given its shared ownership model. — *end note*]

20.11.11.1 Constructors [`inout_ptr.class.ctor`]

```
inout_ptr_t(Smart& smart, Args... args) noexcept;
```

¹ Effects: initializes `s` with `addressof(smart)`, `a` with `std::forward<Args>(args)...`, and `p` to either

— `smart` if `std::is_pointer_v<Smart>` is true,

— otherwise, an unspecified value of either `smart.get()` or its value initialization.

² [*Note:* An unspecified value allows an implementation and subsequent program-defined specializations to pick an option which fits an implementation's purpose and potential implementation-specific optimizations. — *end note*].

³ Remarks: if an implementation calls `smart.release()`, or `s->release()`, then it shall not call `s->release()` in the destructor.

```
inout_ptr_t(inout_ptr_t&& rhs) noexcept;
```

⁴ Effects: initializes `s` with `std::move(rhs.s)`, `a` with `std::move(args)...`, and `p` with `std::move(rhs.p)`. Then sets `rhs.p` to `nullptr`.

20.11.11.2 Assignment [inout_ptr.class.assign]

```
inout_ptr_t& operator=(inout_ptr&& rhs) noexcept;
```

¹ Effects: Equivalent to:

```
s = std::move(rhs.s);
a = std::move(rhs.a);
p = std::move(rhs.p);
rhs.p = nullptr;
return *this;
```

20.11.11.3 Destructors [inout_ptr.class.dtor]

```
~inout_ptr_t() noexcept(see-below);
```

¹ Constraints: Either `std::is_pointer_v<Smart>` is true or the expression `s->release()` is well-formed.

² Let `SP` be `POINTER_OF_OR(Smart, Pointer)` ([memory.defns] 20.10.2).

³ Effects: Equivalent to:

```
-- if (p != nullptr) { *s = Smart( static_cast<SP>(p), std::forward<Args>(args)... );
}; if std::is_pointer_v<Smart> is true,
-- s->release(); if (p != nullptr) { s->reset( static_cast<SP>(p), std::forward<Args>
(args)... ); }; if the expression s->reset( static_cast<SP>(p), std::forward<Args>(args)... )
is well-formed,
-- otherwise, s->release(); if (p != nullptr) { *s = Smart( static_cast<SP>(p),
std::forward<Args>(args)... ); };
```

where `Args` are the arguments stored in `a`.

⁴ Throws:

```
-- no exceptions and is noexcept if std::is_pointer_v<Smart> is true;
-- any exceptions and is conditionally noexcept from s->release(); and s->reset( static_cast<SP>
(p), std::forward<Args>(args)... ); if the expression s->reset( static_cast<SP>(p),
std::forward<Args>(args)... ) is well-formed;
-- otherwise, any exceptions and is conditionally noexcept from s->release(); and *s = Smart(
static_cast<SP>(p), std::forward<Args>(args)... );;
```

where `Args` are the arguments stored in `a`.

20.11.11.4 Conversions [inout_ptr.class.conv]

```
operator Pointer*() noexcept;
```

¹ Effects: returns a pointer to `p`.

Insert §20.11.12 [inout_ptr]:

20.11.12 Function Template `inout_ptr` [inout_ptr]

¹ `inout_ptr` is a function template that produces an object of type `inout_ptr_t` ([inout_ptr.class] 20.11.11).

```
namespace std {  
  
    template <class Pointer, class Smart, class... Args>  
    inout_ptr_t<Smart, Pointer, Args...> inout_ptr(Smart& s, Args&&... args) noexcept  
  
    template <class Smart, class... Args>  
    inout_ptr<Smart, POINTER_OF(Smart), Args...> inout_ptr(Smart& s, Args&&... args) noexc  
  
}
```

² Effects: The first overload is Equivalent to: `return inout_ptr_t<Smart, Pointer, Args...>(s, std::forward<Args>(args)...) ;`

³ Effects: The second overload is Equivalent to: `return inout_ptr_t<Smart, POINTER_OF(Smart), Args...>(s, std::forward<Args>(args)...) ;`

§ 8. Acknowledgements

Thank you to Lounge<C++>'s Cicada, melak47, rmf, and Puppy for reporting their initial experiences with such an abstraction nearly 5 years ago and helping JeanHeyd Meneide implement the first version of this.

Thank you to Mark Zeren for help in this investigation and analysis of the performance of smart pointers.

Thank you to Tim Song for reviewing the wording for this paper and vastly improving it.

§ References

§ Informative References

[ADOBE-OUT-PTR]

Adobe. [Adobe Chromium: scoped_comptr](#). November 25th, 2018. URL: https://github.com/adobe/chromium/blob/master/base/win/scoped_comptr.h#L80

[CCOMPTR]

Microsoft. [CComPtr::operator& Operator](#). 2015. URL: <https://msdn.microsoft.com/en-us/library/31k6d0k7.aspx>

[N4800]

ISO/IEC JTC1/SC22/WG21 - The C++ Standards Committee; Richard Smith. [N4800 - Working Draft, Standard for Programming Language C++](#). January 21st, 2019. URL: <http://www.open-std.org/jtc1/sc22/wg21/docs/papers/2019/n4800.pdf>

[OLDNEWTHING-HANDLE-PROXY]

Raymond Chen. [Spotting problems with destructors for C++ temporaries](#). April 29th, 2019. URL: <https://devblogs.microsoft.com/oldnewthing/20190429-00/?p=102456>

[P0468]

Isabella Muerte. [A Proposal to Add an Intrusive Smart Pointer to the C++ Standard Library](#). October 15th, 2016. URL: <http://wg21.link/p0468>

[STD-PROPOSALS-OVERLOAD-OPERATOR]

isocpp.org Forums. [Add operator&\(\) to std::unique_ptr to get internal pointer](#). April 15th, 2018. URL: <https://groups.google.com/a/isocpp.org/forum/#!topic/std-proposals/8MQhnL9rXBI>

[WRL-COMPTRREF]

Microsoft. [ComPtrRef Class](#). November 4th, 2016. URL: <https://docs.microsoft.com/en-us/cpp/windows/comptrref-class>