



# Digital Transaction Register

## Issuer Interface Agreement

Version: 5.0

Status: Final

## Change History

The following table shows the history of changes to this document.

Date	Author	Change history
25/03/2020	Luca Somaruga	First version Draft
02/09/2020	Denisa Braho	Final Version
22/09/2020	Denisa Braho	Update "Payment instrument enrolment" (paragraphs 1.1.4, 1.2.5). Request and response call parameters updated
08/10/2020	Michael Desogus	Added Appendices 1 and 2 relating to authentication certificates and authentication wizard
14/10/2020	Denisa Braho	"Setting/Modifying IBAN" call parameters updated
23/10/2020	Denisa Braho	<ul style="list-style-type: none"> <li>- Paragraph relating to payment instrument enrolment updated, entering the calls with specific parameters based on the payment instrument (<i>in review</i>)</li> <li>- Added the paragraphs relating to the new APIs envisaged on BPD:</li> <li>- Award Period List</li> </ul>

		<ul style="list-style-type: none"> <li>- Retrieving ranking</li> <li>- Retrieving total cashback</li> </ul>
18/11/2020	Denisa Braho	<ul style="list-style-type: none"> <li>- Added Paragraph "Unsubscribe Citizen"</li> <li>- Update: Paragraph 1.1.8 "List Award Periods" adding new parameters in the Response body</li> </ul>
24/11/2020	Denisa Braho	<ul style="list-style-type: none"> <li>- Added error 404 in the paragraph "Retrieve Payment Instrument Status"</li> <li>- Added error 409 in the API "Enrollment Payment Instrument"</li> <li>- Added error 404 in the API "Citizen Status"</li> <li>- Added note in the "Enrollment Payment Instruments" paragraph</li> </ul>
25/11/2020	Luca Somaruga	Updated paragraphs: 1.1.3; 1.1.6, 1.2.4 and 1.25
27/11/2020	Luca Somaruga	Updated: paragraph 1.1.3.1 - changed format of the parameter brand and type
27/11/2020	Denisa Braho	Updated: paragraph 1.1.2: added new parameter in the body request
11/12/2020	Denisa Braho	Updated: paragraph 1.1.3.1 and 1.1.7 - added new parameters necessary to enroll tokenized cards.

17/12/2020	Denisa Braho	Updated: paragraph 1.1.3.2
18/12/2020	Denisa Braho	<ul style="list-style-type: none"> <li>- Added: paragraph 1.1.12</li> <li>- Updated: paragraph 1.1.6</li> </ul>
15/02/2021	Denisa Braho	<ul style="list-style-type: none"> <li>- Removed field “technicalAccountHolder” from paragraph 1.1.2 (the Use Case that describes Technical Accounts managing process is on review; the necessary information to add in the request are yet to be determined)</li> <li>- Updated API's v.2 <ul style="list-style-type: none"> <li>- 1.1.2 Setting/modifying IBAN from H/M Banking</li> <li>- 1.1.4 Accepting T&amp;Cs from H/M Banking</li> <li>- 1.1.5 Citizen H/M Banking Status</li> <li>- 1.1.6 H/M Banking Payment Instrument Status</li> <li>- 1.1.7 H/M Banking Payment Instrument deactivation</li> <li>- 1.1.9 Retrieving ranking</li> <li>- 1.1.10 Retrieving cashback total</li> <li>- 1.1.11 Unsubscribe Citizen</li> </ul> </li> </ul>
16/02/2021	Denisa Braho	<ul style="list-style-type: none"> <li>- Updated URL of the API 1.1.8 “Award Period List”</li> </ul>

## Glossary

The table below summarises the list of terms and acronyms contained in the document in question.

Term/Acronym	Definition
RTD	Digital Transaction Log
BPD	Digital Payments Bonus
FA	Automatic Billing
CF	User Tax Code
PAN	Primary Account Number
HPAN	Hash of the Primary Account Number (PAN) of a digital payment instrument
MVP	Minimum Viable Product
TBD	To Be Defined
N/A	Not applicable
T&C	Terms & Conditions

## Definitions and semantics

The following table shows the semantics of the key terms used in the document in order to articulate the Platform logic.

Term	Definition
------	------------

User	Identifies the person who makes a purchase transaction with a card at a particular <i>Merchant</i> and represents the subject to whom the <i>Bonus</i> will be awarded. <b>In the following document, some synonyms of the term User will be used, for example <i>Cardholder</i> (to underline card ownership).</b>
Merchant	The term <i>Merchant</i> identifies all the operators present in the system.
Acquirer	Payment institution or bank that offers its collection services to merchants, installing physical POSs at their premises or in any case intermediating payment transactions.
Issuer	Subject subscribing to a Circuit, which issues Cards or other payment instruments, managing the relationship with the Holders.

# Index

<b>Change History</b>	<b>2</b>
<b>Glossary</b>	<b>4</b>
<b>Definitions and semantics</b>	<b>5</b>
<b>Index</b>	<b>6</b>
<b>Introduction and purpose of the document</b>	<b>12</b>
Introduction and purpose of the initiative	12
Objective	12
The main objectives of the project are therefore:	13
Functional solution proposed: Digital Payments Bonus	13
Happy Flow	<b>13</b>
General Context	14
<b>Main processes</b>	<b>14</b>
CentroStella authentication processes via API key	15
Communication of user consent data (T&C Acceptance)	15
Managing payment instruments	15
<b>Definition of interfaces</b>	<b>16</b>
Issuer Registration	16
Issuer Integration	17
<b>1.1 BPD</b>	<b>17</b>
1.1.1 T&C HTML File Return	17
1.1.2 Setting/modifying IBAN from H/M Banking	18
1.1.3 H/M Banking Payment Instrument Enrolment	21
1.1.3.1 Card type payment instrument enrolment	21
1.1.3.2 BancomatPay payment instrument enrolment	24
1.1.3.3 Satispay payment instrument enrolment	27
1.1.4 Accepting T&Cs from H/M Banking	29
1.1.5 Citizen H/M Banking Status	31
1.1.6 H/M Banking Payment Instrument Status	33
1.1.7 H/M Banking Payment Instrument deactivation	37
1.1.8 Award Period List	38
1.1.9 Retrieving ranking	40

1.1.10 Retrieving cashback total	43
1.1.11 Unsubscribe Citizen	44
1.1.12 H/M Banking Update Payment instrument Tokens	46
<b>1.2 FA</b>	<b>48</b>
1.2.1 T&C HTML File Return	48
1.2.2 Accepting T&C from H/M Banking	49
1.2.3 Customer H/M Banking Status	51
1.2.4 H/M Banking Payment Instrument Enrolment	53
1.2.4.1 Card type payment instrument enrolment	53
1.2.4.2 BancomatPay payment instrument enrolment	56
1.2.4.3 Satispay payment instrument enrolment	59
1.2.5 H/M Banking Payment Instrument Status	61
1.2.6 H/M Banking Payment Instrument deactivation	63
1.2.7 Unsubscribe Customer	65
1.2.8 H/M Banking Update payment instruments Token	67
<b>Appendix 1 - Issuer Authentication</b>	<b>70</b>
<b>Appendix 2 - Issuer Services Authorisation</b>	<b>71</b>
<b>Appendix 3 - Environments</b>	<b>76</b>



## Introduction and purpose of the document

The purpose of this document is to describe the application solution, in all its interfaces and the different flows of incoming or outgoing events to be managed and the related data exchange methods, as well as the High Level executive architecture, with particular reference to the interfaces presented by the PagoPa SpA systems to the Issuer subjects.

## Introduction and purpose of the initiative

The objective of the project is the creation of a technological infrastructure which allows to enable new use cases and services for citizens and businesses, mainly focused on the digitalisation of payments through the use of cards and payment instruments through physical POSs.

The pillar of the new infrastructure is communications with the Acquirer entities operating in Italy.

The PagoPa platform CentroStella must manage information that must comply with all the requirements of the GDPR; in particular, it must not be allowed to trace the individual transaction and recover the personal data of the payers and/or the payment in any way.

The macro components covered by the initiative are listed below:

<b>DIGITAL TRANSACTION LOG (RTD)</b> Aggregates commercial transactions carried out through digital payment instruments, both by individuals and by companies through physical POSs throughout Italy. A single log that enables the creation of electronic billing, welfare and automation incentive solutions.	
<b>AUTOMATIC BILLING</b> Relies on the Digital Transaction Log for the automatic issuance of electronic invoices in the context of a payment made by a company.	<b>DIGITAL PAYMENTS BONUS</b> Relies on the Digital Transaction Log to award bonuses to citizens who make payments through digital payment instruments.

## Objective


The Digital Transaction Log is the enabling platform for different and future use

cases that see the role of electronic payments as central, maintaining a unique integration with Acquirer entities operating in Italy.

The main objectives of the project are therefore:

1. to encourage payments by electronic means to reduce the use of cash, creating rewarding conditions and a cumulative result even if achieved with different payment instruments.
2. to boost the adoption of e-billing by small operators by simplifying the exchange of information between all the actors involved in the process.

Functional solution proposed: Digital Payments Bonus

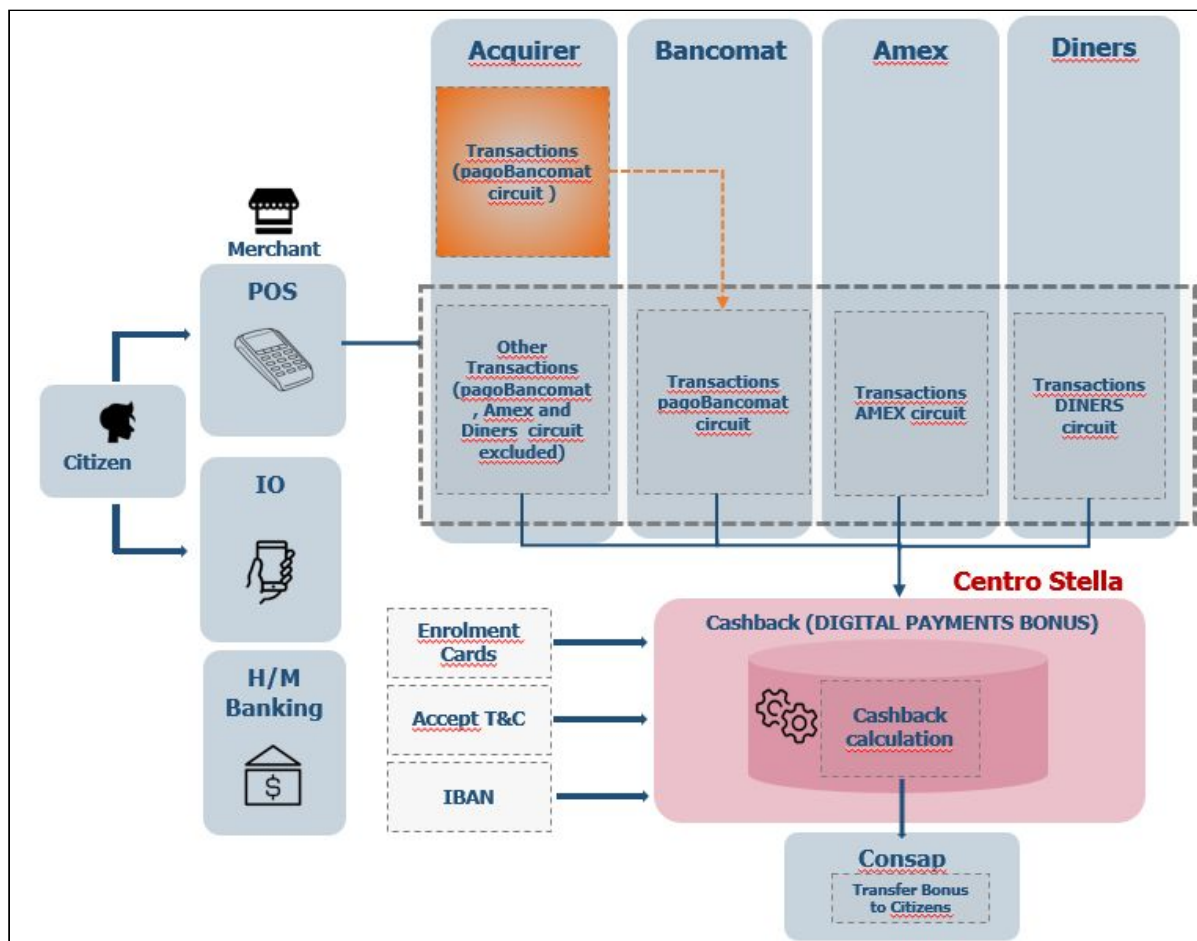

Happy Flow



The Happy Flow is explained below, summarising the proposed functional solution of the project:

- a. The Citizen securely stores their payment instrument on the platform CentroStella
- b. The Citizen makes a payment to a physical operator in Italy
- c. The Acquirer, after posting the transaction, sends the transaction data to the platform BPD
  - The Acquirers participating in the service will send to Centro Stella only the transactions related to circuits different from PagoBancomat, Amex and Diners.
  - The Acquirers will send only the transactions carried out on the PagoBancomat circuit to Bancomat
  - Bancomat, Amex and Diners will send directly to CentroStella all the transactions carried out on their own circuit (including those received from the other Acquirers in case of Bancomat)
- d. CentroStella assigns points to the transaction
- e. Cashback awards are assigned based on the accumulated points
- f. The Citizen enters the IBAN of their current account through the IO App or H/M Banking to be credited with the accrued cashback.

## General Context

If an Issuer of a payment instrument decides, on its own initiative, to see to the integration with the CentroStella platform, it shall mainly:

1. recognise in strong mode (equivalent to SPID) the identity of the Citizen with particular reference to their tax code
2. allow the same to use even a minimal subset of functionalities, such as:
  - a. explicit acceptance/rejection of T&Cs and subscription to the service
  - b. activation/deactivation and payment instruments issued by the Issuer Bank
  - c. sending IBAN for receiving cashback
  - d. display total cashback accrued in the period and ranking

## Main processes

Below are the main processes related to the integration with the Issuer Banking systems and common to both scenarios (Digital Payments Bonus and

Automatic Billing).

### **1. CentroStella authentication processes via API key**

The authentication process of the Issuer Bank on CentroStella is preliminary in order to ensure communication between the two systems. Individual calls to the RTD platform (and related BPD/FA sub-systems) will be made through an authentication key, *API Key*, obtained through the registration of the Issuer Bank on the *API Gateway portal*.

Process Description
<ul style="list-style-type: none"><li>a. the Issuer logs into the API Gateway portal to request registration</li><li>b. Upon registration, the portal returns the API key needed to authenticate on CentroStella</li></ul>

### **2. Communication of user consent data (T&C Acceptance)**

To allow the user to subscribe to the service of their interest, the contract containing the Terms & Conditions of the Digital Payments Bonus/Automatic Billing service will be made available through Home and/or Mobile Banking. Following the user's acceptance of the T&Cs, the Issuer Bank will send the request to CentroStella to save the acceptance date of the T&Cs.

Process Description
<ul style="list-style-type: none"><li>a. The Issuer Bank makes a call to CentroStella to save the T&amp;C date;</li><li>b. CentroStella saves the acceptance date of the T&amp;Cs on its systems</li></ul>

### **3. Managing payment instruments**

Exploiting the APIs made available by CentroStella, the Issuers will be able to manage, through the Home and/or Mobile Banking channels, all the payment

instruments issued to the same Issuer bank.

In particular, it will be possible to enrol/deactivate a card with respect to the Digital Payments Bonus and Automatic Billing services.

Process Description
<ol style="list-style-type: none"> <li>1. Enrolment of the payment instrument issued by the Issuer Bank: <ol style="list-style-type: none"> <li>a. Home/Mobile Banking calls a service presented by CentroStella in order to activate the payment instrument on the BPD/FA service. The parameters sent to the Platform include the card PAN in clear form.</li> <li>b. CentroStella calls a hashing service presented by the PM communicating the unique ID of the card</li> <li>c. The PM hashes the PAN of the payment instrument and sends the HPAN to CentroStella <ol style="list-style-type: none"> <li>i. The data related to the enrolled card is saved, so that it can be retrieved from the APP IO.</li> </ol> </li> <li>d. CentroStella proceeds to save the following information, after which the service on the instrument will be active</li> </ol> </li> <li>2. Deactivation of the payment instrument issued by the Issuer Bank: <ol style="list-style-type: none"> <li>a. the user selects the BPD/FA service deactivation request option from H/M Banking for the payment instrument. H/M Banking therefore sends the deactivation call to CentroStella. <ol style="list-style-type: none"> <li>i. The parameters sent to the Platform include the card PAN in clear form</li> </ol> </li> <li>b. CentroStella calls a hashing service presented by the PM communicating the unique ID of the card</li> <li>c. The PM hashes the PAN of the payment instrument and sends the HPAN to CentroStella</li> <li>d. CentroStella proceeds to deactivate the service and deactivation information is saved in the internal database.</li> </ol> </li> </ol>


The individual interfaces will be analysed in detail in the following paragraphs.

## Definition of interfaces

### Issuer Registration

The “Registration” service will allow Issuers to register on the API Gateway portal in order to obtain the key used for authentication on CentroStella.

After logging into the API Gateway portal and completing the registration procedure, the portal will provide Issuers with the API key needed to authenticate on CentroStella (see Appendix 2)

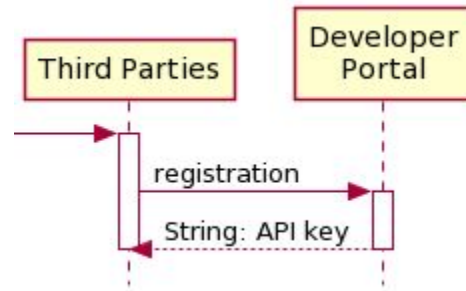

## Issuer Integration

The following paragraphs describe the APIs and parameters necessary for correct integration with the Digital Payments Bonus and Automatic Billing services:

### 1.1 BPD

#### 1.1.1 T&C HTML File Return

API used to recover the html file containing the Digital Payments Bonus Terms and Conditions of Service.

**Path:** /bpd/tc/html

**Method:** GET

##### **Path Parameters**

No parameters envisaged

##### **Query Parameters**

No parameters envisaged

##### **Request Header**

No parameters envisaged

**Request Body**

No parameters envisaged

**Response Code**

HTTP Response Code 200

**Response Header**

No parameters envisaged

**Response Body**

The service responds with the html file, containing the Digital Payments Bonus Terms and Conditions of Service.

**HTTP Error Codes**

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
404	FILE_NOT_FOUND	file not found
500	GENERIC_ERROR	generic error

## 1.1.2 Setting/modifying IBAN from H/M Banking

The BPD platform will provide a service through which the user can save/update, from Home/Mobile Banking, the IBAN on which he/she wishes to receive the award payment. With IBAN entry from H/M Banking, the user can only enter IBANs associated exclusively with accounts opened at the Issuer Bank providing the portal.

**URL:** bpd/hb/citizens/v2

**METHOD:** PATCH

**Path Parameters**

No parameters envisaged

**Query Parameters**



No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)

### Request Body

field	format	Mandatory	Description
<b>id</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>accountHolderCF</b>	String	YES	Tax code of the IBAN holder
<b>accountHolderName</b>	String	YES	Name of IBAN holder
<b>accountHolderSurname</b>	String	YES	Surname of the IBAN holder
<b>payoffInstr</b>	String	YES	means of payment, e.g., IBAN user
<b>payoffInstrType</b>	enum	YES	type of payment instrument for collecting the award

### Response Code

HTTP Response Code 200

### Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)



## Response Body

Field	Type	Mandatory	Description
<b>validationStatus</b>	String	YES	<p>Validation status following the call to check Iban, the possible values will be:</p> <ul style="list-style-type: none"> <li>• OK: the IBAN is associated with the user (IBAN will be saved in BPD)</li> <li>• KO: the IBAN is not associated with the user (IBAN will not be saved in BPD)</li> <li>• UNKNOWN_PSP: could not verify (IBAN will be saved in BPD)</li> </ul> <p>In the case of Technical accounts, the CheckIBAN service will not be invoked, hence the above results will not be shown.</p>

## HTTP Error Codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>403</b>	TC_NOT_ACCEPTED	T&Cs were not accepted
<b>400</b>	IBAN_NOT_VALID	Iban entered is syntactically incorrect

## 1.1.3 H/M Banking Payment Instrument Enrolment

### 1.1.3.1 Card type payment instrument enrolment

API used to enrol a card type payment instrument (credit, debit or prepaid credit) to the digital payment bonus program.



**Path:** /bpd/hb/payment-instruments/card

**Method:** PUT

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)

### Request Body

Field	Type	Mandatory	Description
<b>id</b>	Alphanumeric	YES	id of the payment instrument encrypted with pgp key, which corresponds to the Primary Account Number (PAN) of the payment method*
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>expireYear</b>	Number	YES	expiry year of the payment instrument (4 digits ex. 2020)
<b>exprireMonth</b>	Alphanumeric	YES	expiry month of the payment instrument (2 digits ex .11)
<b>issuerAbiCode</b>	Alphanumeric	YES	ABI code of the card issuing bank



<b>brand</b>	enum	YES	type of circuit String(VISA,MASTERCARD,MAESTRO,VISA_ELECTRON,AMEX, OTHER)
<b>holder</b>	Alphanumeric	NO	cardholder (Name and Surname)
<b>type</b>	enum	YES	card type (PP=Prepaid, DEB=Debit card, CRD=Credit card)  possible values: PP, DEB, CRD
<b>channel</b>	Alphanumeric	YES	Channel that uniquely identifies the issuer on the platform that matches the <b>ABI</b> Issuer code
<b>tokenPanList</b>	String List	NO	list of the tokenized PANs linked to the physical card (PAN)  ex. tokenized payment instruments such as GooglePay, ApplePay etc
<b>PAR</b>	String	NO	corresponds to the Payment Account Reference

**\*Not necessary for the SIT environment.** The parameter id, once encrypted with the pgp public key, must have the following structure in the Request Body :

```
-----BEGIN          PGP          MESSAGE-----\nVersion:          BCPG          C#  
v1.6.1.0\n\nnhQEMA+NENQPn0iNJAQf/ee9tRkksD+lhY84e2SG4Or5lkopVtwWbysbzEpWX0oAo\nVLq10BHBts2zEGILIXwqf24Yrrvc6lUX7j4Xh6n//Mz7op8dCD47uMSVeSDa\nn9EMd239jDKD3ld6O3IICEPfnatVOPy4veHxgNn6deWxdUai9alRCZMJXOX9AXWKtu\nn6oVjUMWiJhpT8zk9OO2KT+YpMUWp8CTJfoQQVMdZx8lpYvXvmbIAAT7HZfGn4l\nnFYnPv07mOseniLI5jOeHcUwDb2uVZEExysxfotgW8VECUXT/39klYkqzh4USyvVWo\nnMC9XN1Jo3iXV6ZIBYDS9f/BydHPK3EGJeOk41QVY68kuVMrPTKAMluHg49E0vj+X\nnSVEPI4vqqNn0hsRJDDOYNFUVbOlEHYHW4q3lmttOlw==\n\n=n=7n38\n\n-----END PGP MESSAGE-----\n
```

**Response Code**

## HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>409</b>	HPAN_OTHER_CF	The payment instrument is "active" in BPD and has been enrolled by another user
<b>400</b>	BAD_REQUEST	bad request.

### 1.1.3.2 BancomatPay payment instrument enrolment

API used to enable a BancomatPay type payment instrument in BPD



**Path:** /bpd/hb/payment-instruments/bpay

**Method:** PUT

### Path Parameters

No parameter envisaged

### Query Parameters

No parameter envisaged

### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)

### Request Body

Field	Type	Mandatory	Description
<b>id</b>	Alphanumeric	YES	unique id of the payment instrument, which corresponds to the encrypted value of the string "ABI+ mobile number"
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>channel</b>	Alphanumeric	YES	Channel that uniquely identifies the issuer on the platform valued with the fixed value <b>"BPAY1"</b>
<b>groupCode</b>	String	YES	ABI code of the group to which the bank indicated in the InstituteCode field belongs.

<b>instituteCode</b>	String	YES	User Institute ABI Code.
<b>bank</b>	String	YES	Name of the Issuer Bank
<b>nameHolder</b>	String	YES	Account Holder's obscured Name
<b>surnameHolder</b>	String	YES	Account Holder's obscured Surname
<b>phoneNumber</b>	String	YES	Account Holder's obscured Mobile Number
<b>cryptedPhoneNumber</b>	String	YES	Account Holder's encrypted Mobile Number
<b>serviceStatus</b>	enum	YES	Service status: domain: ("ATT", "DIS", "SOSP", "SAT_GG", "SAT_MM", "SAT_NO", "NFC_IN_COR", "NFC_ESTINTO", "ATTPND", "DISPND")
<b>infoPaymentInstrument</b>		YES	basic information about the instrument. Field consisting of the fields indicated in the "InstrumentInfo" table

**"InstrumentInfo" table**

<b>iban</b>	String	YES	obscured iban
-------------	--------	-----	---------------



<b>flagPreferredPaymentPI</b>	Boolean	YES	If set to true, it indicates that the instrument with which it is associated has been set as the default instrument for outgoing payments.
<b>flagPreferredIncomingPI</b>	Boolean	YES	If set to true, it indicates that the instrument with which it is associated has been set as the default instrument for incoming payments.

## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token

<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register, accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>409</b>	HPAN_OTHER_CF	The payment instrument is "active" in BPD and has been enrolled by another user

### 1.1.3.3 Satispay payment instrument enrolment

API used to enable a payment instrument of the Satispay type for the digital payment bonus program.

**Path:** /bpd/hb/payment-instruments/satispay/{id}

**Method:** PUT

#### Path Parameters

field	format	Description
<b>id</b>	Alphanumeric	unique id of the payment instrument (Customer ID)

#### Query Parameters

No parameters envisaged

#### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)





## Request Body

Field	Type	Mandatory	Description
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>channel</b>	Alphanumeric	YES	Channel that uniquely identifies the issuer on the platform valued with the fixed value <b>"STPAY"</b>

## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token

<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register, accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>409</b>	HPAN_OTHER_CF	The payment instrument is "active" in BPD and has been enrolled by another user

### 1.1.4 Accepting T&Cs from H/M Banking

API used to enrol the user, which in fact consists of the acceptance of the digital Payments Bonus Terms and Conditions of Service.

**Path:** /bpd/hb/citizens/v2

**Method:** PUT

#### Path Parameters

No parameters envisaged

#### Query Parameters

No parameters envisaged

#### Request Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer

#### Request Body

field	format	Mandatory	Description
-------	--------	-----------	-------------



<b>id</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
-----------	--------------	-----	----------------------------------------------

## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

field	format	Mandatory	Description
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>payoffInstr</b>	Alphanumeric	NO	identifier of the payment instrument for collecting the award
<b>payoffInstrType</b>	Alphanumeric	NO	type of payment instrument for collecting the award
<b>enabled</b>	Boolean	YES	service activation status by the citizen
<b>timestampTC</b>	Timestamp	YES	timestamp of T&C acceptance. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token

500	GENERIC_ERROR	error retrieving user profile
-----	---------------	-------------------------------

### 1.1.5 Citizen H/M Banking Status

API used to retrieve information about the citizen.

**Path:** /bpd/hb/citizens/v2

**Method:** GET

#### Path Parameters

No parameters envisaged

#### Query Parameters

No parameters envisaged

#### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>id</b>	Alphanumeric	YES	user ID, which corresponds to their tax code

#### Request Body

No parameters envisaged

#### Response Code

HTTP Response Code 200

#### Response Header

Field	Type	Mandatory	Description
-------	------	-----------	-------------

<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)
---------------------	--------	----	---------------------------------------------------------------------

## Response Body

Field	Type	Mandatory	Description
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>payoffInstr</b>	Alphanumeric	NO	identifier of the payment instrument for collecting the award
<b>payoffInstrType</b>	Alphanumeric	NO	type of payment instrument for collecting the award
<b>enabled</b>	Boolean	YES	status of service activation by the citizen
<b>timestampTC</b>	Timestamp	YES	timestamp of T&C acceptance. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>404</b>	CF_NOT_FOUND	Tax code not found



## 1.1.6 H/M Banking Payment Instrument Status

API used to retrieve the status of a payment instrument to the BPD program. If there are token related to the PAN, they will have the same status as the master payment instrument.

**Path:** /bpd/hb/payment-instruments/v2

**Method:** GET

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>id</b>	Alphanumeric	YES	id of the payment instrument, which corresponds to the <i>pgp</i> encrypted Primary Account Number (PAN) of the payment method

### Request Body

No Request Body

### Response Code

HTTP Response Code 200

### Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

Field	Type	Mandatory	Description
<b>hpan</b>	Alphanumeric	YES	id of the payment instrument, which corresponds to the hash of the Primary Account Number (PAN) of the payment method
<b>fiscalCode</b>	Alphanumeric	YES	Tax code linked to the payment instrument
<b>Status</b>	Alphanumeric	YES	status of the payment instrument and the eventual tokens related to the PAN. Can have the following values: <ul style="list-style-type: none"> <li>• ACTIVE</li> <li>• INACTIVE</li> </ul>
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX
<b>deactivationDate</b>	Timestamp	NO	timestamp of the eventual deactivation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register, accepting the

		T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>404</b>	HPAN_NOT_FOUND	hashPan not found





## 1.1.7 H/M Banking Payment Instrument deactivation

API used to deactivate the payment instrument from BPD.

**Path:** /bpd/hb/payment-instruments/v2

**Method:** DELETE

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>id</b>	Alphanumeric	YES	id of the payment instrument, which corresponds to the <i>pgp</i> encrypted Primary Account Number (PAN) of the payment method

### Request Body

No parameters envisaged

### Response Code

HTTP Response Code 204

### Response Header



Field	Type	Mandatory	Description
x-request-id	String	NO	Request ID, unique identifier determined by caller or system (UUID)

### Response Body

No response body

### HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
404	HPAN_NOT_FOUND	hpan not found
401	TOKEN_NOT_VALID	invalid token
500	GENERIC_ERROR	error retrieving user profile

## 1.1.8 Award Period List

API that returns a list containing information about the award periods.

**URL:** bpd/hb/award-periods/v2

**METHOD:** GET

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
-------	------	-----------	-------------



<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer

### Request Body

No request body

### Response Code

HTTP Response Code 200

### Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

### Response Body

The response body is formed as a list of objects containing the following information:

Field	Type	Mandatory	Description
<b>awardPeriodId</b>	Number	YES	unique identification of the award period
<b>startDate</b>	Date	YES	Award period start date. FORMAT ISO8601 yyyy-MM-dd
<b>endDate</b>	Date	YES	Award period end date. FORMAT ISO8601 yyyy-MM-dd
<b>minTransactionNumber</b>	Number	YES	Minimum number of transactions to access cashback

<b>maxAmount</b>	Number	YES	Maximum amount payable in the period
<b>minPosition</b>	Number	YES	Minimum position for application of the "special refund"
<b>maxTransactionCashback</b>	Number	YES	Maximum cumulative cashback per single transaction
<b>maxPeriodCashback</b>	Number	YES	Maximum cashback which can be accumulated for the entire period
<b>cashbackPercentage</b>	Number	YES	Cashback percentage
<b>gracePeriod</b>	Number	YES	Duration of the grace period
<b>maxTransactionEvaluated</b>	Number	YES	Maximum value attributable to the single transaction
<b>status</b>	String	YES	Status of the Award period: <ul style="list-style-type: none"> <li>- ACTIVE (current active period)</li> <li>- INACTIVE (future periods)</li> <li>- WAITING (during grace period)</li> <li>- CLOSED (previous periods)</li> </ul>

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>500</b>	GENERIC_ERROR	error during user profile retrieval

### 1.1.9 Retrieving ranking

API used to retrieve information on the ranking, calculated based on the score



accumulated by a given user registered for the digital payment bonus service. It is assumed that the user has accepted the T&Cs and is therefore registered on the BPD system; otherwise, the API returns an error.

If the `awardPeriodId` is specified, the API will return a list containing the details for the requested period, otherwise will return a detailed list including current periods and all previous ones

**URL:** `/bpd/hb/citizens/v2/ranking`

**METHOD:** GET

### Path Parameters

No parameters envisaged

### Query Parameters

Field	Type	Mandatory	Description
<b>awardPeriodId</b>	Numeric	NO	unique identifier of the award period

### Request Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>id</b>	Alphanumeric	YES	user ID, which corresponds to their tax code

### Request Body

No request body



## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

Field	Type	Mandatory	Description
<b>ranking</b>	Number	YES	Ranking position referring to the current award period.
<b>totalParticipants</b>	Number	YES	Total number of participants in the Digital Payments Bonus
<b>maxTransactionNumber</b>	Number	YES	Maximum number of transactions made by users who are eligible for the "special refund"
<b>minTransactionNumber</b>	Number	YES	Minimum number of transactions made by users eligible for the "special refund"
<b>transactionNumber</b>	Number	YES	Number of transactions made by the user
<b>awardPeriodId</b>	Number	YES	unique identifier of the award period

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token



500	GENERIC_ERROR	error during user profile retrieval
-----	---------------	-------------------------------------

### 1.1.10 Retrieving cashback total

API used to verify the calculated score based on the points accumulated by a given user registered for the digital payment bonus service.

**URL:** /bpd/hb/winning-transactions/v2/total-cashback

**METHOD:** GET

#### Path Parameters

No parameter

#### Query Parameters

Field	Format	Mandatory	Description
awardPeriodId	Number	YES	unique identifier of the award period

#### Request Header

Field	Type	Mandatory	Description
x-request-id	String	NO	Request ID, unique identifier determined by initialisation (UUID)
Ocp-Apim-Subscription-Key	Alphanumeric	YES	Subscription key associated with the issuer
fiscalCode	Alphanumeric	YES	user ID, which corresponds to their tax code

#### Request Body

No request body



## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

Field	Type	Mandatory	Description
<b>totalCashback</b>	Number	YES	Sum of the accumulated cashback of all transactions, up to a ceiling defined by the period
<b>transactionNumber</b>	Number	YES	Number of transactions made by the user

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>500</b>	GENERIC_ERROR	error during user profile retrieval

### 1.1.11 Unsubscribe Citizen

API used for disabling the citizen from the platform. This operation allows you to disable the user and all his active payment instruments, his transactions and ranking.

**URL:** /bpd/hb/citizens/v2

**METHOD:** DELETE





## Path Parameters

No parameters envisaged

## Query Parameters

No parameters envisaged

## Request Header

Field	Format	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>id</b>	Alphanumeric	YES	user ID, which corresponds to their tax code

## Request Body

Field	Format	Mandatory	Description
<b>channel</b>	Alphanumeric	YES	the channel that identifies the Issuer calling the API: <ol style="list-style-type: none"><li>Issuer's <b>ABI code</b></li><li>string "BPAY1" for PagoBancomat</li><li>string "STPAY" for Satispay</li></ol>

## Response Code

HTTP Response Code 204

## Response Header

Field	Format	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)



### Response Body

No response body

### HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
401	TOKEN_NOT_VALID	invalid key
500	GENERIC_ERROR	generic error
400	TOO_MANY_CHANNELS	error that occurs in case there are other payments instruments that are active and enrolled from other channels

## 1.1.12 H/M Banking Update Payment instrument Tokens

API used to update the tokens related to a physical Card (identified by the PAN) enrolled on BPD.

**Path:** /bpd/hb/payment-instruments

**Method:** PATCH

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
-------	------	-----------	-------------



<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)

## Request Body

Field	Type	Mandatory	Description
<b>id*</b>	Alphanumeric	YES	id of the payment instrument, which corresponds to the encrypted Primary Account Number (PAN) of the payment method
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>tokenPanList</b>	String List	NO	list of the tokenized PANs linked to the physical card (PAN) ex. tokenized payment instruments such as GooglePay, ApplePay etc
<b>PAR</b>	String	NO	corresponds to the Payment Account Reference

**\*Not necessary for the SIT environment.** The parameter id, once encrypted with the pgp public key, must have the following structure in the Request Body :

```
-----BEGIN PGP MESSAGE-----\nVersion: BCPG C#\nvi.6.1.0\n\nnhQEMA+NENQPn0iNJAQf/ee9tRkksD+IhY84e2SG4Or5IkopVtwWbysbzEpWX0oAo\nn0aVLq10BHbTs2zEG1LIXwqf24YrrRvc6lUX73j4Xh6n//Mz7op8dCD47uMSVeSDa\nn9EMd239jDKD31d6O3lICEPfnATVOPy4veHxgNn6deWxdUai9a1RCZMJXO9AXWKtu\nn6oVjUMWiJhpT8zK9OO2KT+YpMUWp8CTJfoQQVMdZx8lqpYvXvmbIAAtT7HZfGn4l\nnFYnPV07mOseniLI5jOeHcUwDb2uVZExysxfotgW8VECUXT/39kLYkqzh4USyvVWo\nnMC9XN1Jo3iXV6Z1BYDS9f/BydHPk3EGJeOk4lQVY68kuVMrPTKAMluHg49E0vj+X\n\nSVEPl4vqqNn0hsRJDDOYnFUVbOlEhYHW4q3lmttOlw==\n\n=7n38\n\n-----END PGP MESSAGE-----\n
```

## Response Code



## HTTP Response Code 200

### Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

### Response Body

Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the physical card (identified by the PAN). FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

### HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>404</b>	HPAN_NOT_FOUND	hpan not found
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>500</b>	GENERIC_ERROR	error retrieving user profile

## 1.2 FA *(in review)*

### 1.2.1 T&C HTML File Return

API used to recover the Automatic Billing Terms and Conditions of Service HTML file.

**Path:** /fa/tc/html

**Method:** GET

#### Path Parameters

No parameters envisaged

**Query Parameters**

No parameters envisaged

**Request Header**

No parameters envisaged

**Request Body**

No parameters envisaged

**Response Code**

HTTP Response Code 200

**Response Header**

No parameters envisaged

**Response Body**

The service responds with HTML (MediaType = text/html) containing the Automatic Billing Terms and Conditions of Service.

**HTTP Error Codes**

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
404	FILE_NOT_FOUND	file not found
500	GENERIC_ERROR	generic error

## 1.2.2 Accepting T&C from H/M Banking

API used to send HB's acceptance of the Terms & Conditions of a customer who wants to onboard to the automatic billing service

**Path:** /fa/hb/customer

**Method:** PUT

**Path Parameters**



Field	Format	Description

## Query Parameters

No parameters envisaged

## Request Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer

## Request Body

Field	Format	Mandatory	Description
<b>vatNumberList</b>	String List	NO	user ID list, which corresponds to VAT No.
<b>SDI</b>	Alphanumeric	YES	recipient code or certified email address
<b>id</b>	Alphanumeric	YES	user ID, which corresponds to their tax code

## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system



			(UUID)
--	--	--	--------

### Response Body

field	format	Mandatory	Description
fiscalCode	String	YES	user ID, which corresponds to their tax code
vatNumberList	String	NO	user ID list, which corresponds to VAT No.
timestampTC	Timestamp	YES	timestamp of T&C acceptance. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

### HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
401	TOKEN_NOT_VALID	invalid token
500	GENERIC_ERROR	error retrieving user profile

## 1.2.3 Customer H/M Banking Status

API used to retrieve status information about a customer onboarded to the automatic billing program.

**Path:** /fa/hb/customer

**Method:** GET

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged



### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>id</b>	Alphanumeric	NO	customerID, which corresponds to their tax code

### Request Body

No parameters envisaged

### Response Code

HTTP Response Code 200

### Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

### Response Body

Field	Type	Mandatory	Description
<b>id</b>	Alphanumeric	YES	customer id, which corresponds to their tax code
<b>vatNumberList</b>	Alphanumeric list	NO	List of customer VAT numbers
<b>status</b>	Alphanumeric	YES	status of the payment instrument. Can have the following values: <ul style="list-style-type: none"><li>• ACTIVE</li><li>• INACTIVE</li></ul>



<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX
<b>deactivationDate</b>	Timestamp	YES	timestamp of the deactivation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register, accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>404</b>	CF_NOT_FOUND	tax code not found

## 1.2.4 H/M Banking Payment Instrument Enrolment

### 1.2.4.1 Card type payment instrument enrolment

API used to enrol a card type payment instrument (credit, debit or prepaid credit) to the automatic billing program.

**Path:** /fa/hb/payment-instruments/card

**Method:** PUT

#### Path Parameters

No parameters envisaged

#### Query Parameters

No parameters envisaged



## Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)

## Request Body

Field	Type	Mandatory	Description
<b>id</b>	Alphanumeric	YES	id of the payment instrument encrypted with pgp key, which corresponds to the Primary Account Number (PAN) of the payment method*
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>expireYear</b>	Number	YES	expiry year of the payment instrument (4 digit es. 2020)
<b>expireMonth</b>	Alphanumeric	YES	expiry month of the payment instrument (2 digit es.11)
<b>issuerAbiCode</b>	Alphanumeric	YES	ABI code of the card issuing bank
<b>brand</b>	enum	YES	type of circuit String: (VISA,MASTERCARD, MAESTRO,VISA_ELECTRON, AMEX, OTHER)
<b>holder</b>	Alphanumeric	NO	cardholder (Name and Surname)
<b>type</b>	enum	YES	card type (PP=Prepaid,



			DEB=Debit card, CRD=Credit card)  possible values: PP, DEB, CRD
<b>channel</b>	Alphanumeric	YES	Channel that uniquely identifies the issuer on the platform that matches the <b>ABI</b> Issuer code
<b>tokenPanList</b>	String List	NO	list of the tokenized PANs linked to the physical card (PAN)  ex. tokenized payment instruments such as GooglePay, ApplePay etc
<b>PAR</b>	String	NO	corresponds to the Personal Account Reference

**\*Not necessary for the SIT environment.** The parameter id, once encrypted with the pgp public key, must have the following structure in the Request Body :

```
-----BEGIN PGP MESSAGE-----\nVersion: BCPG C#\nvi.6.1.0\n\nnhQEMA+NENQPn0iNJAQf/ee9tRkksD+IhY84e2SG4Or51kopVtwWbysbzEpWX0oAo\nn0aVLq10BHbTs2zEG1LXwqf24YrrRvc6lUX73j4Xh6n//Mz7op8dCD47uMSVeSDa\nn9EMd239jDKD31d6O3lICEPfnatVOPy4veHxgNn6deWxdUai9a1RCZMJXO9AXWKtu\nn6oVjUMWiJhpT8zk9OO2KT+YpMUWp8CTJfoQQVMdZx8lpYvXvmbIAAtT7HZfGn4l\nnFYnPV07mOseniLI5jOeHcUwDb2uVZExysxfotgW8VECUXT/39kLYkqzh4USyvVWo\nnMC9XN1Jo3iXV6Z1BYDS9f/BydHPK3EGJeOk4lQVY68kuVMrPTKAMluHg49E0vj+X\n\nSVEPl4vqqNn0hsRJDDOYnFUVbOlEhYHW4q3lmttOlw==\n\n=7n38\n\n-----END PGP MESSAGE-----\n
```

## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body



Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

### HTTP Error Code

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register, accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>409</b>	HPAN_OTHER_CF	The payment instrument is "active" in BPD and has been enrolled by another user
<b>400</b>	BAD_REQUEST	bad request.

#### 1.2.4.2 BancomatPay payment instrument enrolment

API used to enable a BancomatPay type payment instrument in FA

**Path:** /fa/hb/payment-instruments/bpay

**Method:** PUT

#### Path Parameters

No parameters envisaged

#### Query Parameters



No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)

### Request Body

Field	Type	Mandatory	Description
<b>id</b>	Alphanumeric	YES	unique id of the payment instrument, which corresponds to the encrypted value of the string "ABI+ mobile number"
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>channel</b>	Alphanumeric	YES	Channel that uniquely identifies the issuer on the platform valued with the fixed value <b>"BPAYI"</b>
<b>groupCode</b>	String	YES	ABI code of the group to which the bank indicated in the InstituteCode field belongs.
<b>instituteCode</b>	String	YES	User Institute ABI Code.
<b>bank</b>	String	YES	Name of the Issuer Bank
<b>nameHolder</b>	String	YES	Account Holder's obscured Name
<b>surnameHolder</b>	String	YES	Account Holder's obscured

			Surname
<b>phoneNumber</b>	String	YES	Account Holder's obscured Mobile Number
<b>cryptedPhoneNumber</b>	String	YES	Account Holder's encrypted Mobile Number
<b>serviceStatus</b>	enum	YES	Service status: domain: ("ATT", "DIS", "SOSP", "SAT_GC", "SAT_MM", "SAT_NO", "NFC_IN_COR", "NFC_ESTINTO", "ATTPND", "DISPND")
<b>infoPaymentInstrument</b>		YES	basic information about the instrument. Field consisting of the fields indicated in the "InstrumentInfo" table

**"InstrumentInfo" table**

<b>iban</b>	String	YES	obscured iban
<b>flagPreferredPaymentPI</b>	Boolean	YES	If set to true, it indicates that the instrument with which it is associated has been set as the default instrument for outgoing payments.
<b>flagPreferredIncomingPI</b>	Boolean	YES	If set to true, it indicates that the instrument with which it is associated has been set as the default instrument for incoming payments.

## Response Code



## HTTP Response Code 200

### Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

### Response Body

Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

### HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>409</b>	HPAN_OTHER_CF	The payment instrument is "active" in FA and has been enrolled by another user

#### 1.2.4.3 Satispay payment instrument enrolment

API used to enable a payment instrument of the Satispay type for the FA program.



**Path:** /fa/hb/payment-instruments/satipay/{id}

**Method:** PUT

### Path Parameters

field	format	Description
id	Alphanumeric	unique id of the payment instrument (Customer ID)

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
Ocp-Apim-Subscription-Key	Alphanumeric	YES	Subscription key associated with the issuer
x-request-id	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)

### Request Body

Field	Type	Mandatory	Description
fiscalCode	Alphanumeric	YES	user ID, which corresponds to their tax code
channel	Alphanumeric	YES	Channel that uniquely identifies the issuer on the platform valued with the fixed value <b>"STPAY"</b>

### Response Code

HTTP Response Code 200





### Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

### Response Body

Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

### HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile
<b>409</b>	HPAN_OTHER_CF	The payment instrument is "active" in FA and has been enrolled by another user

## 1.2.5 H/M Banking Payment Instrument Status

API used to retrieve the status of a payment instrument to the FA program. If there are token related to the PAN, they will have the same status as the master payment instrument.

**Path:** /fa/hb/payment-instruments



**Method:** GET

### Path Parameters

field	format	Description

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
Ocp-Apim-Subscription-Key	Alphanumeric	YES	Subscription key associated with the issuer
x-request-id	Alphanumeric	NO	Request ID, unique identifier determined by initialisation (UUID)
id	Alphanumeric	YES	id of the payment instrument, which corresponds to the encrypted Primary Account Number (PAN) of the payment method

### Request Body

No parameters envisaged

### Response Code

HTTP Response Code 200

### Response Header

Field	Type	Mandatory	Description
x-request-id	String	NO	Request ID, unique identifier determined by caller or system (UUID)



## Response Body

Field	Type	Mandatory	Description
<b>hpan</b>	Alphanumeric	YES	id of the payment instrument, which corresponds to the hash of the Primary Account Number (PAN) of the payment method
<b>fiscalCode</b>	Alphanumeric	YES	Tax code linked to the payment instrument
<b>Status</b>	Alphanumeric	YES	status of the payment instrument and the eventual tokens related to the PAN. Can have the following values: <ul style="list-style-type: none"><li>• ACTIVE</li><li>• INACTIVE</li></ul>
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX
<b>deactivationDate</b>	Timestamp	NO	timestamp of the eventual deactivation of the payment instrument. FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>403</b>	TC_NOT_ACCEPTED	Terms & Conditions not accepted. To enable a payment instrument, the user must first register, accepting the T&Cs of the service
<b>500</b>	GENERIC_ERROR	error retrieving user profile



404	HPAN_NOT_FOUND	hpan non presente
-----	----------------	-------------------

## 1.2.6 H/M Banking Payment Instrument deactivation

API used to deactivate the payment instrument from the automatic billing program.

**Path:** /fa/hb/payment-instruments/{id}

**Method:** DELETE

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
Ocp-Apim-Subscription-Key	Alphanumeric	YES	Subscription key associated with the issuer
x-request-id	String	NO	Request ID, unique identifier determined by initialisation (UUID)
id	Alphanumeric	YES	id of the payment instrument, which corresponds to the encrypted Primary Account Number (PAN) of the payment method

### Request Body

No parameters envisaged

### Response Code

HTTP Response Code 204

### Response Header



Field	Type	Mandatory	Description
x-request-id	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body

No response body

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
404	HPAN_NOT_FOUND	hpan not found
401	TOKEN_NOT_VALID	invalid token
500	GENERIC_ERROR	error retrieving user profile

## 1.2.7 Unsubscribe Customer

API used for disabling the user from the platform. This operation allows you to disable the user and all his active payment instruments.

**URL:** /fa/hb/customer

**METHOD:** DELETE

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header



Field	Format	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>id</b>	Alphanumeric	YES	customerID, which corresponds to their tax code

### Request Body

Field	Format	Mandatory	Description
<b>channel</b>	Alphanumeric	YES	the channel that identifies the Issuer calling the API: 1. Issuer's ABI code 2. string "BPAY1" for PagoBancomat 3. string "STPAY" for Satispay

### Response Code

HTTP Response Code 204

### Response Header

Field	Format	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

### Response Body

No response body

### HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
--------------------	------------	-------------



<b>401</b>	TOKEN_NOT_VALID	invalid key
<b>500</b>	GENERIC_ERROR	generic error
<b>400</b>	TOO_MANY_CHANNELS	error that occurs in case there are other payments instruments that are active and enrolled from other channels

## 1.2.8 H/M Banking Update payment instruments Token

API used to update the tokens related to a physical Card (identified by PAN) enrolled on FA.

**Path:** /fa/hb/payment-instruments/{id}

**Method:** PATCH

### Path Parameters

No parameters envisaged

### Query Parameters

No parameters envisaged

### Request Header

Field	Type	Mandatory	Description
<b>Ocp-Apim-Subscription-Key</b>	Alphanumeric	YES	Subscription key associated with the issuer
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by initialisation (UUID)

### Request Body

Field	Type	Mandatory	Description
-------	------	-----------	-------------



<b>id*</b>	Alphanumeric	YES	id of the payment instrument, which corresponds to the encrypted Primary Account Number (PAN) of the payment method
<b>fiscalCode</b>	Alphanumeric	YES	user ID, which corresponds to their tax code
<b>tokenPanList</b>	String List	NO	list of the tokenized PANs linked to the physical card (PAN)  ex. tokenized payment instruments such as GooglePay, ApplePay etc
<b>PAR</b>	String	NO	corresponds to the Payment Account Reference

**\*Not necessary for the SIT environment.** The parameter id, once encrypted with the pgp public key, must have the following structure in the Request Body :

```
-----BEGIN      PGP      MESSAGE-----\nVersion:          BCPG      C#\nvi.6.1.0\n\nnhQEMA+NENQPn0iNJAQf/ee9tRkksD+IhY84e2SG4Or51kopVtwWbysbzEpWX0oAo\n\n0aVLq10BHbTs2zEG1LIXwqf24YrrRvc6lUX73j4Xh6n//Mz7op8dCD47uMSVeSDa\n\nn9EMd239jDKD3ld6O3lICEPfaTVOPy4veHxgNn6deWxdUai9a1RCZMJXO9AXWKtu\n\nn6oVjUMWiJhpT8zK9OO2KT+YpMUWp8CTJfoQQVMdZx8lqpYvXvmbIAAtT7HZfGn4l\n\nnFYnPV07mOseniLI5jOeHcUwDb2uVZExysxfotgW8VECUXt/39kLYkqzh4USyvVWo\n\nnMC9XN1Jo3iXV6Z1BYDS9f/BydHPk3EGJeOk41QVY68kuVMrPTKAMluHg49E0vj+X\n\nnSVEPl4vqqNn0hsRJDDOYnFUVbOlEhYHW4q3lmttOlw==\n\nn=7n38\n\n-----END PGP MESSAGE-----\n
```

## Response Code

HTTP Response Code 200

## Response Header

Field	Type	Mandatory	Description
<b>x-request-id</b>	String	NO	Request ID, unique identifier determined by caller or system (UUID)

## Response Body





Field	Type	Mandatory	Description
<b>activationDate</b>	Timestamp	YES	timestamp of the activation of the physical card (identified by the PAN). FORMAT ISO8601 yyyy-MM-ddTHH:mm:ss.SSSXXXXX

## HTTP Error Codes

Below is the list of error messages and the associated response codes

HTTP Response Code	Error code	Description
<b>404</b>	HPAN_NOT_FOUND	hpan not found
<b>401</b>	TOKEN_NOT_VALID	invalid token
<b>500</b>	GENERIC_ERROR	error retrieving user profile

## Appendix 1 - Issuer Authentication

The interactions of the issuer use a mutual authentication mechanism over TLS 1.2 protocol, through the exchange of public certificates, issued by a CA (certifying authority), used for verification by both actors with respect to the keys in their possession. For this mechanism to be applicable, the following is therefore necessary:

- the Client must be configured to send requests over TLS 1.2 protocol, indicating a store containing the chain of certificates necessary to verify the reliability of the server on which the request is made; in addition, a store containing at least the private and public key with which the client authenticates with the machine contacted.
- the API must be configured to accept requests over TLS 1.2 protocol, it must be configured to use a collection of keys on which to apply certificate verification, it must be configured to provide a public certificate, used by the Client for the authentication of the machine to which the request is directed.

To generate the Certificate Signed Request it is necessary to use the `client-certificate.cnf` configuration template (suitably reconfigured with the information of the specific Issuer). The command to invoke for generating the csr and its private key (using OpenSSL) is as follows:

```
openssl req -new -config client-certificate.cnf -keyout client-certificate.key  
-out client-certificate.csr
```

To enable the authentication process, certificates related to CAs in “.cer” format must be provided to the API publisher (since they must contain only the public key, the password is not mandatory, otherwise it must also be provided).

**N.B:** for tests in the sit environment, the client certificate can be self-signed, and must be provided to the API publisher in “.cer” format, while for higher environments it must be signed by the PagoPA internal CA, and it is not necessary to share it with the API Publisher. Consequently, the file containing the CA's public key should only be provided by the Issuers in the SIT

environment. In higher environments the PagoPA CA certificate will already be preconfigured. If it is necessary to obtain a certificate with a signature valid for environments above SIT, send the .csr to be signed to [security@pagopa.it](mailto:security@pagopa.it).

The APIs will be presented and configured to enable the mutual authentication process based on a given certificate. In the case of services used by Issuers, a dedicated policy is introduced to allow the authentication process through multiple certificates, to allow the use of certificates for the Issuers.

## Appendix 2 - Issuer Services Authorisation

Issuer system developers who need to use the published APIs must include a valid subscription key in HTTP requests when making calls to those APIs. Otherwise, the calls are immediately rejected by the API Management gateway and, as a result, are not forwarded to back-end services.

To obtain a subscription key for API access, a subscription is required. A subscription is essentially a container for a pair of subscription keys. Developers who need to use published APIs can obtain the subscriptions in two ways (depending on how they were configured):

- with the approval of API publishers;
- without the need for API publisher approval.

API publishers can also create subscriptions directly for API consumers.



After subscribing, the client can invoke the services (for which it has subscribed) by entering the field **Ocp-Apim-Subscription-Key** as the parameter of the request header. The value of the field must match the code obtained after registering with the Azure portal.

Below are the steps necessary to register to test the behaviour of the services;  
Access the dev address dedicated to developers (see Appendix 3)



1. After clicking on the yellow button, you will be directed to the registration page where the credentials for the account configuration must be entered.



Sign up

Email

Password

Confirm password

First name

Last name

Company

Phone number

Address

Sign up

2. After completing the credential entry process, we will receive via email the necessary configurations to complete the verification via a link.
3. After clicking on the link contained in the email, you will be redirected to the login page where you will have to authenticate with the created user. To create the subscription and its keys you must select the "Products" option.





4. At this stage, you must select the subscription type



5. Enter a name and select the Subscribe option



# Starter

Starter

Subscribers will be able to run 5 calls/minute up to a maximum of 100 calls/week.

## Your subscriptions

Name	Status
<input type="text" value="starter"/>	<div>Subscribe</div>

## APIs in the product

Name	Description
<a href="#">_Echo API</a>	

6. The outcome of the subscription will be visible under “Profile” in the menu.

Home APIs Products Reports **Profile** Sign out

## User profile

### Account details

Email

First name

Last name

Registration date 10/08/2020

Change name

Change password

Close account

### Subscriptions

Subscription details		Product	State	Action
Name		APP_ID_PRODUCT	Submitted	<a href="#">Cancel</a>
Requested on				
10/08/2020				
Primary key	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx			<a href="#">Show</a>   <a href="#">Regenerate</a>
Secondary key	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx			<a href="#">Show</a>   <a href="#">Regenerate</a>



## Appendix 3 - Environments

Environment	IP API Gateway	URL API Gateway	Developer Portal URL
SIT	104.40.204.96	<a href="https://bpd-dev.azure-api.net">https://bpd-dev.azure-api.net</a>	<a href="https://bpd-dev.developer.azure-api.net">https://bpd-dev.developer.azure-api.net</a>
UAT	20.54.178.216	<a href="https://test.cstar.pagopa.it/">https://test.cstar.pagopa.it/</a>	<a href="https://developer-test.cstar.pagopa.it/">https://developer-test.cstar.pagopa.it/</a>
PROD	51.137.18.218	<a href="https://prod.cstar.pagopa.it/">https://prod.cstar.pagopa.it/</a>	<a href="https://developer.cstar.pagopa.it/">https://developer.cstar.pagopa.it/</a>