
User access the page:

https://studies.cs.helsinki.fi/exampleapp/spa

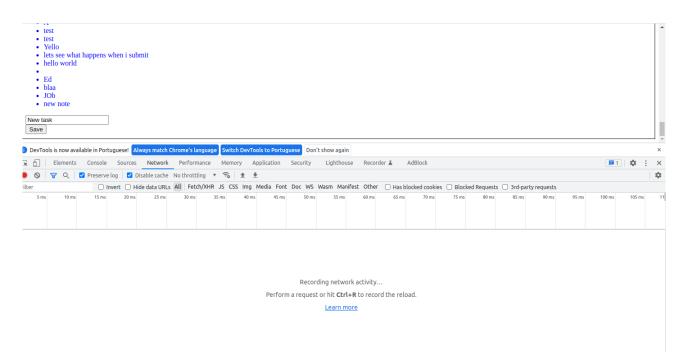

browser->server: HTTP GET https://studies.cs.helsinki.fi/exampleapp/spa

server-->browser: HTML-code

browser->server: https://studies.cs.helsinki.fi/exampleapp/main.css

server-->browser: main.css


browser->server: https://studies.cs.helsinki.fi/exampleapp/main.js server-->browser: https://studies.cs.helsinki.fi/exampleapp/main.js

browser->server: HTTP GET https://studies.cs.helsinki.fi/exampleapp/data.json server-->browser: [{content: "hfg", date: "2022-05-17T14:55:31.949Z"}, ...]

browser->server:: https://studies.cs.helsinki.fi/favicon.ico

server-->browser: favicon.ico

Browser behavior after user sends the new message:

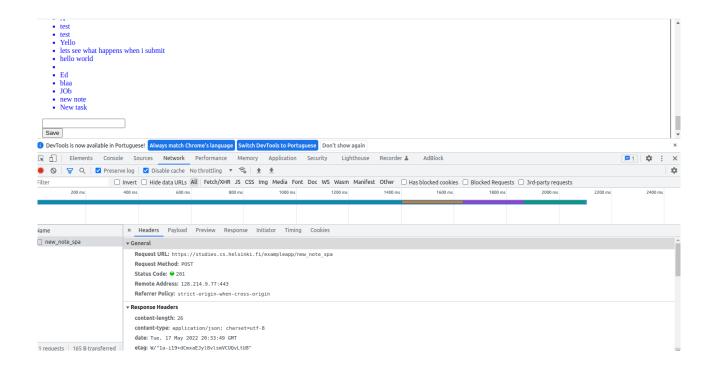

browser->server: HTTP POST https://studies.cs.helsinki.fi/exampleapp/new_note_spa

server-->browser: HTML-code

... similar steps again ...

browser->server:: https://studies.cs.helsinki.fi/favicon.ico

server-->browser: favicon.ico

Note

Server Response: {"message":"note created"}