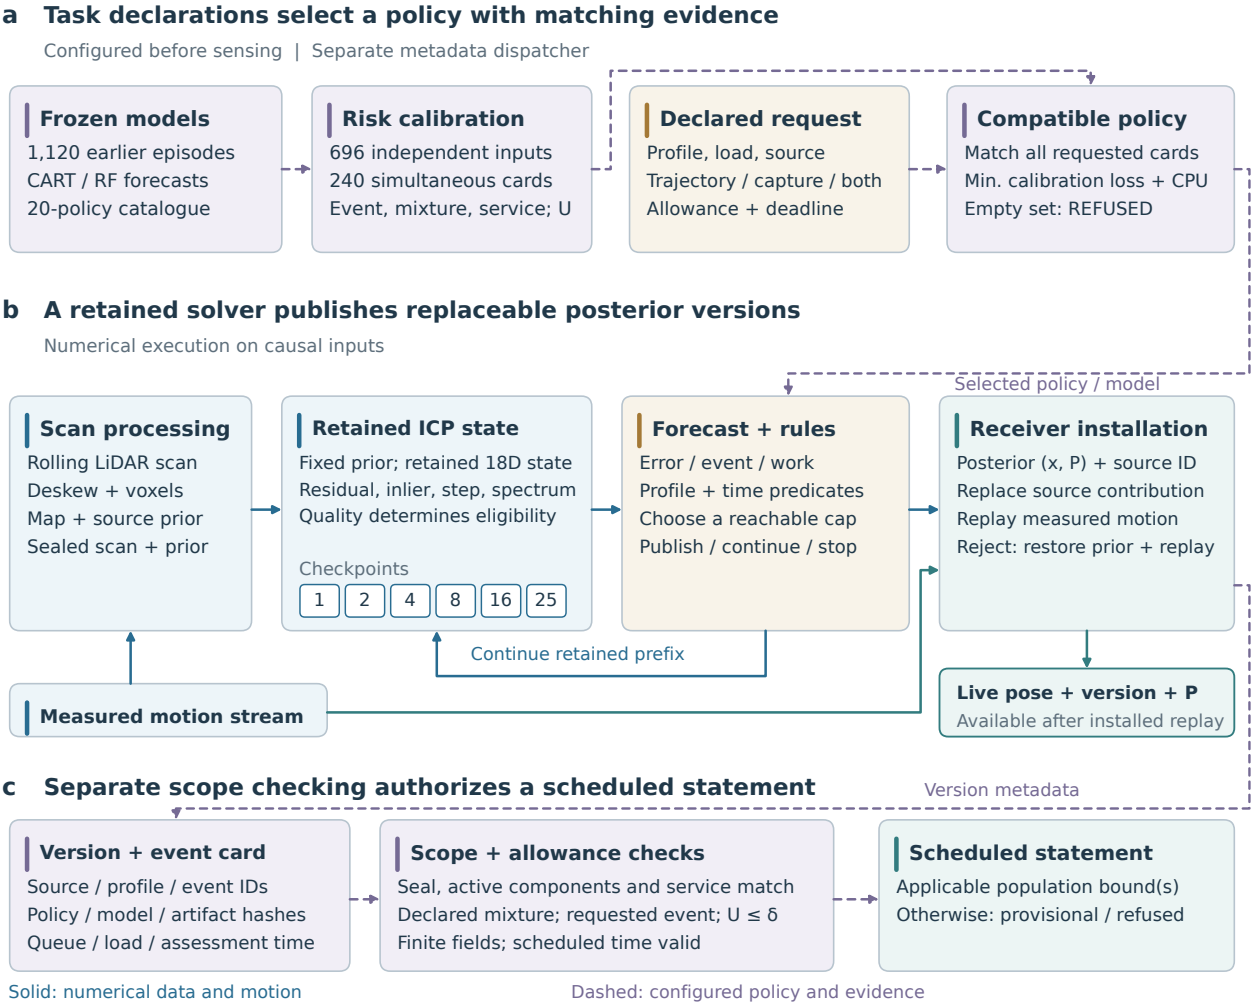
a
Task declarations select a policy with matching evidence
Configured before sensing | Separate metadata dispatcher
Frozen models
1,120 earlier episodes
CART / RF forecasts
20-policy catalogue
Risk calibration
696 independent inputs
240 simultaneous cards
Event, mixture, service; U
Declared request
Profile, load, source
Trajectory / capture / both
Allowance + deadline
Compatible policy
Match all requested cards
Min. calibration loss + CPU
Empty set: REFUSED
b
A retained solver publishes replaceable posterior versions
Numerical execution on causal inputs
Selected policy / model
Scan processing
Rolling LiDAR scan
Deskew + voxels
Map + source prior
Sealed scan + prior
Retained ICP state
Fixed prior; retained 18D state
Residual, inlier, step, spectrum
Quality determines eligibility
Checkpoints
1
2
4
8
16
25
Forecast + rules
Error / event / work
Profile + time predicates
Choose a reachable cap
Publish / continue / stop
Receiver installation
Posterior (x, P) + source ID
Replace source contribution
Replay measured motion
Reject: restore prior + replay
Continue retained prefix
Measured motion stream
Live pose + version + P
Available after installed replay
c
Separate scope checking authorizes a scheduled statement
Version metadata
Version + event card
Source / profile / event IDs
Policy / model / artifact hashes
Queue / load / assessment time
Scope + allowance checks
Seal, active components and service match
Declared mixture; requested event; U ≤ δ
Finite fields; scheduled time valid
Scheduled statement
Applicable population bound(s)
Otherwise: provisional / refused
Solid: numerical data and motion
Dashed: configured policy and evidence