

Rendering Admin

Verwaltungsoberfläche für den edu-sharing Rendering-Service

Stakeholder-Überblick · Juni 2026

Worum geht es?


- Der **Rendering-Service** konvertiert und rendert Inhalte: Bilder, Audio/Video, Dokumente, H5P, Jupyter-Notebooks.
- Speicherverbrauch, Verarbeitungs-Jobs und Fehler waren bislang nur schwer einsehbar — der Betrieb war eine **Blackbox**.
- **Rendering Admin** macht diesen Zustand sichtbar — und steuerbar: eine schlanke Weboberfläche für den laufenden Betrieb.

Auf einen Blick

- Eigenständige Weboberfläche (**Angular 21**), eigener Container, hinter dem bestehenden Proxy — same-origin erreichbar.
- Greift über die `/admin` **-Schnittstelle** des Services auf die Daten zu.
- **Ein aktives Repository** als durchgängiger Arbeitskontext (oben jederzeit umschaltbar).
- **Echtzeit** dank Auto-Refresh · barrierefrei nach **WCAG 2.1/2.2 AA**.

Anmeldung

- Sichere Anmeldung über ein **Admin-Konto** (HTTP-Basic).
- Nach dem Login werden die verfügbaren **Repositories geladen** und zur Auswahl gestellt.

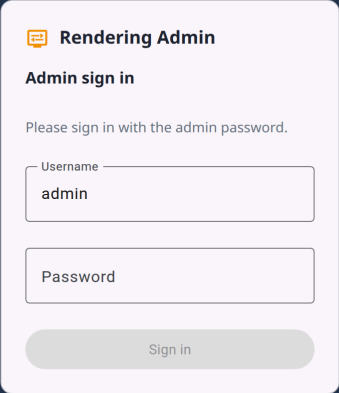

The image shows a login form for 'Rendering Admin' on a dark blue background. The form is white with rounded corners. At the top left is a small icon of a computer monitor. The title 'Rendering Admin' is in bold. Below it is the subtitle 'Admin sign in'. A message says 'Please sign in with the admin password.' There are two input fields: 'Username' with the text 'admin' and 'Password'. At the bottom is a grey button labeled 'Sign in'.

Rendering Admin

Admin sign in

Please sign in with the admin password.


Username
admin

Password

Sign in

Dashboard — Zustand auf einen Blick

- **Echtzeit-Kennzahlen:** In queue
• Failed • Finished • Total used.
- **Speicher-Auslastung** mit Ampel-Balken und Quota-Hinweis.
- **Drilldown** bis auf die einzelnen Storage-Buckets.

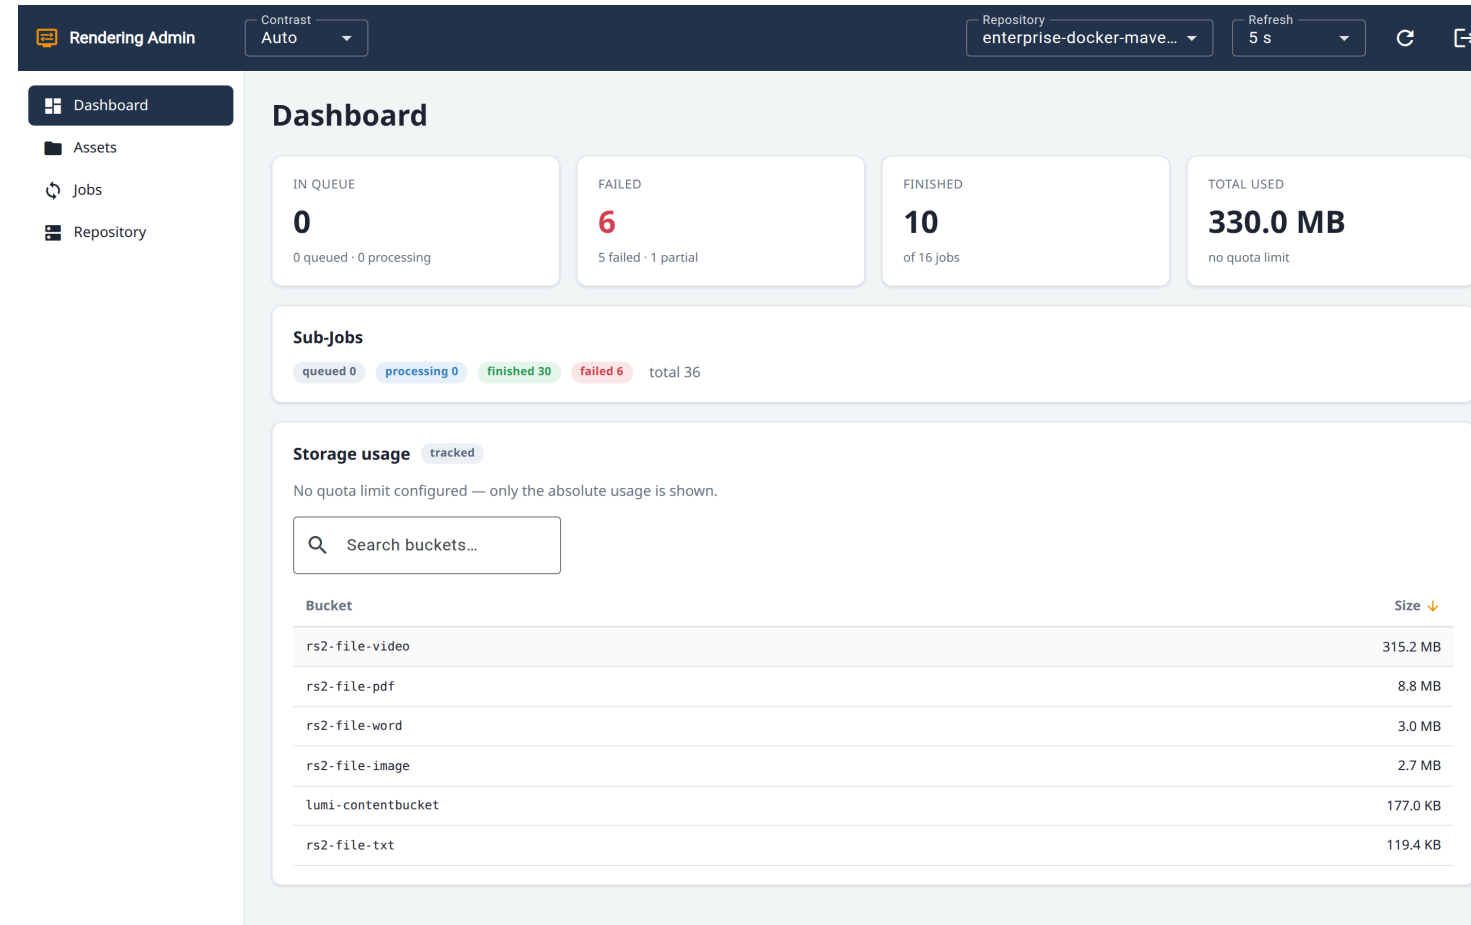

Assets — Speicher gezielt verwalten

- **S3-Asset-Management** nach Typ und Knoten, inkl. Versionen und „last accessed“.
- **Gezieltes Aufräumen:** löschen pro Typ, Knoten, Version oder alles — stets mit Bestätigung.
- **Filter** nach Typ, Zeitraum (von-bis) und Freitext.

The screenshot shows the 'Assets' management page in the 'Rendering Admin' interface. The top navigation bar includes 'Rendering Admin', a 'Contrast' dropdown set to 'Auto', a 'Repository' dropdown set to 'enterprise-docker-mave...', and a 'Refresh' button set to '5 s'. The left sidebar contains links for 'Dashboard', 'Assets' (selected), 'Jobs', and 'Repository'.

The main content area is titled 'Assets' and features a 'Types' section with a search bar and a 'Delete all assets' button. Below this is a table listing asset types with columns for Type, Count, Size, and Action.

Type	Count	Size	Action
file-video	5	315.2 MB	Delete type
file-pdf	22	8.8 MB	Delete type
file-word	5	3.0 MB	Delete type
file-image	7	2.7 MB	Delete type
file-h5p	1	177.0 KB	Delete type
file-txt	5	119.4 KB	Delete type

Below the types table, there are filters for 'Filter type' (set to 'All'), 'Last accessed' (with a calendar icon), 'Start time' (with a clock icon), 'End time' (with a clock icon), and a 'Search assets...' bar. A note states: 'Entries are bundled by node — expand to see the versions.'

The bottom section displays a table of asset entries with columns for Node, Type, Versions, Latest, Total, Last accessed, and Action.

Node	Type	Versions	Latest	Total	Last accessed	Action
> 25cb8068-3909-43a7-8b80-68390973a75a	file-video	1	147.2 MB	147.2 MB	17.6.2026, 15:37:17	Delete all

Jobs — Verarbeitung nachvollziehen

- Jeder Rendering-Job mit **Modul**, **Status**, **Node**, **Fehlertext** und aufklappbaren **Sub-Jobs** samt Fortschritt.
- Status-Badges: **QUEUED** · **PROCESSING** · **FINISHED** · **FAILED** · **PARTIALLY_FAILED**.
- **Filter** nach Status und Zeitraum; alte Jobs verfallen automatisch (TTL).

Rendering Admin

Contrast: Auto

Repository: enterprise-docker-mave...

Refresh: 5 s

Dashboard

Assets

Jobs

Repository

Jobs

Status: All

Created

Start time

End time

Search jobs...

TTL: older jobs are removed automatically.

	Module	Status	Node	Created	Error	Action
>	VIDEO	FAILED	26f92040-b124-4105-b920-40b1246105d1	17.6.2026, 15:37:33		Delete
>	VIDEO	FAILED	26f92040-b124-4105-b920-40b1246105d1	17.6.2026, 15:31:36		Delete
>	VIDEO	FAILED	26f92040-b124-4105-b920-40b1246105d1	17.6.2026, 15:31:25		Delete
>	VIDEO	FAILED	26f92040-b124-4105-b920-40b1246105d1	17.6.2026, 15:31:12		Delete
>	VIDEO	FAILED	26f92040-b124-4105-b920-40b1246105d1	17.6.2026, 15:31:07		Delete
>	VIDEO	PARTIALLY_FAILED	26f92040-b124-4105-b920-40b1246105d1	17.6.2026, 15:30:10		Delete
>	VIDEO	FINISHED	cd59308d-2464-444c-9930-8d2464f44c7c	17.6.2026, 15:20:51		Delete
>	VIDEO	FINISHED	26f92040-b124-4105-b920-40b1246105d1	17.6.2026, 15:20:48		Delete
>	VIDEO	FINISHED	4c20b20c-0164-4c37-b0b3-0c016c3c3704	17.6.2026, 15:20:45		Delete

Previous Page 1 / 1 · 16 jobs Next

Repository — zentrale Konfiguration

- **Auf einen Blick:** URL, Domains, Quota, Buckets, Signatur-Algorithmus, Public Key.
- **Aktivierte Module** (H5P, EduHTML, ...) mit ihren CSP- und Credential-Einstellungen.
- **CORS-Konfiguration** inkl. letzter Synchronisation.

The screenshot displays the 'Rendering Admin' interface. The top navigation bar includes 'Rendering Admin', a 'Contrast' dropdown set to 'Auto', a 'Repository' dropdown set to 'enterprise-docker-mave...', and a 'Refresh' button set to '5 s'. The left sidebar contains links for 'Dashboard', 'Assets', 'Jobs', and 'Repository' (which is highlighted). The main content area is titled 'Repository' and shows the configuration for the selected repository 'enterprise-docker-maven-fixes-10-0-1'. The configuration details include: URL (http://repository-service:8080/edu-sharing), Domains (http://repository.127.0.0.1.nip.io), Quota (no limit), Signing algorithm (SHA512withRSA), Rendering bucket, Temp bucket, and Public Key (-----BEGIN PUBLIC KEY----- MIIBIjANBgkqh...). Below this, the 'Optional modules' section shows 'H5P', 'EDUHTML', 'SPREADSHEET', and 'HTML' as active modules. The 'Module settings' section contains a table with columns for 'Module', 'Credential keys', and 'CSP header'.

Module	Credential keys	CSP header
H5P	—	frame-ancestors *
EDUHTML	—	frame-ancestors *
MOODLE	—	—
SPREADSHEET	—	frame-ancestors *
HTML	—	frame-ancestors *

Bedienkomfort & Barrierefreiheit

- **Repository-Umschalter** und einstellbares **Refresh-Intervall** (Off ... 60 s; pausiert im Hintergrund-Tab).
- **Kontrast-Modus** Auto / High / Normal — **WCAG 2.1/2.2 AA**; der Marken-Look bleibt Standard.
- **Skip-Link** und Fokus-Management für Tastatur- und Screenreader-Nutzung.

The screenshot shows the 'Rendering Admin' dashboard. At the top, there's a navigation bar with 'Rendering Admin', a 'Contrast' dropdown set to 'High', a 'Repository' dropdown set to 'enterprise-docker-mave...', and a 'Refresh' dropdown set to '5 s'. On the left, a sidebar contains links for 'Dashboard', 'Assets', 'Jobs', and 'Repository'. The main content area is titled 'Dashboard' and features four summary cards: 'IN QUEUE' (0, 0 queued, 0 processing), 'FAILED' (6, 5 failed, 1 partial), 'FINISHED' (10, of 16 jobs), and 'TOTAL USED' (330.0 MB, no quota limit). Below these is a 'Sub-Jobs' section with a progress bar showing 0 queued, 0 processing, 30 finished, and 6 failed, totaling 36. The 'Storage usage' section is marked as 'tracked' and notes 'No quota limit configured — only the absolute usage is shown.' It includes a search bar for buckets and a table listing buckets and their sizes.

Bucket	Size
rs2-file-video	315.2 MB
rs2-file-pdf	8.8 MB
rs2-file-word	3.0 MB
rs2-file-image	2.7 MB
lumi-contentbucket	177.0 KB
rs2-file-txt	119.4 KB

Nutzen & Fazit

- **Transparenz** — Fehler und Speicherverbrauch sind sofort sichtbar.
- **Kontrolle** — gezieltes Aufräumen statt manueller Eingriffe im Hintergrund.
- **Fokus** — ein klares Werkzeug pro Repository, durchgängig barrierearm.
- **Einsatzbereit** — und offen für Feedback zu den nächsten Schritten.

Vielen Dank

Fragen & Feedback willkommen

edu-sharing · Rendering Admin